




myPDFmanuals

You can read the recommendations in the user guide, the technical guide or the installation guide for FRIGIDAIRE FAD704DUD. You'll find the answers to all your questions on the FRIGIDAIRE FAD704DUD in the user manual (information, specifications, safety advice, size, accessories, etc.). Detailed instructions for use are in the User's Guide.

User manual FRIGIDAIRE FAD704DUD
User guide FRIGIDAIRE FAD704DUD
Operating instructions FRIGIDAIRE FAD704DUD
Instructions for use FRIGIDAIRE FAD704DUD
Instruction manual FRIGIDAIRE FAD704DUD

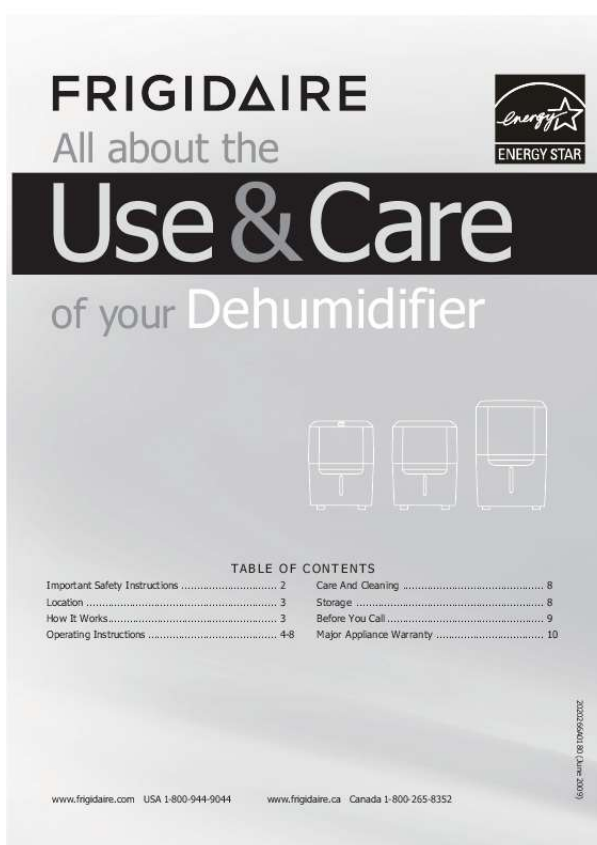

[Your user manual](#)
[FRIGIDAIRE FAD704DUD](#)

Manual abstract:

All rights reserved. Location & How It Works Selecting a Location IMPORTANT: Location 1. Dehumidifier must be operated in an enclosed area to be most effective. Close all doors, windows, and other outside openings to the room. The effectiveness of the dehumidifier depends on the rate at which new moisture-laden air enters the room. 2. Place dehumidifier in a location that does not restrict airflow through the front of the unit or out of the louvers on the left side of cabinet. 3. A dehumidifier operating in a basement will have little or no effect in drying an adjacent enclosed storage area, such as a closet, unless there is adequate circulation of air in and out of the area. It may be necessary to install a second dehumidifier in the enclosed area for satisfactory drying.

4. The dehumidifier must be installed on a level floor that will support it with a full bucket of water. 5. There should be a minimum of 12 inches clearance around the dehumidifier. How It Works When the unit is started, the fan begins to pull moisture-laden air across the dehumidifying coils.

The coils condense or draw moisture from the air, and air flows through the side louvers into the room as dry, warm air. Moisture removed from air is collected in a bucket on the front of the dehumidifier. The unit is designed to operate between 41 °F (5 °C), and 96 °F(35 °C). The unit will not work properly if the temperature is out of this temperature range, or the performance of the unit will fall greatly. The "Compressor" circuit has an automatic 3 minute time delayed start if the unit is turned off and on quickly.

This prevents overheating of the compressor and possible circuit breaker tripping. Make sure the tank is fitted correctly otherwise unit will not turn on. 2009

Electrolux Home Products, Inc. All rights reserved. 3 Operating Instructions Operating Instructions Allow the unit to reach room temperature before operating. To begin operating the dehumidifier, follow these steps: NOTE: Unit must be upright for one hour prior to operating. 1. Plug the power cord into a properly grounded 115 volt AC outlet. NOTE: If the "BUCKET FULL" light is on, remove the bucket and re-install to reset the float switch. 2.

To turn the unit on, press the ON/OFF button. The unit will run in the factory setting of CONTINUOUS and high fan speed. In the CONTINUOUS mode, the unit will only display CO and not the room humidity. It is recommended you leave the unit running in the CONTINUOUS setting for the first three or four days until the sweating and dampness odors have stopped. 4 2009 Electrolux Home Products, Inc. All rights reserved. Operating Instructions Operating Instructions (continued) 3. After a few days when the Relative Humidity has declined, press the HUMIDITY or buttons to choose a value between 35% to 85%, so the room is kept at a comfortable humidity. Pressing the or buttons will change the humidity selection in 5% increments. After you have set the desired humidity, the readout will display the actual room humidity.

If at any time you want to return to the CONTINUOUS Mode, pressing the HUMIDITY button will lower the Relative Humidity through the 5% increments until the display reads CO. 4. You can also use the FAN SPEED button to change the fan speed to HIGH or LOW. The indicator light will show the setting you have selected. A higher fan speed will result in quicker moisture removal.

5. The CLEAN FILTER light will illuminate after 250 hours of operation. At this time refer to the care and cleaning section to remove and clean the filter.

Once the filter has been cleaned and replaced, simply press the FILTER button to extinguish the light. 2009 Electrolux Home Products, Inc.

All rights reserved. 5 Operating Instructions Operating Instructions (continued) 6. The TIMER function enables you to either Delay Start or Delay Stop the unit in the choice from 0.5 hour to 24 hours. If the unit is running, then selecting Timer will turn the unit off in the hours that will be set (Delay Stop). If the unit is off, then selecting Timer will turn the unit on in the hours that will be set (Delay Start). TIMER setting: First press TIMER button, then adjust timer setting, by tapping or holding the or button to change the delay timer at 0..



[Your user manual](#)
[FRIGIDAIRE FAD704DUD](#)