

THE  
**OVEN**  
300 WIN MAG

**PRATKA**

[OWNER'S MANUAL]



# WARNING

## SAFETY GUIDELINES

- 1 Please read and understand this manual before attempting to handle or use your firearm. Take a firearms safety course to ensure firearm safety and knowledge. Local, state and federal Law Enforcement and Fish and Game departments provide excellent courses on firearm safety.
- 2 Always handle your firearm as if it were loaded.
- 3 Never point your rifle at anything you do not intend to shoot.
- 4 Do not handle firearms while impaired under the influence of alcohol or drugs.
- 5 Never leave a loaded firearm unattended.
- 6 Be sure firearm is unloaded and bolt is open before handing it to someone.
- 7 Before starting an inspection, be sure to clear the rifle. Do not pull the trigger until the rifle has been cleared. Inspect the chamber to ensure that it is empty and no ammunition is in position to be chambered.
- 8 Do not keep live ammunition near work area.
- 9 Only use ammunition designed for your firearm. Failure to use the proper caliber ammunition will cause damage to your firearm and may result in injury or death.
- 10 Only use quality commercial ammunition that is in good condition. Using corrosive, lacquer coated, damaged, hand loaded, steel or aluminum cased ammunition will void the warranty and if used, may cause personal injury or death. Since reloading practices are beyond our control, we disclaim all liability for damage or injury that may result.
- 11 When shooting your firearm, know your target and beyond.
- 12 Use eye and ear protection when shooting your firearm.
- 13 Never alter or modify your firearm. Do not disassemble your firearm beyond this manual.
- 14 Only a qualified gunsmith should service, repair or modify your firearm in any way.
- 15 Obey all local, state and federal laws in regards of discharging, handling, storage, security and transportation of your firearms.
- 16 Cleaning, discharging, handling of your firearm and ammunition may result in exposure to toxic and hazardous substances. Wash hands thoroughly after exposure. Read all warnings on ammunition, cleaning and lubrication products.
- 17 To avoid injury to your eyes, use care when removing and installing spring-loaded parts, cleaning, lubricating and handling of your firearm.

- 18** Never allow another person(s) to handle, shoot, clean and lubricate or use your firearm if they do not understand or have not read the safety guidelines of this manual.
- 19** Do not rely on the firearm's safety. It is only to be used as a supplement to safe firearm handling procedures.
- 20** Do not touch the trigger or trigger guard unless you are ready to fire.
- 21** The bolt must be completely closed in full battery when firing your weapon. Failure to have the bolt closed will cause a catastrophic failure that will result in injury or death.
- 22** DO NOT interchange any parts, especially bolt assemblies from one OMEN rifle/carbine to another. Doing so may result in injury or death.
- 23** Bolt cam pin must be installed or rifle/carbine will blow up while firing. If the bolt cam pin is not installed, injury or death may result.
- 24** If there is water or an obstruction in the barrel, including the chamber and barrel extension, do not fire. The gun may explode and cause damage to firearm and personal injury or death.
- 25** Do not drop your firearm, it may discharge. A dropped firearm must be inspected by a qualified gunsmith to ensure firearm is undamaged and safe to operate.
- 26** There is no safety substitute for common sense. You, the owner are the most important safety device when it comes to the use of your NEMO Arms, Inc. firearm. The safe use of your firearm is your personal responsibility. Failure to follow these basic guidelines may result in property damage, injury or death.
- 27** Clean and inspect your firearm regularly. Failure to clean and inspect your firearm regularly will void your warranty, and if discharged may cause property damage, injury or death.
- 28** If you notice a difference in sound or recoil from your firearm, stop firing. There may be a bullet lodged in the barrel, ammunition malfunction, overheated barrel or firearm, or could indicate any number of problems. Point firearm in safe direction. Wait 15 minutes for rifle to cool. After 15 minutes, unload rifle and clear chamber. Check bore for unburned gunpowder, brass or lodged bullet. Bullet, brass, primer, foreign object and unburned gunpowder must be removed before re-chambering another round and firing. Failure to clear foreign objects and re-chambering another round on top of any debris, may cause a catastrophic failure causing damage to your firearm, injury or death. Take firearm to a qualified gunsmith for removal of bullet stuck in barrel or debris that cannot be removed for removal and inspection.
- 29** Extended, continuous or rapid firing will raise barrel to unsafe temperature. At this temperature, any live ammunition in chamber may detonate without pulling trigger. The heat from the barrel alone may cause ammunition to detonate. Allow adequate time for firearm to cool to prevent an overheated barrel. Allow barrel to cool to ambient air temperature.
- 30** Do not exceed 10-12 rounds per minute to prevent an overheated barrel, reduced barrel life and/or voiding your warranty.

- 31 You must check your ammunition prior to using your OMEN. It must be within SAAMI specifications for size and pressure.
- 32 Blown and pierced primers will damage bolt and firing pin. A pierced primer will cause firing pin to continue to pierce primers and may cause a catastrophic failure to your rifle and serious injury or death. Your firing pin must be changed out immediately upon piercing primers.
- 33 The firing pin spring must be installed. Failure to install the firing pin spring after cleaning may cause accidental discharge, or out of battery discharge, resulting in injury or death.

Under no circumstances will NEMO Arms, Inc. nor any affiliated suppliers be responsible for any property damage, injury or death that results from:

- » Failure to read and understand owners manual.
- » Disregarding the safety guidelines and warnings in this manual.
- » The criminal or negligent use of the firearm.
- » Alterations, improper or negligent modifications to the firearm.
- » The use of non-standard, defective, improper or reloaded ammunition.
- » Failure to clean and keep firearm in good working order.

This manual must accompany this firearm and be transferred with it upon change of ownership or when presented to another person.

## SERIAL NUMBER INFORMATION

Record the serial number of your NEMO ARMS, Inc. firearm. The serial number is on the lower receiver, on the mag well. Attach a copy of the proof of purchase/sales record. Keep a copy of the owners manual and proof of purchase/sales record in a secure place. These materials will be necessary if the firearm is damaged, stolen or returned to NEMO Arms, Inc. for warranty or repair.


**Serial Number:**


**Purchase Date:**

**Model Number:**

**Caliber:**

**Place of Purchase:**

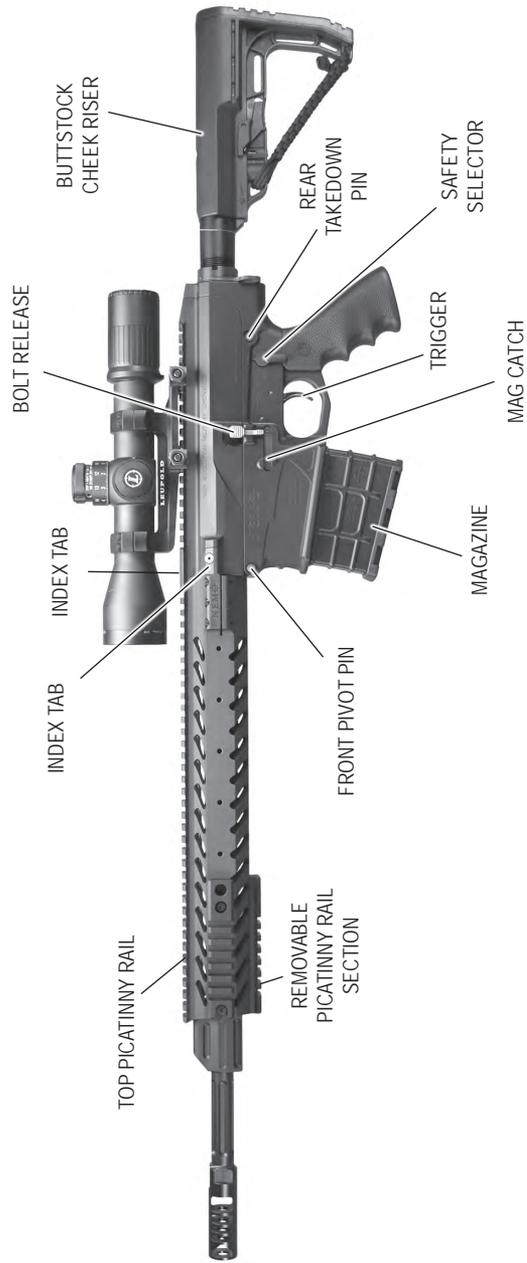

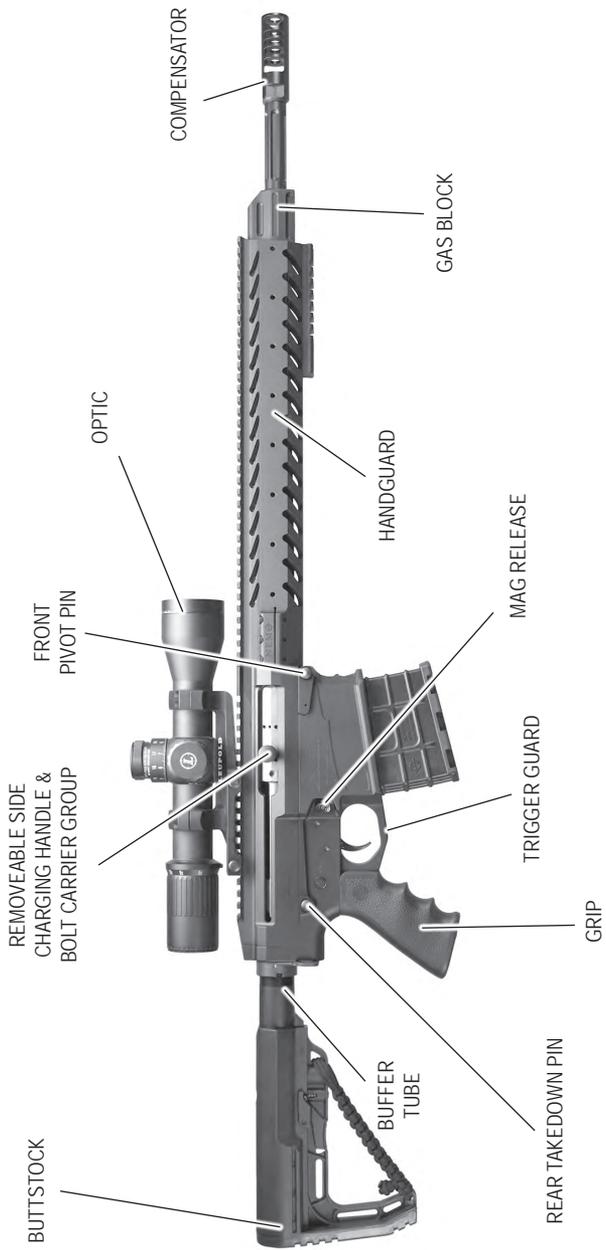

# AMMUNITION

The OMEN is optimized to use quality ammunition. Semi-automatic rifles perform differently than bolt action rifles and cannot handle hot loads. Do not use ammunition that exceeds maximum chamber pressure recommended by SAAMI (Sporting Arms and Ammunition Manufacturers' Institute) The maximum pressure is 64,000 PSI, Piezo measured. You must check your chamber dimensions before loading ammunition beyond SAAMI length. There are many different manufacturers of ammunition and loads for the .300 Win. Different ammunition, bullet weights and powder combinations will cause varying degrees of accuracy and performance of the rifle.

## **Recommended Ammunition:**

- » NEMO Match 220 gr. BTHP
- » Black Hills 190 gr. BTHP Match
- » Nosler 180 or 190 gr. Accubond
- » Barnes TTSX 180 gr.

## **Ammunition not to be used in the OMEN:**

- » Hornady Superformance.
- » Any ammunition that shows excessive pressure signs such as flattened primers, blown primers, pierced primers, excessive ejector marks or excessive extractor marks. \*\*Some ejector marks and extractor marks are due to the semi-automatic design of the AR platform\*\*

# WARNING

**If your ammunition is blowing or piercing primers, discontinue shooting. Completely field strip and clean rifle. Inspect and replace firing pin if it has a damaged tip. Use different ammunition.**

**Do not interchange parts from one NEMO OMEN rifle to the other. NEMO Arms, Inc. has revisions to parts/components on every model, making parts non-interchangeable. Interchanging parts from different OMEN rifles may cause a catastrophic failure causing damage to your firearm, injury or death.**

# **WARNING**

## **BEFORE YOU OPERATE YOUR FIREARM FOR THE FIRST TIME**

Be sure to check your rifle to see if it is loaded and that you know how to clear the rifle and use the safety before operating the rifle for the first time.

Be sure to clean and check your rifle to see if there are any obstructions in the barrel before firing rifle for the first time. Ensure rifle is clean and generously lubricated.

### **:: NOTES ::**

Only use quality, commercially loaded ammunition that is in good condition. Using corrosive, over-pressured, damaged, steel or aluminum-cased ammunition will void the warranty and if used, may cause personal injury or death.

Prior to firing the rifle for the first time, clean the rifle bore and chamber. The barrel will be broken in after 25-100 rounds.

NEMO Arms, Inc. fit and function checks and inspects each rifle. NEMO cannot guarantee fit or function with any other manufacturers components.

Excessive and repeated firing will cause premature wear and degradation of the rifle. Do not exceed 10-12 rounds per minute.

### **ALUMINUM COMPONENTS**

Never use abrasives or metal/wire brushes or harsh chemicals on aluminum components and finishes. Use a soft cloth, or soft nylon brush to clean aluminum components and aluminum finishes

### **PLASTIC/POLYMERS**

Never use solvents, metal/wire brushes or harsh chemicals on plastic/polymers. They will scratch or soften the material.

### **ADJUSTING THE MAGAZINE CATCH**

Insert magazine into the mag well. The magazine catch the magazine in place. Pressing the magazine catch button should release the magazine. To adjust the magazine catch, use a cleaning rod to press in on the magazine catch button until the left side of the magazine catch sticks out beyond the receiver. To tighten, turn the magazine catch clockwise; to loosen, turn it counterclockwise.

## OPERATING YOUR RIFLE

- 1 Point rifle in safe direction.
- 2 Place safety selector on safe position. While keeping finger off the trigger, move safety selector with finger to “SAFE”.



- 3 Check chamber to ensure rifle is unloaded.
- 4 Run a clean, dry patch through the rifle bore.
- 5 Load magazine with new, quality ammunition. Ensure caliber matches the rifle. To load magazine, place cartridge on top of magazine and depress straight down. There will be a positive click. Do not attempt to slide cartridges in, as it is impossible. Load the desired amount of cartridges needed. There are two types of OMEN magazines, 14 round and 10 round. You can tell the difference between the two by looking at the bottom of the magazine. The 10 round magazine has a red floor plate insert inside the magazine that is easily visible. Do not try to overload the magazine.





- 6 Ensure cartridges are seated at the back of the magazines by tapping the back of the mag.



- 7 Insert magazine into rifle. Fully seat magazine by tapping the bottom. Pull down on magazine to insure magazine is captured by the magazine catch. A magazine can be inserted with or without the bolt open.



- 8 To chamber a round, pull back charging handle completely to the rear and let it go. Do not "ride" the charging handle. Let the rifle chamber the round. Any attempt to help or slow down the loading will result in the rifle jamming.



- 9 If the bolt is open, you can pull back on the charging handle to release the bolt or depress the bolt catch to release the bolt.



- 10 After the rifle is charged, you can press forward on the charging handle as a forward assist if needed.
- 11 To fire the rifle, ensure cheek is firmly on buttstock, and buttstock is firmly on your shoulder, switch safety selector from "SAFE" to "FIRE". Ensure fingers/hand is clear of the charging handle. Charging handle reciprocates with every shot. Injury or rifle malfunction may occur if obstructed.
- 12 Slowly pull trigger to fire. Please note that the OMEN comes with a standard two-stage trigger. This means that when slowly pulling the trigger, the trigger will come to a slight stop, pulling the trigger more will instantly fire the rifle. This trigger is designed for safety and accuracy.
- 13 Rifle will automatically chamber another round. The bolt will lock back after the last cartridge in the magazine.
- 14 To release and remove the magazine, place safety selector on "SAFE", push the magazine release button.



- 15 If your rifle experiences a jamb, place rifle on "SAFE". Remove magazine. Pull back charging handle and lock back with bolt catch. Clear rifle by removing cartridge. Replace magazine and re-charge rifle.

## LUBRICATION OF YOUR RIFLE AND COMPONENTS

**Lightly Lubed:** A film of CLP barely visible to the eye.

**Generously Lubed:** Heavy enough CLP so that it can be spread with the finger.

Your rifle has been generously lubed and with thicker viscosity grease and CLP from the factory. This is to allow for function during the break-in period. Your rifle will be broke in after 20-100 rounds of ammunition. After this time, you should clean your entire rifle and re-lubricate. A clean rifle will function much better than a dirty rifle. Having a clean, lubricated rifle will alleviate a lot of potential functioning problems. After break-in, only apply generous lubrication to the areas that need it. Applying excessive lubrication traps dirt and debris at a faster rate. If you are using your rifle in sub-freezing weather, use a CLP that is rated for winter/arctic use.

## PERSONAL PROTECTIVE EQUIPMENT

Reducing the sound by at least 30 decibels is highly recommended. Repeated exposure to the high decibels that firearms produce may cause permanent hearing loss. Use ear protection (ear plugs or ear muffs) at all times.

The use of shooting glasses is encouraged. Quality shooting glasses protect you from spent shell casings, burned and unburned powder and gasses, and UV rays.

Beware of a hot barrel or muzzle after shooting rapid fire or extended shooting.

## BARREL BREAK-IN AND CLEANING INSTRUCTIONS

We've compiled information from several barrel makers on the best barrel break-in and cleaning for your rifle barrel. Using these break-in procedures and cleaning instructions, you can ensure that your barrel will clean easily in the future and that you will achieve maximum accuracy.

**COPPER FOULING:** Caused by bullet jacket material left in the barrel.

**POWDER FOULING:** Caused by burned and unburned powder left in the barrel.

During the first few rounds, a lot of copper fouling will be left in the barrel. It is important to remove this fouling, completely, after each shot, to help prevent a build-up later on. Powder fouling is ongoing, but is easy to remove. Do not use moly coated bullets during break-in procedure.

## BARREL BREAK-IN

**Cleaning items needed:** Brush, action rod guide, rifle barrel solvent: non-copper removing solvent, copper removal solvent and CLP (cleaner/lubricant/preservative). There are many good brands of each of these cleaning items.

For break-in, the barrel should be cleaned after every shot for the first 5-20 rounds or until copper fouling stops. Before shooting your rifle for the first time, the barrel needs to be cleaned to remove the preservative. Use only quality, factory ammunition. Do not use lacquer coated ammunition at any time.

- 1 Saturate a patch with a copper removing solvent and thoroughly soak the barrel, pushing the cleaning rod through the chamber end. Do not use a bronze/copper cleaning tip, as this will give false cleaning indications. Only use a steel or carbon/poly cleaning rod and jag. Keep using copper soaked patches until there is no more blue on the patches (the blue is the dissolved copper). The copper fouling will be heavy for a few rounds and then taper off quickly. Do not let copper solvent stand in barrel more than 10 minutes.
- 2 Push a dry patch through the barrel from the chamber end.
- 3 Fire three shots.
- 4 Repeat steps 1-3 for the first six rounds.
- 5 Shoot five shots, then repeat steps 1-2.
- 6 Your barrel is now broken-in.

## **NORMAL BARREL CLEANING**

For normal cleaning, after break-in and following 10-25 shots or after a shooting session, clean the barrel using a powder solvent or CLP only. Use a clean patch and soak it with the powder solvent/CLP and soak the barrel. Use a bronze or poly brush and stroke the barrel 5-8 times. Do not use a stainless steel brush in your barrel at any time. Push a clean patch through. Push a CLP soaked patch through the barrel. Repeat cleaning if patch is fouled. After cleaning the barrel, run a CLP patch through the barrel for storage. Run a dry patch through barrel prior to shooting.

## **PERIODIC COPPER FOUL BARREL CLEANING**

If your accuracy degrades and your shot groups open up at approximately +/- 300 rounds or so, use a copper removing solvent to check for copper fouling. Use steps 1-2 of the barrel break-in procedure for the copper fouling procedure.

## **ABRASIVE BARREL CLEANERS**

Using an abrasive cleaner is not recommended.

## **MOLY OR COATED BULLETS**

Shooters using moly or coated bullets need to clean their barrels every 25 rounds. Use the normal barrel cleaning procedure.

## **CLEANING EQUIPMENT TIPS**

Using the correct equipment to clean your barrel is important. An action rod guide will keep your rod straight in the barrel and keeps your rifle from getting uneven wear and damaging the rifling.

Use a quality coated cleaning rod as well. The coating on the rod will prevent damages to your barrel, and there are also nylon coated cables that work very well now too. These are available from Otis or Dewey. Both of these companies make a very good complete cleaning kit for your rifle at a reasonable price.

Be sure to use a preservative on your barrel when storing it. Run a dry patch through before shooting. Store your rifle in a dry place to prevent rusting.

## FIELD STRIPPING AND CLEANING BOLT CARRIER GROUP

The OMEN from NEMO Arms, Inc. has a patented bolt carrier. This bolt carrier group looks very different than the standard AR-15 or AR-308 type bolt carriers.

### TO FIELD STRIP AND CLEAN YOUR BOLT CARRIER GROUP:

- 1 Ensure your rifle is unloaded and the chamber is clear.
- 2 Depress the front pivot pin and rear takedown pin. Pull out pivot pin and takedown pins until they stop.




- 3 Remove the charging handle by pulling it out firmly. Pull it straight out, away from the bolt carrier. The side charging handle is captured in the bolt carrier by a detent. It is held into place much like some semi-automatic shotguns.



- 4 With the upper receiver assembly removed from the lower receiver assembly and with the side charging handle removed, pull bolt back and remove the bolt carrier group from the upper receiver assembly.



- 5 Use a punch or bullet tip to push firing pin retaining pin from the bolt carrier. Remove the firing pin retaining pin.

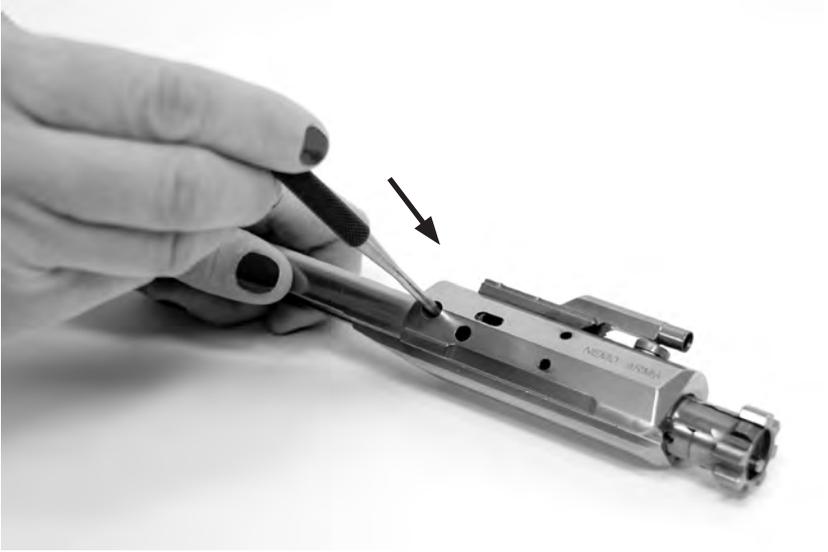

6 Pull bolt out until it stops.



7 With the bolt pulled out, pull the firing pin straight back as far as it can go, until it stops.



8 While holding the firing pin back, push bolt in and line up cam pin so that it can be removed. It must be able to clear the gas key.



9 Remove the cam pin. Cam pin must be perfectly aligned in slot for removal.



10 After cam pin is removed, pull bolt out from the bolt carrier



11 After the bolt is removed, pull out and remove firing pin. Pin can be removed from the bottom or the top of the slot.



- 12 Clean carbon from firing pin and spring. After cleaning, lightly lubricate spring and firing pin with CLP.

This firing pin is not interchangeable with any rifle. DO NOT interchange firing pins with other OMEN rifles, as revisions have been made to the firing pin.

The firing pin spring is conical. The small spring end goes on first, trapping the spring on the firing pin.

**\*\*Warning\*\* The firing pin spring must be installed! Failure to install the firing pin spring may cause accidental discharge, or out of battery discharge.**



- 13 Remove the extractor from the bolt. Depress the rear of the extractor, push the extractor pin out.



- 14 Clean out all of the carbon, brass and foreign debris from the extractor and on the inside of the bolt.



Your bolt carrier group is now completely field stripped for cleaning.

- » **Do not remove the gas key.**
- » **Do not disassemble the rear of the bolt carrier. This part of the bolt carrier only needs to be disassembled if the spring needs replacement or if it needs to be repaired.**

## CLEANING AND LUBRICATING THE BOLT CARRIER GROUP

**Clean all of the parts using a solvent.** Remove carbon build up, debris, dirt, brass and lubricant using cotton swabs and nylon brush. The use of an ultrasonic cleaner is helpful for the bolt carrier group. Removal of carbon may be difficult.

Pieces of brass or primers in the bolt or fire control group can cause malfunction or build up on the firing pin causing weapon malfunction, slam fire, or automatic fire.

Inspect bolt carrier group parts for damage: Extractor claw, firing pin tip, bolt lugs, cam pin and gas key for cracks. Note that shiny spots or other wear marks are normal.

## REASSEMBLING THE BOLT CARRIER GROUP

Reassemble the bolt carrier group by reversing the order of disassembly. Be patient and do not force parts together or bend them to assemble.

### SIDE CHARGING HANDLE INSTALLATION

To insert the side charge handle, the slot must face up to engage and keeping the charging handle from falling out, it is marked "TOP"



**Additional Lubricant** - Add two drops of CLP to the bolt cam pin slot, one drop to the entrance of the gas key hole. Lubricate the running surface on the bolt carrier with a higher viscosity lubricant or grease. The running surface on the bolt carrier is where the carrier touches and rides the upper receiver.

## CLEANING THE UPPER AND LOWER RECEIVER

- 1 Ensure your rifle is unloaded and the chamber is clear.
- 2 Depress the front pivot pin and rear takedown pin. Separate the upper receiver from the lower receiver.
- 3 Remove the side charging handle by pulling it out firmly. The side charging handle is captured in the bolt carrier by a detent. It is held into place much like some semi-automatic shotguns.
- 4 Remove the bolt carrier group from the upper receiver.
- 5 Clean the internal part of the upper receiver and barrel extension using a solvent. Remove carbon build up, debris, dirt, brass and lubricant using cotton swabs and nylon brush. Lightly lubricate the upper receiver and barrel extension, leaving a light film. Clean the barrel and chamber after cleaning the upper receiver.



- 6 Install the cleaned bolt carrier group and install the side charging handle.
- 7 When the trigger and lower receiver well become very dirty (such as when firing with a suppressor), it is not always necessary to remove the trigger group for cleaning. Spray down the trigger group with electrical contact cleaner to remove residual oil and dirt. Next, use compressed air to blow off the trigger group and then flush liberally with a light lubricant as CLP or equivalent. Blow off excess lubricant with compressed air and lubricate the following:
  - » Each side of the disconnecter above the trigger pin;
  - » Hammer and trigger sears;
  - » Face of the disconnecter;
  - » Hammer tail where it contacts the disconnecter;
  - » Top of each side of the hammer spring where the spring contacts the receiver wall.

## PRATKA NON-ADJUSTABLE GAS BLOCK

The Pratkan rifle has a non-adjustable gas block. The rifle is designed to run with a wide variety of ammunition. You cannot run a suppressor on the Pratkan rifle. Since there is no adjustable gas block, using a suppressor will cause rifle to overgas and malfunction. Damage may occur to the rifle if it runs suppressed.

## OMEN GEISSELE® SSA-E TRIGGER


The Geissele Super Semi-Automatic Enhanced (SSA-E) Trigger is a finely-tuned semi-automatic-only version of our full-auto, two stage combat trigger presently used in the U.S. Special Operations Community. Built on the chassis of the Geissele SSA, the SSA-E provides enhanced trigger control and weapon accuracy while maintaining the robustness and reliability of our combat-proven two-stage trigger. The SSA-E's reduced 1st and 2nd stage pull weights result in a trigger with a smooth, light 1st stage take-up and a crisp, candy cane-like 2nd stage break. The SSA-E is ideal for use in precision Squad Designated Marksman type rifles where weapon accuracy and reliability are critical and a non-adjustable drop in trigger is desired.




Go to [www.nemoarms.com](http://www.nemoarms.com) for more information.  
Email [info@nemoarmswith](mailto:info@nemoarmswith) and questions.

# Super Semi-Automatic (SSA-E) Trigger

U.S. Pat. 7,600,338

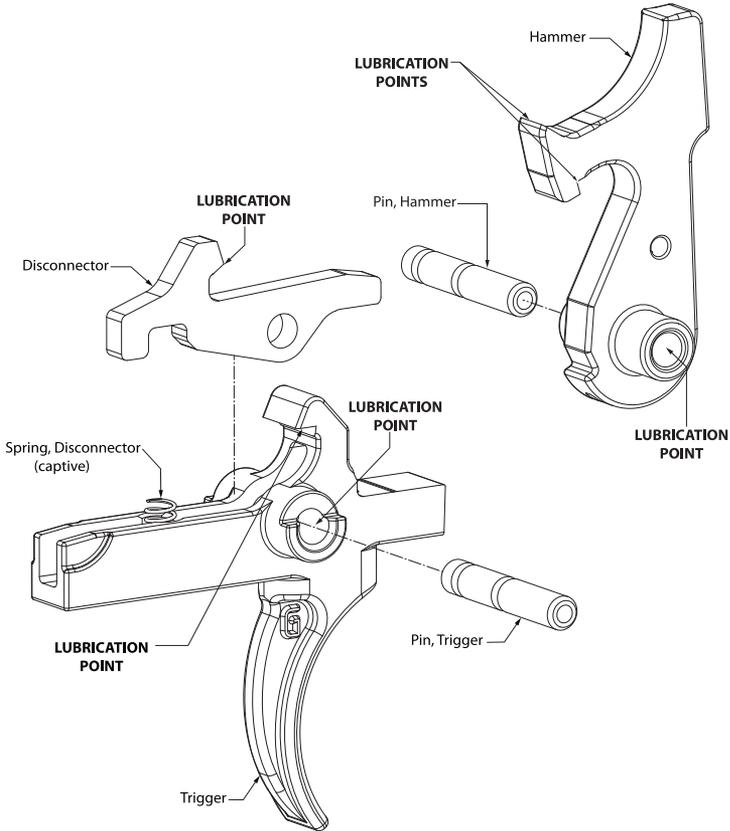


GEISSELE AUTOMATICS®

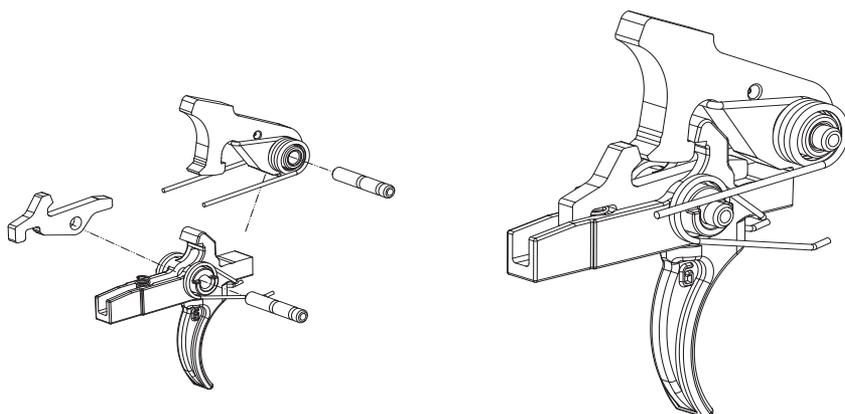

## Trigger Profile

*Geissele Super Semi-Automatic Enhanced vs. Stock AR-15*

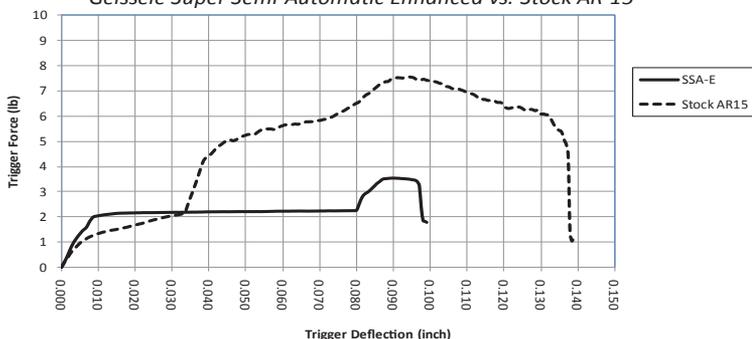

## I. PERFORMANCE ADVANTAGES FOR THE SHOOTER

- » The Geissele SSA-E has a pull weight of about 3.5 lbs. There is 2.3 lbs. on the 1st stage and 1.2 lbs. on the 2nd stage. The pull weights and sear engagement are non adjustable by the shooter.
- » Trigger and hammer are made from quality tool steel.
- » Sear surfaces are cut by a wire edm machine. Sear surfaces cut this way are very accurate and the non-directional surface finish of the wire edm gives a smooth trigger pull without the associated grittiness of directional machining marks left by a milling cutter.
- » The initial force needed to start the disengagement of the sear surfaces is low and the force linearly increases at a low rate. This helps the shot to fall at the initial point of aim and aids in building shooter confidence in his weapons ability to put the rounds where his sight is pointing.

- » The Geissele SSA-E trigger allows the shooter to slap through the trigger pull on close in shots but also set up a long range shot with a crisp trigger break.
- » A full force hammer spring is used for quick locktime and positive ignition of all types of ammo. There is no lightened hammer spring used.
- » The hammer is lighter than a standard AR15 hammer. The lightened hammer favorably decreases locktime over a standard hammer from 8.5 to 5.1 ms and increases accuracy of the weapon.


## 2. ADVANTAGES FOR THE ARMORER

- » The Geissele SSA-E is a simple design that is very similar to the original M16 trigger. The number of parts is identical.
- » There are no adjustment screws to come loose.
- » All springs are captive; they will not get lost during disassembly in the field.
- » The entire trigger can be disassembled for cleaning (no rivets or staked parts).
- » The trigger can be installed without removing the safety.
  - Sear engagement is pre-set from the factory.
- » Hammer and trigger pins are a close slip fit into nominal receiver holes so the trigger can be installed and removed with rudimentary tools.
- » Triggers come with a slave pin for the trigger/disconnector assembly for easy installation.

## 3. SAFETY ADVANTAGES

- » The Geissele SSA-E is a 2 stage trigger where there is generous overlap of the sear surfaces which contributes to safety and a low tendency of any inadvertent movement of the trigger to discharge the weapon.
- » The Geissele SSA-E has a patented pseudo sear that is almost identical to the standard AR15 single stage sear. However, this secondary sear has surfaces that never touch during normal operation. This sear prevents the hammer from falling unless the trigger is pulled.
- » The secondary safety sear contributes to shooter confidence in dynamic/vehicle situations where a fellow shooter's muzzle may cover him. There is firm knowledge that even with the safety in the fire position the weapon can never discharge unless the trigger is pulled.
- » Trigger timing is robust and parts have been sized to operate with a certain amount of wear to the working surfaces. The trigger is designed to operate in dusty, abrasive environments that cause wear.

**MFT BATTLELINK MINIMALIST CARBINE STOCK WITH NRAT, COLLAPSED**

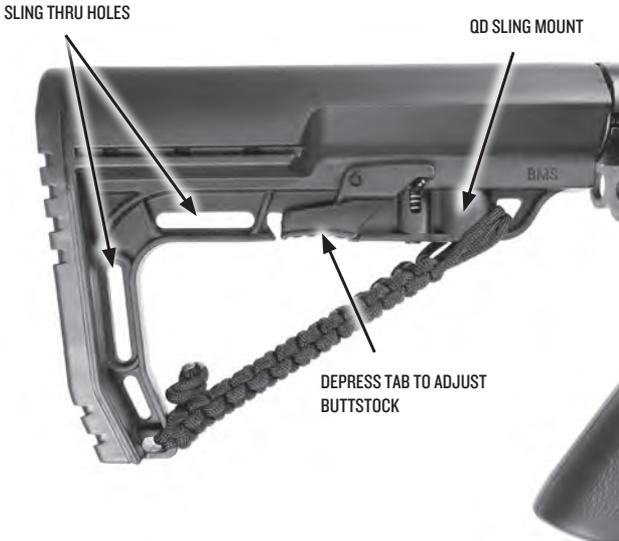

**MFT BATTLELINK MINIMALIST CARBINE STOCK WITH NRAT, EXTENDED**

THE CARBINE STOCK HAS MULTIPLE ADJUSTMENT LEVELS. BUFFER AND BUFFER SPRING IS NOT COMPATIBLE WITH OTHER AR PLATFORMS. ONLY USE NEMO ARMS OEM REPLACEMENT PARTS.



APPROXIMATELY 8 FEET OF PARACORD BRAIDED IN A REGULAR WEAVE DIRECTLY ONTO A BATTLELINK MINIMALIST STOCK ADDING ONLY A HALF AN OUNCE TO THE WEIGHT. THE STRAP WILL NOT INTERFERE WITH THE USE OF THE QD MOUNT OR ITS BENEFIT TO AMBIDEXTROUS SHOOTERS.

## MAINTENANCE AND WEAR

**NOTE:** Your rifle has parts and components that will wear and will need replacement. This is normal. These parts have a service life and will need to be replaced to keep your rifle in safe, optimum operational order. Parts will wear faster under heavy use or use under unusual conditions and may need to be replaced sooner than the scheduled replacement. Even though parts that need to be replaced appear in good condition to the naked eye, they are fatigued and need to be replaced. Most of the parts are inexpensive and are part of the field stripping procedure. If you are unsure how to replace a maintenance item, have the parts replaced by a qualified armorer or gunsmith.

\*\*Parts must be replaced by a qualified armorer or gunsmith

- » Extractor: Replace after 500 rounds
- » Extractor Spring: Replace after 750 rounds
- » Bolt Ejector Spring: Replace after 1000 rounds
- » \*\*Bolt Carrier Extension Spring: Replace after 1000 rounds
- » Firing Pin Retaining Spring: Replace after 1000 rounds
- » \*\*Check Headspace After 300-600 rounds
- » Check Firing Pin For Damage After Each Shooting Session Or When Cleaning, Replace If Damaged or Worn
- » Check Safety Selector Operation Each Shooting Session Or When Cleaning, \*\*Replace Selector, Detent and Spring If Not Working or Damaged
- » Buffer Spring: Replace after 1000 rounds
- » \*\*Barrel and Bolt: Replace after 1000 rounds
- » Trigger Spring: Replace after 2000 rounds
- » Hammer Spring: Replace after 2000 rounds
- » Cam Pin: Replace if Cracked, Damaged or Worn or after 1000-2000 rounds

## OPERATION UNDER UNUSUAL CONDITIONS

**NOTE:** Unusual conditions are defined as any climatic condition requiring special maintenance of the weapon. Perform the maintenance outlined for the climate that most applies to your operational area.

### HOT, DRY, DUSTY CLIMATES

Hot, dry climates are usually dusty and sandy areas. They are hot during daylight and cool at night.

- » Dust and sand will get into the rifle and will cause malfunctions and excessive wear on component working surfaces through abrasive action during the firing operations.

- » Corrosion is less likely to form on metal parts in a dry climate; therefore, lubricate internal working surfaces only with a small amount of cleaner, lubricant and preservative (always shake CLP prior to use). Do not lubricate external parts of the rifle. Doing so will only collect dust and sand, making the rifle difficult to keep clean. Do not lubricate internal components of the magazines.
- » Using additional equipment - i.e., protective cap and spare magazine protective bags and overall rifle protective cover will help keep dust and sand from getting into the rifle. Use these items as the situation warrants. As a minimum effort to keep dust and sand out of your rifle, a cartridge magazine installed in the rifle, and a muzzle cap on the muzzle. **NOTE:** Before firing, remove the protective cap and keep for later use. However, it is not dangerous to fire the rifle with the protective cap. The cap will blow off when the first round is fired and may be lost.

## WET, SNOWY, RAINY, MOIST OR HUMID CLIMATES

Snowy, rainy, moist or humid climates are usually any foggy, rainy, snowy, coastal area. **NOTE:** These conditions can be found anywhere, including desert areas at times.

- » Perform maintenance according to the appropriate climatic condition. Use additional equipment - protective cap and spare magazine, protective bags and overall rifle protective cover as the situation warrants.
- » Always keep the rifle dry. Using a protective cap will help keep water out of the barrel. Always drain/remove any water, snow or ice from the barrel before firing. Dry the bore with a swab and cleaning rod, if necessary.
- » Moisture will cause steel or iron parts to rust, corrode and/or seize. Proper lubrication and inspection are necessary for all parts in damp, wet, snowy, icy or moist conditions. Dry rifle/components off with cloth and re-lubricate with CLP, if necessary.
- » Never store your rifle in a damp/wet area. Always store your rifle in dry conditions. Check your rifle for corrosion after long periods of storage for corrosion.

## TROUBLESHOOTING

### MY RIFLE WON'T FIRE

- » Check to see if the safety selector is on "FIRE" mode.
- » Check to ensure firing pin is in good condition and is assembled correctly.
- » Defective ammunition. Discard ammunition and reload with new ammunition.
- » Too much oil/preservative/CLP in firing pin recess.
- » Bolt carrier must be fully forward, into battery.
- » Magazine or chamber is not loaded, reload.
- » Bolt not in battery.

### THE BOLT WON'T UNLOCK

- » The bolt and barrel extension are dirty. Field strip, clean and lubricate.

## **SPENT RIFLE CARTRIDGE WON'T EXTRACT.**

- » Dirty or corroded ammunition. Remove spent, stuck cartridge by using a cleaning rod to push out round. Be careful not to damage rifling. Clean chamber and use new, clean ammunition.
- » Carbon or dirty chamber. Clean chamber.
- » Fouling or carbon on extractor. Clean bolt, extractor and chamber.
- » Broken or worn extractor spring. Replace extractor spring.
- » Broken or worn extractor. Replace extractor.

## **MY RIFLE WON'T FEED CORRECTLY**

- » Rifle dirty. Field strip and clean rifle, including bolt carrier group, upper receiver assembly and barrel. Re-lubricate.
- » Dirty ammunition or dirty magazine. Clean magazine and use new, clean ammunition.
- » Defective magazine. Discard and replace with new magazine.
- » Buffer assembly restricted. Field strip and clean and lubricate buffer assembly. Replace buffer spring if necessary.
- » Magazine not seated. Adjust magazine catch by pressing mag catch button and turning catch clockwise to tighten or counter clockwise to loosen.
- » Loose or misaligned gas block. Tighten gas block screws and ensure gas block is on straight.
- » Rifle over or undergassed. Call a qualified gunsmith or NEMO Arms, Inc.

## **THE BOLT CARRIER WILL NOT FULLY ENGAGE AND IS HUNG UP**

- » Bolt carrier group is dirty. Point rifle in safe direction, move safety selector to "SAFE", drop magazine and clear the rifle. Field strip and clean and lubricate upper receiver, charging handle and bolt carrier group.
- » Point rifle in safe direction, move safety selector to "SAFE", drop magazine and clear the rifle. Use caution in removing stuck round and stay away from rifle muzzle. Do not pry round with screwdriver or other sharp object. Pull or gently tap charging handle back and/or gently bang rifle butt on the ground, push charging handle forward and bullet will drop clear. Field strip and clean and lubricate upper receiver and bolt carrier group.
- » Firing pin spring bound up on bolt. Field strip bolt carrier clean, reassemble. Replace firing pin spring if necessary.

## THE BOLT WON'T LOCK

- » The bolt and barrel extension are dirty. Field strip and clean.
- » Bolt extractor frozen. Field strip and clean.
- » Bolt carrier group dirty. Field strip and clean and lubricate upper receiver, charging handle and bolt carrier group.
- » Weak buffer spring. Replace buffer spring.

## I AM GETTING PIERCED OR BLOWN PRIMERS

- » Blown primers: The ammunition is too hot. Use different ammunition.
- » Pierced primers: Ammunition too hot, primers too soft. Firing pin tip may be damaged. Inspect firing pin tip for damage. Replace firing pin if needed. Check bolt for pitting, replace if needed.
- » Headspace is too loose. Have a qualified gunsmith check headspace. Replace barrel as needed.

## ACCURACY GUARANTEE

NEMO Arms, Inc. guarantees the OMEN rifle to shoot a 3-shot sub-MOA (1.047 inches or less) after the break-in period using match-quality ammunition. Every OMEN rifle is different. You will have to find what your OMEN rifle shoots the most accurately.

To measure a group measure the center of the hole from the holes that are the farthest apart.

## OPTICS AND BIPODS

Installing a quality optic on your NEMO rifle is imperative for accuracy. A quality optic and mount make the difference with accuracy. Substandard scope rings will cause poor overall accuracy and accuracy shifts. Low quality optic glass will make it hard to see targets at distance. Having a bipod to use with your rifle will provide a steady rest for the best stability at long range.

### Recommended Optics

- » Nightforce
- » Leupold

### Recommended Bipods

- » Harris S-BRM
- » Atlas AccuShot

# THE DIFFERENCE BETWEEN A MIL AND MOA

Mils and MOA differ from an inch because they are angular, not linear, measurements. An inch equals an inch no matter how far away it is.

**What is MOA?** MOA stands for **Minute Of Angle**. There are 360 degrees in a circle and each degree is divided into 60 minutes. If we round to the nearest 1/100 of an inch, at 100 yards 1 degree measures 62.83 inches. One MOA, 1/60 of that, measures 1.047 inches. While 1 MOA at 100 yards equals 1.047 inches, at 200 yards it equals 2.094 inches (2 x 1.047). To calculate MOA at any distance, multiply 1.047 by the distance in yards and divide by 100.

**What is a MIL?** MILS stands for **milliradians**. A mil is another angular measurement. There are 6.2832 ( $\pi \times 2$ ) radians per circle. There are 1,000 mils per radian so, there are 6,283.2 mils in a circle. There are 21,600 MOA in a circle, so a little quick division determines there are 3.4377 MOA per mil. At 100 yards, 3.4377 MOA equals 3.599 inches (3.4377 x 1.047). Rounded up, one mil equals 3.6 inches at 100 yards. A mil is so large, it's broken into tenths in order to make precise adjustments. If you have a riflescope with mil adjustments, each click equals 1/10 mil. Usually an optic has ten hashes or clicks to a mil on the turrets. A tenth of a mil equals .36 inch or .9144 centimeter at 100 yards. Since 1/10 of a mil is an angular measurement, it will be slightly larger at 100 meters than at 100 yards because 100 meters equals 109.361 yards. At 100 meters, 1/10 of a mil equals .9999 centimeter. Practically speaking, 1/10 of a mil equals 1 centimeter at 100 meters. Because mil, like MOA, is an angular measure, the length it represents increases with distance. For example, 1 mil at 100 yards equals 3.6 inches and 7.2 inches at 200 yards. To calculate how many inches are in a mil at any distance, multiply 3.6 times the distance in yards and divide by 100.

## LIMITED WARRANTY

### LIMITED THREE-YEAR WARRANTY

NEMO Arms, Inc firearms, parts or products are warranted to be free from defects in materials and craftsmanship to the initial purchaser for a period of three years. NEMO Arms, Inc. will remedy any such defect of which NEMO Arms, Inc. is given written notice. The liability of NEMO Arms, Inc. under this warranty shall be limited solely to the obligation to repair or replace the firearm, part or product or defect at its discretion, and to pay transportation and insurance charges for return of the firearm, parts or product to owner for a rightful warranty claim. This warranty is not transferable. Modification of any NEMO Arms, Inc. firearm, parts or product will void warranty. This warranty does not cover normal wear, or any damage resulting from careless handling, neglect, unauthorized repairs or adjustments, corrosion or improper or reloaded ammunition or failure to perform normal maintenance.

Warranty claims must state (in writing) the model number, the serial number, the part number (if applicable), a description of the difficulty experienced and include the original receipt with date of purchase. The firearm, part or product concerned should be shipped via normal ground shipping (transportation charges prepaid) to:

### The Warranty Department

NEMO Arms, Inc.  
3582 US Highway 93 South  
Kalispell, Montana 59901

The owner should insure firearm, parts or product shipment. NEMO Arms, Inc. is not responsible for loss or damage in transit. NEMO Arms, Inc. will pay shipping and insurance charges for the return of a firearm, parts or product to its owner if the related claim is a proper claim for warranty work. Under no circumstances shall NEMO Arms, Inc. be responsible for incidental or consequential damages with respect to economic loss or injury to property, whether as a result of express or implied warranty, negligence or otherwise.

## PRIVACY POLICY

NEMO Arms, Inc. respects the privacy of all individuals and businesses. We will never sell or share our customers information to anyone. This includes names, phone numbers, fax numbers, E-mail addresses, physical addresses, IP addresses or databases.

## NORMAL WEAR PARTS AND COMPONENTS

The OMEN has parts that will wear and have to be replaced. This is normal. Each rifle is different and each rifle will wear differently depending upon user and conditions. Some parts will wear significantly faster than others.

- » Springs are a normal wear part and must be replaced per the schedule or sooner if function is affected
- » Extractors will wear and fatigue. Order a spare, they are cheap and will keep you operational in the event of breakage.
- » Dents on the brass after firing. Dents on the brass, especially on the neck area is due to the ejection process and is normal.
- » Finish: The OMEN has the highest quality surface finishes. No matter how durable the finish, some staining and wear will occur on the bolt carrier group, anodized and painted surfaces and on polymers. Metal to metal contact will cause wear, some surfaces faster than others. Other damage may occur during normal use (falling or dropping the rifle while hunting, etc.)

## REPLACEMENT PARTS – NEMO ELITE

You can visit our Web site at [www.nemoarms.com](http://www.nemoarms.com) or call us at (406) 752-6366 or e-mail us at [info@nemoarms.com](mailto:info@nemoarms.com) to find any replacement part or add an accessory to your rifle.

Spare parts kits are available.

As an owner of a NEMO OMEN, you are a member of the NEMO Elite Club, a members only area. This status gives you access to spare parts, deals and promotions not offered to others.

