

BL-MP02 User Manual

Compact Wireless Router




1) Portable access point (AP):

Portable access point mode, BL-MP02 given signal wirelessly over the air, so other device can access it. eg: Laptop / smartphone.



2) Wireless Router (RT):

Wireless router mode, BL-MP02 should be connect to ADSL modem, Other device can connect to BL-MP02 by WiFi to internet.

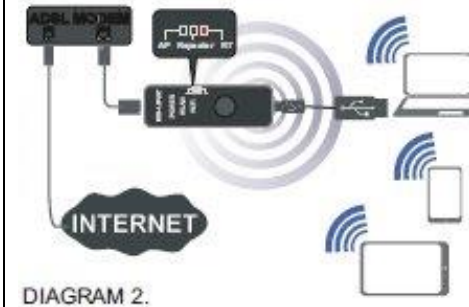


- A. Set the switch BL-MP02 in the "RT" and Plug the equipment in accordance with the diagram 2.
- B. The configuration settings of your Wi-Fi card, select "Obtain an IP address and DNS automatically."
- C. Get wireless BL-MP02 default The SSID is: BL-MP02-XXXXXX, where "X" is are the last six characters MAC address.
- D. Open IE Browser to automatically log on to management of the screen (or type in the address bar any address).

E. Enter the user name and password provided by your Internet service provider



3) WiFi Repeater:

Select Repeater mode, BL-MP02 become Wlan. Repeats, strengthens orextends the range of the received signal Wi-Fi. Useful in areas with an existing network service area.

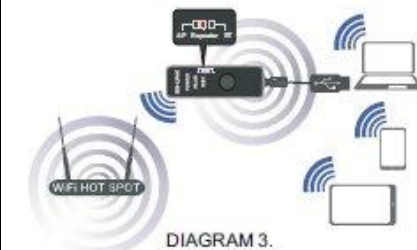

- A. Set the switch BL-MP02 in the "Repeater" and Plug the equipment in accordance with the diagram 3.
- B. The configuration settings of your Wi-Fi card, select "Obtain an IP address and DNS automatically."
- C. Get wireless BL-MP02. Default The SSID is: BL-MP02-XXXXXX, where "X" is are the last six characters MAC address.
- D. Open IE Browser to automatically log on to management of the screen (or type in the address bar any address).

E. Select the network you want to connect BL-MP02 and click on the "Connect". If the network is protected by a password system will ask you to his application.

