



SURVEYOR & CONTRACTORS' TOOLS AND ACCESSORIES

2014 CATALOG



SiteProTM

2014 New Products



SLR202GR
page 4



LL3P
page 6



DT05LS
page 8



Safety Vests
page 26

1400 Tribrach
page 11



Traverse Kit
page 11

Bipods
page 19



GPS Tripod
page 19



Mini Pole
page 16

Prism Adapter
page 18



Topo Shoe
page 18



Field Supplies
page 29



360° Prisms
page 4




Handheld Rod
page 16

Prism Poles
page 15



Range Pole
page 16



Hi-Vis Rods
page 24



SitePro™

Dave White's SitePro is committed to offering quality accessory products for surveying and construction instruments. Integrated with experience from the surveying and construction industry, SitePro offers a diverse range of products- all manufactured and marketed to provide the highest quality at the most competitive prices.

These include tripods, leveling rods, telescopic poles, prism systems, and carrying cases as well as a complete line of laser and optical instruments.

SitePro products are sold through a network of dealers and distributors and also as private-labeled products.

Please contact us with any questions, comments or suggestions at sales@sitepro.us.com

Orders and Shipments, Parts and Repairs:

SitePro

Otterbein, IN 47970 USA

PH: (765) 581-4097

FAX: (765) 581-4098

TOLL: (855) 354-9881

sales@SitePro.us.com

LASER TOOLS	4
OPTICAL INSTRUMENTS	8
BOX LEVELS	10
TRIBRACHS	11
PRISMS	12
PRISM/GPS POLES	15
GNSS ACCESSORIES	18
BIPODS	19
TRIPODS	20
LEVELING RODS	24
MEASURING TAPES	25
SAFETY VEST	26
HAND TOOLS	27
FIELD SUPPLIES	28
HAND LEVELS	30

Surveyor & Contractors' Tools and Accessories

Performance and Accuracy.



NEW!

SLR202GR DUAL DIAL-IN GRADE ROTARY LASER

The SLR202GR features dual dial-in grade ($\pm 10.0\%$) with horizontal and vertical electronic self-leveling laser for precise leveling applications, ideal for both indoor and outdoor use. Vertical laydown positioning provides vertical alignment capabilities and squaring to ensure that walls or partitions are precisely aligned.

- ▶ Manual Mode allows laser to be tilted for simple slope applications
- ▶ Smart H.I. Alert System alerts user when laser has been disturbed or drifts
- ▶ Variable rotation speeds for a wide variety of jobsite visibility settings: 0, 60, 120, 300 and 600RPM
- ▶ Scan Angles: 10°, 45°, 90°, 180°; for maximum visibility
- ▶ Visible 90-degree layout beams (both up and down plumb) for alignment and squaring to ensure that walls or partitions are precisely aligned
- ▶ Clock-wise and counter-clock-wise beam positioning
- ▶ Enclosed Rotor Housing keeps laser safe from tough jobsite conditions
- ▶ Real-time remote control with LCD, adjusts instrument with range up to 65-ft (20m)

Specifications	27-SLR202GR
Accuracy @ 100-ft (30m)	1/8-in (3mm)
Range with Detector (Diameter)	1600-ft (500m)
Interior Range (Diameter)	n/a
Leveling Type (Degrees)	Electronic ($\pm 5^\circ$)
Beam Rating	Class 2M, 650nm
Vertical Self-Leveling @ 100-ft (30m)	n/a
Grade Capability	Dual ($\pm 10.0\%$)
Battery Type	DC 4.8-6V NiMH Battery Pack or (4) C Cell Alkaline
Water/Dust Protection	IP55
Package Contents:	Rotary Laser, RD200 Laser Detector w/Clamp, Rechargeable NiMH Battery Pack, Alkaline Battery Pack, Remote, Target, Glasses Carrying Case, User Manual



Real-Time
Remote Control



SLR300H HORIZONTAL ROTARY LASER

- ▶ Leveling accuracy up to 1/8-in at 100-ft (3mm at 30m) with working range up to 1000-ft (300m) diameter
- ▶ Self leveling range up to $\pm 5^\circ$ that can sense and indicate out-of-level conditions
- ▶ Manual Mode allows laser to tilt for simple slope applications
- ▶ Smart H.I. Alert System alerts user when laser has been moved
- ▶ Dual Manual grade matching up to 8.77% in both axes
- ▶ Enclosed rotor housing keeps laser safe from the elements or tough jobsite conditions

Specifications	27-SLR300H
Horizontal Accuracy @ 100-ft (30m)	1/8-in (3mm)
Range with Detector (Diameter)	1000-ft (305m)
Interior Range (Diameter)	n/a
Leveling Type (Degrees)	Electronic ($\pm 5^\circ$)
Beam Rating	Class 2M, 650nm
Vertical Self-Leveling @ 100-ft (30m)	n/a
Slope/Grade Capability	Dual ($\pm 8.77\%$)
Battery Type	4-C Cell
Water/Dust Protection	IP55
Package Contents:	Rotary Laser, RD200 Laser Detector w/Clamp, Carrying Case, Batteries, User Manual



Precision leveling made simple.

SLR200H HORIZONTAL ROTARY LASER

- ▶ Horizontal self-leveling for precise outdoor leveling applications
- ▶ Leveling accuracy up to 1/8-in at 100-ft (3mm at 30m) with working range up to 1600-ft (500m) diameter
- ▶ Self leveling range up to $\pm 5^\circ$ that can sense and indicate out-of-level conditions
- ▶ Manual Mode allows laser to tilt for simple slope applications
- ▶ Smart H.I. Alert System alerts user when laser has been moved
- ▶ Variable rotation speeds for a wide variety of jobsite visibility settings: 0, 60, 300 and 600RPM
- ▶ Dual Manual grade matching up to 8.77% in both axes
- ▶ Enclosed rotor housing keeps laser safe from the elements or tough jobsite conditions



Specifications	27-SLR200H	27-SLR200HV	27-SLR200HV-G
Horizontal Accuracy @ 100-ft (30m)	1/8-in (3mm)	1/8-in (3mm)	1/8-in (3mm)
Range with Detector (Diameter)	1600-ft (500m)	1600-ft (500m)	1000-ft (305m)
Interior Range (Diameter)	n/a	320-ft (98m)	650-ft (198m)
Leveling Type (Degrees)	Electronic ($\pm 5^\circ$)	Electronic ($\pm 5^\circ$)	Electronic ($\pm 5^\circ$)
Beam Rating	Class 2M, 650nm	Class 2M, 635nm	Class 3R, 525nm
Vertical Self-Leveling @ 100-ft (30m)	n/a	1/8-in (3mm)	1/8-in (3mm)
Slope/Grade Capability	Dual ($\pm 8.77\%$)	Dual ($\pm 8.77\%$)	Dual ($\pm 8.77\%$)
Battery Type	4-C Cell	4-C Cell, NiMH Rechargeable	4-C Cell, NiMH Rechargeable
Water/Dust Protection	IP55	IP55	IP55
Package Contents:	Rotary Laser, RD200 Laser Detector w/ Clamp, Batteries, Carrying Case, User Manual	Rotary Laser, RC28 Remote, Glasses, Magnetic Target, Multi-Mount, RD200 Laser Detector w/Clamp, NiMH Rechargeable Battery Pack, Carrying Case, User Manual	Rotary Laser, RC28 Remote, Glasses, Magnetic Target, Multi-Mount, RD200-G Laser Detector w/Clamp, NiMH Rechargeable Battery Pack, Carrying Case, User Manual

SLR200HV HORIZONTAL & VERTICAL ROTARY LASER

The SLR200HV features horizontal and vertical electronic self-leveling laser for precise leveling applications, ideal for both indoor and outdoor use. Vertical laydown positioning provides vertical alignment capabilities and squaring to ensure that walls or partitions are precisely aligned.

- ▶ Manual Mode allows laser to tilted for simple slope applications
- ▶ Smart H.I. Alert System alerts user when laser has been disturbed
- ▶ Variable rotation speeds for a wide variety of jobsite visibility settings: 0, 60, 300 and 600RPM
- ▶ Scan Angles: 10° , 45° , 90° , 180° ; for maximum visibility
- ▶ Visible 90-degree layout beams (both up and down plumb) for alignment and squaring to ensure that walls or partitions are precisely aligned
- ▶ Clock-wise and counter-clock-wise beam positioning
- ▶ Enclosed Rotor Housing keeps laser safe from tough jobsite conditions
- ▶ Windy Mode Feature allows laser to level at jobsites with high winds or vibrations

SLR200HV-G GREEN BEAM HORIZONTAL & VERTICAL ROTARY LASER

The green beam laser of the SLR200HV-G is 400% brighter than red beams, ideal for indoor construction. Horizontal and vertical electronic self-leveling laser for precise leveling applications. Has all the features of the SLR200HV.



Toll Free: **(855) 354-9881**

Precise Layout & Alignment



NEW!

LL3P 360° 3-PLANE LAYOUT AND ALIGNMENT LINE LASER

Projects a 360° horizontal laser plane and two 360° vertical planes - creating five 90° intersecting points for level and alignment applications.

- ▶ Self-levels and indicates out-of-level condition
- ▶ Pendulum system locks when switched off
- ▶ Detector mode allows laser to be used in bright light conditions with optional line laser detector (use with optional LLD20 laser receiver)
- ▶ Adapter and support base with strong magnets, 1/4-20 and 5/8-11 thread, slots for screws or nails, raceways for optional straps
- ▶ Easy access battery compartment



Specifications	27-LL3P
Accuracy:	1/4-in at 100-ft (6mm @ 10m)
Range:	65-ft (20m)
Range with Detector (Optional):	165-ft (50m)
Leveling Type:	Self-Leveling ($\pm 4^\circ$)
Beam Rating:	Class 2M, 635nm
Power Supply	Three (3) AA cell alkaline provide approx.
Kit Contents	Laser Level, Target, Multi-Mount Adapter, Laser Enhancement Glasses, Batteries, Carrying Case, User Manual

LL2P LINE LAYOUT LASER

Vertical, horizontal & cross laser line modes: projects two lines independently or together for a wide range of level and/or plumb applications.

- ▶ Tilt "manual mode" cross line – ideal for tilting laser cross lines manually at any angle
- ▶ Robust over-molded housing
- ▶ Detector mode allows laser to be used in bright light conditions with optional line laser detector (use with optional LLD20 laser receiver)
- ▶ Adapter and support base with strong magnets, 1/4-20 and 5/8-11 thread, slots for screws or nails, raceways for optional straps
- ▶ Easy access battery compartment



Specifications	27-LL2P
Horizontal Line Accuracy:	1/8-in at 30-ft (3mm @ 10m)
Vertical Line Accuracy:	3/16-in at 30-ft (2.5mm @ 10m)
Range:	65-ft (20m)
Range with Detector (Optional):	165-ft (50m)
Leveling Type:	Self-Leveling ($\pm 4^\circ$)
Beam Rating:	Class 2M, 635nm
Power Supply	Three (3) AA cell alkaline provide approx. >8hrs of continuous use
Kit Contents	Laser Level, Target, Magnetic Adapter, 360-Degree Support Base, Batteries, Carrying Case, User Manual

LASER TOOL ACCESSORIES

RD200/RD200-G ROTARY LASER DETECTOR

- ▶ Locate rotary laser beam in bright light or over long distances; working range dependent on rotary laser range
- ▶ Rugged housing and gasket sealed for water and dust protection (IP56).
- ▶ Built-in memory feature recalls last position of beam if the unit is moved out of the plane of light
- ▶ Built-in leveling bubble vial
- ▶ Automatic shut-off turns off receiver after seven (7) minutes of inactivity to preserve battery life
- ▶ Front and back LCD displays for ease of use in the field
- ▶ Two accuracy settings provide for rough and final grade checking
- ▶ Includes rod clamp

Specifications	27-RD200	27-RD200-G
Type of Beam Detection	Red Laser	Green Laser
Speaker Volume	3 Step (LOW / HIGH / OFF)	3 Step (LOW / HIGH / OFF)
Sensitivity	Fine ($\pm 1.0\text{mm}$) / Coarse ($\pm 2.5\text{mm}$)	Fine ($\pm 1.0\text{mm}$) / Coarse ($\pm 2.5\text{mm}$)
LCD Display	Front and Back	Front and Back
Display Channels	3	3
Battery Type	9v	9v
Operating Temperature	14°F to 122°F (-10°C to +50°C)	14°F to 122°F (-10°C to +50°C)



RC25 REMOTE

- ▶ Remote controls for SLR200H rotary laser
- ▶ Working range up to 100-ft (30m)
- ▶ Batteries: 2- AA alkaline



27-RC25

RC28 REMOTE

- ▶ Remote controls for SLR200HV rotary laser
- ▶ Working range up to 100-ft (30m)
- ▶ Batteries: 2- AA alkaline



27-RC28

LLD20 RECEIVER

- ▶ Range up to 165-ft (50m) with LL2P
- ▶ Front & back LED display
- ▶ Built-in leveling bubble vial
- ▶ Battery: 9V alkaline



27-LLD20

LASER TARGET

- ▶ Enhances laser visibility
- ▶ Magnetic base for attachment to drop ceilings or metal studs
- ▶ Graduations - inch/cm



27-TARGET

LASER GLASSES

- ▶ Improves visibility of laser beams under bright conditions or over distances
- ▶ One size fits all



27-GLASSES

MULTI-MOUNT

- ▶ Mounts rotary laser to surfaces for applications such as drop ceilings, remodeling, and masonry
- ▶ 5/8-11 thread mounting stud to mount rotary laser vert. on tripod.
- ▶ Graduations - inch/cm



27-MT4

SitePro laser products are manufactured to Class 2M or 3R laser classification. Please refer to product warning labels for actual laser output and classification.

2M

Laser radiation. Do not stare into the beam or view directly with optical instrument.



3R

Laser radiation. Do not stare into the beam or view directly with optical instrument.

Maximize Job Performance.

SKT05/SKT05L 5-SEC. DIGITAL THEODOLITE


- ▶ Superior optics with 5" precise vertical and horizontal accuracy and readout
- ▶ Advanced absolute encoder system enhances measuring reliability and reduces power consumption
- ▶ Easy-to-read dual LCD back-lit displays
- ▶ Optical (26-SKT05) or laser (26-SKT05L) plummet for centering of point
- ▶ Automatic power shut-off
- ▶ Easy access battery compartment
- ▶ Water resistant, sealed construction

Specifications	26-SKT05	26-SKT05L
Magnification	30X	30X
Resolving Power	3"	3"
Field of View	1°30'	1°30'
Minimum Focus	3.3-ft (1.0m)	3.3-ft (1.0m)
Angular Accuracy	5 Sec.	5 Sec.
Minimum Reading:	1" / 5" switchable	1" / 5" switchable
Minimum Focus:	1.3m or 4.26ft	1.3m or 4.26ft
Stadia Ratio:	1:100	1:100
Tilt Sensor:	Yes, +/- 3'	Yes, +/- 3'
Plummet	Optical	Laser Diode, Class 2M
Kit Contents:	Digital Transit, Sunshade, Tool Kit, Rain Cover, Drying Cloth, Plumb Bob, Carrying Case, Rechargeable Battery Pack/Charger, Alkaline Battery Tray, User Manual	Digital Transit, Sunshade, Tool Kit, Rain Cover, Drying Cloth, Plumb Bob, Carrying Case, Rechargeable Battery Pack/Charger, Alkaline Battery Tray, User Manual



DT05/DT05LS 5-sec. DIGITAL THEODOLITE

- ▶ Incremental encoding detection system with dual digital displays for easy to read precise readouts
- ▶ 30-power telescope provides a bright wide field of view and the built-in 3x optical plummet enables quick and easy setups
- ▶ 5-second precise vertical and horizontal accuracy and readout with available 1-second display option
- ▶ **DT05LS features laser sight to easily and accurately place a beam in the line of sight**
- ▶ Automatic power shut-off
- ▶ Optical plummet for centering of point
- ▶ Coaxial tangent and clamp screws provide ease of use in sighting and alignment functions
- ▶ Built-in battery pack can be attached and detached by a single action
- ▶ Water resistant, sealed construction

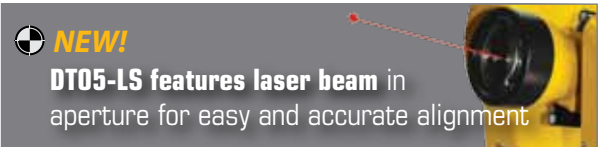

Specifications	26-DT05	26-DT05-LS
Magnification	30X	30X
Resolving Power	3.5"	3.5"
Field of View	1°30'	1°30'
Minimum Focus	4.27-ft (1.3m)	4.27-ft (1.3m)
Angular Accuracy	5 Sec.	5 Sec.
Minimum Reading:	1" / 5" switchable	1" / 5" switchable
Minimum Focus:	1.3m or 4.26ft	1.3m or 4.26ft
Stadia Ratio:	1:100	1:100
Tilt Sensor:	Yes, +/- 3'	Yes, +/- 3'
Kit Contents:	Digital Transit, Sunshade, Tool Kit, Rain Cover, Drying Cloth, Plumb Bob, Carrying Case, Rechargeable Battery Pack/Charger, Alkaline Battery Tray, User Manual	Digital Transit, Sunshade, Tool Kit, Rain Cover, Drying Cloth, Plumb Bob, Carrying Case, Rechargeable Battery Pack/Charger, Alkaline Battery Tray, User Manual



DIAGONAL EYEPIECE

- ▶ Use in areas where large buildings or obstacles prevent an ideal working distance between the Theodolite and target object
- ▶ Measure any target long as the distance is at least 4-1/4' (1.3m) between the instrument and target
- ▶ Angles and points can be measured by the telescope in any direction eyepiece
- ▶ Provides an erect image, and 1°-30' angle of view

Model	Description
26-DTEP	Diagonal Eyepiece, use with DT05/DT05LS
26-SKTEP	Diagonal Eyepiece, use with SKT05/SKT05L



AUTOMATIC LEVELS

Specifications	25-SP24XC	25-SP28XC	25-SK24X	25-SK28X	25-SP32XP
Magnification	24X	28X	24X	28X	32X
Leveling Accuracy	1/16-in at 150-ft (1.5mm @ 45m)	1/16-in at 200-ft (1.5mm @ 60m)	1/16-in at 150-ft (1.5mm @ 46m)	1/16-in at 200-ft (1.5mm @ 60m)	1/16-in at 250-ft (1.5mm @ 76m)
Angular Accuracy	1°	1°	1°	1°	1°
Working Range	300-ft (92m)	350-ft (107m)	300-ft (92m)	350-ft (107m)	400-ft (120m)
Field of View:	1° 30' or 2.6ft@100ft	1° 30' or 2.6ft@100ft	1° 20'	1° 20'	1° 20'
Minimum Focus Distance:	1.64 feet	1.64 feet	< 1-ft	< 1-ft	< 1-ft
Compensator range:	+/-15'	+/-15'	+/-15'	+/-15'	+/-15'
Comp Setting	±0.5"	±0.4"	±0.3"	±0.3"	±0.3"
Kit Contents	Level, Lens Cover, Plumb Bob, Adjustment Tools, Carrying Case, User Manual	Level, Lens Cover, Plumb Bob, Adjustment Tools, Carrying Case, User Manual	Level, Lens Cover, Plumb Bob, Adjustment Tools, Carrying Case, User Manual	Level, Lens Cover, Plumb Bob, Adjustment Tools, Carrying Case, User Manual	Level, Lens Cover, Plumb Bob, Adjustment Tools, Carrying Case, User Manual

SK24X & SK28X PRO AUTOMATIC LEVEL

These autolevels feature excellent magnification with large aperture that allows more light for a sharper image. Finely tuned magnetically dampened compensator levels and stabilizes the line of sight despite fine vibrations providing high precision leveling results

- ▶ Compensator is designed with four suspension wires made of super-high-tensile metal that features minimal thermal expansion coefficient
- ▶ Horizontal and vertical cross hairs with 1:100 stadia lines - measures level, alignment & estimates distance
- ▶ Fine motion horizontal tangent knobs on left and right sides allow friction braked rotation, endless horizontal drive and precise pointing and angle measurement
- ▶ Peep sight to aid in sighting
- ▶ Solid leveling metal base with three precision leveling screws provides stability and accuracy in all weather and job site conditions
- ▶ 360° Graduated horizontal circle in 1-degree increments for layout applications
- ▶ 10/2mm circular bubble vial with 90-degree mirror for accurate and quick set-up



SP32XP PROFESSIONAL AUTOMATIC LEVEL

The XP-Series is designed with four suspension compensator wires made of super-high-tensile metal that features minimal thermal expansion coefficient. Finely tuned magnetically dampened compensator levels and stabilizes the line of sight despite fine vibrations providing high precision leveling results. Excellent magnification with large aperture that allows more light for a sharper image.

- ▶ Horizontal and vertical cross hairs with 1:100 stadia lines - measures level, alignment & estimates distance
- ▶ Fine motion horizontal tangent knobs on left and right sides allow friction braked rotation, endless horizontal drive and precise pointing and angle measurement
- ▶ Peep sight to aid in sighting
- ▶ Solid leveling metal base with three precision leveling screws provides stability and accuracy in all weather and job site conditions
- ▶ 360° Graduated horizontal circle in 1-degree increments for layout applications
- ▶ 10/2mm circular bubble vial with 90-degree mirror for accurate and quick set-up



SP24XC/SP28XC CONTRACTORS AUTOMATIC LEVEL

The SitePro XC-Series automatic levels are designed for the contractor that needs optimum range and accuracy. Available in both 24-power and 28-power lens' featuring crisp, clear optics that allow for brighter, sharper images-especially in low light conditions

- ▶ Magnetically dampened, automatic compensator
- ▶ Horizontal and vertical cross hairs with 1:100 stadia lines - measures level, alignment & estimates distance
- ▶ Fine motion horizontal tangent knobs on left and right sides allow friction braked rotation, endless horizontal drive and precise pointing and angle measurement
- ▶ Solid leveling metal base with three precision leveling screws provides stability in all weather and jobsite conditions
- ▶ 360° Graduated horizontal circle in 1-degree increments for layout applications
- ▶ 8' / 2 mm circular bubble vial with 90-degree mirror for quick and accurate set-up



TL20X 20-POWER TRANSIT LEVEL

- ▶ Fast set-up, simple to use for leveling and vertical applications
- ▶ Accuracy up 1/4-in at 100' (6mm at 30m) with up to 200-ft (60m) working range
- ▶ Clamps and tangents bring your instrument quickly on target.
- ▶ 15 minute horizontal circle
- ▶ 3-screw leveling base with 5/8-11 thread for tripod
- ▶ Built-in sunshade with rubber eyepiece



Specifications	25-TL20X
Magnification	20X
Leveling Accuracy (@ 100-ft)	1/4-in (6mm)
Working Range	200-ft (60m)
Thread Tripod Base	5/8-11
Kit Contents	Transit/Level, Adjustment Tools, Carrying Case, User Manual

DL24 / DL48 DIGITAL LEVEL

- ▶ Precise digital measuring in degrees, percent, or inches/feet
- ▶ Absolute and relative angle measurement
- ▶ Range of display is between 0° and 90°
- ▶ LED back-lit display with audible sound
- ▶ Rugged with aluminum construction
- ▶ Hold/lock measurement feature
- ▶ Horizontal and vertical measuring accuracy of ±0.1°



29-DL24



29-DL48

LED back-lit display with audible sound. Display readout rotates when measuring overhead.	Specifications	29-DL24	29-DL48
	Length (Approx.)	24" (62cm)	48" (120cm)
	Measuring Range	0-360° (4 x 90°)	0-360° (4 x 90°)
	Measuring Accuracy	0° and 90°, ±0.1° -1° to 89°, ±0.2°	0° and 90°, ±0.1° -1° to 89°, ±0.2°
	Power Supply	2 x AAA Alkaline Batteries	2 x AAA Alkaline Batteries
	Operating Temperature	32° F ... 104° F (0°C ... +40 °C)	32° F ... 104° F (0°C ... +40 °C)
	Weight	1.34 lb (610g)	2.65 lb (1200g)
	Dimensions	23.7" x 2.6" x 1.2" (62 x 6.6 x 3 cm)	47.3" x 2.6" x 1.2" (120 x 6.6 x 3 cm)
	Includes	Digital Level, Batteries, Carrying Case, User Manual	Digital Level, Batteries, Carrying Case, User Manual

Soft Case Included



TRIBRACH

PRECISION TRIBRACH, OPTICAL

- ▶ Smooth locking mechanism with secure motion foot screws
- ▶ Precise alignment of support cavity to the base plate assures accurate centering of instrument
- ▶ Optical plummet
- ▶ Durable to endure most weather conditions



05-1200-B



NEW!
05-1400-GY



05-1300-B

Model	Style	Plummet	Wgt
05-1200-B	Swiss Style, Black	Optical- 0.5-15m focus	1.85 lb (.84 kg)
05-1200-GR	Swiss Style, Green	Optical- 0.5-15m focus	1.85 lb (.84 kg)
05-1200-GY	Swiss Style, Grey	Optical- 0.5-15m focus	1.85 lb (.84 kg)
05-1200-Y	Swiss Style, Yellow	Optical- 0.5-15m focus	1.85 lb (.84 kg)
05-1300-B	Swiss Style, Black	Laser- 0.5-15m focus	2.2 lb (.99 kg)
05-1400-GY	Japanese Style, Grey	Optical- 0.5-15m focus	1.85 lb (.84 kg)



21-1200

PADDED BAG

- ▶ Protect tribrach during transport and storage
- ▶ Fits all 05-1200 models
- ▶ Size: 9" x 8.5" x 5.5"
- ▶ Available separately.



NEW!

TRAVERSE KIT

- ▶ For precise setups and traversing applications
- ▶ The 2.5X optical plummet
- ▶ 60-second plate vial, adjustable
- ▶ Precision-machined axis rotates 360°
- ▶ Compatible with all prisms with a 24.9 mm bayonet base
- ▶ Adjustable height: 100 mm-to-120 mm
- ▶ Traverse tribrach adapter fits all standard three-prong tribrachs
- ▶ The over point accuracy is 0.5 mm at 1.5 m

Model	Description
05-3511K	Traverse Kit - Includes 05-3511 Tribrach Adapter, 05-1201 Tribrach, 03-1010-0 Prism System (not shown), Padded Carrying Case
05-3511	Traverse Tribrach Adapter with Optical Plummet
05-1201-B	Tribrach without Optical Plummet, Black
21-3500	Padded Carrying Case, for Traverse Kit (Not Shown)



NEW!
05-3511

NEW!
05-1201

TRIBRACH ADAPTERS

- ▶ Anodized black aluminum
- ▶ 5/8-11 brass thread mounting
- ▶ Anodized aluminum mounting studs

Model	Description
05-2520	Fixed Tribrach Adapter, 5/8-11 female thread
05-2521	Friction Type Rotating Tribrach Adapter
05-2525	Zeiss/Wild Type Rotating Tribrach Adapter, Adjustable



05-2521



05-2520



05-2525

Quality Prisms Systems

0/-30MM TILTING SINGLE PRISMS

- ▶ 0/-30mm constant prism system
- ▶ All metal holder and target
- ▶ Weather-proof sealed 2-1/2" (62.5mm) precise prism
- ▶ Aluminum tension adjusting knob
- ▶ Universal with leading manufacturers
- ▶ 5/8-11 bayonet adapter
- ▶ Colors available: Orange, Yellow



PADDED BAG

- ▶ Protect prism during transport and storage
- ▶ Fits all 03-1010 models
- ▶ Size: 9" x 8.5" x 5.5"

Model	Description	Color
03-1010-0	Single Tilt Prism Assembly with Target Includes Padded Bag (21-1010-Y)	Orange
03-1010-CC	Single Tilt Prism Assembly with Target, Copper Coated Includes Padded Bag (21-1010-Y)	Orange
03-1010-Y	Single Tilt Prism Assembly with Target Includes Padded Bag (21-1010-Y)	Yellow
03-1011-0	Prism in Canister Only	Orange
03-1012-0	Prism Holder & Target Assembly	Orange



-  **NEW!**
- ### 62MM STROBE PRISM

 - ▶ Red LED strobes every two seconds
 - ▶ Sealed prism canister with an standard M20 thread
 - ▶ Fits all holders designed for screw-in style prisms
 - ▶ The battery (camera style) included and provides approximately 48 hours of continuous use

Model	Description	Color
03-4011	62mm Strobe Prism, Screw-in style	Orange



SINGLE TILT PRISM SYSTEM, POLYCARBONATE

- ▶ Fully compatible with leading manufacturers such as Sokkia, Trimble, Topcon, etc.
- ▶ Built-in peep sight for easy setup
- ▶ Precision glass up to 2 arc seconds with 0/-30mm offset tilting prism assembly
- ▶ Prism canister and holder/target molded from durable lightweight polycarbonate, with metal yoke
- ▶ Single tilt holder tilts to 360 degrees

PADDED BAG

- ▶ Protect prism during transport and storage
- ▶ Fits 03-2010 models

Model	Description	Color
03-2010M-0	Single Tilt Prism System, Polycarbonate with Metal Yoke, Includes padded carrying case	Orange
03-2012M-0	Single Tilt Prism Mount Only, Polycarbonate with Metal Yoke	Orange



IMPROVED
03-2010M-0

0/-30MM MINI PRISM SYSTEM

- ▶ 25.4mm diameter prism, black anodized sealed aluminum can.
- ▶ 5/8-11 mounting thread.
- ▶ On-board circular bubble leveling vial
- ▶ Includes: plumb bob prism point, 5/8-11 height extension, carrying case with belt loop

Model	Description	Color
03-1500-0	Mini Prism System, Side On-Board Vial	Orange
03-1500-CC	Mini Prism System, Side On-Board Vial, Copper Coated	Orange
03-1600-CC	Mini Prism System, Centered On-Board Vial, Copper Coated	Orange
03-1600-0	Mini Prism System, Centered On-Board Vial	Orange



03-1600-CC

FIXED L-BAR 25MM SETUP PRISM

- ▶ Ideal for surveying locations where a permanent mounting is needed
- ▶ 25mm copper-coated prism which is water and dust proof
- ▶ Assembly made of black anodized aluminum, 10.3mm ID mounting hole

Model	Description	Color	Weights
03-1700-B	Fixed "L-Bar" Single Set-up Prism with Copper Coated Prism	Black	0.45lb (.020kg)



03-1700-B

MINI PRISM STAKEOUT POLE SYSTEM

- ▶ 25mm precise mini prism with 0/-30mm offset tilting aluminum prism and holder.
- ▶ Black anodized sealed aluminum can
- ▶ Two on-board circular bubble vials
- ▶ Four (4) precision machined sectional poles
- ▶ Includes prism system, four (4) sectional poles, point, adjustment tools, and padded carrying case

Model	Description	Color
03-1518-R	Mini Prism Stakeout Pole System	Red



STAKEOUT MINI-PRISM

- ▶ 25mm copper-coated mini prism with 0/-30mm offset tilting prism assembly
- ▶ Top & bottom adjustable bubble vials
- ▶ Includes replaceable point, carrying case

Model	Description	Color
03-1520-OC	Stakeout Mini-Prism, Copper Coated	Orange



 **NEW!**

360° MINI REFLECTOR SYSTEM

- ▶ Compatible with Leica instruments and offsets.
- ▶ Prism assembly is set to precise standards.
- ▶ Ideal for 360° surveying applications
- ▶ 30mm offset, 360° reflector
- ▶ Push button for easy release

Model	Description	Wgt
03-1360	360° Mini Reflector System. Includes 4-section pole set, mount with bubble vial, case	



 **NEW!**

360° ROBOTIC PRISM SYSTEM

- ▶ Precision 360° robotic prisms ensure tracking lock with robotic instruments is quick
- ▶ Seven 25.4mm prisms
- ▶ 0mm offset
- ▶ Includes height adapter system with 5/8-11 thread

Model	Description	Color
03-3600	360° Robotic Prism System	Black



TWIST LOCK ALUMINUM PRISM POLES

- ▶ Adjustable tip with 5/8-11 adapter for prism mounting
- ▶ Twist lock system with built-in 40-minute precise level vial
- ▶ The soft rubber knob is easy to tighten and loosen
- ▶ Easily visible precise level vial
- ▶ Anodized dual-graduation marks



Specifications	Length	Material	Locking Type	Wgt	Mounting Type	Sections
07-4705-TMA-FY	5.10' (1.55m)	Aluminum-Florescent	Twist Lock	2.8 lbs (1.29 kg)	5/8-11, Adj. H.I.	3
07-4708-TMA	8' (2.5m)	Aluminum-Red/White	Twist Lock	3.1 lbs (1.4kg)	5/8-11, Adj. H.I.	2
07-4708-TMA-FY	8' (2.5m)	Aluminum-Florescent	Twist Lock	3.1 lbs (1.4kg)	5/8-11, Adj. H.I.	2
07-4712-TMA	12' (3.7m)	Aluminum-Red/White	Twist Lock	4.1 lbs (1.85kg)	5/8-11, Adj. H.I.	3
07-4712-TMA-FY	12' (3.7m)	Aluminum-Florescent	Twist Lock	4.1 lbs (1.85kg)	5/8-11, Adj. H.I.	3
07-4715-TMA	15' (4.6m)	Aluminum - Red/White	Twist Lock	6.2 lbs (2.79kg)	5/8-11, Adj. H.I.	4
07-4715-TMA-FY	15' (4.6m)	Aluminum-Florescent	Twist Lock	6.2 lbs (2.79kg)	5/8-11, Adj. H.I.	4

TWIST LOCK ULTRALITE PRISM POLES

- ▶ Lightweight carbon fiber prism pole with inner aluminum pole
- ▶ Adjustable tip with 5/8-11 adapter for prism mounting
- ▶ Twist lock system with built-in 40-minute precise level vial
- ▶ The soft rubber knob is easy to tighten and loosen
- ▶ Easily visible precise level vial
- ▶ Anodized dual-graduation marks



Specifications	Length	Material	Locking Type	Wgt	Mounting Type	Sections
07-4608-TMA	8' (2.5m)	Carbon Fiber	Twist Lock	n/a	5/8-11, Adj. H.I.	2

COMPRESSION LOCK PRISM POLES

- ▶ Adjustable tip with 5/8-11 adapter for prism mounting
- ▶ Compression lock system is constructed of brass/aluminum and provides a quick positive hold on extension pole
- ▶ Easily visible precise level vial
- ▶ Anodized dual-graduation marks



Specifications	Length	Material	Locking Type	Wgt	Mounting Type	Sections
07-4208-TMA	8' (2.5m)	Aluminum	Compression Lock	2.1 lbs (0.95kg)	5/8-11, Adj. H.I.	2
07-4215-TMA	15' (4.6m)	Aluminum	Compression Lock	3.8 lbs (1.72kg)	5/8-11, Adj. H.I.	4



 **NEW!**

MINI STAKEOUT POLE, 1.28 FT ALUMINUM

The SitePro mini stakeout pole is only 1.28 ft tall with a 5/8-11 thread fixed tip for prism mounting.

- ▶ Built-in 40-minute precise level vial
- ▶ Mostly used with a Mini Prism System
- ▶ Can be used as a pole extension, 1-1/4" outside diameter.
- ▶ Includes prism pole point

Specifications	Length	Material	Wgt	Mounting Type	Sections
07-4001-FY	1.28' (0.39m)	Aluminum	1.5 lbs (0.68kg)	5/8-11, Fixed	1

 **NEW!**

4.7" MINI HANDHELD ROD

The SitePro mini handheld rod features a 5/8-11 threaded stud with adjustable bubble vial. Use with any prism system that fits the 5/8-11 male thread.

- ▶ Height of 4.7" (120 mm)
- ▶ built-in adjustable 40-min circular bubble vial
- ▶ Removable tip

Specifications	Length	Material	Wgt	Mounting Type	Sections
07-4047	4.7" (120mm)	Aluminum	0.4 lbs (0.18kg)	5/8-11, Fixed	na

2M TWO-PIECE GNSS ROVER ROD

- ▶ Lightweight 2 section pole
- ▶ Carbon fiber or aluminum model
- ▶ Fixed height at two (2) meters
- ▶ On-board 40-minute, adjustable circular vial
- ▶ Easy soft-grip

Specifications	Length	Heights	Material	Locking Type	Wgt	Sections
09-2002-M	2.0m (7.22 ft)	Fixed, 7.22 ft (2m)	Carbon fiber, Black	5/8-11 Fixed	1.76 lbs (0.80kg)	2
09-2102-M	2.0m (7.22 ft.)	Fixed, 7.22 ft (2m)	Aluminum, Yellow	5/8-11 Thread	1.76 lbs (0.80kg)	2

3.6M ALUMINUM RANGE POLE

- ▶ Lightweight aluminum, 3-section with steel point
- ▶ Electrostatically powder-coated white and red
- ▶ 5/8-11 female thread


Specifications	Length	Material	Locking Type	Wgt	Mounting Type	Sections
09-3812	Fixed, 3.6m (12 ft)	Aluminum	5/8-11	3.4 lb (1.54kg)	5/8-11, Adj. H.I.	3

 **NEW!**

3.6M COMPOSITE RANGE POLE

- ▶ Lightweight non-conductive fiberglass, 3-section with point (with rubber boot)
- ▶ Sections are 4-ft in length with alternate white and red striping
- ▶ 1-1/4" (32mm) diameter tubes with 5/8-11 male and female thread metal inserts

Specifications	Length	Material	Locking Type	Wgt	Mounting Type	Sections
09-3912	Fixed, 3.6m (12 ft)	Non- Conductive Fiberglass	5/8-11	3.4 lb (1.54kg)	5/8-11, Adj. H.I.	3

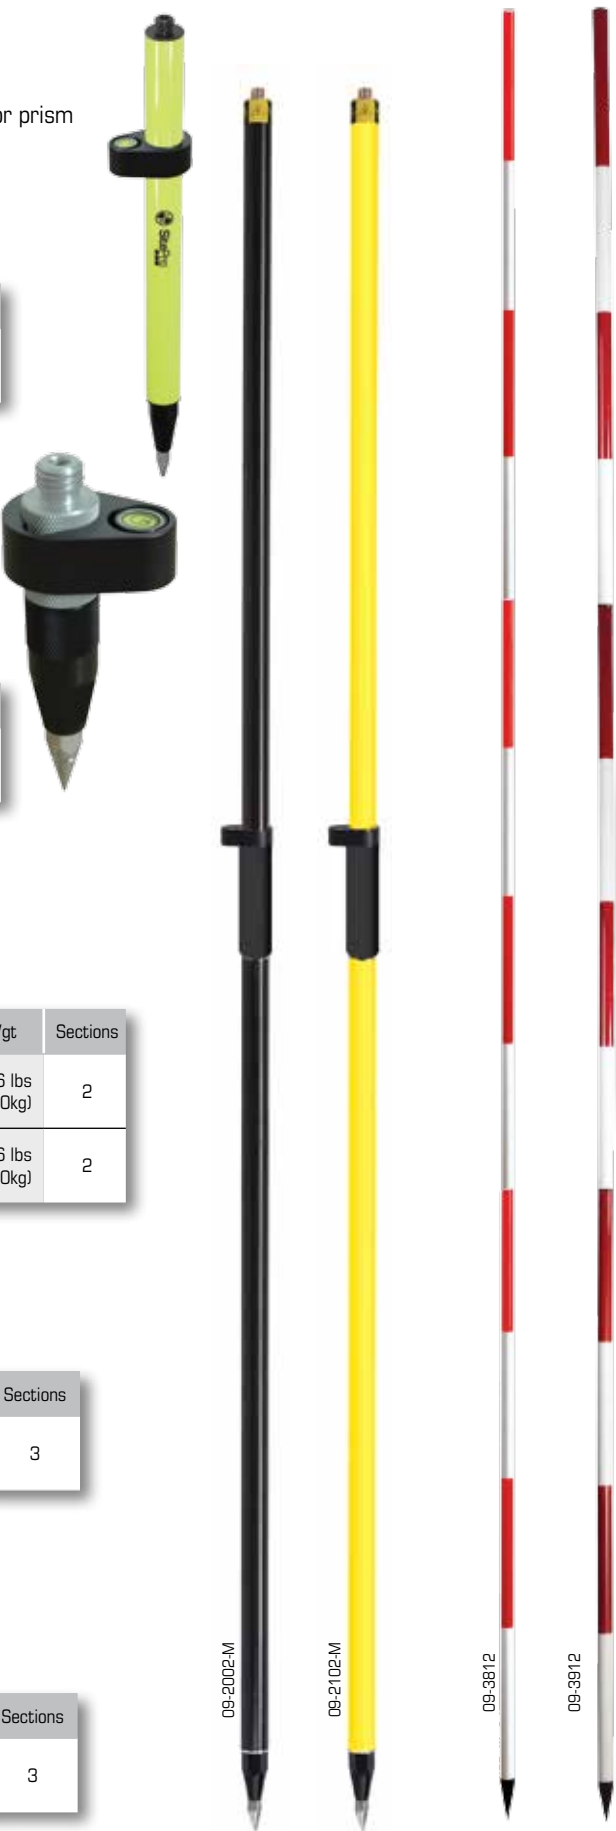

*All SitePro Poles and Rods Include Soft Carrying Case

2M SNAP-LOC ROVER ROD

- ▶ Lightweight telescoping 2-section pole
- ▶ Snap-loc for no slip with compression lock
- ▶ On-board 40-minute, adjustable circular vial



Specifications	Length	Heights	Material	Outer Pole Graduations	Wgt	Sections
09-2022-M	2.0m (7.22 ft)	7.22 ft (2m), Collapses to 4.4 ft (1.354m)	Carbon Fiber, Black	-		2
09-2122-M	2.0m (7.22 ft)	7.22 ft (2m), Collapses to 4.4 ft (1.354m)	Aluminum, Yellow	-	1.76 lbs (0.80kg)	2
09-2122-GT	2.0m (7.22 ft)	7.22 ft (2m), Collapses to 4.4 ft (1.354m)	Aluminum, Fluorescent	10ths 100ths	1.76 lbs (0.80kg)	2
09-2122-GM	2.0m (7.22 ft)	7.22 ft (2m), Collapses to 4.4 ft (1.354m)	Aluminum, Fluorescent	metric	1.76 lbs (0.80kg)	2

3-POSITION CARBON FIBER GPS ROVER ROD

- ▶ Lightweight telescoping carbon fiber pole
- ▶ Snap-loc for no slip with compression lock - 3 heights: 2m, 1.8m or 1.6m and collapses to 1.343m
- ▶ On-board 40-minute, adjustable circular vial



Specifications	Length	Heights	Material	Outer Pole Graduations	Wgt	Sections
09-2222-M	2.2m (7.87 ft)	1.6m, 1.8m, 2m (5.25 ft, 5.9 ft, 6.56 ft)	Carbon fiber	-	1.9 lbs (0.84kg)	2
09-2222-GT	2.2m (7.87 ft)	1.6m, 1.8m, 2m (5.25 ft, 5.9 ft, 6.56 ft)	Carbon fiber	10ths 100ths	1.9 lbs (0.84kg)	2
09-2222-GM	2.2m (7.87 ft)	1.6m, 1.8m, 2m (5.25 ft, 5.9 ft, 6.56 ft)	Carbon fiber	metric	1.9 lbs (0.84kg)	2



NEW!

3-POSITION ALUMINUM GPS ROVER ROD

- ▶ All-aluminum telescoping pole
- ▶ Snap-loc for no slip with compression lock - 3 heights: 2m, 1.8m or 1.6m and collapses to 1.34m
- ▶ On-board 40-minute, adjustable circular vial



Specifications	Length	Heights	Material	Outer Pole Graduations	Wgt	Sections
09-2322-GM	2.2m (7.87 ft)	1.6m, 1.8m, 2m (5.25 ft, 5.9 ft, 6.56 ft)	Aluminum	Metric	2.2 lbs (0.99kg)	2
09-2322-GT	2.2m (7.87 ft)	1.6m, 1.8m, 2m (5.25 ft, 5.9 ft, 6.56 ft)	Aluminum	10ths 100ths	2.2 lbs (0.99kg)	2

09-2708-TM 2.4M CARBON FIBER ROBOTICS POLE

- ▶ Lightweight telescoping carbon fiber pole with dual graduations imprinted on inner - 10ths/100ths
- ▶ Twist locking system with stainless steel locking pin for fixed length positioning
- ▶ On-board 40-minute, adjustable circular vial



Extended Length	Heights	Material	Locking Type	Wgt	Sections
2.4m (7.87 ft) -GPS 2.5m (8.20 ft) -Prism	1.8m, 2m, 2.2m, 2.4m (5.9 ft, 6.56 ft, 7.22 ft, 7.87 ft)	Carbon fiber, Aluminum	Twist Lock	2.2 lbs (1.0 kg)	2

09-2122-GM

09-2222-M

09-2222-GT

09-2322-GT

09-2708-TM

Toll Free: (855) 354-9881



QUICK RELEASE SUREGRIP™ CLAMPS

- ▶ Easily clamps to pole with special design to prevent overtightening the pole clamp screw.
- ▶ Clamping feature is limited to prevent overtightening on pole
- ▶ Ideal for RTK and GNSS surveys requiring a pole and a data collector.
- ▶ Made of anodized aluminum for durability and performance.
- ▶ Designed to fit a pole diameter of 1.25-in (32mm).
- ▶ Compatible with most popular quick-release cradles to hold data controllers.

Specifications	Description	Fits Pole Diameter	Wgt
10-5215	Sure-Grip Quick-Release Pole Clamp	1.25-in (32mm)	2
10-5215X	Sure-Grip Quick-Release Pole Clamp with Vial and Compass	1.25-in (32mm)	3



10-5215



10-5215X

QUICK RELEASE SUREGRIP™ CRADLES FOR DATA COLLECTOR/CONTROLLER

- ▶ Easily secures data collector/controller with anti-crush quick release design that locks cradle when tightened
- ▶ Plugs directly into quick-release pole clamps
- ▶ Durable anodized aluminum design

Specifications	Description	Designed to fit	Wgt (lbs)
10-5250	5250 Sure-Grip Cradle for Data Collector/Controller	TSC 2™, Ranger™ 300X, 500X	0.42
10-5252	5252 Sure-Grip Cradle for Data Collector/Controller	Allegro, JETT•ce, Explorer, Tporacker, FC-2200	0.42
10-5254	5254 Sure-Grip Cradle for Data Collector/Controller	FC-100, Mobile Mapper CE/CX, ProMark 3	0.63
10-5257	5257 Sure-Grip Cradle for Data Collector/Controller	Archer, Leica DX10, Carlson Mini, Javad Victor	0.50
10-5262	5262 Sure-Grip Cradle for Data Collector/ Controller	Carlson Surveyor, Surveyor+ (Not Shown)	0.43
10-5263	5263 Sure-Grip Cradle for Data Collector/Controller	FC-2500	0.41
10-5265	5265 Sure-Grip Cradle for Data Collector/Controller	TSC3	0.46
10-5269	5269 Sure-Grip Cradle for Data Collector/Controller	FC236/X7, Q/R, GETAC PS236	0.46



10-5250



10-5263



10-5252



10-5265



10-5254



10-5269



10-5257

ADAPTER, PRISM



NEW!

07-2080 SNAP-ON TYPE PRISM ADAPTER

- ▶ Adjustable tip with 5/8-11 adapter for prism mounting
- ▶ Twist lock system with built-in 40-minute precise level vial
- ▶ The soft rubber knob is easy to tighten and loosen
- ▶ Easily visible precise level vial
- ▶ Anodized dual-graduation marks



NEW!

07-191 PRISM POLE TOPO SHOE

- ▶ 3.37 inch (85.6 mm) aluminum body
- ▶ Weighs 0.34 lb (0.15 kg)



BIPODS AND TRIPODS

RANGE/PRISM POLE BIPOD

- ▶ Side entry head with clamp for quick and easy pole setup
- ▶ Unique locking system provides non-slip quick clamping
- ▶ Thumb release style allows easy adjustments
- ▶ Fits 1" to 1-1/2" (25mm-38mm) diameter poles

Model	Type	Style	Open	Close	Weight
07-4360	Aluminum	Thumb Release	71-1/2" (182cm)	42-1/2" (108cm)	
07-4361	Carbon Fiber	Thumb Release	71-1/2" (182cm)	42-1/2" (108cm)	

NEW!

POLE TRIPOD WITH THUMB RELEASE

- ▶ Tripod creates free-standing setup for GNSS antenna poles or prism poles.
- ▶ Top mount universal head will accommodate 1 to 1.25 inch diameter
- ▶ Feature large, thumb release buttons for quick setup on even or uneven ground.
- ▶ Impact resistant materials, replaceable shoes, and quick release telescoping aluminum legs.
- ▶ Legs extend independently to 6-ft (180 cm)
- ▶ Weighs 5.15 lb (2.34 kg)
- ▶ Includes carrying case

Model	Description	Style	Open	Close
07-4250	Aluminum Tripod	Thumb Release	71" (180 cm)	42-1/2" (108cm)

NEW!

GPS ANTENNA TRIPOD

- ▶ Ideal for GPS and machine-control applications
- ▶ Heavy duty aluminum with collapseable 2 meter center staff that rotates 360-degrees
- ▶ 3-position center staff with steel locking pin - locking heights of 79", 71", and 59" (2.0m, 1.8m, 1.5m)
- ▶ Electrostatic powder-coated aluminum legs with replaceable points
- ▶ Double leg points creates more grip to maximize stability to prevent chance of twisting, ideal when using angle measuring instruments such as robots
- ▶ Built-in compass with 8 minute vial
- ▶ Removable 5/8-11 thread adapter
- ▶ Large telescoping legs (1.25 to 1.50 inch diameters) feature adjustable handle bolts on the leg pivots creating greater stability
- ▶ Aluminum hardware is anodized black
- ▶ Florescent yellow

Model	Style	Center Locking	Open	Close	Wgt
09-100-FY	Twist Lock	79", 71", 59" (2.0m, 1.8m, 1.5m)	79" (201cm)	50" (127cm)	15 lb (6.8 kg)





Versatility and Stability

HVFG SITEMAX™ COMPOSITE DUAL-CLAMP TRIPOD

The SiteMax HVFG is the best value heavy duty fiberglass tripod on the market. Heavy duty dual clamp design add extra stability - both quick clamp and wing screw. Large round head is precision machined to add even more stability for your instrument.

- ▶ Powder coated wear-resistant metal hardware
- ▶ Double banded extension legs and large positive locking quick clamp add stability
- ▶ Replaceable shoe points
- ▶ Ergonomic hand carrying strap
- ▶ Includes: heavy-duty poly-webbing shoulder strap for ease of carrying to the job site


Specifications	01-HVFG20-DCB	01-HVFG20-DCO
Type	Fiberglass	Fiberglass
Extended	72" (183cm)	72" (183cm)
Collapsed	47" (119cm)	47" (119cm)
Clamping Style	Dual Clamp: Quick & Wing Screw	Dual Clamp: Quick & Wing Screw
Head Style	5/8-11, Large Flat	5/8-11, Large Flat
Net Wt	18lb (8.4kg)	18lb (8.4kg)
Hardware Color	Black	New! Orange

SiteMax™ is a SitePro signature product designed and engineered by customer specifications



01-TLS TRIPOD RETAINER STRAP

- ▶ Used with the 01-HVFG20 series tripod
- ▶ Ensures tripod stays stable and in place

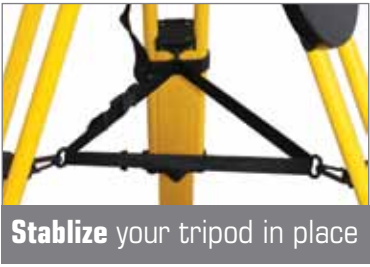

Stablize your tripod in place

HVFG SITEMAX™ COMPOSITE TRIPOD, QUICK CLAMP

- ▶ Best value heavy duty fiberglass tripod on the market
- ▶ Powder coated wear-resistant metal hardware
- ▶ Double banded extension legs and large positive locking quick clamp add stability
- ▶ Replaceable shoe points
- ▶ Standard 5/8-11 flat head
- ▶ Ergonomic hand carrying strap
- ▶ Includes: heavy-duty poly-webbing shoulder strap for ease of carrying to the job site

Specifications	01-HVFG20-B
Type	Fiberglass
Extended	72" (183cm)
Collapsed	47" (119cm)
Clamping Style	Quick Clamp
Head Style	5/8-11, Std Flat
Net Wt	18lb (8.2kg)
Hardware Color	Black



WDF WOOD/FIBERGLASS TRIPOD

The WDF is the best value heavy duty wood/fiberglass tripod on the market. Heavy duty dual clamp design add extra stability - both quick clamp and wing screw. Large round head is precision machined to add even more stability for your instrument.

- ▶ Combination of hardwood legs with fiberglass dowels provides stability and weather resistance
- ▶ Double banded extension legs and large positive locking quick clamp add extra stability
- ▶ Powder coated wear-resistant metal hardware
- ▶ Replaceable shoe points
- ▶ Includes: heavy-duty poly-webbing shoulder strap for ease of carrying to the job site

Specifications	01-WDF20-DCB
Type	Wood/Fiberglass
Extended	72" (183cm)
Collapsed	42" (107cm)
Clamping Style	Dual Clamp: Quick & Wing Screw
Head Style	5/8-11, FLAT
Net Wt	16lb (7.2kg)
Hardware Color	Black



01-WDF20-DCB

WDF WOOD/FIBERGLASS TRIPOD, QUICK CLAMP

- ▶ Combination of hardwood legs with fiberglass dowels provides stability and weather resistance
- ▶ Double banded extension legs and large positive locking quick clamp add extra stability
- ▶ Powder coated wear-resistant metal hardware
- ▶ Replaceable shoe points
- ▶ Includes: heavy-duty poly-webbing shoulder strap for ease of carrying to the job site

Specifications	01-WDF20-B	01-WDF20-O
Type	Wood/Fiberglass	Wood/Fiberglass
Extended	72" (183cm)	72" (183cm)
Collapsed	42" (107cm)	42" (107cm)
Clamping Style	Quick Clamp	Quick Clamp
Head Style	5/8-11, FLAT	5/8-11, FLAT
Net Wt	16lb (7.2kg)	16lb (7.2kg)
Hardware Color	Black	Orange



01-WDF20-O

WDW HEAVY DUTY WOOD TRIPOD, WING SCREW

- ▶ Made of high quality hardwood with wide-frame extension legs and 1" diameter dowels
- ▶ Wing screw style clamp with die cast aluminum hardware for maximum stability
- ▶ Wear-resistant with treated finish and powder coated metal hardware
- ▶ Includes: plastic head cap for protection, heavy-duty poly-webbing shoulder strap for ease of carrying to the job site

Specifications	01-WDW20-O
Type	Wood
Extended	72" (183cm)
Collapsed	42" (107cm)
Clamping Style	Wing Screw
Head Style	5/8-11, FLAT
Net Wt	16lb (7.2kg)
Hardware Color	Orange



01-WDW20-O

ALQR HEAVY DUTY ALUMINUM TRIPOD: QUICK RELEASE

The ALQR Series tripods are made of medium weight, heavy gauge aluminum with added stability of double banded legs.

- ▶ Positive locking quick clamps
- ▶ Powder coated wear-resistant metal hardware
- ▶ Replaceable shoe points
- ▶ Includes: heavy-duty poly-webbing shoulder strap

Specifications	01-ALQR20-B	01-ALQR20-O	01-ALQR40-B
Type	Aluminum	Aluminum	Aluminum
Extended	64" (163cm)	64" (163cm)	64" (163cm)
Collapsed	40" (102cm)	40" (102cm)	40" (102cm)
Clamping Style	Quick Clamp	Quick Clamp	Quick Clamp
Head Style	5/8-11, FLAT	5/8-11, FLAT	5/8-11, DOME
Net Wt	10lb (4.6kg)	10lb (4.6kg)	10lb (4.6kg)
Hardware Color	Black	Orange	Black



01-ALQR20-O

ALQR ELEVATOR ALUMINUM TRIPOD: QUICK RELEASE

The ALQR elevator tripod is a heavy duty, aluminum tripod with positive locking quick clamp style clamps.

- ▶ Adjustable center column with height adjustment range of 21" (54cm) and metal gear & rack system for smooth continuous motion.
- ▶ Special inner column provides additional 22" (56cm) height adjustment
- ▶ Aluminum shoe with hardened steel replaceable shoe points
- ▶ Powder coated castings for durability and wear-resistance
- ▶ Easy "on/off" 5/8-11 mounting head
- ▶ Includes: heavy-duty poly-webbing shoulder strap

Specifications	01-ALQR20ELAZ
Type	Aluminum
Extended	116" (295cm)
Collapsed	48" (122cm)
Clamping Style	Quick Clamp
Head Style	5/8-11, FLAT
Net Wt	15lb (6.8kg)
Hardware Color	Black



Quick Clamp
Positive locking clamps
for quick secure clamping

(01-ALQR20-B)



Sturdy Aluminum -
hinge, clamp, and
shoe castings with
replaceable points

(01-ALQR20-O)



AC CONTRACTORS' ALUMINUM TRIPOD

- ▶ Lightweight, aluminum tripod with positive locking quick clamp style clamps and individually tightened hinge screws
- ▶ Aluminum hinge, clamp and shoe castings with replaceable shoe points
- ▶ Powder coated castings for durability and wear-resistance
- ▶ Includes: heavy-duty poly-webbing shoulder strap

Specifications	01-AC20-B	01-AC20-O
Type	Aluminum	Aluminum
Extended	65" (165cm)	65" (165cm)
Collapsed	39" (99cm)	39" (99cm)
Clamping Style	Quick Clamp	Quick Clamp
Head Style	5/8-11, FLAT	5/8-11, FLAT
Net Wt	9lb (4.1kg)	9lb (4.1kg)
Hardware Color	Black	Orange



01-AC20-B

ALW HEAVY DUTY ALUMINUM TRIPOD: WING SCREW

Heavy duty, aluminum tripod with wing screw clamps

- ▶ Aluminum hinge, clamp and shoe castings with replaceable shoe points
- ▶ Powder coated castings for durability and wear-resistance
- ▶ Includes: heavy-duty poly-webbing shoulder strap

Specifications	01-ALW10-B	01-ALW20-B
Type	Aluminum	Aluminum
Extended	25" (64cm)	65" (165cm)
Collapsed	19" (48cm)	42" (107cm)
Clamping Style	Wing Screw	Wing Screw
Head Style	5/8-11, FLAT	5/8-11, FLAT
Net Wt		9lb (4.1kg)
Hardware Color	Black	Black



NEW!
01-ALW10-B



01-ALW20-B

01-TFG TRIPOD FLOOR GUIDE

- ▶ Ideal when setting up tripod on slick and concrete floors.
- ▶ Makes setting up over a point faster
- ▶ Heavy gauge metal with slots for points on tripod legs for easy set-up



 **NEW!**

HI-VIS FIBERGLASS LEVELING RODS

- ▶ Hi-visibility bottom section is safety-yellow for easy and quick visual of rod
- ▶ Non-conductive telescoping fiberglass Lightweight and durable telescoping leveling rods
- ▶ Easy-to-read graduations and a special measuring scale on the backside, permits users to read height at eye level
- ▶ Includes carrying case



Safety Yellow with Red Markings Improve Visibility
increasing performance and safety on the jobsite.

Models	Length	Description	Sections
11-907HV-M	7m	High Visibility, Metric "E"	5
11-916HV-C	16-ft	High Visibility, Feet/Inches/8ths	4
11-916HV-T	16-ft	High Visibility, Feet/10ths/100ths	4
11-925HV-C	25-ft	High Visibility, Feet/Inches/8ths	5
11-925HV-T	25-ft	High Visibility, Feet/10ths/100ths	5

FIBERGLASS LEVELING RODS

- ▶ Non-conductive telescoping fiberglass Lightweight and durable telescoping leveling rods
- ▶ Easy-to-read graduations and a special measuring scale on the backside, permits users to read height at eye level
- ▶ Includes carrying case

Models	Length	Description	Sections
11-913-C	13-ft	Feet/Inches/8ths	3
11-913-T	13-ft	Feet/10ths/100ths	3
11-905-M	5m	Metric "E"	4
11-907-M	7m	Metric "E"	5
11-916-C	16-ft	Feet/Inches/8ths	4
11-916-T	16-ft	Feet/10ths/100ths	4
11-920-C	20-ft	Feet/Inches/8ths	5
11-920-T	20-ft	Feet/10ths/100ths	5
11-925-C	25-ft	Feet/Inches/8ths	5
11-925-T	25-ft	Feet/10ths/100ths	5

Graduations Available



8ths
Feet, Inches, and 8ths



10ths
Feet, 10ths, and 100ths



Metric
Metric 'E'

ALUMINUM LEVELING RODS

- ▶ Lightweight and durable telescoping aluminum leveling rods
- ▶ Easy-to-read graduations with measuring scale on the backside for direct reading at eye level
- ▶ Includes leveling bubble vial attachment and carrying case

Models	Length	Graduations (Units of Measure)	Sections
11-813-C	13-ft	Feet/Inches/8ths	4
11-813-T	13-ft	Feet/10ths/100ths	4
11-805-M	5m	Metric "E"	5
11-805-MC	16-ft/5m	Metric 'E', Feet/Inches/8ths	5
11-805-MT	16-ft/5m	Metric 'E', Feet/10ths/100ths	5
11-816-C	16-ft	Feet/Inches/8ths	5
11-816-T	16-ft	Feet/10ths/100ths	5

Bubble Vial Attachment Easily
clips into slot for quick leveling of aluminum rods.



TAPES, FIBERGLASS

- Durable with non-woven pvc-coated fiberglass
- Waterproof
- Easy to rewind with fast reel design (3:1 gear ratio), with folding crank handle
- Tape width is 1/2" with various graduations available.

Model	Length	Type	UOM
34-Y1001	100' Fiberglass Tape	Dual Sided	Ft/10ths
34-Y2001	200' Fiberglass Tape	Dual Sided	Ft/10ths
34-Y3001	300' Fiberglass Tape	Dual Sided	Ft/10ths
34-Y1008M	100' (30m) Fiberglass Tape	Dual Sided	Ft/In/8ths, Meter/cm/mm
34-Y1001M	100' (30m) Fiberglass Tape	Dual Sided	Ft/10ths, Meter/cm/mm
34-Y1658M	165' (50m) Fiberglass Tape	Dual Sided	Ft/In/8ths, Meter/cm/mm
34-Y1651M	165' (50m) Fiberglass Tape	Dual Sided	Ft/10ths, Meter/cm/mm
34-Y1008	100' Fiberglass Tape	Dual Sided	Ft/In/8ths
34-Y2008	200' Fiberglass Tape	Dual Sided	Ft/In/8ths
34-Y3008	300' Fiberglass Tape	Dual Sided	Ft/In/8ths
34-Y3008M	300' (100M) Fiberglass Tape	Dual Sided	Ft/In/8ths, Meter/cm/mm
34-Y30M	30M Fiberglass Tape	Dual Sided	Meter/cm/mm
34-Y50M	50M Fiberglass Tape	Dual Sided	Meter/cm/mm
34-Y100M	100M Fiberglass Tape	Dual Sided	Meter/cm/mm



Refills	Description	Type	UOM
33-Y508	Refill, 50' Fiberglass Tape	Dual Sided	Ft/In/8ths
33-Y1008	Refill, 100' Fiberglass Tape	Dual Sided	Ft/In/8ths
33-Y1658	Refill, 165' Fiberglass Tape	Dual Sided	Ft/In/8ths
33-Y2008	Refill, 200' Fiberglass Tape	Dual Sided	Ft/In/8ths
33-Y3008	Refill, 300' Fiberglass Tape	Dual Sided	Ft/In/8ths

TAPES, NYLON-CLAD STEEL

- Accurate and durable high tempered steel tapes with temperature stability for superior performance.
- Nylon coated wear-resistant graduated tape withstands the extreme conditions
- Easy to rewind with fast reel design (3:1 gear ratio), with folding crank handle
- Tape width is 1/2" with various graduations available.

Model	Description	Type	UOM
32-10010B	100' Nyclad Steel Tape	Dual Sided	Ft/10ths
32-20010B	200' Nyclad Steel Tape	Dual Sided	Ft/10ths
32-30010B	300' Nyclad Steel Tape	Dual Sided	Ft/10ths
32-10080B	100' Nyclad Steel Tape	Dual Sided	Ft/8ths
32-20080B	200' Nyclad Steel Tape	Dual Sided	Ft/8ths
32-30080B	300' Nyclad Steel Tape	Dual Sided	Ft/8ths
32-30MA	30m Nyclad Steel Tape	Dual Sided	Meter/cm/mm
32-50MA	50m Nyclad Steel Tape	Dual Sided	Meter/cm/mm
32-100MA	100m Nyclad Steel Tape	Dual Sided	Meter/cm/mm



TAPES, DEPTH GAUGE

Lightweight fiberglass tapes are rugged and versatile, ideal for measuring in water, mud, and rough terrain.

Model	Length	UOM	Model	Length	UOM
35-2588	25'	Ft/In	35-10088	100'	Ft/In
35-5088	50'	Ft/In	35-20088	200'	Ft/In
			35-30MM	30M	Metric



High-Performance Vest

SURVEYORS VEST

NEW!
SURVEYORS SAFETY VEST

- ▶ Solid Polyester Front with Mesh Back
- ▶ Zipper Front Closure Reinforced with Durable Webbing
- ▶ Meets ANSI/ISEA Class 2 requirements
- ▶ Silver Reflective Material Laminated to **Contrasting Orange Color**
- ▶ Left and Right Mic Tabs
- ▶ Back Pouch for Additional Storage

Pockets:

- ▶ Left chest 2-tier pocket with dual function flap that can be held open by hook & loop
- ▶ Large right gusseted pocket with flap
- ▶ Outside lower front pockets with flaps, left and right stake pockets, left and right elastic pockets
- ▶ Lower inside left and right full length zipper pockets with load-bearing straps
- ▶ Left and right side spray can holders
- ▶ Hidden back pouch with left and right zipper access



Model	Size
23-550-S	Small
23-550-M	Medium
23-550-L	Large
23-550-XL	X-Large
23-550-2X	XX-Large

CONSTRUCTION VEST

NEW!

CONSTRUCTION SAFETY VEST

- ▶ Multi-pocket ultra-cool design
- ▶ Solid polyester front with 100% polyester mesh back
- ▶ Silver Reflective Material Laminated to **Contrasting Orange Color**
- ▶ Zipper front closure reinforced with durable webbing
- ▶ 2" silver reflective material laminated to 3" contrasting color

Multiple Pockets:

- ▶ Left chest 2-tier pocket with pencil pocket
- ▶ Right chest radio pocket with flap
- ▶ Two inside patch pockets
- ▶ Hidden back pouch with left and right zipper access

Model	Size
23-500-S	Small
23-500-M	Medium
23-500-L	Large
23-500-XL	X-Large
23-500-2X	XX-Large




ENGINEER'S HAMMER



- ▶ Forged steel head which is hardened and tempered
- ▶ Dual machine finished faces that are beveled and fully polished
- ▶ Designed for striking spikes and hardened nails, cold chisels, brick chisels, punches, star drills
- ▶ Textured yellow fiberglass handle which allows for heavier blows in an environment where there is limited swing
- ▶ Ribbed grip to help prevent slipping

Specifications	17-030	17-040
Depth	1.75" (44mm)	1.75" (44mm)
Width	4.25" (108mm)	5.0" (127mm)
Handle Length	12.5" (318mm)	13.5" (343mm)
Net Wt	Head: 48 oz (1.4kg) Hammer: 53 oz (1.5kg)	Head: 64 oz (1.8kg) Hammer: 70 oz (2.0kg)

MACHETE

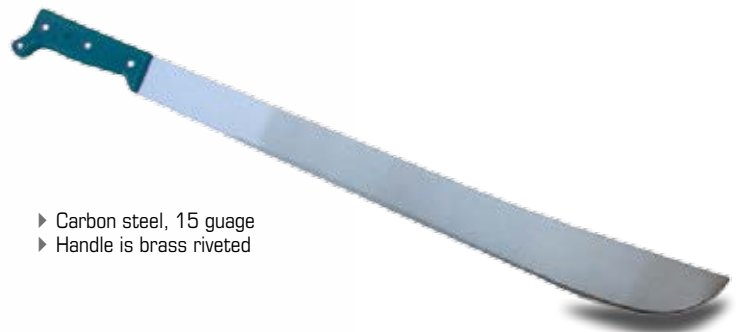

- ▶ Carbon steel, 15 gauge
- ▶ Handle is brass riveted

Model	Description	Length	Weight
17-222	22" Machete	22"	22 oz

Toll Free: **(855) 354-9881**

ROD LEVEL

- ▶ Strong aluminum housing, quickly level your leveling rod with convenience
- ▶ Large, easy to read 10-min bubble vial



Model	Description	Vial
11-750	Rod Level	10-min

PLUMB BOBS

- ▶ Precision machined for perfect balance and treated for a lasting finish
- ▶ Steel ASA screw cap allows storage for an extra point (included)
- ▶ Includes a hardened steel point with ASA thread.



Model	Wgt
15-016	16 oz (454 g)
15-018	18 oz (510 g)
15-024	24 oz (680 g)

GAMMON REELS

- ▶ An aid to set up and deploy a clean, accurate plumb
- ▶ Draw the bob to desired position and stop with finger pressure
- ▶ Steel clock spring retracts the string back into case



Model	Description
15-728	Hi-Vis Black and Orange Target
15-729	12-ft (3.6m) Gammon Reel
15-730	6-1/2 ft (1.9m) Gammon Reel with 72lb test Orange Nylon Cord

PLUMB BOB SHEATHS

- ▶ Heavy duty and riveted for long life
- ▶ Made of top grain saddle leather
- ▶ Strong metal snap secures bob in sheath



Model	Description	Fits (Most)
15-1016	Small Plumb Bob Sheath	16oz - 18oz
15-2432	Large Plumb Bob Sheath	24oz - 32oz

TRANSIT COMPASS

- ▶ Graduated circle for optimal versatility
- ▶ Dampened for superior stability
- ▶ Includes velvet lined, belt-loop case for storage and transport



Model	Description
17-651	Compass, Transit Pocket 0-360 Degrees
17-661	Compass, Transit Pocket Quadrants

RIGHT ANGLE PRISM

- ▶ Center lens permits foresight viewing
- ▶ Step off angles of 90° and 180°
- ▶ Features a larger field of view, and larger foresight viewing glass
- ▶ Includes carrying case



Model	Description
17-911	Precise Large Double Right Angle Prism

TALLY COUNTER

- ▶ Four-digit counter counts up to 9999, with reset to zero
- ▶ “Audible click” signals a registered count without viewing the counter
- ▶ White digits on black for easy reading with protective window



Model	Description
17-100	Four-Digit Mechanical Tally Counter

MARKING PINS



Model	Description
17-401	14-in Marking Pins. Made of 3/16-in spring steel, heat treated, painted red/white. 11 pins per box
17-406	Leather Quiver for Marking Pins
17-411	Marking Pin Carrying Ring 3/16-in spring steel, chrome plated to insure a long field life

SURVEY MARKERS



Model	Length	Type
19-700	1-3/8 in (34.9mm)	Flat
19-701	2 in (50.8mm)	Flat
19-702	2-1/2 in (63.5mm)	Flat
19-703	3 in (76.2mm)	Flat
19-705	2 in (50.8mm)	Domed
19-706	2-1/2 in (63.5mm)	Domed
19-707	3 in (76.2mm)	Domed

**NEW!**

GIANT CONCRETE SCRIBE

- ▶ Ideal for fine line marking on metal and stone
- ▶ Machined aluminum handles with diamond knurling for sure grip
- ▶ Precision ground carbide scribe tip
- ▶ Pocket clip and protective cap



Model	Description	Tip Style
17-207	7-1/2 in Concrete Scribe, with Replaceable Tip	Carbine
17-201	Tips, Replacement 10-Pack	Carbine

**NEW!**


TACK BALL

- ▶ 3" (76 mm) rubber sponge ball
- ▶ Ideal for holding stake tacks
- ▶ Black nylon loop



Model	Description	Diameter
19-BALL750	Tack Ball, with Loop	3" (76 mm)

MASONRY NAILS, CADMIUM

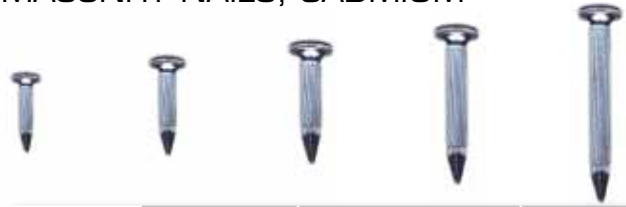

Model	Length	Diameter	Nails per Box
19-751	3/4 in (19.05mm)	1/8 in (3.18mm)	100
19-752	1 in (25.4mm)	5/32 in (3.97mm)	100
19-753	1-1/4 in (31.75mm)	3/16 in (4.76mm)	100
19-754	1-1/2 in (38.1mm)	1/4 in (6.35mm)	100
19-755	2 in (50.8mm)	1/4 in (6.35mm)	100
19-756	2-1/2 in (63.5mm)	1/4 in (6.35mm)	100

BAGS



Model	Description	Purpose
21-1200	Padded Bag, Tribrach	Fits 05-1200 tribrachs
21-1010-Y	Padded Bag, Prism	Fits 03-1010 prisms
21-3500	Padded Case, Traverse Kit (Picture not Shown)	Fits 05-3511K

LATH AND STAKE BAG

- ▶ 8-inch diameter bag
- ▶ Orange with shoulder strap
- ▶ Reinforced base for carrying 48-inch (122cm) wooden lath
- ▶ Outside pockets




Model	Description	Purpose
21-200	Lath Carrier Bag	Carries up to 50 lath.



NEW!
FIELD BOOK

SitePro field books are made with white ledger paper with extra-stiff hard cover book. Published on fine 50% cotton content ledger paper. Protected by a waterproof barrier with blind embossing.

- ▶ 80 Sheets (160 pages)
- ▶ 50% cotton rag content paper
- ▶ Ruled light blue with red vertical lines
- ▶ Hardback, yellow color
- ▶ Size: 4" x 6-1/2"

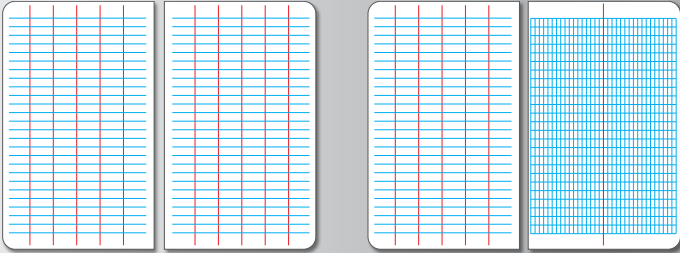

17-325-L Level Book

17-350-T Transit Book

Model	Description	Left Page	Right Page	Pages
17-325-L	Level Field Book	Six (6) Vertical Columns	Six (6) Vertical Columns	160
17-350-T	Transit Field Book	Six (6) Vertical Columns	8 x 4 Grid	160



HAND LEVELS

640 5-1/4" ABNEY LEVEL

- ▶ Features radius arc graduated 0 to 90 degrees in both directions, with vernier reading to 10 minutes
- ▶ Percent of grade scale from 0 to 100%
- ▶ Includes belt loop case

642 6-1/4" TOPOGRAPHIC ABNEY LEVEL

- ▶ All brass construction, square sighting tube with internal focusing telescope
- ▶ Dual interchangeable arcs: one arc graduated in percentage of grade/degrees (bi-directional, 0° to 60°) and one graduated in percentage of grade/topographic scale
- ▶ Includes belt loop case

632 6" HAND LEVEL

- ▶ 2X magnification
- ▶ 6" long draw eyepiece extends to 7-1/2"
- ▶ Internally mounted bubble assembly

590 2.5X HAND LEVEL

- ▶ 2.5X magnification
- ▶ Convenient pocket-sized tool for establishing a level line of sight; Ideal for leveling, grading and hundreds of construction tasks
- ▶ Stadia and vertical lines
- ▶ Includes leather carrying case



Specifications	13-640	13-642	13-632	13-590
Magnification	1 X	1 X	2 X	2.5 X
Length	5 1/4-in (13.3cm)	6 3/8-in (16.1cm)	6-in (15.2cm), ext. 7.5-in (19.1cm)	5-in (12.7cm)
Degrees (10min)	0° - 90°	0° - 60°	n/a	n/a
%Grade	Yes	Yes	n/a	n/a

Dave White's SitePro Guarantee



WARRANTY*

www.SitePro.us.com
1-855-354-9881

*See owners manual for more details.

Limited Warranty Program

SitePro warrants laser and optical instruments to the original purchaser for a period of two (2) years from date of purchase against any defects in material or workmanship. This warranty does not cover part failure due to normal wear or tool abuse. For more details of warranty coverage and warranty repair information, call (855) 354-9881. This warranty does not apply to accessories items or damage caused where repairs have been made or attempted by person other than SitePro or authorized service center. This warranty gives you specific legal rights and you may have other rights which vary in certain states or provinces.

This Limited Warranty does not apply to accessory items such as tripods, rods, poles, prisms, hand levels, field supplies, instrument accessories and other related items. These items receive a 90 day limited warranty.

To make a claim under this Limited Warranty, you must return the tool, transportation prepaid, along with any relevant paperwork (RGA number, if you have obtained one, proof of purchase, contact information, and any request for new accessories, etc.) to our Service Department or an Authorized Service Center.

SitePro/Service Department, 7619 S 1150 E,
Otterbein, IN 47970



WARRANTY*

www.SitePro.us.com
1-855-354-9881

*See owners manual for more details.

SITEPRO EXTENDS WARRANTY COVERAGE FOR THE ELECTRONIC SELF-LEVELING ROTARY LASERS AND AUTOMATIC LEVELS. SitePro ("Seller") extends the warranty coverage of the SLR200 Series and SLR300H Rotary Lasers to three (3) years from date of purchase. Automatic Levels receive extended warranty coverage to five (5) years from date of purchase.

IMPLIED WARRANTIES ARE EXPRESSLY LIMITED IN DURATION TO ONE YEAR FROM DATE OF PURCHASE.

IN NO EVENT SHALL SELLER BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING BUT NOT LIMITED TO LIABILITY FOR LOSS OF PROFITS) ARISING FROM THE SALE OR USE OF THIS PRODUCT. SOME STATES IN THE U.S., AND SOME CANADIAN PROVINCES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

SOME STATES IN THE U.S. AND SOME CANADIAN PROVINCES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, OR THE EXCLUSION OR LIMITATION OF SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THESE LIMITATIONS AND EXCLUSIONS MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS. YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE/PROVINCE TO STATE/PROVINCE.

Committed to Offering Quality

Surveyor & Contractors' Tools and Accessories



SiteProTM

Toll: (855) 354-9881

Fax: (765) 581-4098

sales@sitepro.us.com



Dave White's SitePro LLC
Otterbein, Indiana

www.SitePro.us.com