


CA-15

Acoustic Amplifier

Item ref: 173.431

User Manual

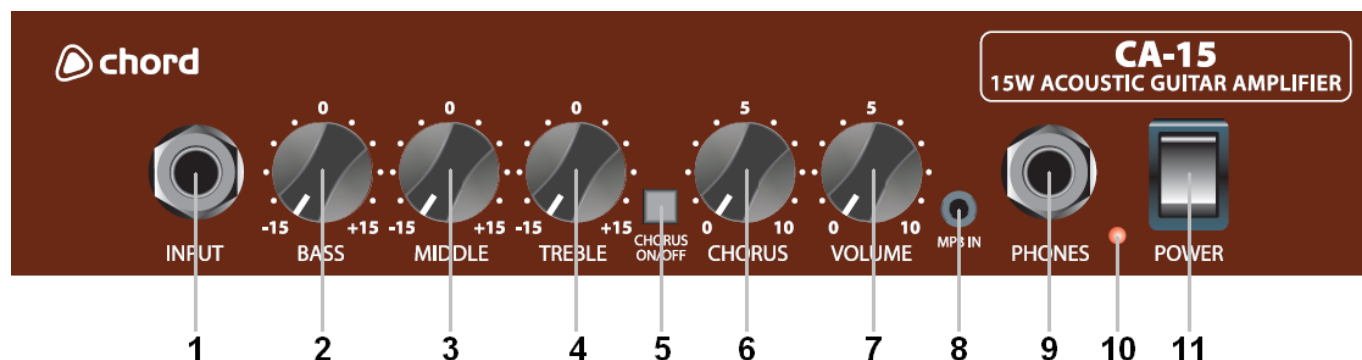

- | | | |
|----------------------|---|--|
| 1. Guitar input | - | connect guitar via 6.3mm mono jack |
| 2. BASS EQ control | - | boost or cut low frequencies |
| 3. MIDDLE EQ control | - | boost or cut middle frequencies |
| 4. TREBLE EQ control | - | boost or cut high frequencies |
| 5. CHORUS ON/OFF | - | switch to enable chorus effect |
| 6. CHORUS control | - | control depth of chorus effect |
| 7. VOLUME control | - | master output volume control |
| 8. MP3 IN | - | connect playback source via 3.5mm stereo jack |
| 9. PHONES | - | connect headphones via 6.3mm stereo jack (mutes speaker) |
| 10. Power indicator | - | LED illuminates when power is on |
| 11. POWER switch | - | mains power on/off |

Operation

Connect guitar to input (1) via a 6.3mm jack lead

If mp3 or other playback is to be used, connect this to the 3.5mm MP3 IN connector (8)

If headphones are to be used for silent practice, connect these to the 6.3mm PHONES jack (9)

Turn the VOLUME control fully down and all other controls to the vertical (12 o'clock) position

Connect to mains using the supplied mains lead via the rear panel IEC connector and switch POWER on (11)

Gradually turn up the volume and play until sound is heard and increase to the required level

Adjust BASS, MIDDLE and TREBLE controls to achieve the required tone character

If "feedback" causes howling or squealing through the speaker, cutting certain EQ levels can help curtail this

It is advised to position the guitar facing away from the CA-15 and not too close in order to avoid feedback

To give a special effect, the internal chorus can be engaged by pressing in the CHORUS ON/OFF switch (5)

Depth of this effect can be adjusted with the CHORUS control (6)

Turn down the VOLUME control before unplugging the guitar or switching off the CA-15

Caution

Do not cover cooling vents at the rear of the amplifier. Keep away from damp or dusty environments

Check mains lead is in good condition and ensure mains outlet voltage is correct as indicated.

Use only approved fuse rated as shown. Unplug from mains before replacing fuse.

No user serviceable parts inside. Refer all servicing to qualified personnel

*Errors and omissions excepted.
Copyright© 2012. AVSL Group Ltd.*