

# basickitz

**EN**

**USER INSTRUCTIONS AND SAFETY**

Congratulations on your purchase of a Nolan N-Com product.

The N-Com Basic Kit2 was designed and built using the latest technologies and the best materials. Long tests and thorough system development have made it possible to achieve the highest sound quality.


**The N-Com Basic Kit2 is the basic equipment for one of the communication systems of the Nolan N-Com product line.**

**The Basic Kit2 can only be installed on Nolan helmets preset for N-Com.**

---

### **Reference standards**

The Basic Kit2 product of the N-Com line complies with EEC Directive.

EMC 2004/108 

## Table of contents

<b>1. WARNINGS AND SAFETY</b>	<b>4</b>		
1.1. Road safety	4		
1.2. Switching on the system in safe environments	5		
1.3. Interferences	5		
1.4. Appropriate use	5		
1.5. Qualified personnel	6		
1.6. Accessories and batteries	6		
1.7. Disposal	7		
<b>2. CONTENTS OF THE PACKAGING</b>	<b>8</b>		
<b>3. INSTALLING THE BASIC KIT2</b>	<b>9</b>		
3.1. Preliminary operations	9		
3.2. Installing the microphone	12		
3.3. Connecting the battery	14		
3.4. Installing the Basic Kit2 in the helmet	16		
3.5. Installing the basic card	21		
<b>4. REMOVING THE BASIC KIT2</b>	<b>23</b>		
4.1. Removing the battery (if equipped)	23		
<b>5. USING THE BASIC KIT2 WITH A CELL PHONE</b>	<b>24</b>		
5.1. Answering a phone call	25		
5.2. Making a phone call	25		
5.3. Vocal calls	25		
<b>6. USING OTHER AUDIO PERIPHERAL DEVICES</b>	<b>26</b>		
<b>7. MAINTENANCE</b>	<b>26</b>		
<b>8. LIMITED WARRANTY</b>	<b>27</b>		
		8.1. Warranty coverage	27
		8.2. Exclusions and limitations of the coverage	27
		8.3. Validity of this limited warranty	28
		8.4. Procedure for the forwarding of claims	28
		8.5. Product identification	30
<b>9. WARRANTY REGISTRATION FORM</b>	<b>31</b>		

## 1. WARNINGS AND SAFETY

Read this User Manual carefully, as well as the User Manuals for other N-Com kits that you will be using with the N-Com Basic Kit2. Read the simple rules listed below. Failure to comply with these rules may lead to dangerous situations.

**Caution:** The product cannot be used in official or non-official competitions, motordromes, circuits, racing tracks and the like.

**Caution:** Installation of the N-Com Basic Kit2 system results in a weight increase of approximately 60g, which is added to the weight of the helmet and of the other accessories.

**Warning:** The electronic components of the N-Com system mounted inside the helmet are not waterproof. Consequently, make sure the inside of the helmet, including the comfort padding, does not get wet in order to avoid damage to the system. If it does, remove the N-Com system and the helmet comfort padding and let it air dry. Disconnect the battery connector and let it dry as well.

### 1.1. Road safety

Always obey all Traffic Regulations in force. While riding the motorcycle, your hands should always be engaged in actually riding the vehicle. Any operation to the N-Com system must be carried out with the vehicle stopped. Specifically:

- Set your cell phone on automatic answer (see the cell phone instructions to do this).
- If your cell phone is not equipped with this function, first stop your vehicle in a safe area, in compliance with Traffic Regulations and then answer the call.
- Do not make any calls while riding. Stop your vehicle in a safe place in compliance with Traffic Regulations, and then make the call.
- Adjust the volume so that it does not cause a disturbance or distraction while riding and at the same time allows you to distinctively hear background noises.
- Do not operate your cell phone or other devices connected to N-Com while riding your motorcycle.
- In all cases, obey the Traffic Regulations and remember that riding the motorcycle has absolute priority over any other maneuver.

## 1.2. Switching on the system in safe environments

- When using the N-Com system, comply with all limitations and instructions related to the use of cell phones.
- Do not turn on your cell phone or the N-Com system whenever their use is forbidden or when the devices can cause interference or dangerous situations.
- Turn off while refuelling. Do not use the N-Com system in filling stations. Do not use the device near combustible materials or chemical products.
- Turn off in proximity to explosive materials.

## 1.3. Interferences

All phones and devices with wireless signal transmission are subject to interferences that may affect the performance of the device connected to them. These interferences are not ascribable to a defect of the N-Com system.

## 1.4. Appropriate use

Use the device only in the normal position, as described in the product documentation. Do not attempt to disassemble, tamper with or modify any part of the N-Com system.

**Caution:** Adjust the volume of the N-Com system (where provided) and of the audio sources connected to it before you use the system on the road.

**Caution:** Adjusting the volume to very high levels may cause damage to your hearing.

**Caution:** Adjust the volume of the N-Com system (where provided) and of the audio sources connected to it so as to avoid audio reproduction at high volumes. Constant exposure to high audio volumes may damage your hearing.

**Caution:** An incorrect installation of the system in the helmet may alter the aerodynamic and safety characteristics of the helmet itself, thus creating dangerous conditions. Install the N-Com system according to the instructions

provided in the product documentation. In case of doubt, please contact your local N-Com dealer.

**Warning:** Listening to other equipment should not interfere with driving the vehicle, which must be the top priority at all times. Carry out all operations on the electronic equipment and on the N-Com system with the vehicle stopped, in compliance with Traffic Regulations.

### 1.5. Qualified personnel

- Only qualified personnel can carry out technical assistance on this product. In case of any malfunction, always turn to your local dealer.
- The helmet is a safety device. Tampering with it and/or with the electronic system inside the helmet, in addition to invalidating the product warranty, can also lead to dangerous situations.

### 1.6. Accessories and batteries

- Only use the type of batteries, battery chargers and accessories approved by Nolan for the specific model.
- The use of a battery type different from the recommended one may lead to dangerous situations and invalidate the warranty.
- Contact your local dealer to see about the availability of approved accessories.
- When disconnecting the power supply cable of any accessory or of the battery charger, always grab and pull the plug not the cable.
- Do not use batteries for purposes other than the prescribed ones.
- Never use batteries or battery chargers that turn out to be damaged.
- Do not short-circuit the battery.
- Keep the battery at a temperature between **0° / +45°C (charging)**; **-20° / +60 °C (in use)**.
- Danger of fire or explosion: do not throw the batteries into a fire nor expose them to high temperatures!
- Do not throw out batteries together with household refuse. The batteries should be disposed of in compliance with local regulations
- Do not wear the helmet while the battery is recharging.

- The helmet should never be left within the reach of unsupervised children in order to prevent damage to their health caused by access to the batteries.










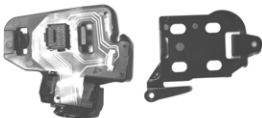

### 1.7. Disposal

Refer to this user manual and to manuals related to other parts of the N-Com system in order to disassemble the system from the helmet. Once the system has been disassembled, dispose of it according to the following instructions:



- The presence of a crossed-out wheellie bin indicates that in the European Union the product is subject to separate collection at the end of its useful life (European Directive 2002/96/EC).
- Do not dispose of these products together with undifferentiated urban waste.
- The proper disposal of obsolete equipment contributes to preventing possible negative consequences on people's health and on the environment.
- For more detailed information on the disposal of obsolete equipment, contact your municipality, a waste disposal service or the store where the product was purchased.

## 2. CONTENTS OF THE PACKAGING

 <p>Basic Kit2 and battery holder</p>	 <p>Wiring system</p>	 <p>Removable microphone</p>		
 <p>Basic card</p>	 <p>Microphone securing stickers</p>	 <p>Battery securing sticker</p>		
 <p>Microphone foam</p>	 <p>Adhesive Velcro pads</p>	 <p>Clamp Microphone-Stop</p>	 <p>Screw</p>	 <p>Key</p>



### 3. INSTALLING THE BASIC KIT2

You can download the Installation Video from N-Com website [www.n-com.it](http://www.n-com.it) – Download Section.

#### 3.1. Preliminary operations

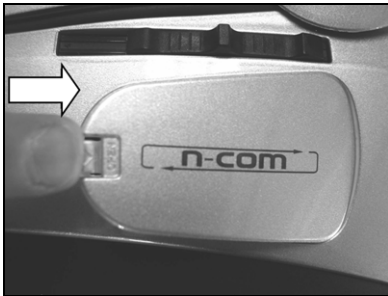


Fig. 1



Fig. 2

- Remove the “N-Com” protection plate located on the helmet shell and open the helmet chin guard.
- Remove the right and left cheek pads from the helmet (see specific instructions provided in the user manual of the helmet).
- Remove the Noise Reducers from the two cheek pads, and tear off the pre-cut plastic inserts.

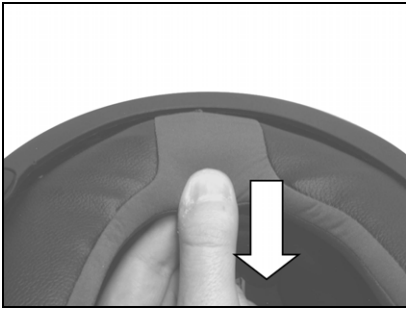


Fig. 3



Fig. 4

- Remove the back of the comfort padding by pulling on the neck roll until it separates from the shell (Fig. 3).
- Temporarily put the padding on the outside of the helmet (Fig. 4).



Fig. 5

- Remove the N-Com cover from the helmet border gasket. Push from the inside of the helmet to facilitate the removal (Fig. 5).



Fig. 6

**Only for full face helmets:**

- Remove the chin guard by pulling on the special red tab.



Fig. 7

- Remove the right and left polystyrene cheek pads by gently pulling them out of the helmet. The helmet shell can be opened slightly to facilitate the removal of the cheek pad.

**Caution:** In case the polystyrene cheek pad is damaged during this operation, turn to your local dealer for its replacement.

### 3.2. Installing the microphone

#### Jet helmets or flip-up helmets



Fig. 8

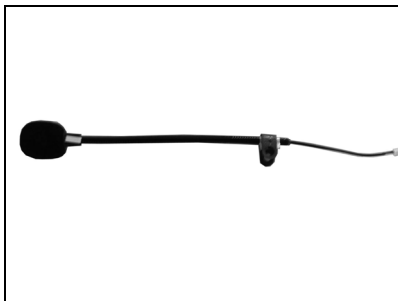


Fig. 9

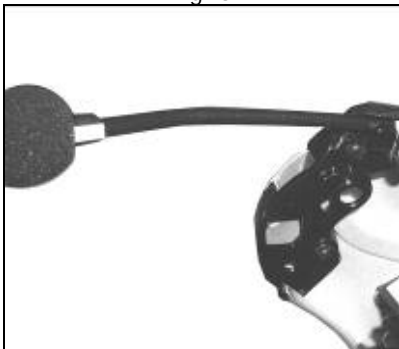


Fig. 10

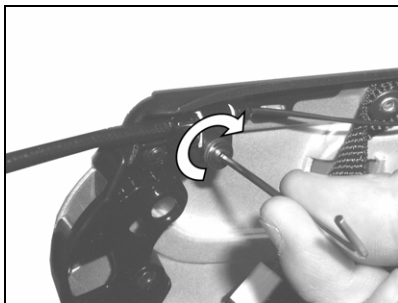


Fig. 11

- Prepare the microphone by inserting the microphone clamp, being careful to position it properly (Fig. 8)

**Note:** the flat part of the clamp must be facing upward when the microphone is positioned as shown in figure 9.

- Position the microphone in its support as shown in figure 10, being careful that the fluorescent clamp is facing toward the inside of the helmet.
- Insert screw and washer in the microphone clamp; use the key to screw in the microphone securing screw to the shell frame.

### **Full-face helmets**



Fig. 12

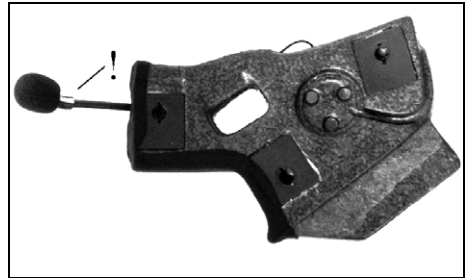


Fig. 13

- Take the polystyrene cheek pad (left-hand side) and position the microphone in its housing, as shown in fig. 12, making sure that the fluorescent band stays facing the inside of the helmet (Fig. 13).
- Secure the microphone to the cheek pad using the “microphone securing stickers”, see Fig. 12.

### 3.3. Connecting the battery

#### Only for Jet helmets or flip-up helmets

If the system contemplates the use of a rechargeable battery, the battery must be installed in advance, as described below.




Fig. 14

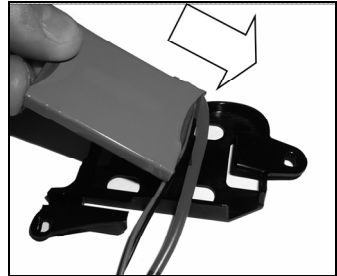


Fig. 15

- Hook up the battery cable (Red+Black) to the connector located on the wiring system (Fig. 14).
- Insert the battery in its holder, first positioning the side equipped with the cables underneath the plastic tab (Fig. 15).



Fig. 16



Fig. 17

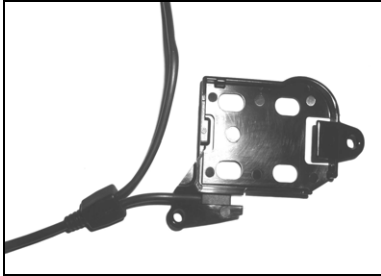


Fig. 18

- Insert the connectors set in the cable-stop guide located on the side of the battery-holder (Fig. 16 and 17).
- If the system does not contemplate the use of a rechargeable battery, take the wiring system and secure the battery connector in the cable-stop guide located on the side of the battery holder (Fig. 18).

***Only for full face helmets:***

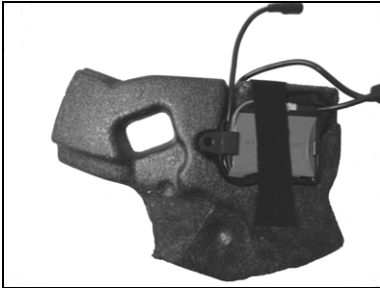


Fig. 19

- Position the battery in the right polystyrene cheek pad housing and secure it using the ribbon (Fig. 19).
- 
- Once the Basic Kit2 is prepared as described above, it can be mounted on the helmet.

### 3.4. Installing the Basic Kit2 in the helmet

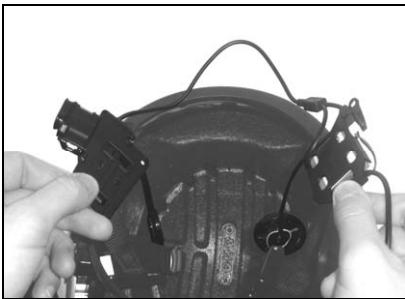


Fig. 20

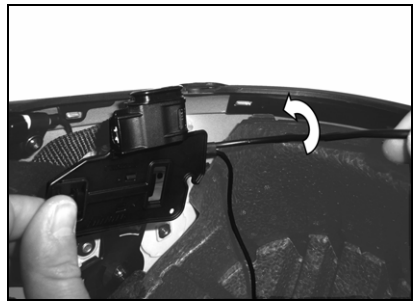


Fig. 21

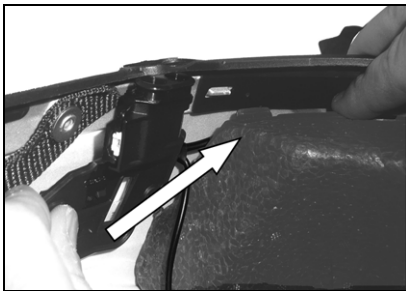


Fig. 22

- Position the Basic Kit2 inside the helmet as shown in figure 20 - 21, next to the N-com housing in the shell.
- Looking at the helmet from the outside, slide the rear positioning tab into groove A as shown in the figure; then secure the plastic part to the helmet by lining up the 15 contacts with the shell hole (Fig. 23).
- Press in the area marked PUSH from inside the helmet until the fastening clasp B clicks (Fig. 23).



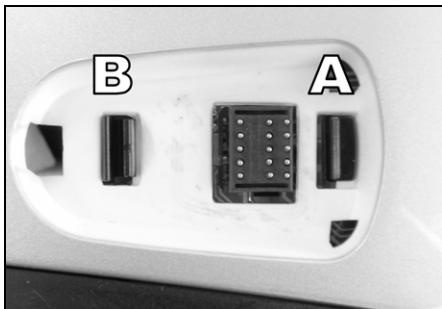


Fig. 23



Fig. 24

- Pull out the connectors area from the helmet gasket: the gasket will have to be slightly deformed to facilitate the insertion.
- Insert the microphone connector in the Basic Kit2 (Fig. 25).



Fig. 25

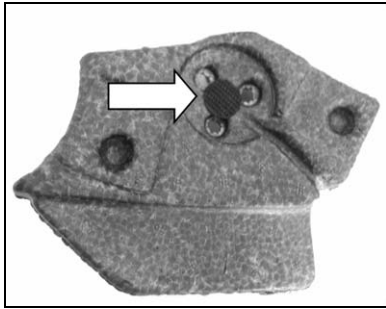


Fig. 26



Fig. 27

- Before you place the speaker in its housing, apply the Velcro pad to the polystyrene cheek pad (Fig. 26).
- Position the loudspeaker in the special housing obtained in the polystyrene cheek pad (Fig. 27).
- Replace the polystyrene cheek pad (left side), positioning the cable in the groove that you see in the cheek pad (Fig. 27).

**Note:** Make sure the cheek pad is properly positioned in its housing, pushing in the lined corner underneath the ribbing on the shell (Fig. 28).

- Secure the battery-holder support to the right side of the helmet, lining up the holes with the pins on the shell (Fig. 29).

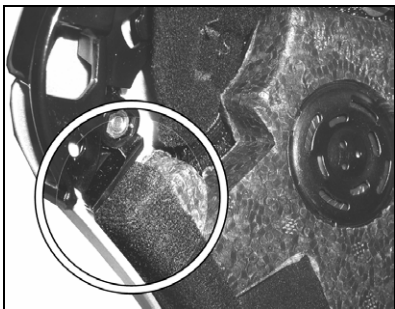


Fig. 28

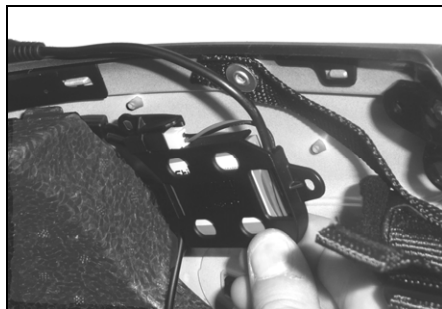


Fig. 29

- Before you place the speaker in its housing, apply the Velcro pad to the polystyrene cheek pad (right side).
- Position the loudspeaker in its housing obtained in the polystyrene cheek pad (right side).
- Replace the polystyrene cheek pad (right side), positioning the cable in the groove you see in the cheek pad.



Fig. 30

**Only for full-face helmets:**

- Insert the chin guard (microphone side), gently placing the microphone in its housing. Then press down on the red tab until the chin guard is locked in place on the helmet (Fig. 30).

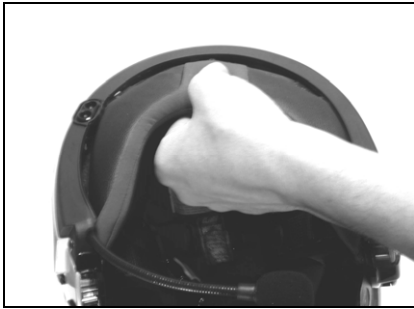


Fig. 31



Fig. 32

- Position the comfort padding in its housing (see specific instructions provided in the helmet user manual), hooking the neck roll (Fig. 31).
- Position both the comfort cheek pads in their housing (see specific instructions provided in the helmet user manual) making sure that all the press-studs click.



Fig. 33

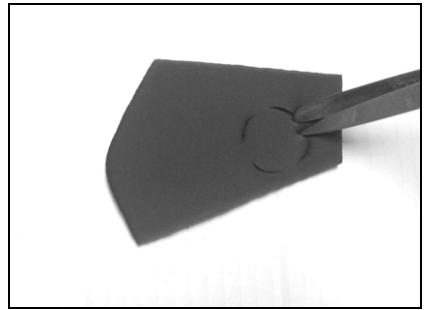


Fig. 34

- At the end of the installation, the helmet should look like the one shown in Fig. 33.

- After the installation is complete, you can position the Noise Reducers provided with the helmet. Once the Noise Reducers are assembled, the perceived audio volume of the loudspeakers may be considerably lower than the standard one.
- To use the Noise Reducers, use scissors to cut out the pre-drilled sponge disk. Then position the Noise Reducers in the helmet, making sure that the Velcro on the cheek pads sticks.

**Note:** Carefully check the proper final positioning of the cheek pad, pulling the chinstrap toward the inside of the helmet and testing the press-studs.

**Caution:** Make sure that there are no cables sticking out of the helmet and that the loudspeakers are in their housing.

**Caution:** Always verify the proper length of the chinstrap and adjust it as necessary, once again referring to the specific helmet instructions.

### 3.5. Installing the basic card

The basic card makes it possible to use the basic kit by itself, in order to connect to an external audio source or to a cell phone or for an interphone connection via cable to another helmet equipped with an N-Com system.

Depending on the type of connection and on the cable used, the basic card has to be inserted the right way:

<p>The image shows the blue side of the basic card. It features a grid of 12 contact points. Text on the card includes 'BASIC', 'PLABANNSAN', 'HW-6C', and 'MONO'.</p>	<p><b>Blue side (MONO):</b> use this for connection to a Mono type cable (Multimedia wire or Mobile Wire) or in case of cable connection to another helmet equipped with Bluetooth Kit, Bluetooth Kit2, Intercom Kit.</p>
<p>The image shows the red side of the basic card. It features a grid of 12 contact points. Text on the card includes 'STEREO'.</p>	<p><b>Red side (STEREO):</b> use this for connection to a Stereo type cable <u>Multimedia Wire2</u> or in case of cable connection to another helmet equipped with Bluetooth Kit3 and next version.</p>

**N.B.:** By using a Mono cable (Multimedia wire) with the basic card inserted from the red side (STEREO), you will be able to hear the audio signal in the left channel only.

**Caution:** Never use the Basic Card on the RED side (STEREO) in case of cable connection to another helmet equipped with Bluetooth Kit, Bluetooth Kit2, Intercom Kit. IMPROPER USE MAY DAMAGE THE SYSTEM.

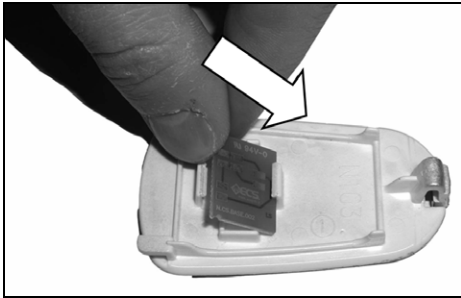


Fig. 35

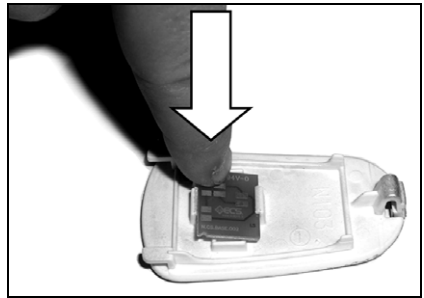


Fig. 36

- Position the back of the Basic Card (Fig. 35) in the rear of the “N-Com” protection plate and then push the basic card in its housing until the fastening clasps click (Fig 36);

**Note:** The basic electronic card has a rounded corner that helps you to always position it correctly in its housing.

- Reposition the protection plate covering the “N-Com” housing on the shell. First insert the rear part and then press the front part until the fastening clasp clicks.

## 4. REMOVING THE BASIC KIT2

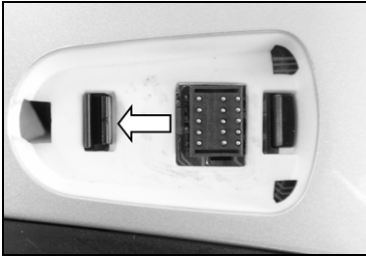


Fig. 39

To remove the basic Kit2 from the helmet, remove the earphone and the comfort cheek pads as shown in the assembly operations. Then remove the polystyrene cheek pads. Remove the protection plate (or the e-box in case of Intercom Kit or Bluetooth Kit), then, looking at the helmet from the outside, release the 15-way connector by acting on the fastening clasp as illustrated in the figure.

- After releasing the 15-way connector from the shell, also remove the right part by releasing the Basic Kit2 from the shell pins.
- Now remove the entire basic Kit2 from the helmet.

### 4.1. Removing the battery (if equipped)



Fig. 40

- Unhook the battery connector (red+black) from the wiring.
- Take out the battery by slightly deforming the bottom part as shown in the figure.
- If necessary, push the battery out of its housing by pushing it through the holes found on the support

## 5. USING THE BASIC KIT2 WITH A CELL PHONE

The N-Com systems are preset for connection to a cell phone. By separately purchasing an N-Com connection cable, specific for your cell phone model, you can use the N-Com system as a simple earphone.

Cell phones are equipped with their own volume adjustment. Adjust the cell phone volume levels so as to obtain the desired volume prior to using the system while riding.

1. Connect the Mobile wire to the INPUT connector (3.5 mm jack).
2. Connect the Mobile wire to the cell phone.
3. Make sure that the cell phone displays the icon that signals connection to an earphone

**Note:** In order to use the Basic Kit2 together with another N-Com system, please refer to the specific instructions provided with these systems.

**Note:** Due to the varying strength of the network signal, there may be interferences in the wire connections that do not depend on the N-Com system or the cable used

**Caution:** Listening to other devices must not interfere with driving the vehicle, which has absolute priority. All maneuvers on electronic devices and on the N-Com system must be carried out with the vehicle stopped, in compliance with Traffic regulations.

**Caution:** Listening at a very high volume may distract you from riding your vehicle and create dangerous situations or limit the ability to hear background noises.

**Caution:** Adjust the volume of the N-Com system (where provided) and of the audio sources connected to it before you use the system on the road.

**Caution:** Adjust the volume of the N-Com system (where provided) and of the audio sources connected to it so as to avoid audio reproduction at high volumes. Constant exposure to high audio volumes may damage your hearing



## 5.1. Answering a phone call

### Automatic answer

Preset your cell phone for automatic answer when it is connected to an earphone. When a call comes in, you can talk through the Basic Kit2 microphone.

### Manual answer

If your cell phone is not equipped with an automatic answering function, stop the vehicle in a safe place, in compliance with Traffic Regulations. Then answer your call normally and speak through your N-Com helmet.

**Caution:** Do not answer any calls while riding.

## 5.2. Making a phone call

Stop your vehicle in a suitable place in compliance with Traffic Regulations and make the phone call as you would normally with your cell phone. Once the phone call is sent, communication switches directly to the helmet.

**Caution:** Do not make any calls while riding.

## 5.3. Vocal calls

Some cell phones allow vocal calls or other functions using vocal commands by using a “magic word”. If your cell phone is equipped with this function, you can send a vocal command or function simply by saying the magic word previously recorded.

**Note:** If the cell phone allows it, it is better to record vocal commands directly from the helmet. This will facilitate recognition of the vocal command when the command is given directly from the helmet.

## 6. USING OTHER AUDIO PERIPHERAL DEVICES

The N-Com Basic Kit2 is pre-set for listening to various audio devices, which must be connected through the special Multimedia Wire cable (sold separately).

You can listen to an MP3 or to an FM radio, connect to a satellite navigation system, to the audio system of your motorcycle or to a radio for communication between two motorcycles.

Refer to the list of Multimedia Wire cables and the possible connections available on the website [www.n-com.it](http://www.n-com.it)




Fig. 41

Connect the 3.5 mm 4-pole connector of the Multimedia cable to the input connector (IN – see fig. 41). Connect the other end of the cable to the audio device.

A coloured clamp on the cable indicates the connector to hook up to the audio peripheral device.

## 7. MAINTENANCE

The N-Com does not require any special maintenance tasks. In case you use the kit when it rains, remove the e-box from its housing and dry it with warm air. Wipe dry the outside of the helmet when wet, especially in the contact area.

In case the kit gets wet several times, rust or corrosion may form, thus hindering the electrical contact. In these cases, it is recommended to clean the contacts of the socket on the shell and on the e-box using alcohol or another antirust product.

## **8. LIMITED WARRANTY**

With this LIMITED WARRANTY CERTIFICATE, Nolangroup warrants this Product to be free from defects in material and workmanship at the time of its original purchase by the buyer.

We invite you to:

- Read the cautions pertaining to safety and proper use.
- Read the warranty terms and conditions.
- Keep the originals sales receipt. This must be shown in case of repairs covered by warranty. In these cases, the product has to be taken back to the dealer where it was purchased.

### **8.1. Warranty coverage**

If any defect covered by this limited warranty certificate is discovered within 2 (two) years from the purchase date shown on the tax receipt, Nolangroup shall repair or replace the defective product through its distribution network after having verified the defect. Nolangroup shall supply all the material and labor that is reasonably required to remedy the defect, except in those cases where the damage is caused by one of the items listed in the following paragraph "Exclusions and limitations of the Coverage".

### **8.2. Exclusions and limitations of the coverage**

This warranty only covers defects in materials and manufacturing. Nolangroup shall not be considered responsible for product defects that can be attributed, either partially or in full, to any other cause, including but not limited to:

- Defects or damages resulting from using the Product in conditions that differ from the usual ones.
- Damages caused by improper use not conforming with normal operation in accordance with the product operating and maintenance instructions provided by Nolangroup.
- Negligence and normal wear of internal and external parts.
- Any damage caused by an accident;
- Any change or modification made to the helmet or to the N-com system by the user or by third parties.
- Color changes or damages caused by exposure to harmful chemical products.
- The use of incompatible accessories that are not part of the N-Com product range.
- Moreover, the warranty does not cover product defects caused by fortuitous events, modifications or adjustments, causes of force majeure or damages deriving from the product coming in contact with liquids.
- The internal helmet components are not and cannot be waterproof. Consequently, any improper exposure to rain, humidity, food spillages or other liquids can result in damages to the N-Com electronic devices, damages for which Nolangroup shall not be responsible.

- This warranty does not include those parts subject to wear and tear such as, for example, the rechargeable battery and the cables used for connection between the various N-Com systems or between the N-Com systems and other devices.
- Since Nolangroup does not supply the system on which the cell phones work, it shall not be responsible for the operation, availability, coverage, services or range pertaining to the aforementioned system.
- Whenever the product is used in conjunction with accessories or equipment not supplied by Nolangroup, Nolangroup shall not guarantee proper operation of the product/device combination, nor will it accept requests for repairs or replacements under warranty in case the product is used in such a way.

Nolangroup shall not be responsible in case the product presents limited capabilities due to the operating mode of cell phones or of other accessories or equipment not supplied by Nolangroup. Tampering with the internal electronic card or with other parts of the N-Com system shall invalidate the warranty.

Moreover, the defects covered by this warranty do not include all those specific and subjective situations that may come up during the active use of the helmet such as, for example, comfort problems while riding or aerodynamic noises.

Nolangroup shall not be held responsible in any case for incidental or consequential damages (including, without any limitation whatsoever, damages to one or more persons) resulting from non-fulfillment of the obligations arising from this warranty as it pertains to Nolangroup products.

### **8.3. Validity of this limited warranty**

This warranty is valid only if the enclosed warranty form is duly and completely filled out with the following information:

- Product identification code
- Name and stamp of the authorized dealer.
- Product purchase date.
- Buyer's name and address.

Nolangroup reserves itself the right to not carry out repairs under warranty if the aforementioned information is removed or modified after the original purchase of the product from the dealer.

### **8.4. Procedure for the forwarding of claims**

To forward a claim covered by this warranty, the buyer has to directly notify the dealer where the helmet was purchased with regards to the defect, presenting at the same time the defective product, a copy of the sales receipt and the Warranty registration form, duly filled out as instructed above.

PRIOR TO CONTACTING THE DEALER, WE RECOMMEND THAT YOU READ CAREFULLY THE USER MANUAL ENCLOSED WITH THE PRODUCT.

AFTER 2 (TWO) YEARS FROM THE DATE OF PURCHASE, THIS LIMITED WARRANTY IS VOID FOR ALL EFFECTS AND PURPOSES.

Repairs or maintenance under warranty do not extend the period of the warranty itself. Therefore, in case the product or one of its components is replaced, this does not initiate a new warranty period, as the purchase date of the original product shall be taken into account for warranty purposes.

Only for repairs or replacement of electronic components, in the event that Nolangroup proceeds to repairing or replacing the product, said product shall enjoy a warranty period equal to the residual portion of the original warranty or ninety (90) days from the repair date (the longer period being considered).

The repair or replacement can be carried out even with regenerated components with equivalent functions.

The replaced parts or components shall become property of Nolangroup.

THIS WARRANTY VOIDS AND REPLACES ANY OTHER WRITTEN OR VERBAL WARRANTIES PROVIDED FOR BY THE LAW THAT CAN BE DEROGATED AT THE PARTIES' WILL; SPECIFICALLY, NOLANGROUP DOES NOT GRANT SPECIFIC WARRANTS OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL NOLAN BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES INCLUDING BUT NOT LIMITED TO LOST PROFITS OR COMMERCIAL DAMAGES, TO THE FULL EXTENT THOSE DAMAGES CAN BE DISCLAIMED BY THE LAW.

NOLANGROUP RESERVES ITSELF THE RIGHT TO MODIFY, AT ANY TIME AND WITHOUT ADVANCE NOTICE, THE PRODUCT CHARACTERISTICS, FUNCTIONS, COMPATIBILITY AND SOFTWARE.

Some Countries do not allow the exclusion or limitation of incidental or consequential damages, or the limitation of the duration of implied warranties; as a result of this, the previous limitations and exclusions may not be applicable to you.

This warranty does not have any effect on the customer's legal rights under the national jurisdiction in force or on the consumer's rights towards the dealer sanctioned by the purchase/sale contract.

This warranty is valid throughout the European territory, and it represents the only express warranty provided by Nolangroup in relation to the sale of its own products. This warranty does not affect the rights to which the buyer is entitled and which are expressly provided for by Directive 1999/44/CE.

This warranty does not affect the consumer's rights provided for by the law, and specifically by the provisions of Legislative Decree 2 February 2002 n. 24.

### 8.5. Product identification

N-Com products are identified by means of a code that allows product traceability and identification.

The identification code is found underneath the bar code printed on the product packaging.



**9. WARRANTY REGISTRATION FORM**

**Product name:** Basic Kit2

**Identification code**

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

**Buyer's Information**

**Name**

**Last name**

**Address**

**Phone**

**e-mail**

**Dealer's stamp**

**Date of purchase**

Printed on recycled paper.

