

www.magplates.com

OPERATION

Charge Indicators

Once the front power button is pushed, four charge indicators will be lit according to the chart below.

Charge Light	1 ON	2 ON	3 ON	4 ON
Charge	<25%	25-50%	50-75%	75-100%

Input/Output


Input: Micro USB Connector

Output: USB Connector

CHARGING DEVICES

Connect the mobile device to the B515 Power Bank using the original device charging cable.

Example:

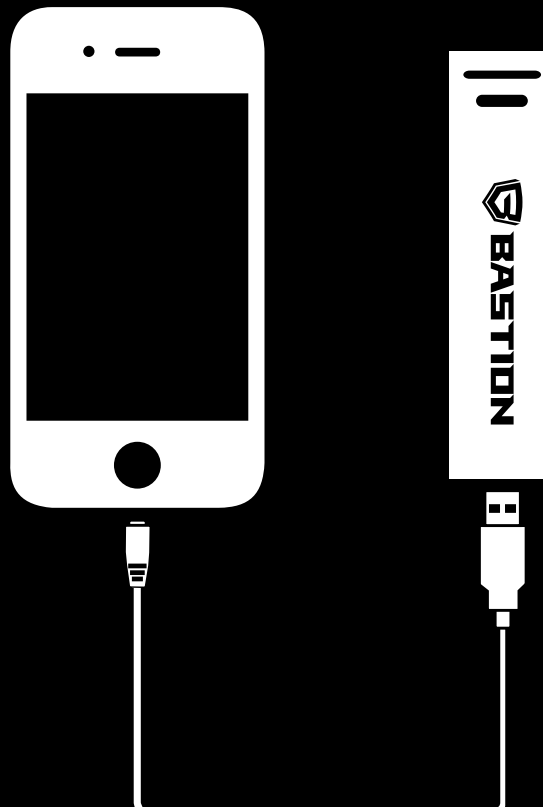

*Device charging cable not included

CHARGING B515 POWER BANK

- Use the provided Micro USB cable to charge the B515 Power Bank
- Charge from USB outlet(e.g. wall charger, computer, etc.)

CHARGING STATUS

- Flashing charge indicator light is on: B515 is charging
- All charge indicator lights are on(not flashing): B515 has full charge

ATTENTION: Make sure cables are firmly connected to both the B515 unit and the mobile device to ensure proper charging.

SAFETY

WARNING: Failure to follow safe operation may result in fire, damage, electric shock, or personal injury.

Do not attempt to open or puncture the B515 unit or expose to fire, high temperatures, or water. If the B515 unit becomes damaged, dispose of properly.

SPECIFICATIONS

Body Material:	Aluminum
Battery:	Li-ion
Input:	DC5V-800mA
Output:	DC5V-800mA (MAX)
Capacity:	2600 mAh
Weight:	7.41 oz
Standard:	GB 4706.18-2005
Protection:	Surge, Overcharge Protection
Charging Time:	Approx. 3 Hr
Recycle Life:	+/- 500 Cycles
Dimensions:	3 5/8 in. X 7/8 in. X 7/8 in.

*The amount of mobile device charges depends on the the device battery capacity.