

Advanced LED Illumination for Fluorescence Microscopy

X-Cite® XLED1

Resetting the standard for LED illumination

Optimized excitation with high power LED illumination at the sample plane

Instant switching between wavelengths; ideal for multi-color live cell imaging

High-Speed automation with advanced internal pulse generation and external triggering options

Ease of use through an optional interactive touch screen controller and intuitive user interface

Flexible and scalable to allow you to tailor to specific applications




LUMEN DYNAMICS
PUTTING YOU IN CONTROL

X-Cite®
—XLED1

The X-Cite® Advantage.

Designed with researchers in mind, the X-Cite® XLED1 combines high power excitation specificity with high-speed imaging capabilities for maximum control, versatility, flexibility and ease of use.

Inspired by over 27 years of light applications expertise, X-Cite® XLED1 is the superior choice in LED technology ideal for microscopy applications involving fast, automated multi-color live cell imaging.

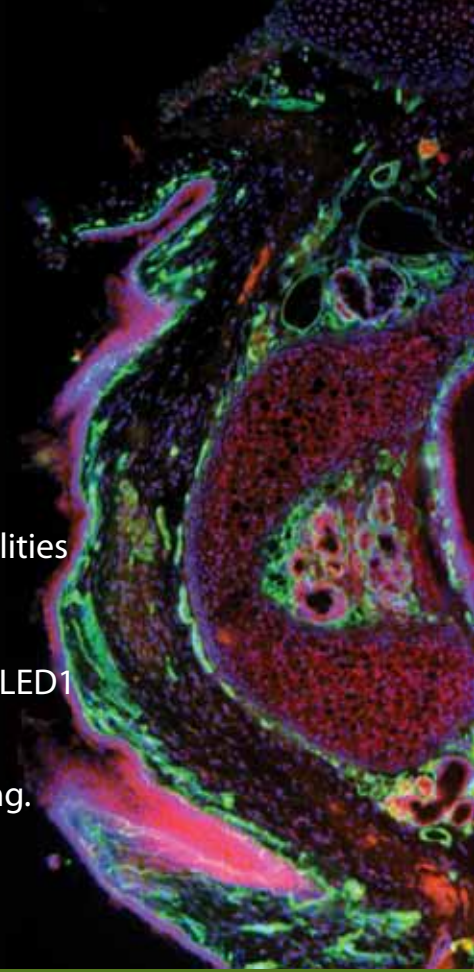

With the recent advancements in LED technology, researchers can benefit from the intrinsic advantages of LEDs:

- Reliability with long lifetimes
- Fast on/off switching with no warm-up required
- Elimination of frequent mercury and xenon lamp changes
- No need for mechanical shutters - prevents vibration and increases imaging speed
- Optimized excitation through narrow bandwidth and diverse wavelengths
- Reduced phototoxicity and bleaching
- Compact size, low heat generation, and energy efficiency
- Stability (spatial and temporal)
- Increased excitation specificity without the high cost of lasers

What does X-Cite® XLED1 offer?

- Uniform and stable, high-power LED illumination
- Narrow LED bandwidth that reduces crosstalk between fluorophores
- Efficient wavelength mixing for uniform and powerful illumination of up to four fluorophores at the sample plane
- Fast triggering both internally and externally with pulse duration as short as 10µs for advanced system control
- Instantaneous wavelength switching for fast multi-color imaging applications
- Ultra-fine control of intensity (0.1%) for precise adjustments to output power
- Ease of use for a novice or an expert microscopist
- Intuitive, intelligent GUI offering full system control via PC or optional touch screen controller
- Simple plug and play modules allowing fast and easy system reconfiguration
- Compatibility with third party software for simplified integration into existing experimental set-ups
- 20,000 hours (or 3 years) LED module guarantee



X-Cite® XLED1 represents the industry's next generation of LED illumination for fluorescence microscopy applications. The XLED1 includes user configurable high power LEDs with specific excitation modules ranging from 365-735nm to image from the most commonly used fluorophores to those used in niche applications. The X-Cite® XLED1 offers superior power output and advanced control for high-speed automated fluorescence imaging.

Harnessing the intrinsic advantages of solid-state LED technology, the X-Cite® XLED1 provides unprecedented wavelength and power stability over extended lifetimes. Integrated with state-of-the-art technology that provides full control over LED intensity and signaling, the X-Cite® XLED1 can trigger, or be triggered by, external hardware. By combining these features with an easy-to-use intelligent GUI or optional controller, the XLED1 offers maximum control with the convenience and versatility of an X-Cite®.

Maximum Power and Specificity for your Application

The X-Cite® XLED1 offers up to four high-powered LEDs with narrow spectral profiles that enable excitation specificity while maintaining high power at the peak excitation wavelength via efficient optics including optimized microscope adaptors. In certain applications, excitation filters may not be required, and the use of multi-band filters negates the need to rely on a filter wheel, thus enabling high-speed imaging.

The X-Cite® XLED1 is well-suited for applications including live cell imaging (high-speed or long-term), optogenetics and even fixed cell imaging involving fluorescent probes, conjugates and the ever-popular fluorescent proteins (FP's) along with the


standard Alexa, ATTO dyes and traditional DAPI, FITC, and Cy dyes. The XLED1 system maximizes excitation specificity to which laser users are accustomed, but without the high cost of lasers (*Figure 1*).

Control Options

The X-Cite® XLED1 has been designed with an optional touchscreen controller featuring an intuitive interface for easy navigation and advanced system control (*Figure 2*). With a touch screen display, users have the ability to view LED and system status while ensuring peace of mind when exchanging modules. Advanced operators and lab managers can manage more complicated imaging protocols through the triggering screen (*Figure 3*). A unique virtual oscilloscope feature plots all programmed channel and trigger waveforms (*Figure 4*), ensuring proper system set-up, as well as potentially eliminating the need for external electrical or optical test equipment. A PC version of this GUI is also included with every X-Cite® XLED1. For those who choose to control the system through their own software, a full SDK is available, as well as drivers for common software packages.

Flexibility and Ease of Use

The X-Cite® XLED1 system allows operators to control the intensity of each LED in large steps through a slider, or through smaller steps using simple up and down arrows associated with each LED. With the touch of a button, intensity levels used from past experiments can be set via a numerical value of the required intensity. The XLED1 touch screen controller also offers the ability to save optimized settings for future experiments with up to five user profiles that are password protected. By simply logging in when starting an experiment and logging out at the end of the day, individual settings will be saved for future use.

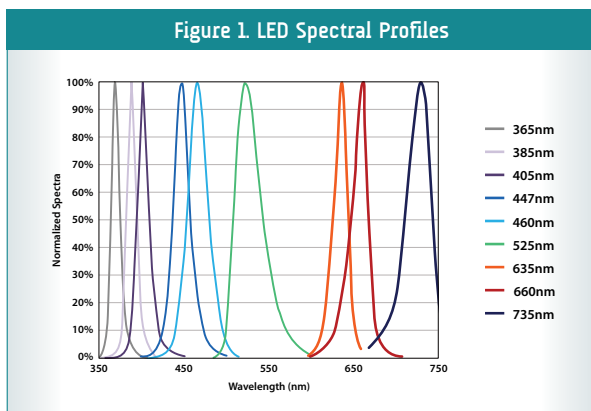

and the new XLED1 LED light source from Lumen Dynamics to be extremely bright in a multi-user environment, providing great excitation for all of our favorite fluorescent proteins.



Molecular Imaging Center, UC, Berkeley

Ideal for Live Cell Imaging

The X-Cite® XLED1 system is ideal for single or multi-color live cell imaging including high-speed applications, long-term development imaging, protein activation and interactions (FRET) and the popular optogenetics techniques. With super-fine control of power intensity as little as 0.1% increments, users can fine tune the exact power required for optimal imaging. With instantaneous switching between wavelengths and ability to pulse each LED for a defined time period or continuously, the XLED1 system will allow you to image for long time periods while minimizing photobleaching and phototoxicity when compared to alternative light sources.

Programmable for High-Speed Automated Imaging

Designed with a sophisticated internal pulse generator, the X-Cite® XLED1 allows full control of the LEDs according to experimental needs. Signals can also be directed into each or all of the LEDs through TTL inputs generated by external hardware connected to the XLED1.

Timing protocols can be defined as per experimental design to turn each LED ON and OFF, as well as transmit trigger signals to peripherals (e.g. stages, cameras, electrophysiology rigs) connected to the XLED1.

Configurable with Plug and Play Modules

The X-Cite® XLED1 can be configured specifically for each user's applications. Simply choose two or more LEDs and our online configurator will help you choose the dichroics required for the LED combination and help you determine the system for your needs.

The XLED1 offers easy replacement of LEDs with additional modules that may be required for niche applications for greater flexibility. Just simply plug and play - no wires to reconnect and no need for special tools.

Optical table visualization (*Figure 5*) on the maintenance screen provides researchers with useful system configuration information and also pinpoints the location and details of each LED source and dichroic, making reconfiguration straightforward.

Setting the New Standard for LED Illumination

X-Cite® is recognized as the industry standard for fluorescence illumination and was the first to introduce a commercial replacement for traditional HBO systems in 2002. The X-Cite® XLED1 represents a new generation of LED microscopy illuminators with optimum LED power where it is most essential - at the sample - while offering the convenience and ease of use researchers have come to expect from an X-Cite®.



What X-Cite® XLED1 offers...

How researchers benefit.

High power at the sample plane (365nm - 735nm modules)	Increased spectrally targeted excitation power where it matters most to excite/uncage/activate fluorophores – at the sample
Narrow LED bandwidth	High signal to noise ratio; reduces crosstalk between fluorophores leading to high signal specificity
Instantaneous wavelength switching	Enables fast multi-color image acquisition and pulsing applications (down to 10µs)
Fast ON/OFF	Eliminates vibration and latency of mechanical shutters, allowing precise, short exposure times to limit photobleaching and phototoxicity
Advanced triggering and pulsing options	Flexibility with experimental design and system control
Configurable plug and play modules	Easy configuration according to user application
Optimized X-Cite® adaptors	High efficiency coupling to a wide variety of microscopes currently available with X-Cite® products
Uniform and stable illumination	Reliable and consistent image data
Intuitive GUI and interactive touch screen	Ease of use; no advanced training required
Easy module exchange	GUI verifies system set-up and ensures worry-free module exchange
0.1% intensity control increments	Repeatable illumination and optimal imaging

Figure 2



Figure 3



Figure 4



Figure 5



X-Cite® XLED1 offers superior power output and advanced control for high-speed automated microscopy in LED fluorescence illumination.

Designed with researchers in mind, the X-Cite® XLED1 combines excitation specificity and high speed imaging capabilities for maximum control, versatility and ease of use.

Recognized as the industry standard in fluorescence illumination, X-Cite® offers the XLED1 as the next generation of advanced LED technology for microscopy applications.

SPECIFICATIONS

X-Cite® XLED1 package includes: X-Cite® XLED1 illumination system, optional XLED1 touch screen controller, up to four modules, user manual (CD) with GUI and USB driver, quick start guide, liquid light guide, microscope adaptor, power cord, trigger cables, USB cable

X-Cite® XLED1 System

Wavelengths:	Wavelengths available at http://www.LDGI-XCite.com/downloads/misc/spectra.pdf
Dimensions:	8.5" (W) x 8" (H) x 15" (D) (22cm x 20cm x 39cm)
Weight:	~7.3kg, ~16lbs (full system)
Supply:	Universal input of 100-240Volts AC, 50-60Hz. Fused at 6.3A
Connectivity:	USB type-B female Trigger Input BNC (TTL-compatible) Sync Output BNC (TTL-compatible)
Triggering:	Internal/External User-defined per channel Global trigger input User-defined free-running or single shot pulse modes Internal triggering generated from internal pulse generator 10µs (min), up to 18 hours (max)
Sync Out:	Mapped echo of LED cycles on separate output pins
Sync Out Phase Control:	Individual control of sync phase advance/retard (half of max cycle duration)
Switching Speed:	Instantaneous
Minimum Duty Cycle:	10µs

X-Cite® XLED1 Touch Screen Controller (Optional)

Screen:	Medical/Industrial grade 7" TFT viewable diagonal. Resistive touch screen with 16:9 aspect ratio and LED backlight with adjustable intensity
Resolution:	800 x 480 pixels
Display Viewing Area:	6" (W) x 3.5" (H) (15cm x 9cm)
External Dimensions:	8" (W) x 2.5" (H) x 5.5" (D) (20cm x 7cm x 14cm)
Program:	Lumen Dynamics proprietary graphical user interface
Connectivity:	~2.5m connectorized power and data combo cable
Power:	<10 watts
Certifications:	CE Marked, Certified to IEC, Canadian and US standards, RoHS compliant
Warranty:	X-Cite® XLED1 System, XLED1 touch screen controller and XLED1 LED drivers: 12 months from shipping. LED modules: 20,000 hours or 3 years



2260 Argentia Road,
Mississauga, Ontario,
L5N 6H7 CANADA

www.LDGI-XCite.com

Telephone: +1 905 821-2600
Toll Free (USA and Canada): +1 800 668-8752
Facsimile: +1 905 821-2055

X-Cite@LDGI.com



光技術をサポートする
株式会社オプトサイエンス
<http://www.optoscience.com>

東京本社 〒160-0014 東京都新宿区内藤町1番地 内藤町ビルディング
TEL: 03 (3356) 1064 FAX: 03 (3356) 3466 E-mail: info@optoscience.com
大阪支店 〒532-0011 大阪市淀川区西中島7-7-2 新大阪ビル西館
TEL: 06 (6305) 2064 FAX: 06 (6305) 1030 E-mail: osk@optoscience.com
名古屋営業所 〒450-0002 名古屋市中村区名駅2-37-21 東海ソフトビル
TEL: 052 (569) 6064 FAX: 052 (569) 8064 E-mail: ngo@optoscience.com