

EV6551A-DI IP Camera

High Resolution Vandal Dome IP Camera



H.264

Audio

PoE

Day&Night


IP66

Features

- 520TVL Sony CCD Sensor
- 3.8 ~ 9.5mm (F1.2) Auto Iris Lens
- H.264, MPEG-4, M-JPEG Dual Streams Simultaneously
- 3-Axis Swivel Design
- 0 Lux IR on, 8pcs LED 20 Meters
- Day / Night Mode, Built-in ICR
- Vandal-proof, IP66
- 802.3af standard A/B compliant PoE

Dimensions

Figure. Rear Panel

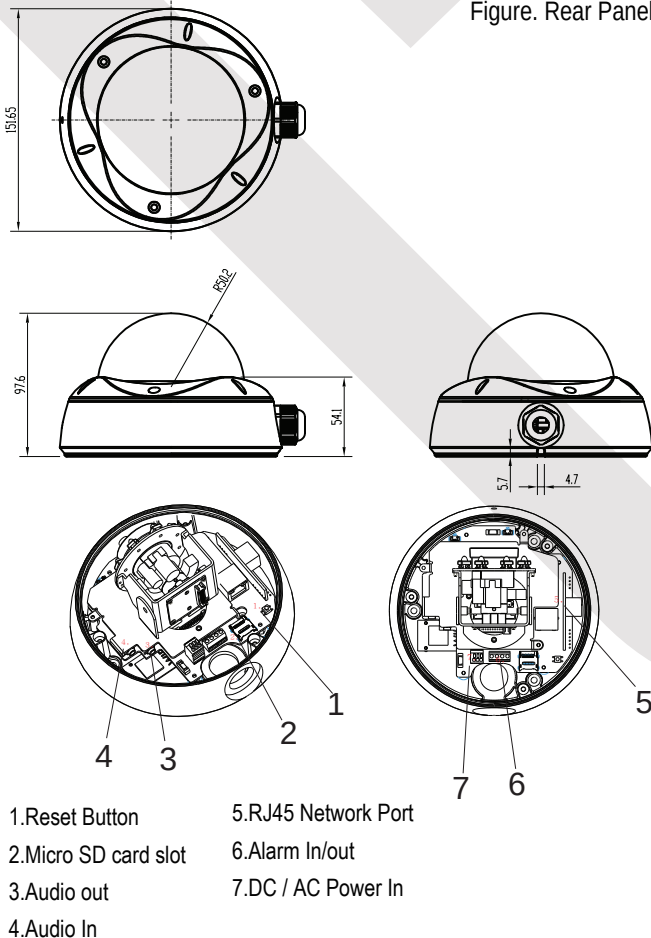

Specifications

	Model	EV6551A-DI	EV6551AP-DI
Camera	Image Sensor	1/3" SONY CCD	
	Lens	3.8 ~ 9.5mm (F1.2) Auto Iris Lens	
	Minimum Illumination	0.1 Lux (IR off), 0 Lux (IR on, 8pcs LED 20 Meters)	
	Shutter time	1/60~1/100,000 (NTSC) , 1/50~ 1/100,000 (PAL)	
	Number of Effective Pixels (HxV)	811 x 508 (NTSC) , 795 x 596 (PAL)	
	Auto Iris	DC Drive	
	Sync System	Internal Lock / Line Lock	
	Resolution	520 TVL	
	S/N Ratio	50 dB	
	Video Compression	H.264, M-JPEG, MPEG-4 Format Selectable	
Video / Audio	Image Size	D1(NTSC : 720x480, PAL : 720x576), CIF(352x240), QCIF(176x120)	
	Frame Rate	30fps (NTSC) / 25fps (PAL) @ D1 Resolution	
	Video Streaming	Simultaneous Dual Streams Controllable Frame Rate and Bandwidth CBR/VBR	
	Day / Night	Auto	
	Image Settings	Compression, Brightness, Contrast, Saturation	
	Bit Rate	M-JPEG: 5 Video Quality Level Selectable; MPEG-4/H.264 : 64K~4Mbps	
	Video Output	Composite BNC Connector, 1.0 Vp-p (with 75 ohms load)	
	Audio	Audio In/Out : ADPCM	
	Security	Password Protection, IP Address Filtering, User Access Privilege	
	Protocols	TCP/IP, UDP, DHCP, PPPoE, HTTP, DNS, DynDNS, NTP, FTP, SMTP, UDP, RTP, RTSP, 3GPP, UPnP, IPv4, SAMBA client (NAS)	
Network	Application Programming Interface	EtroSDK™ 3.0	
	Intelligent Video	Video Motion Detection	
	Alarm Trigger	Intelligent video and external input	
	Alarm Events	Intelligent Video, File Upload via FTP and E-mail, Notification via E-mail, External Output Activation, File Recording to NAS	
	Video Buffer	Pre-and Post Alarm Buffer up to 10-sec	
System Integration	Configuration	EtroScan™ Utility, Web UI	
	Web Browser	Microsoft Internet Explorer 6.0, or Above	
	Casing	3-Axis Swivel Design, IP66, Vandal-proof	
	Dimension	167(Ø) X 98(H) mm	
	Processor and Memory	ARM9 Base SoC, 128MB RAM, 16MB Flash	
	Power	12V DC / 1A	12V DC / 1A, PoE
	Connectors	RJ-45 for 10BASE-T/100 BASE-TX, DC jack, Reset, BNC, Audio In, Audio Out, DI/DO	
	Operating Conditions	Temperature: 0 °C ~ 50 °C (32 °F ~ 122 °F) Humidity: 20% ~ 80% RH	
	Power over Ethernet	NA	802.3af standard A/B compliant
	Wireless	NA	
	Approvals	CE, LVD, FCC, RoHS	
	Weight	1190g	
	Included Accessories	Power Adapter, CD-ROM (User Manual, Free Bundle NVR)	
General			