



Mixy

Getting
started

OK, So smart people don't read manuals ...



... but **MIXY** is smart too. Don't be fooled by her simple looks, there's a great deal more to her than meets the eye. By all means treat her as a thoroughly stereo-capable mixer but not as a stereotypical one. Read on....



MIXY can run on her internal rechargeable battery (for more than 10 hours) or on external 8-18VDC. When you unpack her the battery will be only part-charged. You will need to plug in the external mains power supply at the HR4 connector for about 4 hours to recharge it fully.

MIXY will operate normally while recharging on external power.

Turn **MIXY** on by holding the Esc button down for >2 seconds. Her screen will light up.




Hold down the ESC button for >2 seconds to turn **MIXY** off.

Unlike most portable mixers **MIXY** is largely controlled through her display screens. Take a little time to explore them. Once you have decided the way you want to work you can store the settings and **MIXY** will remember them. You can turn her off and when she starts again the settings will have been retained unchanged.

There are 9 memories so that you can quickly switch between different sets of parameters if you need to use **MIXY** in a variety of ways.

It's quite OK to peek at menus and settings while **MIXY** is handling audio - you won't affect the sound just by looking.

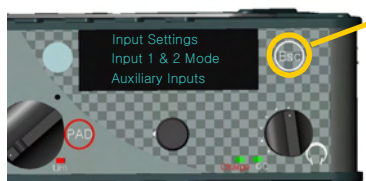


To set up **MIXY** press the Esc button briefly - the meter display will change to a menu.



Use the joystick to select the option you want,

and then press the Left button to enter that menu.

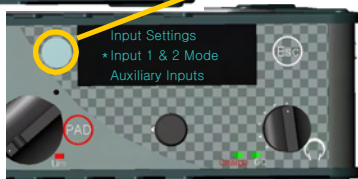

You can navigate up, down and across lists using the joystick.

If you meet a >sign there are further options for you to scroll to.

Highlight an item to change by pressing the Left button - the item will flash.

Change the highlighted item or value using the joystick - and press the Left button to confirm the change.

Press Esc to leave a menu - and repeat the press to return to the meter screen at any time.

Inputs : all three XLR-3 inputs can be controlled individually.

Set **routing**: L, R, C (=L+R), or - (not routed)

Set **powering**: T12 (tonader), P12, P48, or - (no powering).

T12 must only be used with microphones marked as such. Phantom power microphones will normally use P48 but if rated for P12 this option will be more economical of battery power. Dynamic microphones, including ribbons, might be safe with P12, P48 but it is wiser to turn the mic powering off.

If **MIXY** is turned off with mic powering enabled she will ask if this is OK when she is next switched on. This is to prevent accidental damage. Press the PAD button briefly to confirm - or change the settings.

Set **gain**: select preamplifier gain from 0dB to 50dB.

With 0dB preamp gain **MIXY** has up to 40dB of gain to the line outputs. Adding 50dB of switched gain (90dB total) will give an input suitable for very low sensitivity microphones such as ribbons. In the 0dB gain position inputs as high as Line level can be accommodated.

Input 3 can have a 20dB pad (attenuator) inserted directly before the preamplifier. Press PAD—an P icon appears.



A **limiter** can be inserted into each channel, post-fader. N=no, Y=yes, YC=yes coupled—this is automatic with stereo pairing of Ch 1 & 2.

The channel LIM LED lights **green** when selected...

... and turns **red** when the signal begins to limit.



MIXY always checks the input level to each channel.

If there is a risk of overload the OVL LED lights **red**.

The LED begins to light at -12dB below overload. If it does more than flash occasionally go back to the input set-up screen and reduce gain.



High-pass filters (HPF) - there are four options. None(-),

50 (50Hz, 18dB/oct), 120 (120Hz, 18dB/oct), 300 (300Hz, 6dB/oct). The steep 18dB options cut windnoise and traffic rumble effectively. The gentle 6dB slope compensates for proximity effect (bass tip-up) in directional microphones.

Phase (polarity) - + or -

Always confirm your selection with the Left button

Inputs 1 & 2 mode: these channels can operate independently or as a stereo pair.

Set **mode** to: 2 Ch (independent), L/R (normal stereo), or M/S (Mid/Side or sum and difference stereo).


In stereo modes channel 1 fader is not used—the Ch2 fader becomes the master.

The outer concentric control provides +/-5dB balance (ch2) in L/R or stereo width in M/S.

Linking of limiters is automatic in both stereo modes.

Routing is also automatic but can be modified manually for L/R mode (but not M/S).

Gain setting is automatic for L/R but not for M/S since M and S microphones often have different inherent sensitivity.

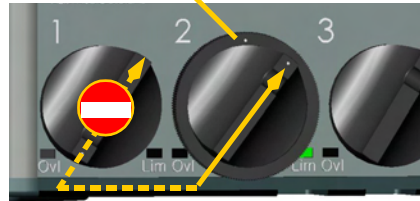

Auxiliary Inputs - MIXY has three auxiliary inputs, USB, Line (XLR5F) and the digital SPDIF.

USB can be routed to the mix bus: L only (L), R only (R) or L&R. It can also be left unrouted (-) which still allows the signal to be monitored.

Mixy automatically recognises USB signals and decodes them to their original analogue levels. It does not matter what the sample rate was when they were recorded.



The **Line** input can also be routed to the mix bus: L or R to L, L or R to R, L + R to both *. Alternatively it can be left unrouted (-) but it will still be available for monitoring.

MIXY has no physical fader to control the signal level but an alignment level can be preset. Highlight **Level** to set the maximum theoretical level between -9dBu and 22dBu (EBU reference level is -18dBFS).

The Digital In **SPDIF** signal (from the RCA connector) can be routed to the analogue outputs and replaces any other signal source routed there. Whether routed or not a valid signal at the SPDIF will synchronize Mixy's AES/EBU output (Sync).

If **MIXY** is the master (mistress?) digital source then sync is not required. However if she is being used with digital video recorders or as part of a larger digital network it is better to put **MIXY** into slave mode and use external sync.

Outputs: *MIXY* has several outputs which can be configured on the **Output Setting** screen.

The **output** is normally set to L/R. Under **XLR5M** highlight and select **M/S** to encode the output as sum and difference. *This setting applies to all analogue outputs.*

The **XLR5 M** output level can be adjusted in two ways—a fixed 40dB attenuator to match levels to nominal microphone inputs, and by presetting a maximum output level relative to 0dBFS.

Highlight **"Pad L/R"** and select **N/N** (no attenuation), **Y/N** (-40dB L only), **N/Y** (-40dB R only), or **Y/Y** (-40dB both).

To set *MIXY's* Maximum Output Level select **MOL** and adjust the level between -9dBu and +22dBu. The **R** output tracks the **L** but this can be overridden by selecting and adjusting the **R** independently.

Whatever **MOL** is set at the **XLR5M** (but *not* the attenuator setting) is mimicked at the 3.5mm stereo mini-jack output, except that it unbalanced and 6dB lower.



ISO outputs of Ch1, 2 & 3 are available as unbalanced outputs at *MIXY's* HR10-6 connector.

MIXY always translates her analogue output to a digital USB feed. The sample rate (44.1kHz or 48kHz) is governed by the host computer and the wordlength is always 16bit.



MIXY also routes the analogue output to the **12pin Minicon** with independent level control, primarily for use with radio TXs. Select **"RF"** and adjust **MOL** between -40dB and 14dBu.

Inputs 2 & 3 can be selected to the **Ext I/O** for use with radio RXs etc. Use the **Miscellaneous Settings** menu, **Ext I/O** sub menu. Select **None**, **In 2**, **In 3**, or **In 2&3** to suit. If an input is enabled on the Minicon it replaces the XLR feed.

MIXY is as much a digital mixer as an analogue one and she has two digital outputs, a balanced AES/EBU (AES3) and an optical TosLink

In the **Output Settings** screen select **Rate** (48k, 44.1k). 32k or 96k only in Ext sync. Select **Consumer** or **Pro** to set the appropriate AES frame flag. Word length is always 24bit. If Ext sync is selected the sample rate will be driven by the digital input.



The **Miscellaneous Settings** screen is used for various “housekeeping” purposes.

Battery Charge—MIXY normally charges her internal NiMH battery if an external 8-18VDC supply is plugged in. Charging requires more than 10W so if external power is limited (an auxiliary battery, for instance) it may be helpful to turn the charge off. Select Y or N.


Display Brightness—select the option and adjust the brightness with the joystick. There is also a choice for maximum brightness with “reverse” video—black text.

The **Left key** is “soft” and can be assigned various functions. These only operate when the meter screen is displayed.

Select **L Key** and then **Boost** (+20dB for headphone—PFL only), **Tone** (for analogue alignment tone), or **Slate** (identification from front panel microphone). B, T or S tallies appear to confirm the selection.




MIXY can display two optional styles of monitoring screen. The standard (STD) one shows the two output channels with overload warning (-3dBFS)

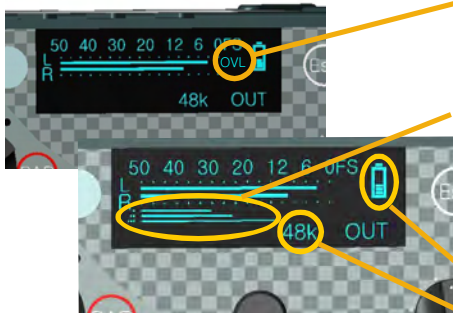

In “multi” mode three additional bars show the 3 input channels post-fader levels.

Battery level and sample rate are always shown.

MIXY shows the status of her input channels through the use of small icons at the bottom of the metering display. Microphone powering, filter and polarity (phase) are shown.

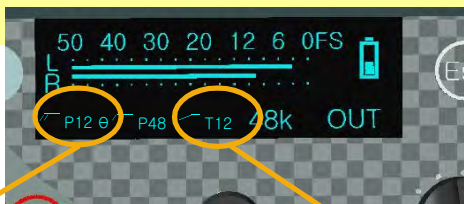

Example: Ch1 HPF= 120Hz, P12 mic powering, reverse polarity (180° phase)

Example: Ch3 HPF= 300Hz, T12 mic powering, normal polarity (0° phase)

MIXY has a very comprehensive headphone monitoring system. While the meter display is visible you can select any signal source and also listen to it in a variety of ways.

Monitor source and mode are labelled on the display

The level is controlled by the front panel knob.

The **monitor source** is selected by sideways joystick movements.

The **monitor mode** is selected by vertical joystick movements.


The joystick can be "locked" against accidental changes. Push to lock—and push again to unlock. If not used for ~3 secs it will automatically lock itself.



MIXY has a low impedance (16Ω) monitor output which is suitable for all headphones.

Mode sequence:

M/S
M-S
M+S
L+R
R/R
L/L
L/R




Some modes are not relevant for all sources (only L+R is logical for a mono input) so **Mixy** will change mode to suit these but will remember the previous setting.

Source sequence:

IN3, IN2, IN1, OUT, RTN (return), USB, BUS, IN1&2



Monitor mode and source reselection have no effect on **MIXY's** programme outputs.

MIXY comes with her factory-default setting which you can always return to and also nine selectable memories which you can use to preset.

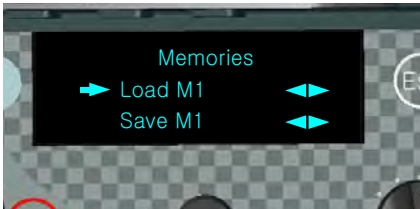


Select the memory where you want to store your settings.
Highlight and confirm with the Left button.
MIXY's memory status is shown by the ➡

As you work with MIXY you might find she has a few clever tricks up her sleeve. Try a double-click of the joystick to get to the **Inputs** menu quickly...

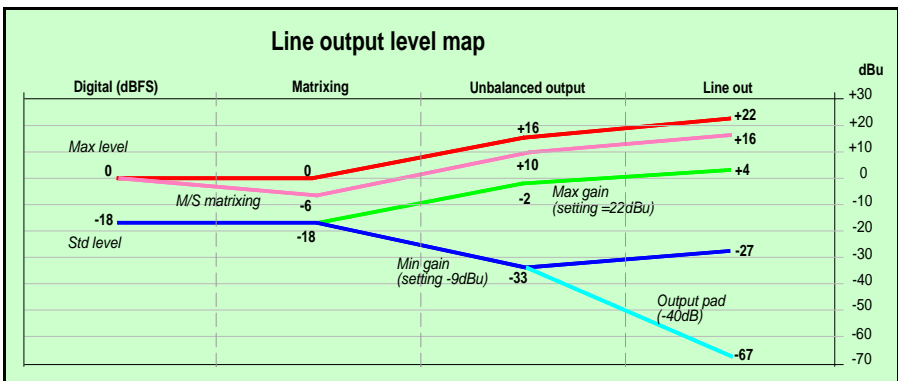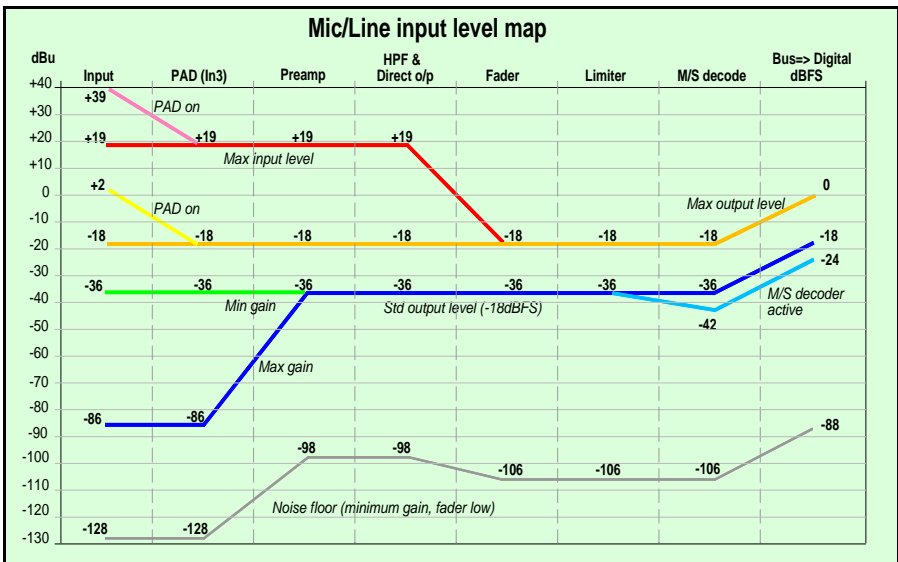

MIXY block schematic diagram

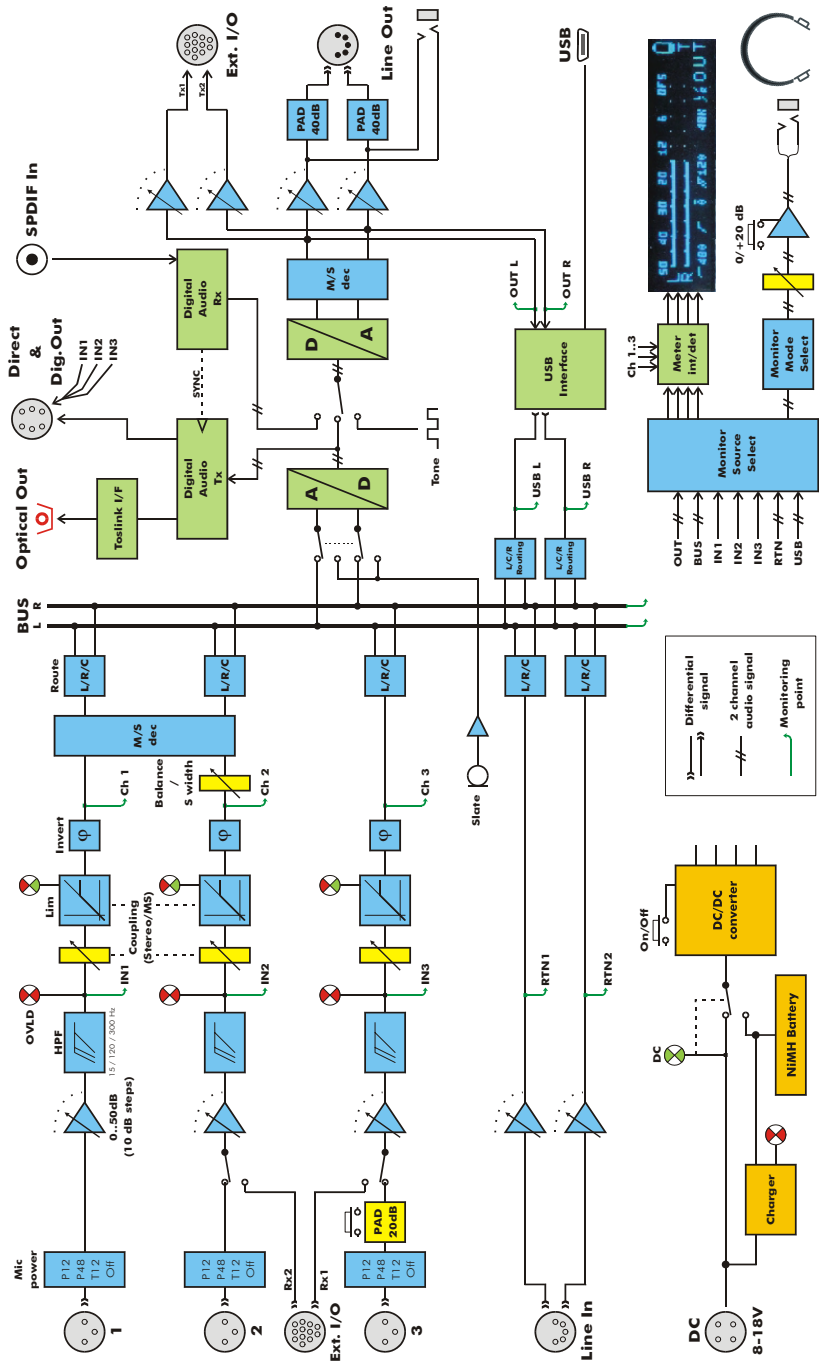

MIXY Technical Specification

Mic/Line inputs

Max gain (Mic)	+92dB
Max gain (Line)	+30dB
Max input level	+19dBu
Equivalent input noise	-128dBu (80dB gain)
Input headroom	37dB
Balance adjustment	±5dB
High Pass Filter	50Hz 18dB/oct 120Hz 18dB/oct 300Hz 6dB/oct
Limiters	Attack 1ms Release 0.2s
L/R path gain matching	±0.5dB
Frequency response	±0.25dB (20Hz–20kHz) ±1dB (20Hz–40kHz F ₀ 96kHz)
Crosstalk	<-60dB

Analogue Outputs

Nominal output level	+4dBu / -10dBV / Mic level (-46dBu)
Maximum output level	-10 to +22dBu
Output noise	-90dBu
THD+N	<0.1%, -80dB @1kHz
Headphone output	Z _L >16Ω (fully protected)

M/S matricing

Matrix accuracy	Better than 1%
(M+S) / (M-S)	>50dB
Stereo stage width	steplessly adjustable 50–180° (110° centre)
Stereo reverse	Polarity inverter on S channel

Digital connections

AES/SPDIF/Toslink	
Sampling rate	32 / 44.1 / 48 / 96kHz
Bit depth	24 bit
USB 1.1	32 / 44.1 / 48 kHz (set by host)
Bit depth	16 bit

General

External power	8-18VDC
Operation	<300mA
Battery charge	<2A
Dimensions	164 x 49 x 126mm (171 x 49 x 131mm inc connectors)
Weight	1.2kg

measured over 20–20kHz bandwidth unless otherwise annotated

Connector pinouts



XLR3

- 1 Ground
- 2 Hi
- 3 Lo



XLR5

- 1 Ground
- 2 L Hi
- 3 L Lo
- 4 R Hi
- 5 R Lo



Minicon

- 1 L TX out
- 2 DC out
- 3 Ground
- 4 Ground
- 5 R TX out
- 6 IN3 Hi
- 7 IN3 Lo
- 8 9V out- (max 100mA)
- 9 IN2 Hi
- 10 Power ground
- 11 In 2 Lo
- 12 Ext detect



HR10-4

- 1 Power ground
- 2 Power ground
- 3 8-18VDC
- 4 8-18VDC

BEWARE! Never short-circuit pins 1 or 2 with other (signal) ground connections on MIXY



HR10-6

- 1 Out Pre 1
- 2 AES out Hi
- 3 AES out Lo
- 4 Out Pre 2
- 5 Ground
- 6 Out Pre 3



AETA AUDIO SYSTEMS

© 2007 AETA Audio Systems www.aeta-audio.com

55 000 055-B