

INSTALLATION GUIDE

ONNA




Pando

CAMPANA ONNA

ATTENTION!

- Please read the User Manual before installing and using the range hood.
- The hood must be centered over the cooking area. If this requirement is not fulfilled, correct aspiration is NOT GUARANTEED.
- The hood is available only in recirculation mode (FCA)
- The ideal distance between the hood and the filters of the hood is 65 cm.
- Do not connect the hood to the main supply until the installation. (**Step 8**).

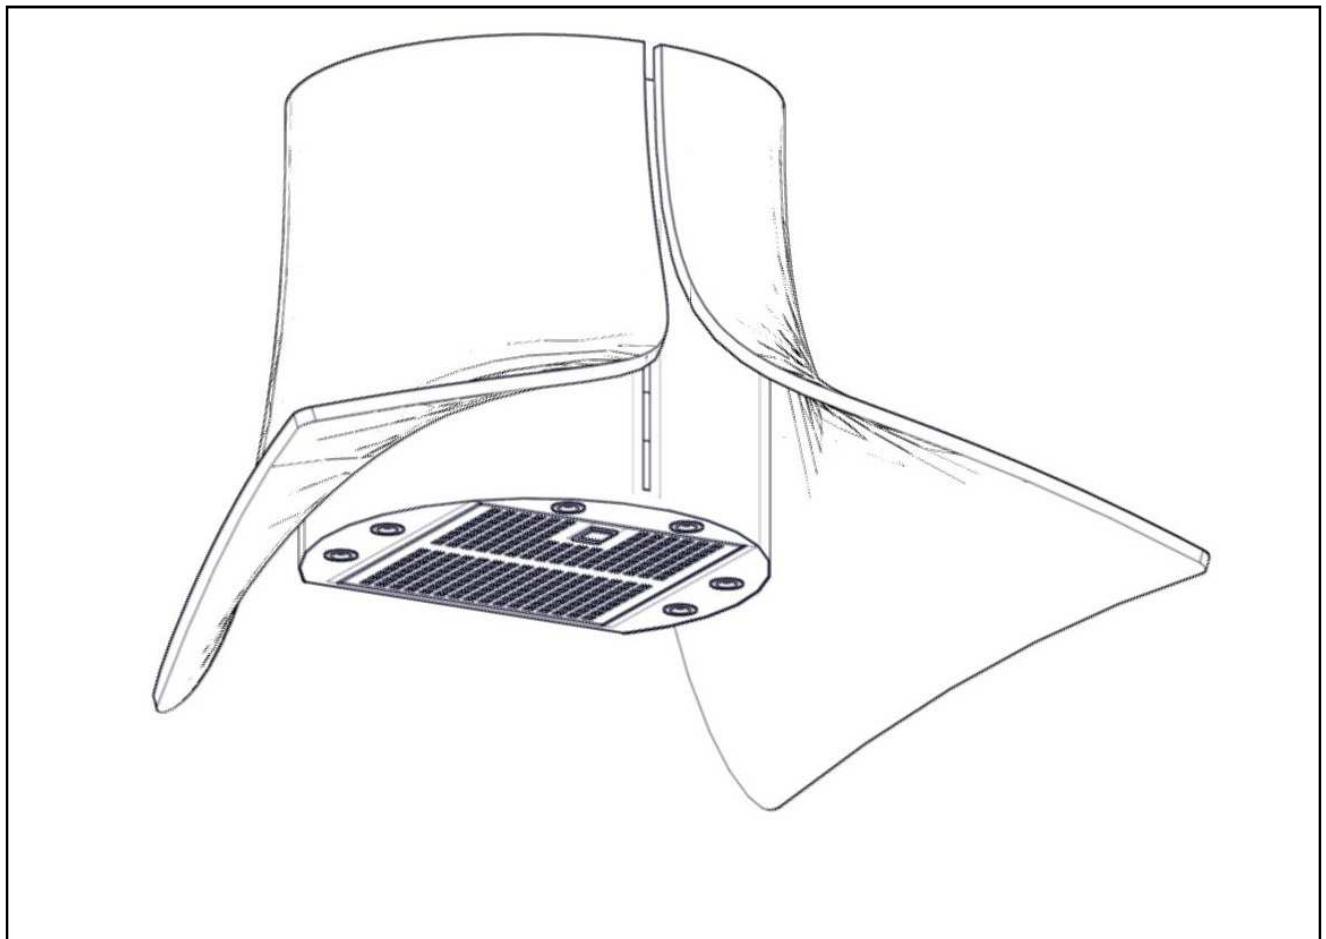

1– Unpack the range hood ONNA. Verify the condition of the range hood.

2– Drill the holes in the wall as it indicated in the Fig.1. When the hood is installed, the distance between the from the base of the cooktop to the bottom of the hood(the filters) will be 65 cms.



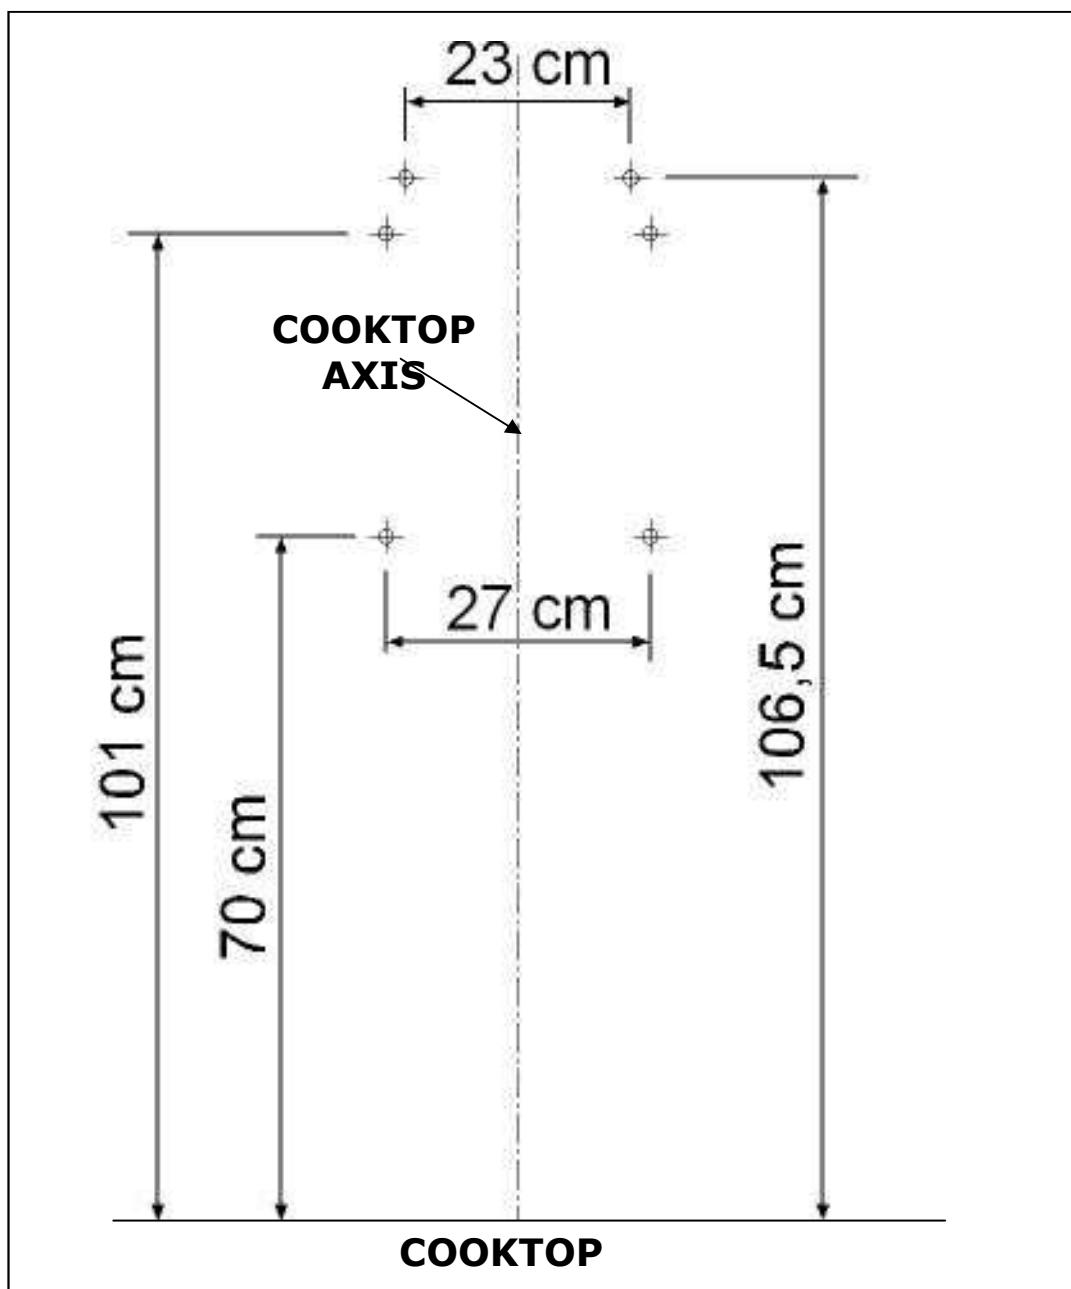


Fig.1


3– Insert the plugs, then put 4 screws, let between the screw heads and the wall about 4-5 mm.

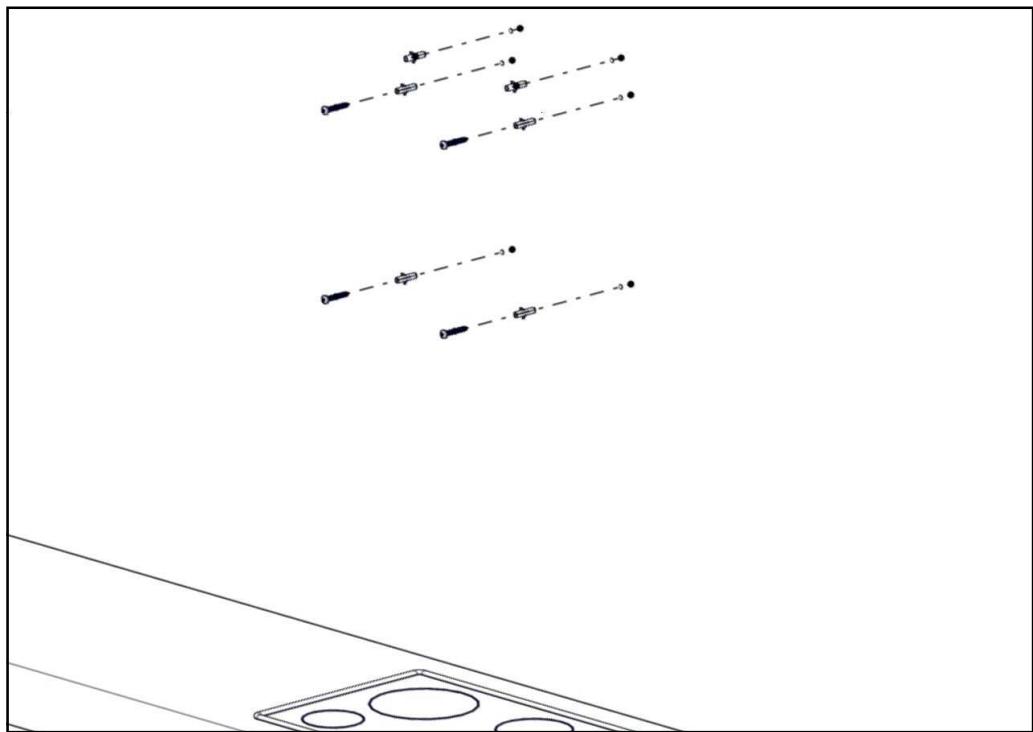


4– Hang the hood to the 4 screws, that you put before.

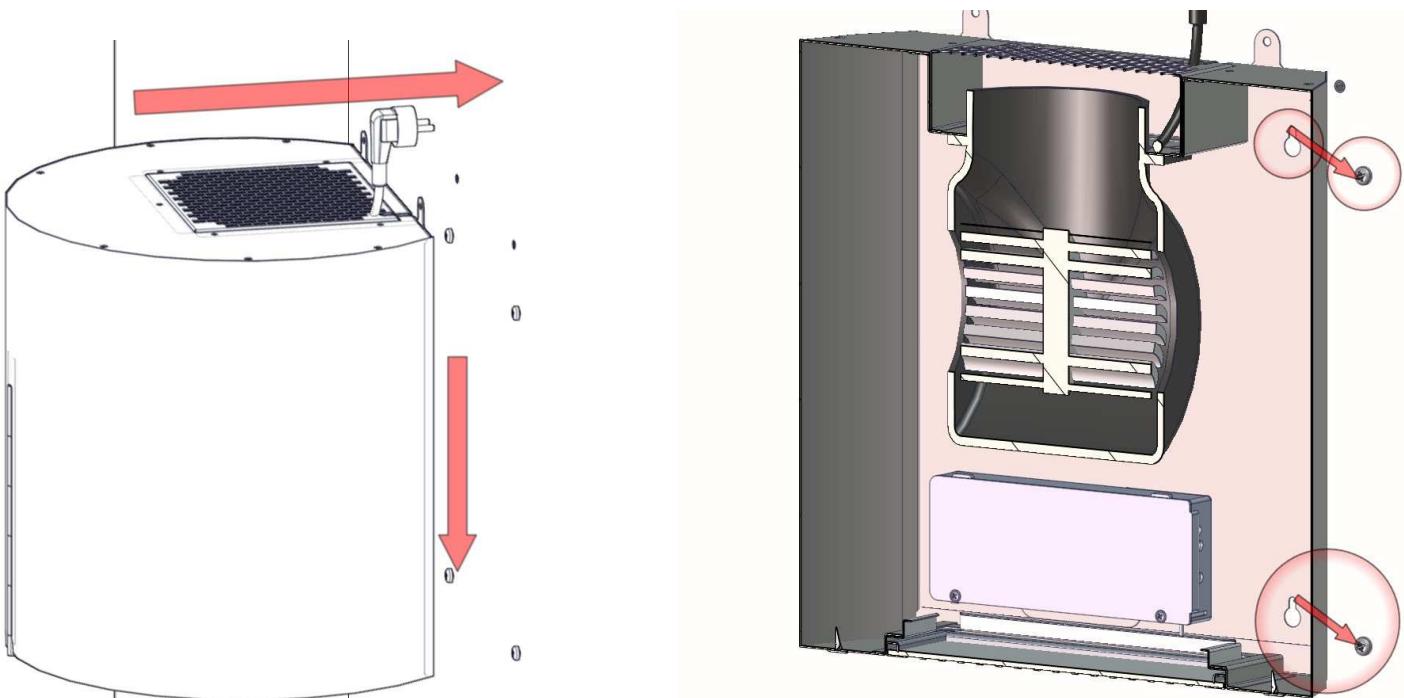


5– Put the fixation screws of the hood.

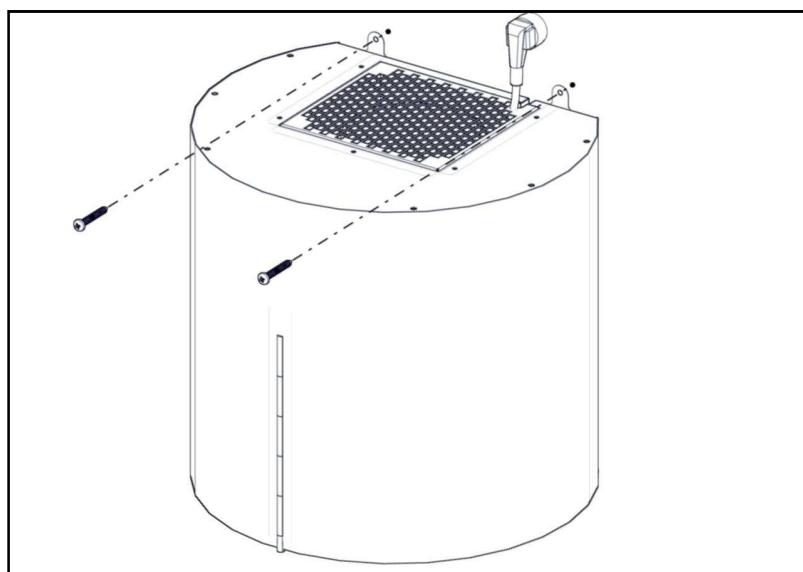



6– Install the decorative Corian wings.

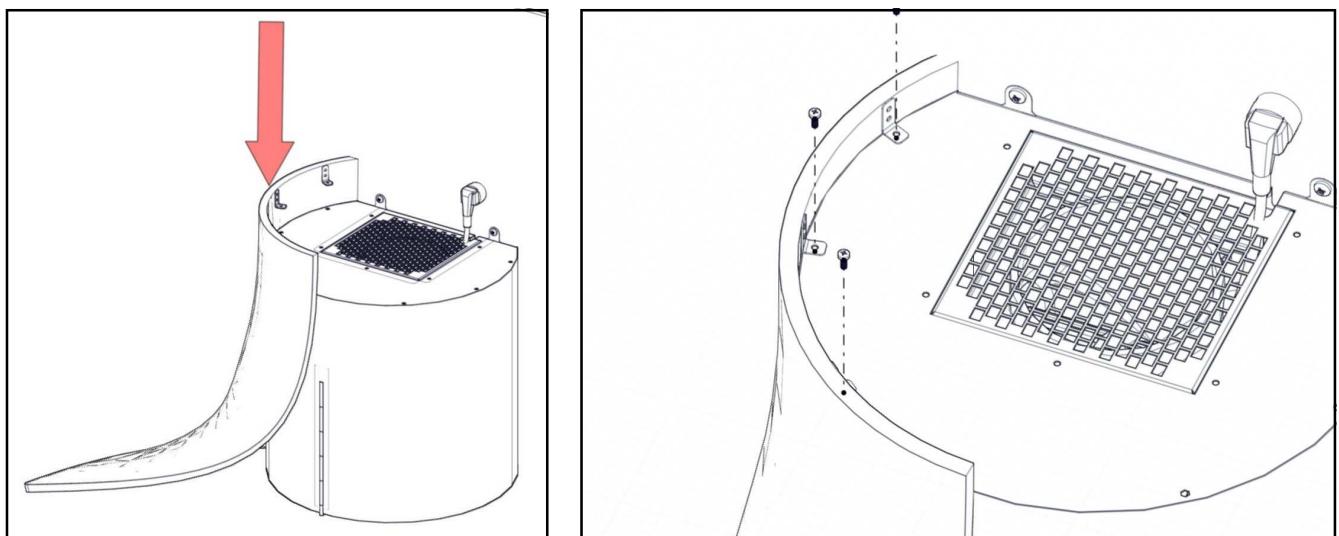


7– Screw the decorative Corian wings to the hood.

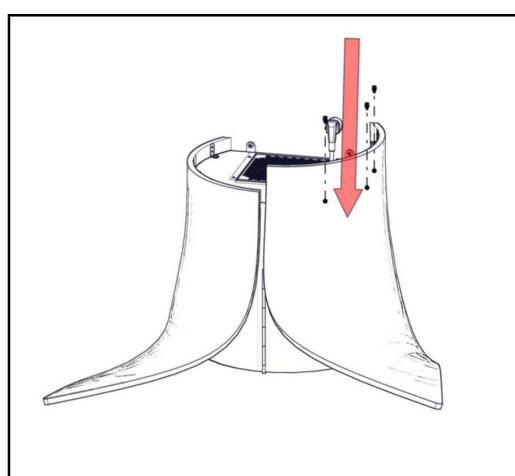

8– Turn off the residual current device , connect the hood to the mains supply, then turn on the residual current device.

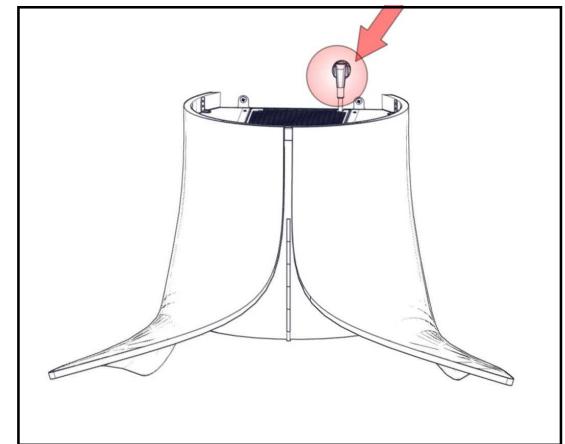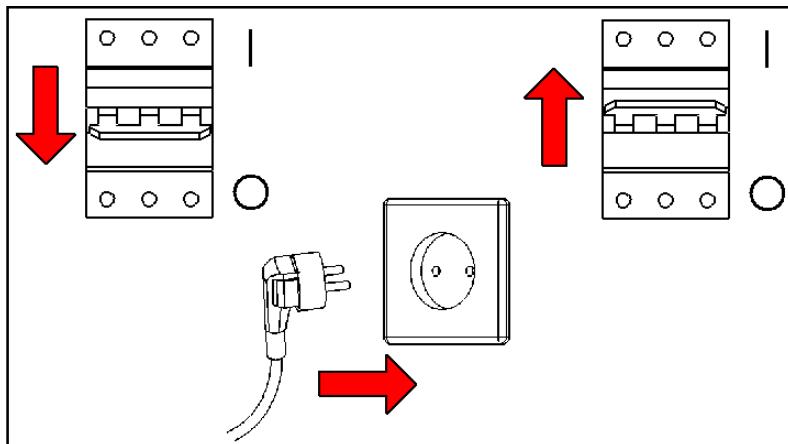

9– Check the correct installation of the hood ONNA. Remove the non-scratch plastic.

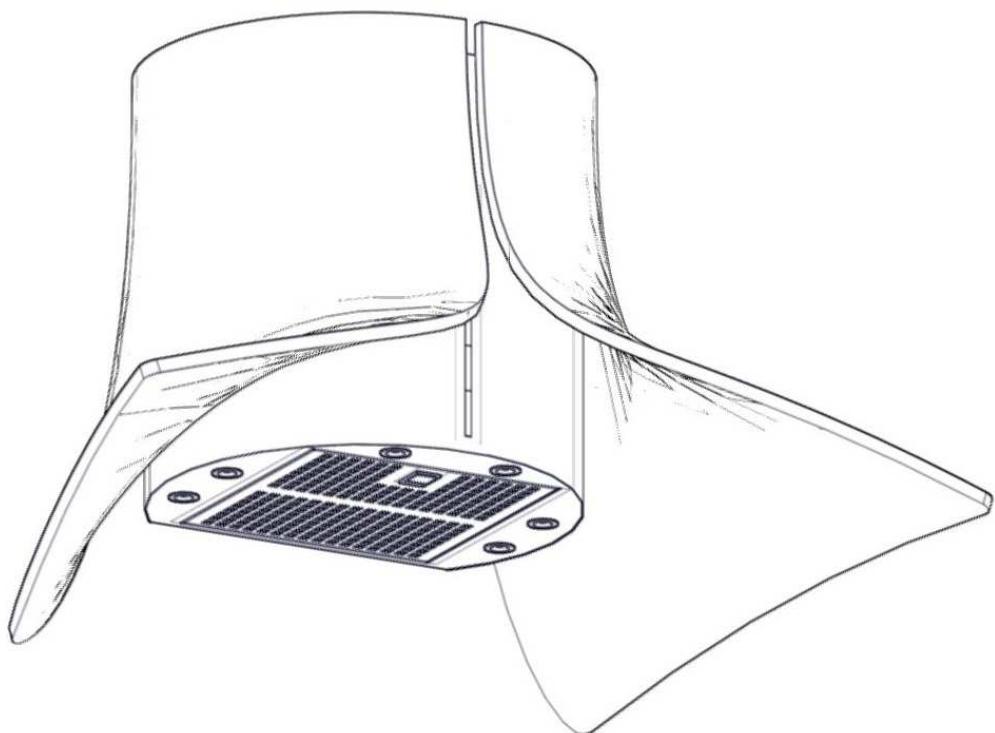

Pando

Fabricado por INOXPAN S.L.

Pol. Ind. El Cros — Camí del Cros, S/N
Apdo. Correos nº21
08310 ARGENTONA (Barcelona -
Spain)

Tel. +34 93 757 94 11
Fax. +34 93 757 96 53

www.pando.es

Certificado de Empresa de Gestión de la
Calidad UNE-EN ISO 9001:2000



The International Certification Network
Quality Management System ISO
9001:2000

