

Smart Plug User Manual



STEPS OF OPERATION (FIRST-USE)

Connect power cable and Ethernet cable to bridge , the other end Ethernet cable connects to Router



Make sure the bridge is in working order , Indicators constants on ,turn on Smart Plug



Smart Plugs pair of bridge

Press resetting button on the back of bridge , indicators flashes ,turn on the Smart Plugs



Connection successful (Mobile phone can find the Smart Plugs)



Enjoy the Smart Plugs and pleasure they bring to your life

Note :The second time using the APP Ledo ,directly turn on the Smart Plug.

BRIDGE OPERATION

1、 Turn on Pair Mode

Button Pair Mode: Correctly connect power cable and Ethernet cable, when indicators constant on , press resetting button , after the two indicators flashing ,turn on the Smart Plug.

Mobile Phone Pair Mode: Run the Ledo App, in the Setting interface , click the Add Device ,and then bridge will turn into the Pair Mode.

2、 Bridge resetting to factory default : long press button on the back for 8s.




SMART PLUG USING

1、 Take the Smart Plug into an ordinary Plug;

2、 Make sure they are in working;

3、 Make sure the Smart Plug is OK: Press the button to turn on or turn off on the Smart Plug, you can hear the sound of “Pia-Pia”, and the Power indicator will show the status of the Smart Plug.

4、 Make sure your mobile phone can control the Smart Plug :If your Smart Plug is paired on your bridge , the wifi indicator will constant on, if not, it is off , you need to check it !

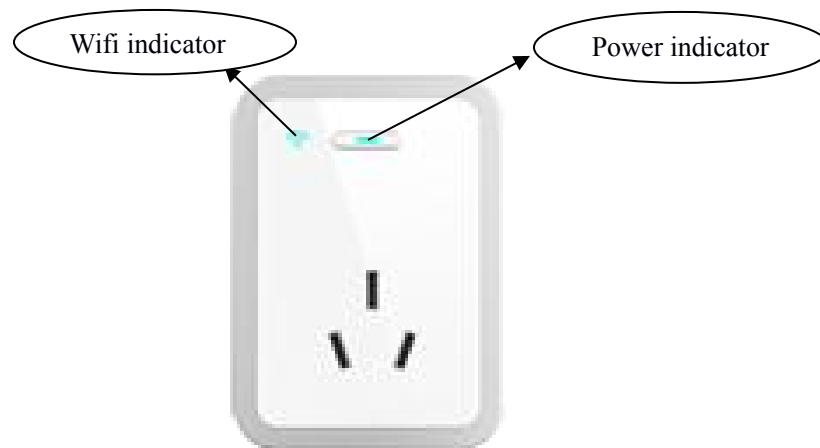

APP OPERATION

1、 Download and install the APP

For iPhones, you can download Ledo from APP store ,and install it according to the guides.


For Android phones, you can download Ledo from Google Play, or Android Market, or 360 Mobile Applications Assistant, or Baidu Mobile Applications Assistant, and then install it according to the guides.



Of course you can download it by Dimensional code scanning.





2、Ledo Using



2.1 Add Device

When the bridge have no devices, first you can click  on the top right the corner ,and choose Add Devices, then bridge will turn into Pair Mode , the interface will also show all your devices automatically.

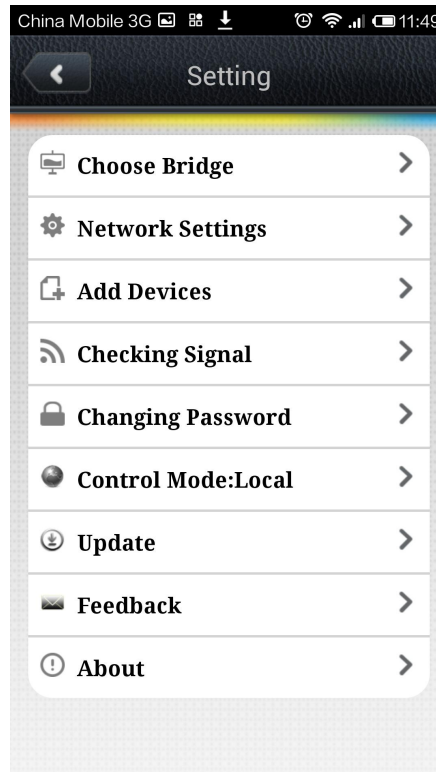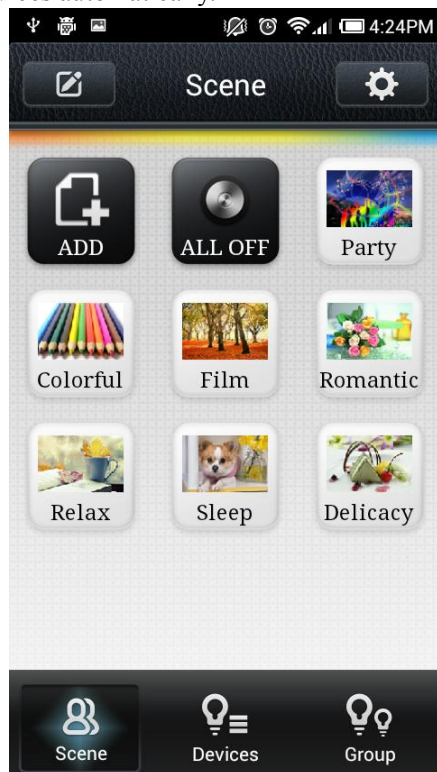

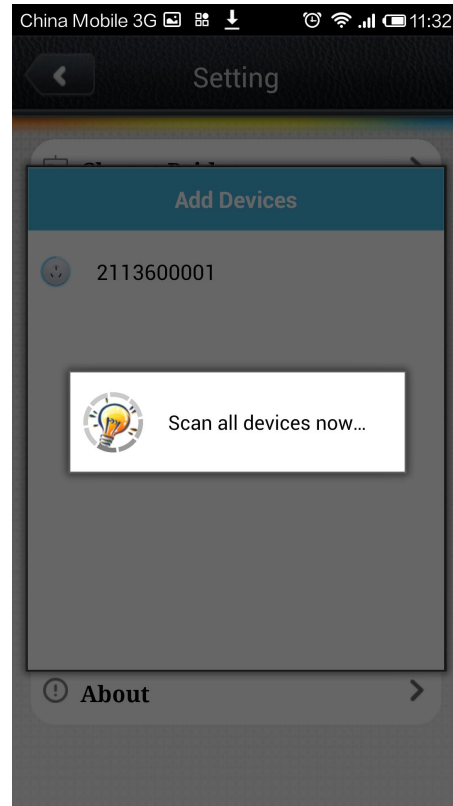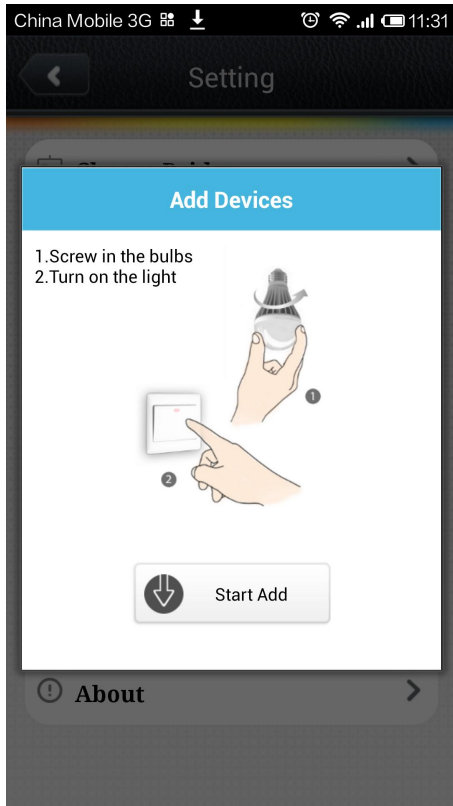



2.2 After all the devices are OK, you can turn into the Device List Interface, click the device you want to control. In the Device Control Interface, you can play those operators: Turn on or Turn off, Delay or Timer

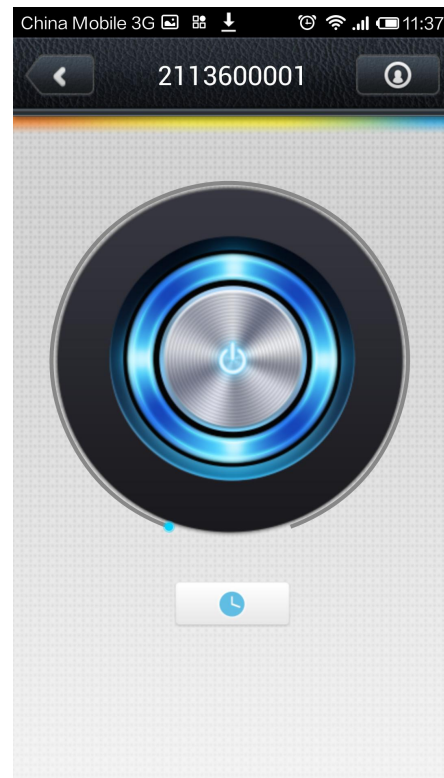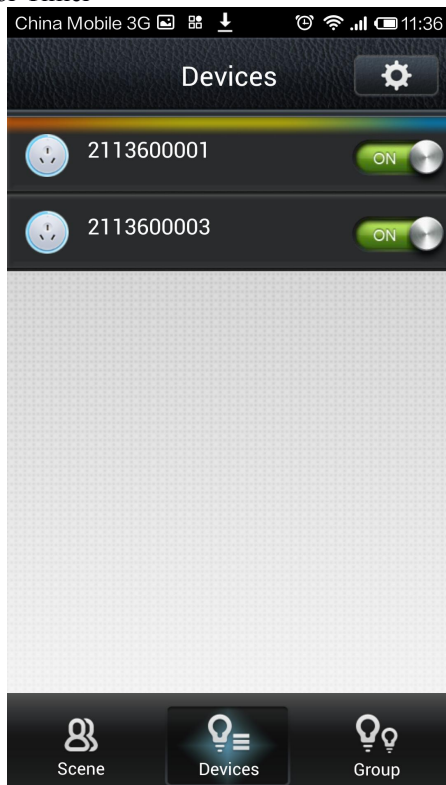



2.3 Scenes Mode


Setting the Scene Mode: you can select the default scenes by just click it, or edit the scene by yourself.

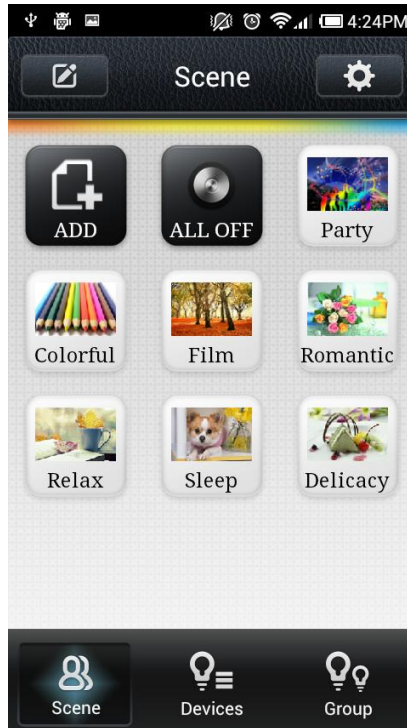


Add new scene: In the Scenes Mode Interface, click the [ADD] turn into Add Scene Interface, Select the device you want, and then click  to set the Smart Plug's delay time to turn on or turn off, and you can name it as Cooking, Playing or others you like.


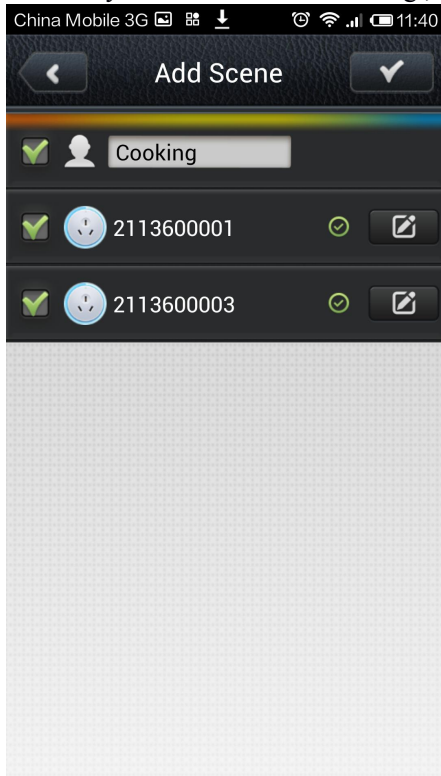


If you want to editor your scene, Just click  on the top light corner on the Scenes Mode Interface, after scenes have turn into the Editor Mode, click the Scene you want to editor.

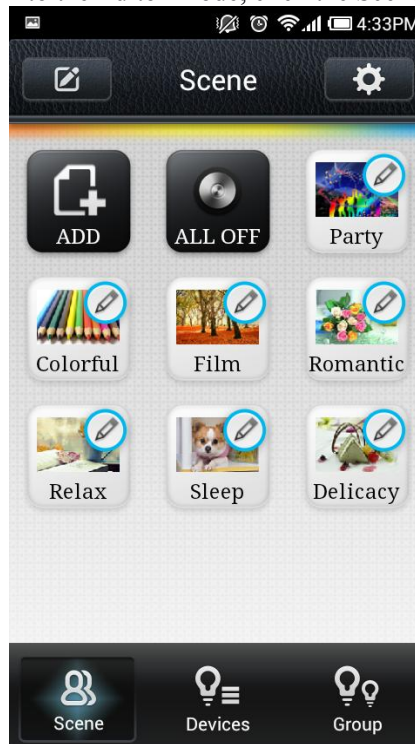



2.5 Group: If you have more than one Smart Plugs, you can control them by Group control.


Click  turn into the Group Editor Interface, And select the devices you want, save it with a name you like.

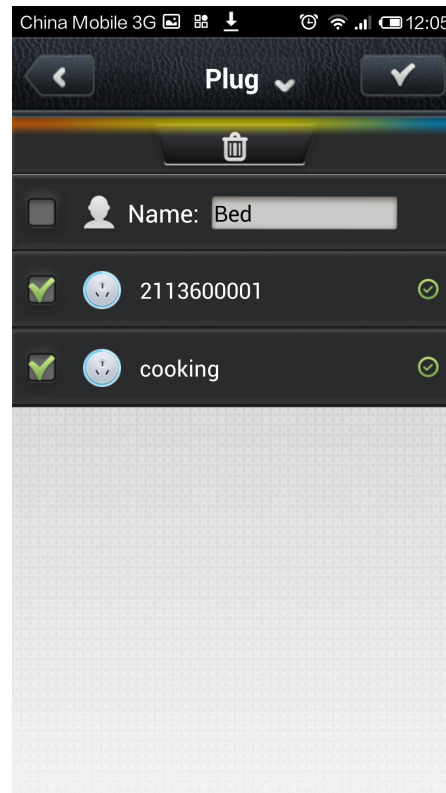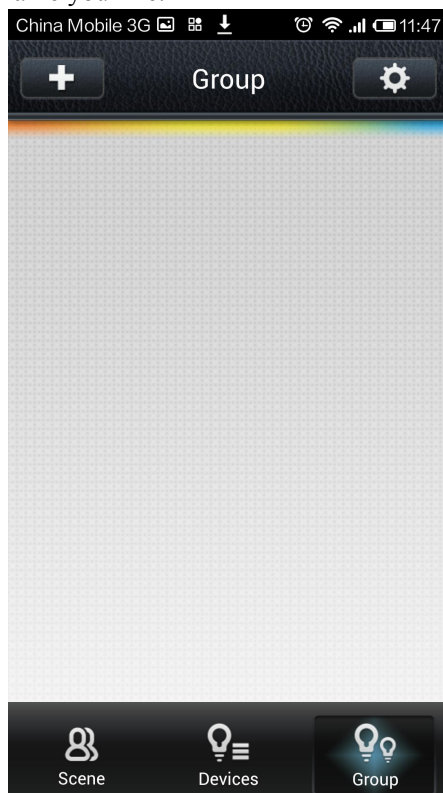


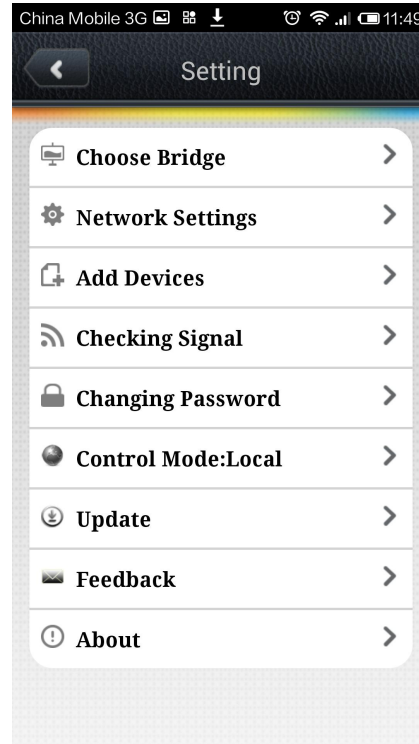
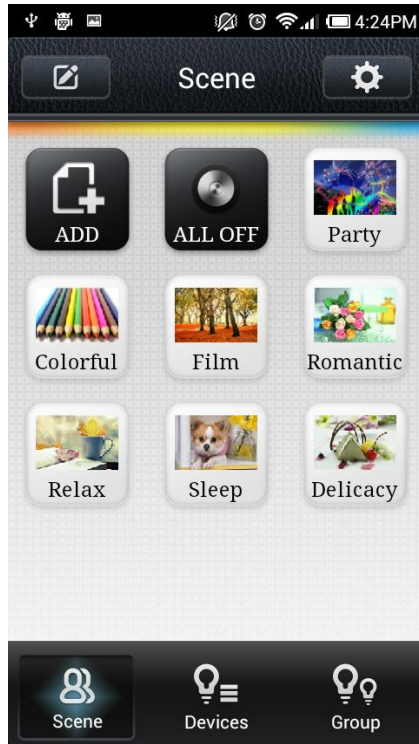
Click the group you just added, and then you can set the Smart Plugs' Delay and Timer.

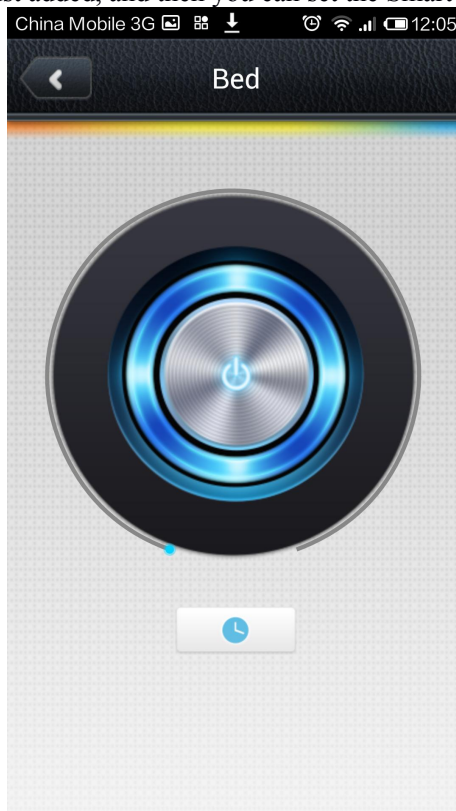


If you want to editor your group, click  in the Group Interface to turn into the Group Editor Interface, and then you can select devices, rename or delete the group.

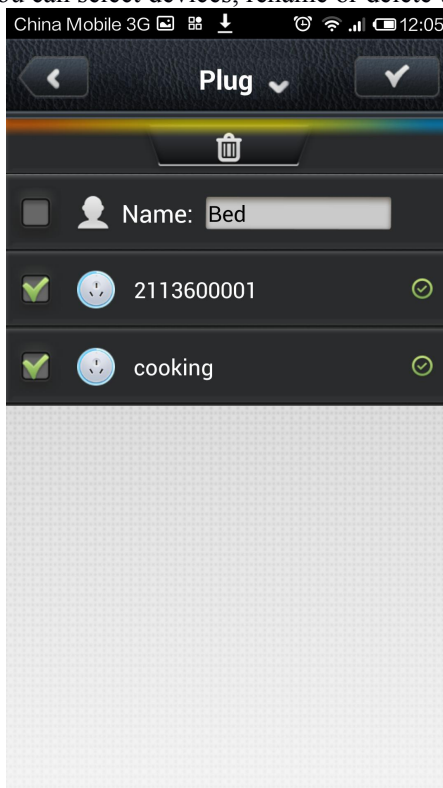


2.6 Setting: click  on the top right corner. In the Setting Interface, you can set your bridge , password or network and so on.




Choose Bridge:

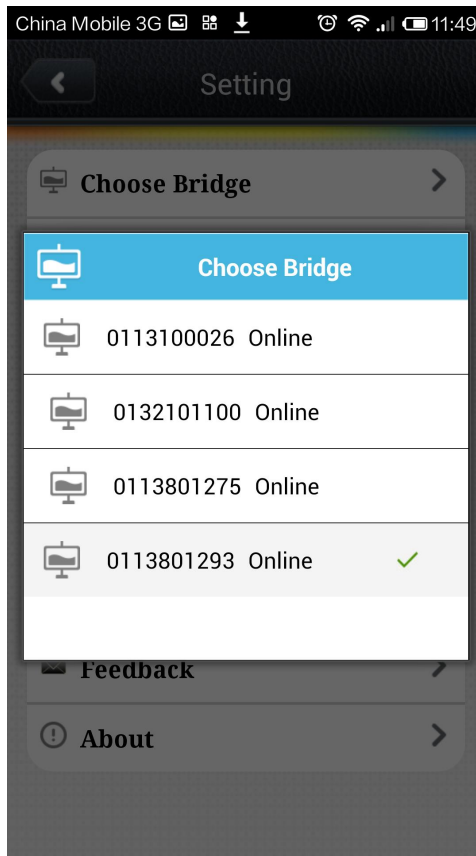


Network Settings: After set the password of bridge, you can select the function of Support Internet, and then back to the Setting Interface, change the Control Mode Local to Internet, and then you can control your devices in WAN Mode.

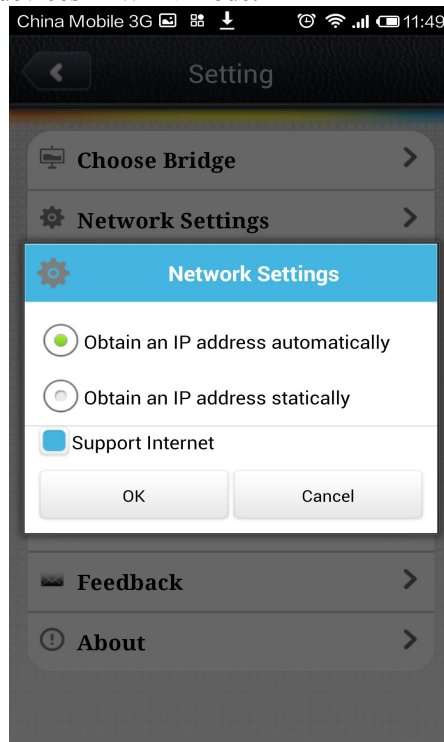


Checking Signal:

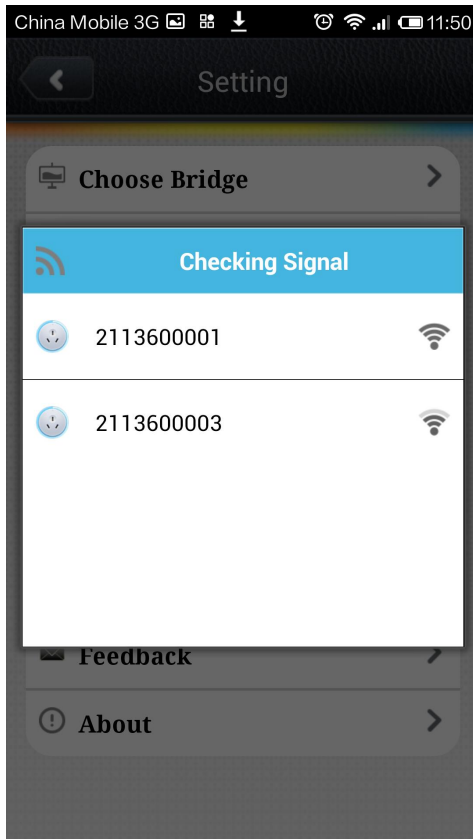


Changing Password: To protect your bridge that other people can not use, you can give your bridge a password (Default password is 000000)

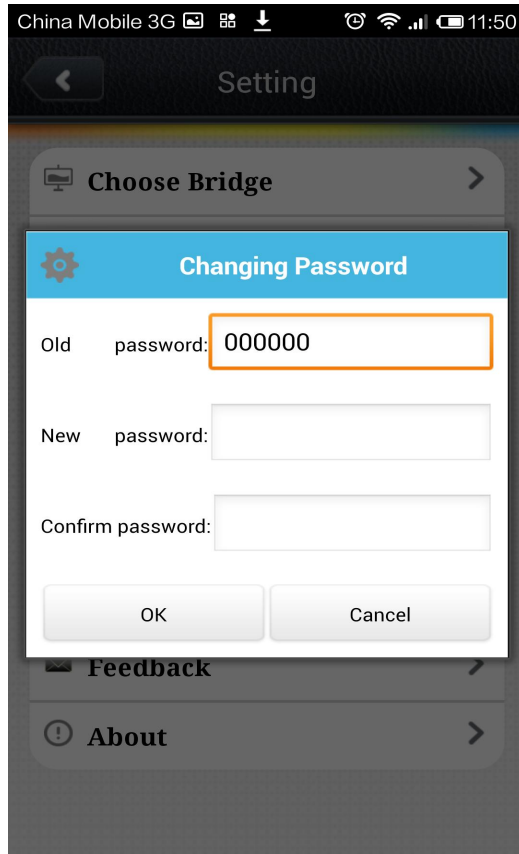



install it. Update: If the bridge or Smart Plug have new firmware, you can download and

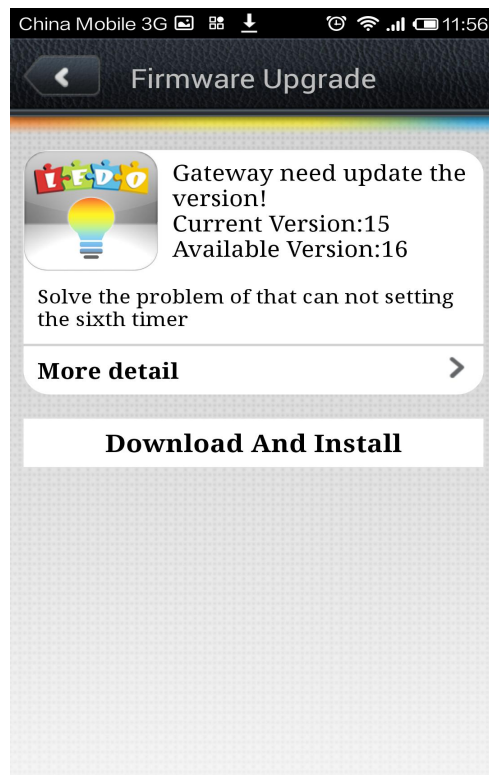

Character Functions:

Rename Device: In the Device Control Interface, click  on the top right corner, and then you can rename the device as you like.

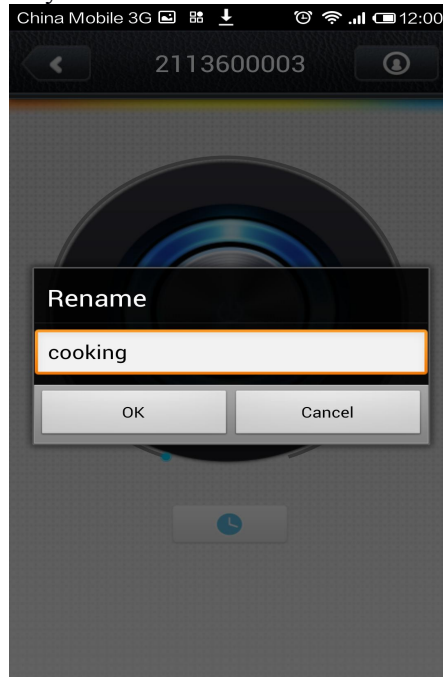

Timer: In the Device Control Interface or Group Control Interface, click to turn into the Timer Interface. Then click  to add a timer, and you can set it turn on or turn off in a time (Now supports less than 7 timers).

