

SMART PLATFORM

One software – One connection – One minute

Omron's Smart Platform is designed to make machine automation easy. It provides seamless, drag-and-drop integration of all automation components in your machine. From sensor to controller, from HMI to drive, all devices are accessible through one connection using a single software suite, CX-One.
Built-in distributed intelligence in Omron devices means less time programming and troubleshooting.



Everyone claims ease of use, a short movie explains how easy programming and configuration really can be:
www.smartplatform.info



СИТЕЛ ООД - OMRON дистрибутор
www.sitel-omron.com

София - бул. Цариградско шосе 113А, ет.3,
офис 5 /в Лито Балкан, зад Shell и The Mall/
тел./факс: (02) 975 2282
sofia@sitel-omron.com

Плевен - бул. Русе 37А, ет. 3, офис 2
тел./факс: (064) 81 58 70
pleven@sitel-omron.com

Пловдив - ул. Белград 2, ет. 2, офис 104
(до Новотела)
тел./факс: (032) 96 91 55
plovdiv@sitel-omron.com

Стара Загора - ул. Захарий Княжески 21, ап. 5
тел./факс: (042) 62 11 65
starazagora@sitel-omron.com

Automation systems – Table of contents

Системи за автоматизация

Machine automation controller Контролери за машинна автоматизация **1**

Product overview	8
Machine controller	NJ-Series 10

Programmable logic controllers (PLC) Програмируеми логически контролери **2**

Product overview	12
Selection table	14
Compact PLC	16
CPM2C CPU units	17
CPM2C expansion units	18
CP1E CPU units	20
CP1L CPU units	22
CP1H CPU units	23
CP1W expansion units	24
Modular PLC	26
CJ-Series CPU units	27
CJ-Series power supplies, expansions	28
CJ-Series digital I/O units	30
CJ-Series analogue I/O and control units	32
CJ-Series motion/position control units	33
CJ-Series communication units	34
Rack PLC	35
CS-Series CPU units	36
CS-Series power supplies, backplanes	38
CS-Series digital I/O units	39
CS-Series analogue and process I/O units	40
CS-Series position/motion control units	42
CS-Series communication units	43

Remote I/O Отдалечени входно / изходни модули **3**

Product overview	40
Selection table	42
Remote I/O	43
NX-series modular I/O system	45
SmartSlice I/O system	46
Compact I/O GX-series	47
Compact I/O DRT2	48
Compact I/O CRT1	49
Compact I/O SRT2	50
Field I/O DRT2- _C_	51
Field I/O SRT2- _C_	52

Human machine interfaces (HMI) Сензорни тъч терминали (дисплеи) **4**

Product overview	52
Selection table	54
PC based HMI	Dyalox 57
HMI-Connection	61
Integrated controller	62
NSJ12/NSJ10	64
NSJ8/NSJ5	66
Scalable HMI	67
NS15/NS12/NS10/NS8	68
NS5	69
NS5 handheld	70
Integrated controller/ Scalable HMI	Accessories NSJ/NS 72
Compact HMI	NB series 73
Function-key HMI	NT11 74
NT2S	75
Sysmac machine interface	NA series 76

Cables and accessories Кабели и аксесоари **5**

I/O cables and terminal blocks	I/O cables 76
I/O terminal blocks	84
Ethernet cables and accessories	Ethernet cables 85
Accessories	86
Wireless communication	WE70 87

NJ-SERIES MACHINE AUTOMATION CONTROLLER


Complete and robust machine automation

The NJ-Series Machine Automation Controller is at the heart of the new Sysmac platform. One integrated machine controller that offers speed, flexibility and scalability of software centric architecture without compromising on the traditional reliability and robustness that you have come to expect from Omron PLCs. The NJ-Series is designed to meet extreme machine control requirements in terms of motion control speed and accuracy, communication, security and robust system. You just create...

- Integration of logic and motion in one Intel CPU
- Scalable control: CPUs for 4, 8, 16, 32 and 64 axes
- EtherCAT and EtherNet/IP ports embedded
- Fully conforms to IEC 61131-3 standards
- Certified PLCopen function blocks for motion control
- Linear, circular and spiral (helical) interpolation
- CPU units with SQL client and robotic functionality



SYSMAC
always in control

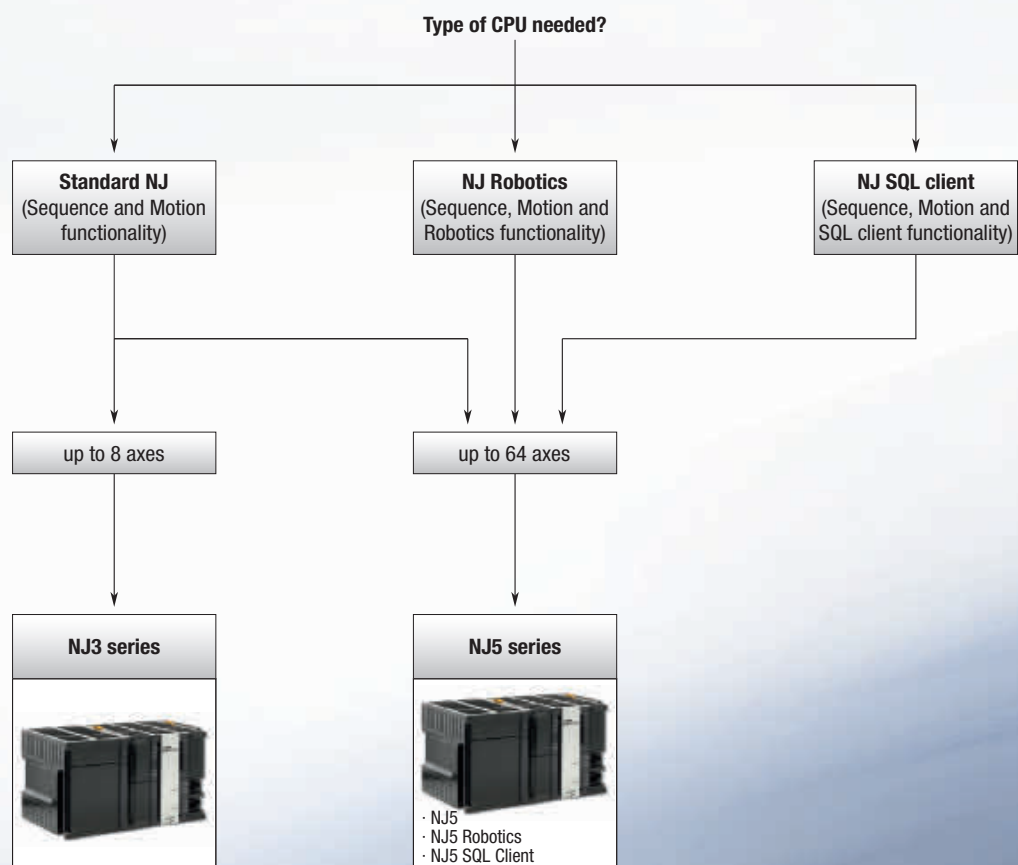




Complete and robust machine automation

The NJ-Series is designed to meet extreme machine control requirements in terms of motion control speed and accuracy, communication, security and robustness.

- Integration of logic and motion in one Intel CPU
- Scalable control: CPUs for 4, 8, 16, 32 and 64 axes
- EtherCAT and EtherNet/IP ports embedded
- Fully conforms to IEC 61131-3 standards
- Certified PLCopen function blocks for motion control
- Linear, circular and spiral (helical) interpolation
- CPU units with SQL client and robotic functionality

Ordering information

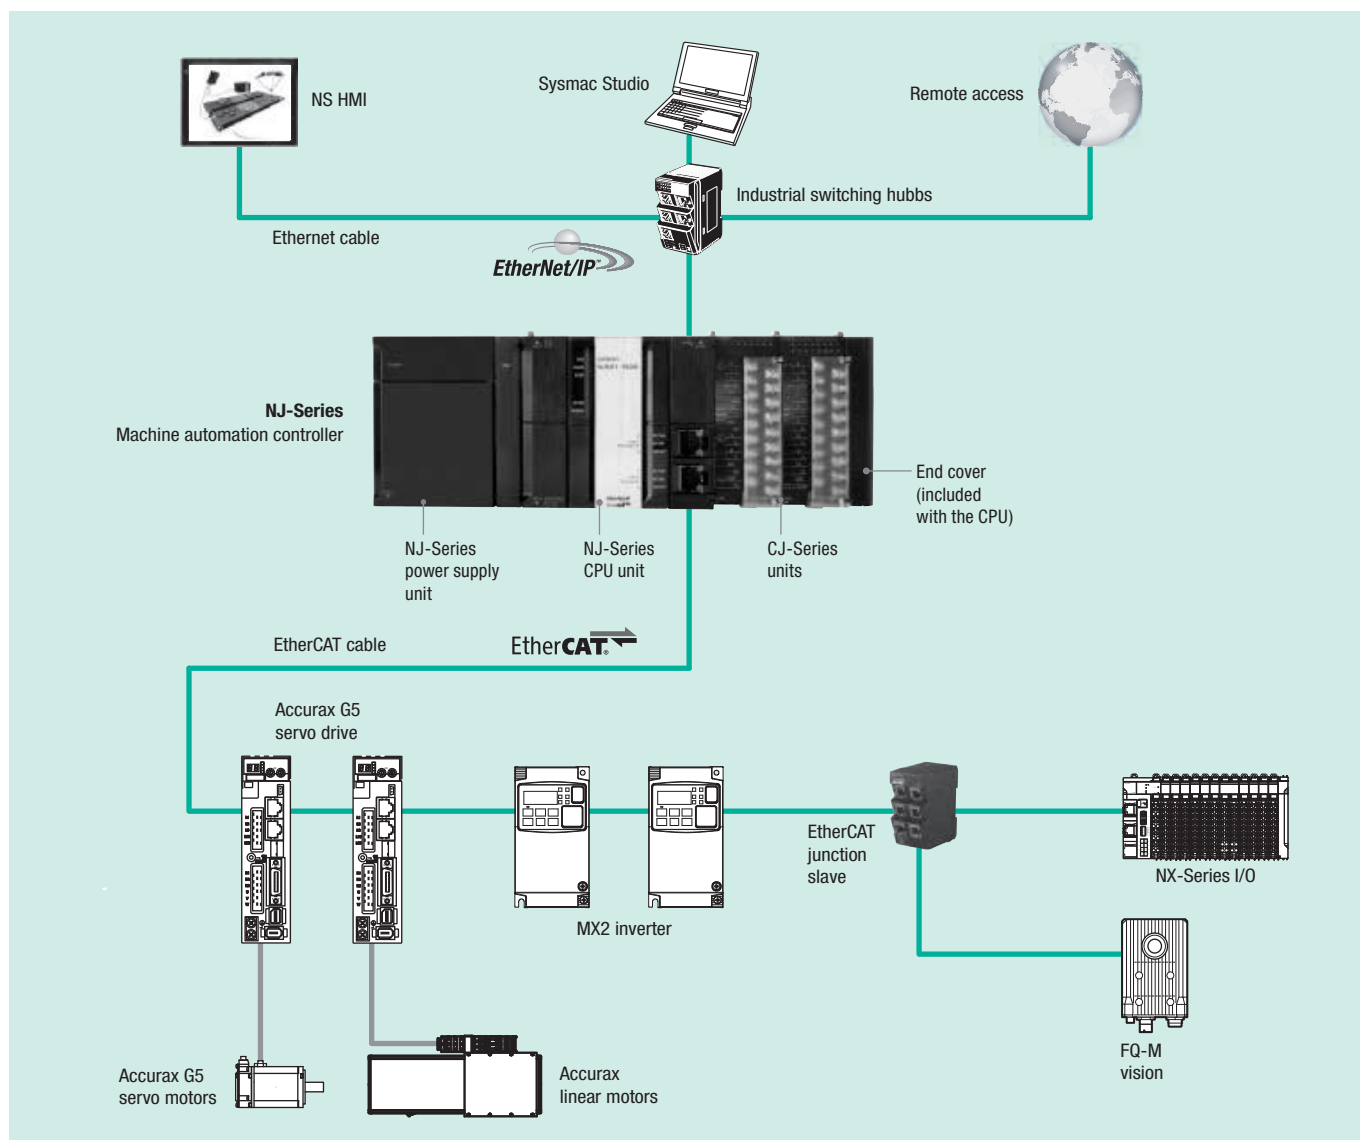

Power supply

Type	Output capacity at 5 VDC	Output capacity at 24 VDC	Max. output power	Features	Size in mm (H × W × D)	Order code
100 to 240 VAC	6.0 A	1.0 A	30 W	Run output	90 × 70 × 90	NJ-PA3001
24 VDC						NJ-PD3001

CPU

Series	Description	Max. Digital I/O points	Program capacity	Variables capacity	Max. I/O units	5 VDC current consumption	Size in mm (H × W × D)	Number of axes	Order code
NJ5 series	Sequence and motion functionality	2,560	20 MB	2 MB: Retained 4 MB: Not retained	CPU rack: 10 units max. Expansion rack: 40 units max. (up to 3 expansion racks)	1.90 A	90 × 90 × 90	64	NJ501-1500
								32	NJ501-1400
								16	NJ501-1300
	Sequence, motion and robotics functionality							64	NJ501-4500
								32	NJ501-4400
								16	NJ501-4300
	Sequence, motion and SQL client functionality								NJ501-4310*1
								64	NJ501-1520
								32	NJ501-1420
NJ3 series	Sequence and motion functionality	5 MB	0,5 MB: Retained 2 MB: Not retained					16	NJ501-1320
								8	NJ301-1200
								4	NJ301-1100

^{*1} The NJ501-4310 CPU unit only supports one delta robot.

Note: The end cover unit CJ1W-TER01 is included with the CPU unit.

Accessories

Type	Remarks	Size in mm (H × W × D)	Order code
EtherCAT branching unit	3 ports, 24 VDC, DIN rail mounting	90 × 25 × 78	GX-JC03
	6 ports, 24 VDC, DIN rail mounting	90 × 48 × 78	GX-JC06
Industrial switching hub	3 ports, 24 VDC, DIN rail mounting	90 × 25 × 78	W4S1-03B
	5 ports, 24 VDC, DIN rail mounting	90 × 48 × 78	W4S1-05B
	5 ports, 24 VDC, failure detection, DIN rail mounting	90 × 48 × 78	W4S1-05C
SD memory card	2 GB		HMC-SD291
DIN track	Length: 0.5 m, height: 7.3 mm		PFP-50N
	Length: 1 m, height: 7.3 mm		PFP-100N
	Length: 1 m, height: 16 mm		PFP-100N2
End plate to secure the units on the DIN track	2 pieces are included with the CPU unit and I/O interface unit		PFP-M (2 pcs.)
Battery for NJ-series CPU unit	The battery is included with the CPU unit		CJ1W-BAT01
End cover	The end cover is included with each CPU unit and I/O interface unit		CJ1W-TER01

Computer software


Specifications	Order code
Sysmac Studio	SYSMAC-SE2_


KNOW ONE... KNOW THEM ALL!

Whether your automation requires a simple and economical solution, or your target is advanced, high-speed control, you can find what you need in Omron's line-up of Programmable Controllers.

And if your systems grow, or change due to market demand, you will find that only Omron offers a full range of Compact PLCs and Modular PLCs that share the same architecture. Therefore your programs are fully upward compatible, both in memory allocation and instruction set.

- One scalable PLC family to always match exactly with your application
- Transparent communication routing through different networks
- The best size/performance ratio in the industry

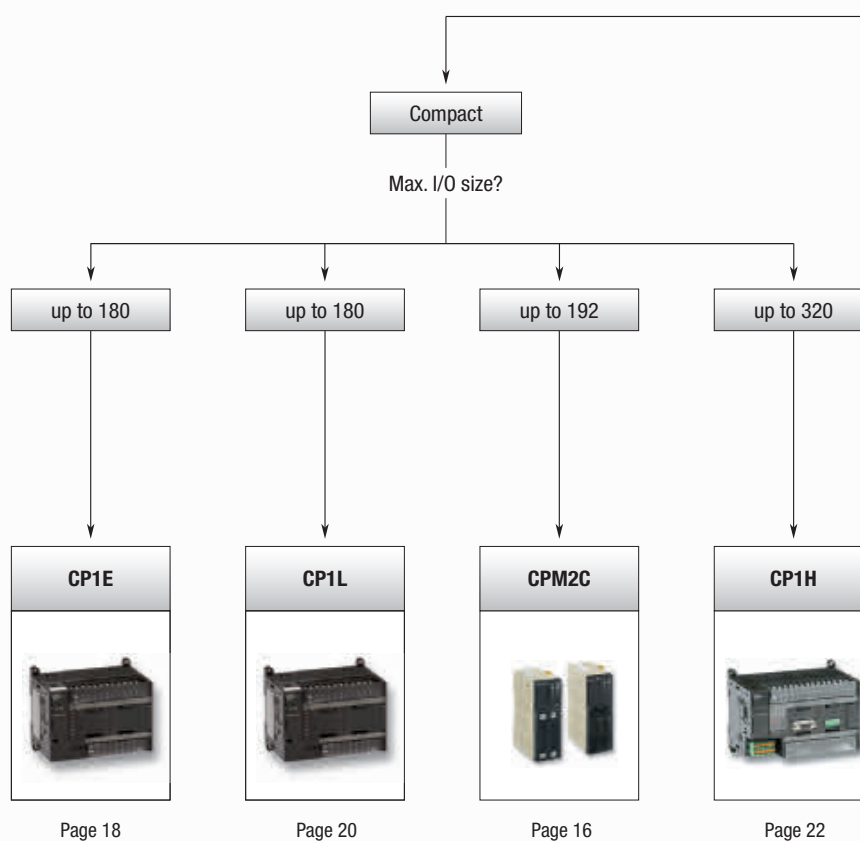

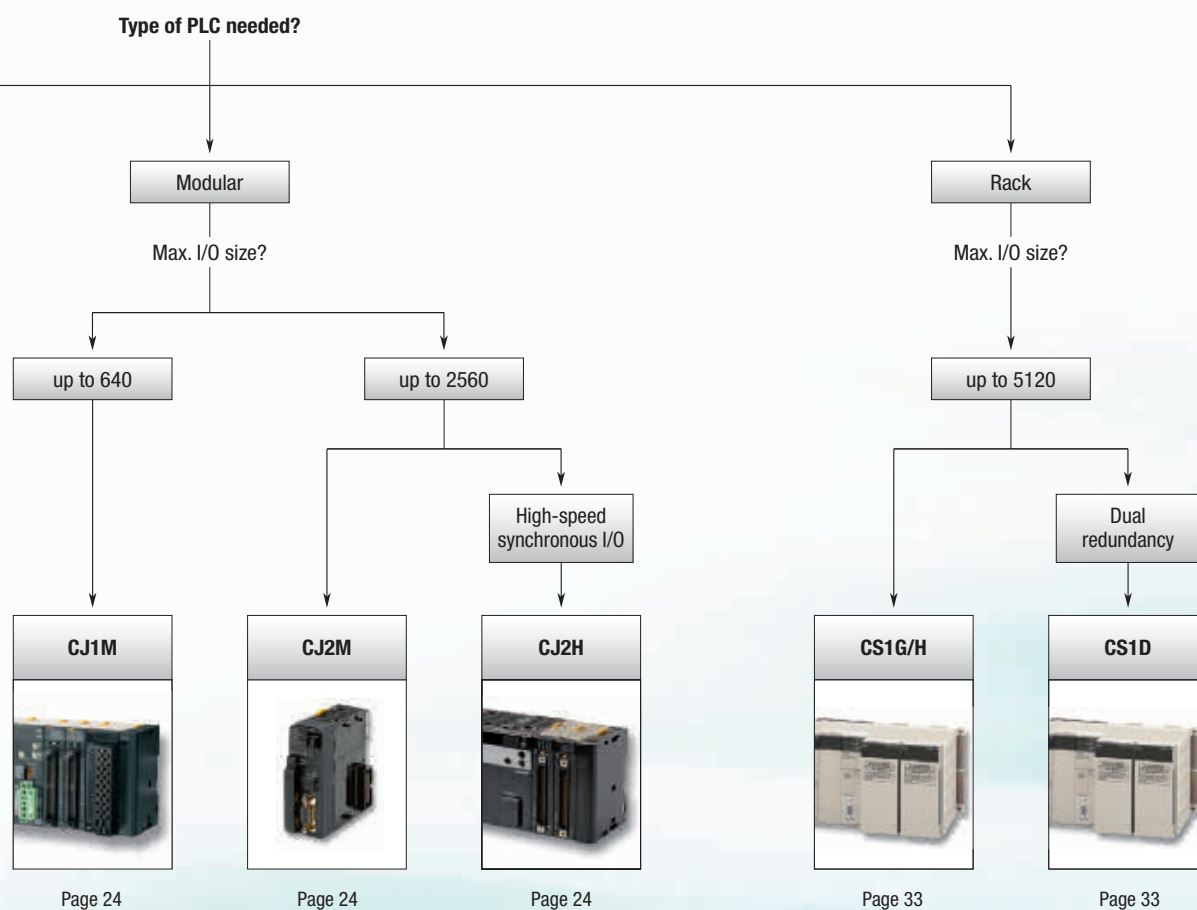

Page 24

Page 24

Page 24

Page 33

Page 33

Compact PLC series				
				
Model	CPM2C	CP1E	CP1L	CP1H
Max digital I/O points* ¹	192	180	180	320* ²
Built-in	Digital I/O	10 to 32	10 to 60	10 to 60
	Interrupt inputs	2 or 4	4 or 6	2, 4, or 6
	Counter inputs	2 or 4	5 or 6	4
	Pulse outputs* ¹	2	2	2
CPU features* ¹	Compact size Expansion units Quick-response inputs High-speed counter Pulse output with PWM RS-232C port Real time clock	USB port Expansion I/O units Quick-response inputs High-speed counter Pulse output with PWM RS-232C port RS-485 port Real time clock 2 Analogue adjusters See Analogue I/O section	USB or Ethernet port Expansion I/O units Quick-response inputs High-speed counter Pulse output with PWM Up to 2 serial option boards Real time clock 1 Analogue adjuster See Analogue I/O section	USB port Expansion I/O units CJ-series Special I/O Units CJ-series CPU Bus Units Quick-response inputs High-speed counter Pulse output with PWM RS-232C port Option board slots Real time clock 1 Analogue adjuster LED display, 2 digit See Analogue I/O section
Instruction Execution time (bit instruction)	0.64 µs	1.19 µs	0.55 µs	0.10 µs
Program memory	4K words	2 or 8K steps	5 or 10K (+10K Function block) steps	20K steps
Data memory	2K words	2 or 8K words	10 or 32K words	32K words
External memory	Expansion memory unit	—	Memory cassette	Memory cassette
Analogue I/O	Analogue I/O unit Temperature sensor unit	Built-in for E-NA model (2 in + 1 out) Analogue I/O Expansion Units Temperature Input Expansion Units	Built-in for EL/EM model (2 inputs) Analogue I/O Expansion Units Temperature Input Expansion Units	Built-in for XA model (4 in + 2 out) Analogue I/O Expansion Units Temperature Input Expansion Units CJ Analogue I/O Units CJ Temperature Units
Special function units	—	—	—	CJ-series Special I/O Units CJ-series CPU Bus Units
Fieldbus master	—	ModBus	Ethernet ModBus	Ethernet EtherNet/IP Controller Link DeviceNet PROFIBUS-DP PROFINET ModBus CompoNet CompoBus/S CAN (freely configurable)
Fieldbus I/O	CompoBus/S DeviceNet	PROFIBUS-DP CompoBus/S DeviceNet	PROFIBUS-DP CompoBus/S DeviceNet	PROFIBUS-DP CompoBus/S DeviceNet
Page	16	18	20	22

*¹ Some features listed are not available for all CPU types within each series. Please review specifications for more information on CPU features and performance.

*² Represents local I/O capacity. If a fieldbus master is used more I/O is possible.

Modular PLC series				Rack PLC series		
						
Model		CJ1M/G	CJ2M	CJ2H	CS1G/H	CS1D
Max. digital I/O points*1		1280	2560	2560	5120	5120
Built-in*1	Digital I/O	16	—			
	Interrupt inputs	4	—			
	Counter inputs	2	—			
	Pulse outputs	2	—			
CPU features*1		Compact size No backplane required Large program capacity Easy backups Built-in pulse I/O Loop control CPU type Real time clock	USB port Ethernet/IP port High-speed I/O units Option board plug-in Structures and arrays Tag data links Compact size No backplane required Large program capacity Function Block memory Easy backups Real time clock	USB port Ethernet/IP port High-speed I/O units Structures and arrays Tag data links Synchronous I/O Compact size No backplane required Extra Large program capacity Easy backups Real time clock	High I/O capacity Inner board support Large program capacity Backwards compatible Easy backups Real time clock	Redundant CPU Redundant power supply Hot swapping High I/O capacity Inner board support Large program capacity Backwards compatible Easy backups Real time clock
Instruction Execution time (bit instruction)		0.10/0.04 µs	0.04 µs	0.016 µs	0.04/0.02 µs	0.04/0.02 µs
Program memory		5 to 60K steps	5 to 60K steps	50 to 400K steps	10 to 250K steps	10 to 250K steps
Data memory		32 to 128K words	64 to 160K words	160 to 832K words	64 to 448K words	64 to 448K words
CompactFlash memory		Up to 512 MB				
Analogue I/O		Analogue I/O unit Temperature sensor unit Temperature control unit				
Special function units		Temperature control High-speed counters (500 kHz) SSI encoder input Position control Protocol macro RFID sensor unit Weighing unit Data collection & storage unit		Temperature control High-speed counters (500 kHz) SSI encoder input Position control Protocol macro RFID sensor unit High-speed I/O Synchronised Position Data collection & storage unit	Temperature control SSI encoder input High-speed counters (500 kHz) Position control Motion control Process control Protocol macro RFID sensor unit Data collection & storage unit	
Fieldbus master		Ethernet EtherNet/IP Controller Link DeviceNet PROFIBUS-DP PROFINET ModBus CompoNet CompoBus/S CAN (freely configurable)				
Fieldbus I/O		DeviceNet PROFIBUS-DP CAN (freely configurable)				
Page		24			33	

*1 Some features listed are not available for all CPU types within each series. Please review specifications for more information on CPU features and performance.



The versatile slim-line controller

An extensive range of models ensures efficient machine control in an ultra-compact package. CPU units are available with relay or transistor output, terminal block or various connector options, and an optional real-time clock function. Select the output type, number of I/O points and other specifications to meet your needs. Expansion I/O units with 8 to 32 I/O points make it possible to configure a control system with a maximum of 192 I/O points.

- Space-saving slim outline, high-density I/O
- 10-32 I/O points per CPU, transistor or relay outputs
- 20 kHz counter input, two 10 kHz pulse outputs integrated
- Two communication ports built-in, freely accessible
- Digital, analogue, and fieldbus expansion units

Ordering information

Input points	Output points	Program capacity	Data memory capacity	Logic execution speed	Size in mm (H × W × D)	I/O Connectors	Output method	Built-in functions	Real time clock	Order code
6 points	4 points	4K words	2K words	0.64 μs	90 × 33 × 65	2 Terminal blocks	Relay	1 Encoder input (20 kHz)	—	CPM2C-10CDR-D
									Yes	CPM2C-10C1DR-D
						2 Fujitsu (24 pt)	Transistor (source type)	1 Encoder input (20 kHz) 2 Pulse output (10 kHz)	—	CPM2C-10CDT1C-D
									Yes	CPM2C-10C1DT1C-D
						2 MIL (20 pt)	Transistor (source type)	1 Encoder input (20 kHz) 2 Pulse output (10 kHz)	—	CPM2C-10CDT1M-D
									Yes	CPM2C-10C1DT1M-D
12 points	8 points	4K words	2K words	0.64 μs	90 × 33 × 65	2 Terminal blocks	Relay	1 Encoder input (20 kHz)	—	CPM2C-20CDR-D
									Yes	CPM2C-20C1DR-D
						2 Fujitsu (24 pt)	Transistor (source type)	1 Encoder input (20 kHz) 2 Pulse output (10 kHz)	—	CPM2C-20CDT1C-D
									Yes	CPM2C-20C1DT1C-D
						2 MIL (20 pt)	Transistor (source type)	1 Encoder input (20 kHz) 2 Pulse output (10 kHz)	—	CPM2C-20CDT1M-D
									Yes	CPM2C-20C1DT1M-D
16 points	16 points	4K words	2K words	0.64 μs	90 × 33 × 65	2 Fujitsu (24 pt)	Transistor (source type)	1 Encoder input (20 kHz) 2 Pulse output (10 kHz)	—	CPM2C-32CDT1C-D
						2 MIL (20 pt)	Transistor (source type)	1 Encoder input (20 kHz) 2 Pulse output (10 kHz)	—	CPM2C-32CDT1M-D
6 points	4 points	4K words	2K words	0.64 μs	90 × 40 × 65	1 Fujitsu (24 pt)	Transistor (source type)	1 Encoder input (20 kHz) 2 Pulse output (10 kHz) Programmable Slave with DeviceNet slave and CompoBus/S Master	Yes	CPM2C-S110C-DRT
6 points	4 points	4K words	2K words	0.64 μs	90 × 40 × 65	1 Fujitsu (24 pt)	Transistor (source type)	1 Encoder input (20 kHz) 2 Pulse output (10 kHz) CompoBus/S Master	Yes	CPM2C-S110C

Note: All CPU's are available only with DC supply voltage (CPM2C-PA201 can be used as power supply).

CPU's with sourcing transistor outputs are also available with sinking transistor outputs.

MIL = connector according to MIL-C-83503 (compatible with DIN 41651/IEC 60603-1).

For I/O Cables and Terminal Blocks, see page 76



Expand the capacity of your CPM2C PLC

Expansion I/O units with 8 to 32 I/O points make it possible to configure a control system with a maximum of 192 I/O points

Ordering information

Unit	Output type	I/O Connectors	Inputs	Outputs	Order code
Expansion I/O units	–	1 Fujitsu (24 pt)	8	–	CPM2C-8EDC
		1 MIL (20 pt)			CPM2C-8EDM
	–	1 Fujitsu (24 pt)	16	–	CPM2C-16EDC
		1 MIL (20 pt)			CPM2C-16EDM
	Relay	1 Terminal block	–	8	CPM2C-8ER
	Transistor output (source type)	1 Fujitsu (24 pt)			CPM2C-8ET1C
		1 MIL (20 pt)			CPM2C-8ET1M
	Transistor output (source type)	1 Fujitsu (24 pt)	–	16	CPM2C-16ET1C
		1 MIL (20 pt)			CPM2C-16ET1M
	Relay	2 Terminal blocks	6	4	CPM2C-10EDR
	Relay	2 Terminal blocks	12	8	CPM2C-20EDR
	Transistor output (source type)	2 Fujitsu (24 pt)	16	8	CPM2C-24EDT1C
		2 MIL (20 pt)			CPM2C-24EDT1M
	Transistor output (source type)	2 Fujitsu (24 pt)	16	16	CPM2C-32EDT1C
		2 MIL (20 pt)			CPM2C-32EDT1M
Analogue I/O units	Analogue (resolution 1/6,000)	2 Terminal blocks	2	1	CPM2C-MAD11
Temperature sensor units	Thermocouple input	1 Terminal block	2	–	CPM2C-TS001
	Platinum resistance input	1 Terminal block	2	–	CPM2C-TS101
CompoBus/S I/O link unit	–	1 Terminal block	I/O link of 8 input bits and 8 output bits		CPM2C-SRT21
RS-232C and RS422 adapter units	–	1 D-sub 9-pin	RS-232C		CPM2C-CIF01-V1
		1 Terminal block and 1 D-sub 9-pin	RS-232C and RS422		CPM2C-CIF11

Note: Expansion I/O units with sourcing transistor outputs are also available with sinking transistor outputs.
MIL = connector according to MIL-C-83503 (compatible with DIN 41651/IEC 60603-1).
For I/O Cables and Terminal Blocks, see page 76



Maximum functionality at minimum cost

Omron's CP1E series targets a "lean" automation solution, but still offers all functionality you need to control relatively simple applications, including outstanding positioning capability. The CP1E comes with 10, 14, 20, 30, 40 or 60 I/O built-in and can be expanded with a wide range of CP1W expansion units up to 180 I/O points. It uses a standard USB port for programming and monitoring. The CP1E-N CPU types have a RS232C serial communication port embedded and offer an extra serial communication port that can be used to connect frequency inverters or temperature controllers. As the CP1E series shares the same architecture as the CP1L, CP1H, CJ, and CS1 series, programs are compatible for memory allocations and instructions.

Ordering information

CP1E CPU	Digital input	Digital output	Max. I/O points (incl. expansions)	Communication ports	Input/output functions	Output type	Power supply	Expandability	Program capacity	Data memory capacity	Logic execution speed	Order code
E-type with 10 I/O points	6	4	10	—	5 Encoder inputs (10 kHz) 4 Interrupts/counters	Relay	84 to 264 VAC 20.4 to 26.4 VDC	Up to 3 expansion units ^{*1}	2K steps	2K words	1.19 µs	CP1E-E10DR-A
						Transistor (sinking)						CP1E-E10DR-D
						Transistor (sourcing)						CP1E-E10DT-D
												CP1E-E10DT1-D
												CP1E-E14SDR-A
E-type with 14 I/O points	8	6	14	—	6 Encoder inputs (10 kHz) 6 Interrupts/counters	Relay	84 to 264 VAC	Up to 3 expansion units ^{*1}	2K steps	2K words	1.19 µs	CP1E-E14SDR-A
E-type with 20 I/O points	12	8	20									CP1E-E20SDR-A
E-type with 30 I/O points	18	12	150									CP1E-E30SDR-A
E-type with 40 I/O points	24	16	160									CP1E-E40SDR-A
												CP1E-E10DR-A
N-type with 14 I/O points	8	6	14	RS-232C port	6 Encoder inputs (2 × 100 kHz, 4 × 10kHz)	Relay	84 to 264 VAC 20.4 to 26.4 VDC	Up to 3 expansion units ^{*1}	8K steps	8K words	1.19 µs	CP1E-N14DR-A
					6 Encoder inputs (2 × 100 kHz, 4 × 10kHz) 2 Pulse outputs (100 kHz)	Transistor (sinking)						CP1E-N14DR-D
						Transistor (sourcing)						CP1E-N14DT-D
												CP1E-N14DT1-D
												CP1E-N20DR-A
												CP1E-N20DR-D
												CP1E-N20DT-D
												CP1E-N20DT1-D
												CP1E-N20DR-A
												CP1E-N20DT-D
												CP1E-N20DT1-D
NA-type with 20 I/O points and analogue I/O	12	8	140	RS-232C port	6 Encoder inputs (2 × 100 kHz, 4 × 10kHz) 2 analogue inputs (1/6,000) 1 analogue output (1/6,000)	Relay	84 to 264 VAC	Up to 3 expansion units ^{*1}	8K steps	8K words	1.19 µs	CP1E-NA20DR-A
					6 Encoder inputs (2 × 100 kHz, 4 × 10kHz) 2 Pulse outputs (100 kHz) 2 analogue inputs (1/6,000) 1 analogue output (1/6,000)	Transistor (sinking)	20.4 to 26.4 VDC					CP1E-NA20DT-D
						Transistor (sourcing)						CP1E-NA20DT1-D
												CP1E-NA20DT1-D

CP1E CPU	Digital input	Digital output	Max. I/O points (incl. expansions)	Communication ports	Input/output functions	Output type	Power supply	Expandability	Program capacity	Data memory capacity	Logic execution speed	Order code
N-type with 30 I/O points	18	12	150	RS-232C port	6 Encoder inputs (2 × 100 kHz, 4 × 10kHz)	Relay	84 to 264 VAC 20.4 to 26.4 VDC	Up to 3 expansion units ¹	8K steps	8K words	1.19 μs	CP1E-N30DR-A
					6 Encoder inputs (2 × 100 kHz, 4 × 10kHz) 2 Pulse outputs (100 kHz)	Transistor (sinking)						CP1E-N30DR-D
						Transistor (sourcing)						CP1E-N30DT-D
				RS-232C port RS-485 port (half-duplex)	6 Encoder inputs (2 × 100 kHz, 4 × 10kHz)	Relay	84 to 264 VAC					CP1E-N30DT1-D
					6 Encoder inputs (2 × 100 kHz, 4 × 10kHz) 2 Pulse outputs (100 kHz)	Transistor (sinking)	20.4 to 26.4 VDC					CP1E-N30S1DR-A
						Transistor (sourcing)						CP1E-N30S1DT-D
N-type with 40 I/O points	24	16	160	RS-232C port	6 Encoder inputs (2 × 100 kHz, 4 × 10kHz)	Relay	84 to 264 VAC 20.4 to 26.4 VDC		CP1E-N40DR-A			
					6 Encoder inputs (2 × 100 kHz, 4 × 10kHz) 2 Pulse outputs (100 kHz)	Transistor (sinking)			CP1E-N40DR-D			
						Transistor (sourcing)			CP1E-N40DT-D			
				RS-232C port RS-485 port (half-duplex)	6 Encoder inputs (2 × 100 kHz, 4 × 10kHz)	Relay	84 to 264 VAC		CP1E-N40DT1-D			
					6 Encoder inputs (2 × 100 kHz, 4 × 10kHz) 2 Pulse outputs (100 kHz)	Transistor (sinking)	20.4 to 26.4 VDC		CP1E-N40S1DR-A			
						Transistor (sourcing)			CP1E-N40S1DT-D			
N-type with 60 I/O points	36	24	180	RS-232C port	6 Encoder inputs (2 × 100 kHz, 4 × 10kHz)	Relay	84 to 264 VAC 20.4 to 26.4 VDC		CP1E-N60DR-A			
					6 Encoder inputs (2 × 100 kHz, 4 × 10kHz) 2 Pulse outputs (100 kHz)	Transistor (sinking)			CP1E-N60DR-D			
						Transistor (sourcing)			CP1E-N60DT-D			
				RS-232C port RS-485 port (half-duplex)	6 Encoder inputs (2 × 100 kHz, 4 × 10kHz)	Relay	84 to 264 VAC		CP1E-N60DT1-D			
					6 Encoder inputs (2 × 100 kHz, 4 × 10kHz) 2 Pulse outputs (100 kHz)	Transistor (sinking)	20.4 to 26.4 VDC		CP1E-N60S1DR-A			
						Transistor (sourcing)			CP1E-N60S1DT-D			

^{*1} There is no restriction on the possible combination of CP1W expansion units. All expansion units can be combined with each other up to the maximum number of expansions.

Note: The CP1E E-type has no real-time clock and therefore no battery. The N/NA-type has one optional battery for the real-time clock.

The CP1E-N/NA-type has 6 Interrupts/counters.

The CP1E-NxxS1 CPU types do not support serial option boards.

Accessories

Type	Remarks	Order code
USB programming cable	A-type male to B-type male (length: 1.8 m)	CP1W-CN221
RS-232C option board	D-Sub, 9 pins, female (15 m max.)	CP1W-CIF01
RS-422A/485 option board	Terminal block (50 m max.)	CP1W-CIF11
RS-422A/485 (isolated) option board	Terminal block (500 m max.)	CP1W-CIF12
Ethernet option board	100/10Base-TX (Auto-MDIX)	CP1W-CIF41 ^{*1}
Battery for CP1E-N/NA type	To retain time of clock	CP1W-BAT01

^{*1} Only firmware v2.0



The compact machine controller

When it comes to controllers for compact machines, Omron's CP1L series offers the compactness of a micro-PLC with the capability of a modular PLC. It provides all the functionality you need to control your machine, including outstanding positioning capability. The CP1L comes with 14, 20, 30, 40, or 60 I/O built-in and can be expanded with a wide range of CP1W expansion units up to 180 I/O points. It uses a standard USB port for programming and monitoring and offers two optional plug-in serial communication ports, of which one can be used for a display or Ethernet option as well. As the CP1L series shares the same architecture as the CP1E, CP1H, CJ1, and CS1 series, programs are compatible for memory allocations and instructions.

Ordering information

CP1L CPU	Digital input	Digital output	Max. I/O points (incl. expansions)	Input/output functions	Output type	Power supply	PLC port	Expandability	Program capacity	Data memory capacity	Logic execution speed	Order code					
L-type with 10 I/O points	6	4	10	4 Encoder inputs (100 kHz) 2 Interrupts/counters	Relay	84 to 264 VAC 20.4 to 26.4 VDC	USB	—	5K steps	10K words	0.55 μs	CP1L-L10DR-A					
				4 Encoder inputs (100 kHz) 2 Pulse outputs (100 kHz) 2 Interrupts/counters	Transistor (sinking)							CP1L-L10DR-D					
					Transistor (sourcing)							CP1L-L10DT-D					
					L-type with 14 I/O points							8	6	54	4 Encoder inputs (100 kHz) 4 Interrupts/counters	Relay	84 to 264 VAC 20.4 to 26.4 VDC
4 Encoder inputs (100 kHz) 2 Pulse outputs (100 kHz) 4 Interrupts/counters	Transistor (sinking)	CP1L-L14DR-D															
	Transistor (sourcing)	CP1L-L14DT-D															
	L-type with 20 I/O points	12	8	60		4 Encoder inputs (100 kHz) 6 Interrupts/counters	Relay	84 to 264 VAC 20.4 to 26.4 VDC	Ethernet		5K (+10K FB) steps						
4 Encoder inputs (100 kHz) 2 Pulse outputs (100 kHz) 6 Interrupts/counters					Transistor (sinking)	CP1L-L20DR-D											
					Transistor (sourcing)	CP1L-L20DT-D											
					4 Encoder inputs (100 kHz) 6 Interrupts/counters 2 Analogue inputs (1/1,000)	Relay								CP1L-EL20DR-D			
4 Encoder inputs (100 kHz) 2 Pulse outputs (100 kHz) 6 Interrupts/counters 2 Analogue inputs (1/1,000)						Transistor (sinking)			CP1L-EL20DT-D								
						Transistor (sourcing)			CP1L-EL20DT1-D								
						M-type with 30 I/O points			18	12	150			4 Encoder inputs (100 kHz) 6 Interrupts/counters	Relay	84 to 264 VAC 20.4 to 26.4 VDC	USB
4 Encoder inputs (100 kHz) 2 Pulse outputs (100 kHz) 6 Interrupts/counters					Transistor (sinking)		CP1L-M30DR-D										
	Transistor (sourcing)	CP1L-M30DT-D															
	4 Encoder inputs (100 kHz) 6 Interrupts/counters 2 Analogue inputs (1/1,000)	Relay	Ethernet		10K (+10K FB) steps		CP1L-M30DT1-D										
4 Encoder inputs (100 kHz) 2 Pulse outputs (100 kHz) 6 Interrupts/counters 2 Analogue inputs (1/1,000)		Transistor (sinking)					CP1L-EM30DR-D										
		Transistor (sourcing)					CP1L-EM30DT-D										
								CP1L-EM30DT1-D									

CP1L CPU	Digital input	Digital output	Max. I/O points (incl. expansions)	Input/output functions	Output type	Power supply	PLC port	Expandability	Program capacity	Data memory capacity	Logic execution speed	Order code						
M-type with 40 I/O points	24	16	160	4 Encoder inputs (100 kHz) 6 Interrupts/counters	Relay	84 to 264 VAC 20.4 to 26.4 VDC	USB	Up to 3 expansion units ^{*1}	10K steps	32K words	0.55 μs	CP1L-M40DR-A						
				4 Encoder inputs (100 kHz) 2 Pulse outputs (100 kHz) 6 Interrupts/counters	Transistor (sinking)	CP1L-M40DR-D												
					Transistor (sourcing)	CP1L-M40DT-D												
				4 Encoder inputs (100 kHz) 6 Interrupts/counters 2 Analogue inputs (1/1,000)	Relay	Ethernet	10K (+10KFB) steps		CP1L-EM40DR-D									
					4 Encoder inputs (100 kHz) 2 Pulse outputs (100 kHz) 6 Interrupts/counters 2 Analogue inputs (1/1,000)				Transistor (sinking)			CP1L-EM40DT-D						
									Transistor (sourcing)			CP1L-EM40DT1-D						
					M-type with 60 I/O points				36			24	180	4 Encoder inputs (100 kHz) 6 Interrupts/counters	Relay	84 to 264 VAC 20.4 to 26.4 VDC	USB	10K steps
				4 Encoder inputs (100 kHz) 2 Pulse outputs (100 kHz) 6 Interrupts/counters		Transistor (sinking)	CP1L-M60DR-D											
Transistor (sourcing)	CP1L-M60DT-D																	
							CP1L-M60DT1-D											

^{*1} There is no restriction on the possible combination of CP1W expansion units. All expansion units can be combined with each other up to the maximum number of expansions.

Accessories

Type	Remarks	Order code
Memory cassette	512K words (upload/download program)	CP1W-ME05M
USB programming cable	A-type male to B-type male (length: 1.8 m)	CP1W-CN221
RS-232C option board	D-Sub, 9 pins, female (15 m max.)	CP1W-CIF01
RS-422A/485 option board	Terminal block (50 m max.)	CP1W-CIF11
RS-422A/485 (isolated) option board	Terminal block (500 m max.)	CP1W-CIF12
Ethernet option board	100/10Base-TX (Auto-MDIX)	CP1W-CIF41
LCD display	4 rows × 12 characters	CP1W-DAM01
Analogue I/O option board (only for CP1L-EL/EM)	2 inputs, 0 to 10 V/0 to 20 mA	CP1W-ADB21
Analogue I/O option board (only for CP1L-EL/EM)	2 outputs, 0 to 10 V	CP1W-DAB21V
Analogue I/O option board (only for CP1L-EL/EM)	2 inputs, 0 to 10 V/0 to 20 mA + 2 outputs 0 to 10 V	CP1W-MAB221
Battery	For replacement purpose	CJ1W-BAT01

Note: CP1L-10 I/O points CPU does not support option boards.
 CP1L-30/40/60 I/O points CPUs support two option boards.
 For Ethernet Cables and Accessories, see page 85.



The all-in-one PLC

Designed for compact machines, it combines the size of a micro PLC and the power of a modular PLC. Four built-in high-speed counters and four pulse outputs are ideal for multi-axis positioning control. The CP1H-XA comes with 4 analogue inputs and 2 analogue outputs built-in. This makes it suitable for simple loop control, using the PLC's advanced PID control function with auto-tuning. The CP1H can be expanded with CP1W I/Os and supports up to 2 CJ1 special I/O units. This means that it is open to popular fieldbuses and supports all communication units of the CJ1 series.

- Up to 1 MHz for inputs/outputs
- CJ1M compatible instruction set and execution speed
- 4 analogue inputs and 2 analogue outputs for the XA model
- USB port for easy communication, programming and configuration
- Supports PROFIBUS, DeviceNet, CAN and Ethernet

Ordering information

CP1H CPU	Digital input	Digital output	Max. I/O points (incl. expansions)	Input/output functions	Output type	Power supply	PLC port	Expandability	Program capacity	Data memory capacity	Logic execution speed	Order code
Y-type with 20 I/O points	12	8	300	4 Encoder inputs (2 × 1 MHz + 2 × 100 kHz) 4 Pulse outputs (2 × 1 MHz + 2 × 100 kHz) 6 Interrupts/counters	Transistor (sinking)	20.4 to 26.4 VDC	USB	Up to 7 expansion units ^{*1}	20K steps	32K words	0.1 μs	CP1H-Y20DT-D
X-type with 40 I/O points	24	16	320	4 Encoder inputs (100 kHz) 8 Interrupts/counters	Relay	84 to 264 VAC						CP1H-X40DR-A
				4 Encoder inputs (100 kHz) 4 Pulse outputs (100 kHz) 8 Interrupts/counters	Transistor (sinking)	20.4 to 26.4 VDC						CP1H-X40DT-D
					Transistor (sourcing)							CP1H-X40DT1-D
XA-type with 40 I/O points and analogue I/O				4 Encoder inputs (100 kHz) 8 Interrupts/counters 4 Analogue inputs (1/12,000) 2 Analogue outputs (1/12,000)	Relay	84 to 264 VAC						CP1H-XA40DR-A
				4 Encoder inputs (100 kHz) 4 Pulse outputs (100 kHz) 8 Interrupts/counters 4 Analogue inputs (1/12,000) 2 Analogue outputs (1/12,000)	Transistor (sinking)	20.4 to 26.4 VDC						CP1H-XA40DT-D
					Transistor (sourcing)							CP1H-XA40DT1-D

^{*1} CP1H CPU series can be expanded with CP1W expansion units (up to 7 units) and CJ1 Special I/O units (up to 2 units).

Note: Some expansion units count for 2 unit numbers (eg. CP1W-AD041, CP1W-DA041, CP1W-TS002 and CP1W-TS102) but only 7 expansion unit numbers can be allocated in a CP1H PLC's configuration.

Accessories

Type	Remarks	Order code
Memory cassette	512K words (upload/download program)	CP1W-ME05M
USB programming cable	A-type male to B-type male (length: 1.8 m)	CP1W-CN221
RS-232C option board	D-Sub, 9 pins, female (15 m max.)	CP1W-CIF01
RS-422A/485 option board	Terminal block (50 m max.)	CP1W-CIF11
RS-422A/485 (isolated) option board	Terminal block (500 m max.)	CP1W-CIF12
Ethernet option board	100/10Base-TX (Auto-MDIX)	CP1W-CIF41
LCD display	4 rows × 12 characters	CP1W-DAM01
Expansion I/O connecting cable	80 cm cable to connect CP1W expansion units	CP1W-CN811
CJ1 expansion unit adapter	Unit to connect CJ1 Special I/O units	CP1W-EXT01
Battery	For replacement purpose	CJ1W-BAT01



Expand the capacity of your compact PLC

A wide variety of expansion units such as Digital I/O, Analogue I/O and Remote I/O are available to create the application you need. These CP1W expansion units can be used for CP1E-, CP1L-, and CP1H series PLC.

Ordering information

Expansion unit	Inputs	Outputs	Max I/O points	Input/output functions	Input/output type	Size in mm (H × W × D)	No. of unit numbers allocated (CP1H only) ^{*1}	Order code
Digital I/O units	8	—	8 points	8 Inputs	—	90 × 66 × 50	1	CP1W-8ED
	—	8		8 Outputs	Relay	90 × 66 × 50	1	CP1W-8ER
					Transistor (sinking)	90 × 66 × 50	1	CP1W-8ET
					Transistor (sourcing)	90 × 66 × 50	1	CP1W-8ET1
		16	16 points	16 Outputs	Relay	90 × 86 × 50	1	CP1W-16ER
	12	8	20 points	12 Inputs/8 outputs	Relay	90 × 86 × 50	1	CP1W-20EDR1
					Transistor (sinking)	90 × 86 × 50	1	CP1W-20EDT
					Transistor (sourcing)	90 × 86 × 50	1	CP1W-20EDT1
	24	16	40 points	24 Inputs/16 outputs	Relay	90 × 150 × 50	1	CP1W-40EDR
					Transistor (sinking)	90 × 150 × 50	1	CP1W-40EDT
					Transistor (sourcing)	90 × 150 × 50	1	CP1W-40EDT1
Analogue I/O units	4	—	4 analogue points	4 Analogue inputs (resolution 1/6,000)	Analogue	90 × 86 × 50	2	CP1W-AD041
	—	4	4 analogue points	4 Analogue outputs (resolution 1/6,000)	Analogue	90 × 86 × 50	2	CP1W-DA041
	—	2	2 analogue points	2 Analogue outputs (resolution 1/6,000)	Analogue	90 × 86 × 50	1	CP1W-DA021
	2	1	3 analogue points	2 Analogue inputs (resolution 1/6,000) 1 Analogue output (resolution 1/6,000)	Analogue	90 × 86 × 50	1	CP1W-MAD11
Temperature sensor units (K, J)	2	—	2 analogue points	2 Thermocouple inputs (K or J)	—	90 × 86 × 50	1	CP1W-TS001
	4	—	4 analogue points	4 Thermocouple inputs (K or J)	—	90 × 86 × 50	2	CP1W-TS002
Temperature sensor units (Pt100, JPt100)	2	—	2 analogue points	2 Platinum resistance thermometer inputs (Pt100 or JPt100)	—	90 × 86 × 50	1	CP1W-TS101
	4	—	4 analogue points	4 Platinum resistance thermometer inputs (Pt100 or JPt100)	—	90 × 86 × 50	2	CP1W-TS102
CompoBus/S I/O link unit	8 points	8 points	16 points	I/O link of 8 input bits and 8 output bits	CompoBus/S communication	90 × 66 × 50	1	CP1W-SRT21
PROFIBUS-DP I/O link unit	16 points	16 points	32 points	I/O link of 16 input bits and 16 output bits	PROFIBUS-DP communication	90 × 66 × 50	1	CPM1A-PRT21
DeviceNet I/O link unit	32 points	32 points	64 points	I/O link of 32 input bits and 32 output bits	DeviceNet communication	90 × 66 × 50	1	CPM1A-DRT21

^{*1} Some expansion units count for 2 unit numbers (eg. CP1W-AD041, CP1W-DA041, CP1W-TS002 and CP1W-TS102) but only 7 expansion unit numbers can be allocated in a CP1H PLC's configuration.



Fast and powerful CPUs for any task

The family of CJ1 and CJ2 CPUs range from very small CPUs for simple sequence control to powerful and fast models that offer total machine control which can handle up to 2,560 I/O points. This enables you to modularize or 'slice' your machine into logical sections without changing PLC series.

All CPU units support IEC61131-3 Structured text, Sequential Function Charts and ladder language. Omron's extensive function block library helps to reduce your programming effort, while you can create your own function blocks to suit your specific needs.

All CJ2M CPU units can be equipped with pulse I/O option modules to perform position control for up to 4 axes, using dedicated instructions.

Ordering information

Max. digital I/O points	Program capacity	Data memory capacity	Logic execution speed	Max. I/O units	Width	5 V current consumption	Built-in functions	Order code
2,560	400 K	832 K	16 ns	40	80 mm	820 mA	USB + EtherNet/IP + RS-232C	CJ2H-CPU68-EIP
2,560	250 K	512 K	16 ns	40	80 mm	820 mA	USB + EtherNet/IP + RS-232C	CJ2H-CPU67-EIP
2,560	150 K	352 K	16 ns	40	80 mm	820 mA	USB + EtherNet/IP + RS-232C	CJ2H-CPU66-EIP
2,560	100 K	160 K	16 ns	40	80 mm	820 mA	USB + EtherNet/IP + RS-232C	CJ2H-CPU65-EIP
2,560	50 K	160 K	16 ns	40	80 mm	820 mA	USB + EtherNet/IP + RS-232C	CJ2H-CPU64-EIP
2,560	60 K	160 K	40 ns	40	62 mm	700 mA	USB + EtherNet/IP, serial comm. option slot	CJ2M-CPU35
2,560	30 K	160 K	40 ns	40	62 mm	700 mA	USB + EtherNet/IP, serial comm. option slot	CJ2M-CPU34
2,560	20 K	64 K	40 ns	40	62 mm	700 mA	USB + EtherNet/IP, serial comm. option slot	CJ2M-CPU33
2,560	10 K	64 K	40 ns	40	62 mm	700 mA	USB + EtherNet/IP, serial comm. option slot	CJ2M-CPU32
2,560	5 K	64 K	40 ns	40	62 mm	700 mA	USB + EtherNet/IP, serial comm. option slot	CJ2M-CPU31
2,560	400 K	832 K	16 ns	40	49 mm	420 mA	USB + RS-232C	CJ2H-CPU68
2,560	250 K	512 K	16 ns	40	49 mm	420 mA	USB + RS-232C	CJ2H-CPU67
2,560	150 K	352 K	16 ns	40	49 mm	420 mA	USB + RS-232C	CJ2H-CPU66
2,560	100 K	160 K	16 ns	40	49 mm	420 mA	USB + RS-232C	CJ2H-CPU65
2,560	50 K	160 K	16 ns	40	49 mm	420 mA	USB + RS-232C	CJ2H-CPU64
2,560	60 K	160 K	40 ns	40	31 mm	500 mA	USB + RS-232C	CJ2M-CPU15
2,560	30 K	160 K	40 ns	40	31 mm	500 mA	USB + RS-232C	CJ2M-CPU14
2,560	20 K	64 K	40 ns	40	31 mm	500 mA	USB + RS-232C	CJ2M-CPU13
2,560	10 K	64 K	40 ns	40	31 mm	500 mA	USB + RS-232C	CJ2M-CPU12
2,560	5 K	64 K	40 ns	40	31 mm	500 mA	USB + RS-232C	CJ2M-CPU11
1,280	60 k	128 k	40 ns	40	69 mm	1,060 mA	Loop control engine (300 blocks) with Gradient Temperature Control	CJ1G-CPU45P-GTC
1,280	60 k	128 k	40 ns	40	69 mm	1,060 mA	Loop control engine (300 blocks)	CJ1G-CPU45P
1,280	30 k	64 k	40 ns	40	69 mm	1,060 mA	Loop control engine (300 blocks)	CJ1G-CPU44P
960	20 k	64 k	40 ns	30	69 mm	1,060 mA	Loop control engine (300 blocks)	CJ1G-CPU43P
960	10 k	64 k	40 ns	30	69 mm	1,060 mA	Loop control engine (50 blocks)	CJ1G-CPU42P
640	20 k	32 k	100 ns	20	49 mm	640 mA	2 Encoder inputs (100 kHz) 2 Pulse outputs (100 kHz) 4 interrupt/counter inputs	CJ1M-CPU23
320	10 k	32 k	100 ns	10	49 mm	640 mA	2 Encoder inputs (100 kHz) 2 Pulse outputs (100 kHz) 4 interrupt/counter inputs	CJ1M-CPU22
160	5 k	32 k	100 ns	10	49 mm	640 mA	2 Encoder inputs (100 kHz) 2 Pulse outputs (100 kHz) 4 interrupt/counter inputs	CJ1M-CPU21
640	20 k	32 k	100 ns	19	62 mm	950 mA	100 base-Tx Ethernet port	CJ1M-CPU13-ETN
				20	31 mm	580 mA	—	CJ1M-CPU13
320	10 k	32 k	100 ns	9	62 mm	950 mA	100 base-Tx Ethernet port	CJ1M-CPU12-ETN
				10	31 mm	580 mA	—	CJ1M-CPU12
160	5 k	32 k	100 ns	9	62 mm	950 mA	100 base-Tx Ethernet port	CJ1M-CPU11-ETN
				10	31 mm	580 mA	—	CJ1M-CPU11

Accessories

Description	Remarks	Order code
High-speed data collection and storage unit, with CF card slot and Ethernet port	CPU bus unit	CJ1W-SPU01-V2
Pulse I/O option module for CJ2M CPU Units, 2 encoder inputs, 2 pulse outputs	NPN (sinking) outputs	CJ2M-MD211
Pulse I/O option module for CJ2M CPU Units, 2 encoder inputs, 2 pulse outputs	PNP (sourcing) outputs	CJ2M-MD212
CompactFlash memory card, 128 MB, for all models (not required for operation)	Industrial grade	HMC-EF183
CompactFlash memory card, 256 MB, for all models (not required for operation)	Industrial grade	HMC-EF283
CompactFlash memory card, 512 MB, for all models (not required for operation)	Industrial grade	HMC-EF583
CompactFlash PC-Card adapter	—	HMC-AP001
I/O terminal block (40-pt.) for CJ1M-CPU2_/CJ2M-MD21_	Push-in	XW2R-P40G-T
I/O terminal block (40-pt.) for CJ1M-CPU2_/CJ2M-MD21_	Clamp	XW2R-E40G-T
I/O terminal block (40-pt.) for CJ1M-CPU2_/CJ2M-MD21_	M3 Screws	XW2R-J40G-T
Connection cable between I/O terminal block and CJ1M-CPU2_/CJ2M-MD21_ (_____ = length in cm)	MIL (40 pt)	XW2Z-_____FF-L
Servo unit terminal block for 1 axis	—	XW2B-20J6-8A
Servo unit terminal block for 2 axes	—	XW2B-40J6-9A
SMARTSTEP cable for CJ1M-CPU2_/CJ2M-MD21_, cable length: 1 m	—	XW2Z-100J-A26
W-series servo cable for CJ1M-CPU2_/CJ2M-MD21_, cable length: 1 m	—	XW2Z-100J-A27
CX-One, integrated software for programming and configuration of all Omron control system components	—	CX-ONE-AL__C-E
Connection cable, D-Sub 9-pin PC serial port to PLC peripheral port (length: 2.0 m)	—	CS1W-CN226
Connection cable, D-Sub 9-pin PC serial port to PLC peripheral port (length: 6.0 m)	—	CS1W-CN626
USB to serial conversion cable	—	CS1W-CIF31
RS-232C Option Board ^{*1}	—	CP1W-CIF01
RS-422A/485 Option board ^{*1}	—	CP1W-CIF11
RS422A/485 (isolated) Option board ^{*1}	—	CP1W-CIF12
Battery Set ^{*2}	—	CJ1W-BAT01
USB Programming cable	—	CP1W-CN221

^{*1} Only used with CJ2M-CPU3_

^{*2} Included with the CPU unit

Note: - MIL = connector according to MIL-C-83503 (compatible with DIN 41651/IEC 60603-1).
 - More accessories are available. Please refer to CJ-Series Data Sheets and Operation Manuals for details
 For I/O Cables and Terminal Blocks, see page 76
 For Ethernet Cables and Accessories, see page 85



Power and flexibility

CJ systems can operate on 24 VDC power supply, or on 100 to 240 VAC mains. For small-scale systems with mainly digital I/O a low cost, small capacity power supply can be used. For systems with many analogue I/Os and control/communication units, it may be necessary to use a larger power supply unit.

Depending on the CPU type, up to 3 expansions can be connected to the CPU 'rack', giving a total capacity of 40 I/O units. The total length of the expansion cables of one system may be up to 12 m.

Ordering information

Power supply

Input range	Power consumption	Output capacity at 5 VDC	Output capacity at 24 VDC	Max. output power	Features	Width	Order code
21.6 to 26.4 VDC	35 W max.	2.0 A	0.4 A	16.6 W	—	27 mm	CJ1W-PD022
19.2 to 28.8 VDC	50 W max.	5.0 A	0.8 A	25 W	—	60 mm	CJ1W-PD025
85 to 264 VAC 47 to 63 Hz	50 VA max.	2.8 A	0.4 A	14 W	—	45 mm	CJ1W-PA202
	100 VA max.	5.0 A	0.8 A	25 W	Run output (SPST relay) Maintenance status display	80 mm	CJ1W-PA205R CJ1W-PA205C

Note: The CJ1W-PD022 has no galvanic isolation

I/O expansion

Type	Description	Width, Length	Order code
I/O control unit	Required unit on CPU 'rack' to connect I/O expansions	20 mm	CJ1W-IC101
I/O interface unit	Start unit for each I/O expansion 'rack'. Requires a power supply unit.	31 mm	CJ1W-II101
I/O expansion cable	Connects CJ1W-IC101 or -II101 to the next expansion rack's -II101	0.3 m	CS1W-CN313
		0.7 m	CS1W-CN713
		2.0 m	CS1W-CN223
		3.0 m	CS1W-CN323
		5.0 m	CS1W-CN523
		10 m	CS1W-CN133
		12 m	CS1W-CN133-B2



8 to 64 points per unit – input, output or mixed

Digital I/O units serve as the PLC's interface to achieve fast, reliable sequence control. A full range of units, from high-speed DC inputs to relay outputs, let you adapt CJ1 to your needs.

CJ1 units are available with various I/O densities and connection technologies. Up to 16 I/O points can be wired to units with detachable M3 screw terminals or screwless clamp terminals. High-density 32- and 64- point I/O units are equipped with standard 40-pin flat cable-connectors. Prefabricated cables and wiring terminals are available for easy interfacing to high-density I/O units.

Ordering information

Points	Type	Rated voltage	Rated current	Width	Remarks	Connection type ^{*1}	Order code
16	AC input	120 VAC	7 mA	31 mm	–	M3	CJ1W-IA111
8	AC input	240 VAC	10 mA	31 mm	–	M3	CJ1W-IA201
8	DC input	24 VDC	10 mA	31 mm	–	M3	CJ1W-ID201
16	DC input	24 VDC	7 mA	31 mm	–	M3 Screwless	CJ1W-ID211 CJ1W-ID211(SL)
16	DC input	24 VDC	7 mA	31 mm	Fast-response (15 µs ON, 90 µs OFF)	M3	CJ1W-ID212
16	DC input	24 VDC	7 mA	31 mm	Inputs start interrupt tasks in PLC program	M3	CJ1W-INT01
16	DC input	24 VDC	7 mA	31 mm	Latches pulses down to 50 µs pulse width	M3	CJ1W-IDP01
32	DC input	24 VDC	4.1 mA	20 mm	–	1 × Fujitsu	CJ1W-ID231
32	DC input	24 VDC	4.1 mA	20 mm	–	1 × MIL ^{*1} (40 pt)	CJ1W-ID232
32	DC input	24 VDC	4.1 mA	20 mm	Fast-response (15 µs ON, 90 µs OFF)	1 × MIL ^{*1} (40 pt)	CJ1W-ID233
64	DC input	24 VDC	4.1 mA	31 mm	–	2 × Fujitsu	CJ1W-ID261
64	DC input	24 VDC	4.1 mA	31 mm	–	2 × MIL ^{*1} (40 pt)	CJ1W-ID262
8	Triac output	250 VAC	0.6 mA	31 mm	–	M3	CJ1W-OA201
8	Relay output	250 VAC	2 A	31 mm	–	M3 Screwless	CJ1W-OC201 CJ1W-OC201(SL)
16	Relay output	250 VAC	2 A	31 mm	–	M3 Screwless	CJ1W-OC211 CJ1W-OC211(SL)
8	DC output (sink)	12 to 24 VDC	2 A	31 mm	–	M3	CJ1W-OD201
8	DC output (source)	24 VDC	2 A	31 mm	With short-circuit protection, alarm	M3	CJ1W-OD202
8	DC output (source)	24 VDC	0.5 A	31 mm	With short-circuit protection, alarm	M3	CJ1W-OD204
16	DC output (sink)	12 to 24 VDC	0.5 A	31 mm	–	M3 Screwless	CJ1W-OD211 CJ1W-OD211 (SL)
16	DC output (source)	24 VDC	0.5 A	31 mm	With short-circuit protection, alarm	M3 Screwless	CJ1W-OD212 CJ1W-OD212 (SL)
16	DC output (sink)	24 VDC	0.5 A	31 mm	Fast-response (15 µs ON, 80 µs OFF)	M3	CJ1W-OD213
32	DC output (sink)	12 to 24 VDC	0.5 A	20 mm	–	1 × Fujitsu	CJ1W-OD231
32	DC output (source)	24 VDC	0.3 A	20 mm	With short-circuit protection, alarm	1 × MIL ^{*1} (40 pt)	CJ1W-OD232
32	DC output (sink)	24 VDC	0.5 A	20 mm	Fast-response (15 µs ON, 80 µs OFF)	1 × MIL ^{*1} (40 pt)	CJ1W-OD234
64	DC output (sink)	12 to 24 VDC	0.3 A	31 mm	–	2 × Fujitsu	CJ1W-OD261
64	DC output (source)	24 VDC	0.3 A	31 mm	–	2 × MIL ^{*1} (40 pt)	CJ1W-OD262
16+16	DC in+out (source)	24 VDC	0.5 A	31 mm	–	2 × MIL ^{*1} (20 pt)	CJ1W-MD232
32+32	DC in+out (sink)	24 VDC	0.3 A	31 mm	–	2 × MIL ^{*1} (40 pt)	CJ1W-MD263
32+32	DC in+out (TLL)	5 VDC	35 mA	31 mm	–	2 × MIL ^{*1} (40 pt)	CJ1W-MD563

^{*1} MIL = connector according to MIL-C-83503 (compatible with DIN 41651/IEC 60603-1).

Note: All digital I/O units are designated as basic I/O units.
For I/O Cables and Terminal Blocks, see page 76

Accessories

Description	Connection type	Order code
Replacement 18-point screwless terminal blocks for I/O units, pack of 5 pcs.	Screwless	CJ-WM01-18P-5
Replacement 18-point screw terminal blocks for I/O units, pack of 5 pcs.	M3	CJ-OD507-18P-5



From basic analogue I/O to advanced temperature control

The CJ-series offers a wide choice of analogue input units, fit for any application, from low-speed, multi-channel temperature measurement to high-speed, high-accuracy data acquisition. Analogue outputs can be used for accurate control or external indication.

Advanced units with built-in scaling, filtering and alarm functions reduce the need for complex PLC programming. High-accuracy process I/O units support an extensive range of sensors, for fast and accurate data acquisition. Temperature control units relieve the PLC CPU of PID calculations and alarm monitoring. These functions are handled autonomously by the unit, offering control performance and auto-tuning functions similar to stand-alone temperature controllers.

Ordering information

Points	Type	Ranges	Resolution	Accuracy ¹	Conversion time	Width	Remarks	Connection type	Order code
4	Universal analogue input	0 to 5 V	V / I: 1/12,000 T/C: 0.1 °C RTD: 0.1 °C	V: 0.3% I: 0.3% T/C: 0.3% RTD: 0.3%	250 ms/4 point	31 mm	Universal inputs, with zero/span adjustment, configurable alarms, scaling, sensor error detection	M3	CJ1W-AD04U
		1 to 5 V 0 to 10 V 0 to 20 mA 4 to 20 mA K, J, T, L, R, S, B Pt100, Pt1000, JPt100						Screwless	CJ1W-AD04U(SL)
4	Analogue input	0 to 5 V	1/8,000	V: 0.2% I: 0.4%	250 µs/point	31 mm	Offset/gain adjustment, peak hold, moving average, alarms	M3	CJ1W-AD041-V1
		0 to 10 V -10 to 10 V 1 to 5 V 4 to 20 mA						Screwless	CJ1W-AD041-V1 (SL)
4	High-speed analogue input	1 to 5 V 0 to 10 V -5 to 5 V -10 to 10 V 4 to 20 mA	1/40,000	V: 0.2% I: 0.4%	35 µs/4 points	31 mm	Direct conversion (CJ2H special instruction)	M3	CJ1W-AD042
8	Analogue input	1 to 5 V	1/8,000	V: 0.2% I: 0.4%	250 µs/point	31 mm	Offset/gain adjustment, peak hold, moving average, alarms	M3	CJ1W-AD081-V1
		0 to 5 V 0 to 10 V -10 to 10 V 4 to 20 mA						Screwless	CJ1W-AD081-V1 (SL)
2	Analogue output	0 to 5 V	1/4,000	V: 0.3% I: 0.5%	1 ms/point	31 mm	Offset/gain adjustment, output hold	M3	CJ1W-DA021
		0 to 10 V -10 to 10 V 1 to 5 V 4 to 20 mA						Screwless	CJ1W-DA021 (SL)
4	Analogue output	1 to 5 V	1/4,000	V: 0.3% I: 0.5%	1 ms/point	31 mm	Offset/gain adjustment, output hold	M3	CJ1W-DA041
		0 to 5 V 0 to 10 V -10 to 10 V 4 to 20 mA						Screwless	CJ1W-DA041 (SL)
4	High-speed analogue output	1 to 5 V 0 to 10 V -10 to 10 V	1/40,000	0.3%	35 µs/4 points	31 mm	Direct conversion (CJ2H special instruction)	M3	CJ1W-DA042V
8	Voltage output	0 to 5 V	1/8,000	0.3%	250 µs/point	31 mm	Offset/gain adjustment, output hold	M3	CJ1W-DA08V
		0 to 10 V -10 to 10 V 1 to 5 V						Screwless	CJ1W-DA08V (SL)
8	Current output	4 to 20 mA	1/8,000	0.3%	250 µs/point	31 mm	Offset/gain adjustment, output hold	M3	CJ1W-DA08C
								Screwless	CJ1W-DA08C (SL)
4 + 2	Analogue in + out-put	1 to 5 V	1/8,000	in: 0.2% out: 0.3%	1 ms/point	31 mm	Offset/gain adjustment, scaling, peak hold, moving average, alarms, output hold	M3	CJ1W-MAD42
		0 to 5 V 0 to 10 V -10 to 10 V 4 to 20 mA						Screwless	CJ1W-MAD42 (SL)
4	Universal analogue input	DC voltage, DC current, Thermocouple, Pt100/Pt1000, potentiometer	1/256,000	0.05%	60 ms/4 points	31 mm	All inputs individually isolated, configurable alarms, maintenance functions, user-defined scaling, zero/span adjustment	M3	CJ1W-PH41U
2	Process input	4 to 20 mA 0 to 20 mA 0 to 10 V -10 to 10 V 0 to 5 V -5 to 5 V 1 to 5 V 0 to 1.25 V 1.25 to 1.25 V	1/64,000	0.05%	5 ms/point	31 mm	Configurable alarms, maintenance functions, user-defined scaling, zero/span adjustment, square root, totaliser	M3	CJ1W-PDC15


Points	Type	Ranges	Resolution	Accuracy*1	Conversion time	Width	Remarks	Connection type	Order code
2	Thermocouple input	B, E, J, K, L, N, R, S, T, U, WRe5-26, PLII, -100 to 100 mV	1/64,000	0.05%	5 ms/point	31 mm	Configurable alarms, maintenance functions	M3	CJ1W-PTS15
4	Thermocouple input	B, J, K, L, R, S, T	0.1°C	0.3%	62.5 ms/point	31 mm	4 configurable alarm outputs	M3	CJ1W-PTS51
4	Resistance thermometer input	Pt100, JPt100	0.1°C	0.3%	62.5 ms/point	31 mm	4 configurable alarm outputs	M3	CJ1W-PTS52
6	Thermocouple input	K-type (-200 to 1,300°C) J-Type (-100 to 850°C)	0.1°C	0.5%	40 ms/point	31 mm	Basic I/O unit, setup by DIP switches, adjustable filtering 10/50/60 Hz	M3 Screwless	CJ1W-TS561 CJ1W-TS561 (SL)
6	Resistance thermometer input	Pt100 (-200 to 650°C) Pt1000 (-200 to 650°C)	0.1°C	0.5%	40 ms/point	31 mm	Basic I/O unit, setup by DIP switches, adjustable filtering 10/50/60 Hz	M3 Screwless	CJ1W-TS562 CJ1W-TS562 (SL)
4	Temperature control loops, Thermocouple	B, J, K, L, R, S, T	0.1°C	0.3%	500 ms total	31 mm	4 control outputs: PNP open collector, 100 mA max.	M3	CJ1W-TC002
2	Temperature control loops, Thermocouple	B, J, K, L, R, S, T	0.1°C	0.3%	500 ms total	31 mm	2 control outputs: PNP open collector, 100 mA max., 2 current transformer inputs for heater burnout detection.	M3	CJ1W-TC004
4	Temperature control loops, RTD	Pt100, JPt100	0.1°C	0.3%	500 ms total	31 mm	4 control outputs: PNP open collector, 100 mA max.	M3	CJ1W-TC102
2	Temperature control loops, RTD	Pt100, JPt100	0.1°C	0.3%	500 ms total	31 mm	2 control outputs: PNP open collector, 100 mA max., 2 current transformer inputs for heater burnout detection.	M3	CJ1W-TC104
1	Load Cell Interface unit	10 VDC or 2.5 VDC, max. four 350Ω load cells.	24 bit, 0.1μV/count	Linearity error: <0.02% FS	0.33 ms	31 mm	Self-contained unit designed for fast weight and force measurement. Low-pass filter adjustable 3 Hz - 1 kHz. Made by Unipulse Co.	M3	CJ1W-F130
1	Weighing unit	10 VDC, max. four 350Ω load cells	24 bit, 0.3μV/count	Linearity error: <0.01% FS	2 ms	31 mm	Self-contained unit designed for feed weighing, discharge weighing, hopper scales, packing scales, bag filling, etc. Made by Unipulse Co.	M3	CJ1W-F159

*1 Accuracy for Voltage and Current Inputs/Outputs as percentage of full scale and typical value at 25°C ambient temperature (Consult the operation manual for details)
Accuracy for Temperature Inputs/Outputs as percentage of process value and typical value at 25°C ambient temperature (Consult the operation manual for details)

Note: All Analogue I/O units are designated as Special I/O units, except TS561/TS562, which are Basic I/O units (cannot be used with CP1H).

Accessories

Description	Connection type	Order code
Replacement 18-point screwless terminal blocks for I/O units, pack of 5 pcs.	Screwless	CJ-WM01-18P-5
Replacement 18-point screw terminal blocks for I/O units, pack of 5 pcs.	M3	CJ-OD507-18P-5

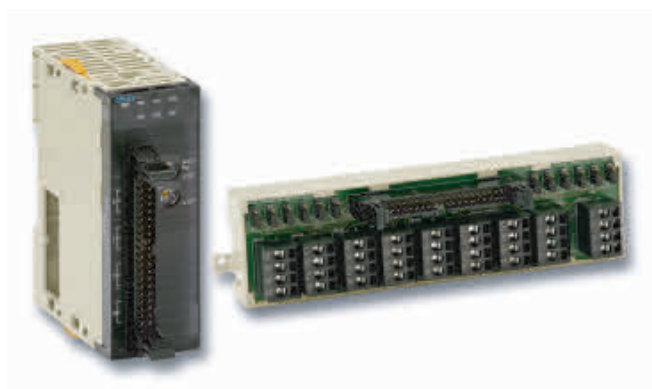

Add motion control to any CJ-Series PLC

From simple position measurement to multi-axis synchronised motion control, the CJ-Series offers a full range of units:

- Counter units gather position information from SSI- or incremental encoders. Actual positions are compared with internally stored target values.
- CJ2M CPU Units have dedicated positioning functions that can be used by installing up to 2 Pulse I/O option modules.
- Position Control units are used for point-to-point positioning with servo drives or stepper motors. Target data and acceleration/deceleration curves can be adjusted on-the-fly.
- Position- and Motion Control units equipped with EtherCAT or MECHATROLINK-II interface can control multiple drives through a single high-speed link. Message routing through multiple communication layers allows the attached drives to be configured from any point in the control network.

Ordering information

Channels/ Axes	Type	Signal type	Unit class	Width	Remarks	Connection type	Order code
2	SSI inputs (absolute position data)	Synchronous serial protocol	Special I/O unit	31mm	Baud rate, encoding type, data length, etc. can be set per channel	M3 screw	CJ1W-CTS21-E
2	500 kHz Counter	24 V, line driver	Special I/O unit	31mm	2 configurable digital inputs + outputs	1 × Fujitsu (40 pt)	CJ1W-CT021
4	100 kHz Counter	Line driver, 24 V via terminal block	Special I/O unit	31mm	Target values trigger interrupt to CPU	1 × MIL (40 pt)	CJ1W-CTL41-E
1	DC Motor Control unit	PWM (24 V/4 A)	Special I/O unit	31mm	4 configurable digital inputs + 50 kHz counter input	3 × Screwless	CJ1W-DCM11-E
2	Pulse I/O option module for CJ2M CPU	24 V, line driver	CPU Option Module	20mm	100 kpps encoder inputs and pulse outputs, NPN (sinking), interrupt / fast response inputs	1 × MIL (40 pt)	CJ2M-MD211
2	Pulse I/O option module for CJ2M CPU	24 V, line driver	CPU Option Module	20mm	100 kpps encoder inputs and pulse outputs, PNP (sourcing), interrupt / fast response inputs	1 × MIL (40 pt)	CJ2M-MD212
1	Position Control unit	24 V open collector	Special I/O unit	31mm	500 kpps pulse outputs, inputs for origin, limit switches, stop, interrupt	1 × Fujitsu (40 pt)	CJ1W-NC113
2	Position Control unit	24 V open collector	Special I/O unit	31mm	500 kpps pulse outputs, inputs for origin, limit switches, stop, interrupt	1 × Fujitsu (40 pt)	CJ1W-NC213
4	Position Control unit	24 V open collector	Special I/O unit	31mm	500 kpps pulse outputs, inputs for origin, limit switches, stop, interrupt	2 × Fujitsu (40 pt)	CJ1W-NC413
2	Position Control Unit High speed type	24 V open collector	Special I/O Unit	51mm	500 kpps pulse outputs, built-in feedback pulse counters, synchronous multi-axis control	MIL	CJ1W-NC214
4	Position Control Unit High speed type	24 V open collector	Special I/O Unit	62mm	500 kpps pulse outputs, built-in feedback pulse counters, synchronous multi-axis control	MIL	CJ1W-NC414
2	Position Control Unit	EtherCAT	CPU bus unit	31mm	Position, speed and torque control, access to all drive parameters	RJ45	CJ1W-NC281
4	Position Control Unit	EtherCAT	CPU bus unit	31mm	Position, speed and torque control, access to all drive parameters	RJ45	CJ1W-NC481
4	Position Control Unit	EtherCAT	CPU bus unit	31mm	Position, speed and torque control, access to all drive parameters, supports up to 64 general purpose EtherCAT slaves	RJ45	CJ1W-NC482
8	Position Control Unit	EtherCAT	CPU bus unit	31mm	Position, speed and torque control, access to all drive parameters	RJ45	CJ1W-NC881
8	Position Control Unit	EtherCAT	CPU bus unit	31mm	Position, speed and torque control, access to all drive parameters, supports up to 64 general purpose EtherCAT slaves	RJ45	CJ1W-NC882
16	Position Control Unit	EtherCAT	CPU bus unit	31mm	Position, speed and torque control, access to all drive parameters	RJ45	CJ1W-NCF81
2	Position Control Unit	MECHATROLINK-II	CPU bus unit	31mm	Position, speed and torque control, access to all drive parameters	ML-II	CJ1W-NC271
4	Position Control Unit	MECHATROLINK-II	CPU bus unit	31mm	Position, speed and torque control, access to all drive parameters	ML-II	CJ1W-NC471
16	Position Control unit	MECHATROLINK-II	CPU bus unit	31mm	Position, speed and torque control, access to all drive parameters	ML-II	CJ1W-NCF71
30	Advanced Motion Control unit	MECHATROLINK-II, Encoder I/O, digital I/O	CPU bus unit	49mm	Trajexia Motion Controller on the CJ-series	ML-II, 9-pin D-Sub, screwless push-in	CJ1W-MCH72

Note: Line driver signal type units also available.

Accessories

Description	Connection type	Order code
Screwless terminal block for connecting 24 V or Line driver encoders to CJ1W-CTL41-E	Push-in	XW2G-40G7-E
General purpose I/O connection cable for I/O units with 40-pt. Fujitsu connector (____ = length in cm)	Fujitsu (40 pt.) to MIL (40 pt.)	XW2Z-____BF-L
General purpose I/O connection cable for I/O units with 40-pt. MIL connector (____ = length in cm)	2 × MIL (40 pt)	XW2Z-____FF-L
Servo relay unit 1-Axis position control unit	—	XW2B-20J6-1B
Servo relay unit 2-Axes position control unit	—	XW2B-40J6-2B
Cable connecting servo relay unit to Position control unit CJ1W-NC113, cable length 1 m. For Accurax G5 servo drives.	—	XW2Z-100J-A14
Cable connecting servo relay unit to Position control unit CJ1W-NC213/413, cable length 1 m. For Accurax G5 servo drives.	—	XW2Z-100J-A15
Cable connecting servo relay unit to Position control unit CJ1W-NC113, cable length 1 m. For SmartStep 2 servo drives.	—	XW2Z-100J-A14
Cable connecting servo relay unit to Position control unit CJ1W-NC213/413, cable length 1 m. For SmartStep 2 servo drives.	—	XW2Z-100J-A15
Cable connecting servo relay unit to Position control unit CJ1W-NC133, cable length 1 m. For Accurax G5 servo drives.	—	XW2Z-100J-A18
Cable connecting servo relay unit to Position control unit CJ1W-NC233/433, cable length 1 m. For Accurax G5 servo drives.	—	XW2Z-100J-A19
Cable connecting servo relay unit to Position control unit CJ1W-NC133, cable length 1 m. For SmartStep 2 servo drives.	—	XW2Z-100J-A18
Cable connecting servo relay unit to Position control unit CJ1W-NC233/433, cable length 1 m. For SmartStep 2 servo drives.	—	XW2Z-100J-A19
Cable connecting servo relay unit to Accurax G5 servo drives, cable length 1 m.	—	XW2Z-100J-B25
Cable connecting servo relay unit to SmartStep 2 servo drive, cable length 1 m.	—	XW2Z-100J-B29

Note: For General-purpose I/O Cables and Terminal Blocks, see page 76



Open to any communication

The CJ-Series offers both standardised open networks interfaces, and cost-efficient high-speed proprietary network links. Datalinks between PLCs, or to higher-level information systems can be made using serial or Ethernet links, or the easy-to-use controller link network.

Omron supports the 2 major field networks, DeviceNet and PROFIBUS-DP. For high-speed field I/O, Omron's own CompoBus/S offers an unsurpassed ease of installation. Fully user-configurable serial and CAN-based communication can be used to emulate a variety of application-specific protocols. EtherNet/IP units provide data link functions to share large amounts of data between PLCs. The new PROFINET-IO controller together with the SmartSlice modular I/O system offers Ethernet based I/O with controller- and network redundancy.

Ordering information

Type	Ports	Data transfer	Protocols	Unit class	Width	Connection type	Order code
Serial	2 × RS-232C		CompoWay/F, Host link, NT link, Modbus, User-defined	CPU bus unit	31 mm	9-pin D-Sub	CJ1W-SCU21-V1
Serial	2 × RS-232C	High-speed	CompoWay/F, Host link, NT link, Modbus, User-defined	CPU bus unit	31 mm	9-pin D-Sub	CJ1W-SCU22
Serial	2 × RS-422A/RS-485		CompoWay/F, Host link, NT link, Modbus, User-defined	CPU bus unit	31 mm	9-pin D-Sub	CJ1W-SCU31-V1
Serial	2 × RS-422A/RS-485	High-speed	CompoWay/F, Host link, NT link, Modbus, User-defined	CPU bus unit	31 mm	9-pin D-Sub	CJ1W-SCU32
Serial	1 × RS-232C + 1 × RS-422/RS-485		CompoWay/F, Host link, NT link, Modbus, User-defined	CPU bus unit	31 mm	9-pin D-Sub	CJ1W-SCU41-V1
Serial	1 × RS-232C + 1 × RS-422/RS-485	High-speed	CompoWay/F, Host link, NT link, Modbus, User-defined	CPU bus unit	31 mm	9-pin D-Sub	CJ1W-SCU42
Ethernet	1 × 100 Base-Tx		UDP, TCP/IP, FTP server,SMTP (e-mail), SNTP (time adjust), FINS routing, socket service	CPU bus unit	31 mm	RJ45	CJ1W-ETN21
EtherNet/IP	1 × 100 Base-Tx		EtherNet/IP, UDP, TCP/IP, FTP server, SNTP, SNMP	CPU Bus unit	31 mm	RJ45	CJ1W-EIP21
Controller link	2-wire twisted pair		Omron proprietary	CPU bus unit	31 mm	2-wire screw + GND	CJ1W-CLK23
DeviceNet	1 × CAN		DeviceNet	CPU bus unit	31 mm	5-p detachable	CJ1W-DRM21
PROFIBUS-DP	1 × RS-485 (Master)		DP, DPV1	CPU bus unit	31 mm	9-pin D-Sub	CJ1W-PRM21
PROFIBUS-DP	1 × RS-485 (Slave)		DP	Special I/O unit	31 mm	9-pin D-Sub	CJ1W-PRT21
PROFINET-IO	1 × 100 Base-Tx		PROFINET-IO Controller, FINS/UDP	CPU Bus unit	31 mm	RJ45	CJ1W-PNT21
CAN	1 × CAN		User-defined, supports 11-bit and 29-bit identifiers	CPU bus unit	31 mm	5-p detachable	CJ1W-CORT21
CompoNet	4-wire, data + power to slaves (Master)		CompoNet (CIP-based)	Special I/O unit	31 mm	4-p detachable IDC or screw	CJ1W-CRM21
CompoBus/S	2-wire (Master)		Omron proprietary	Special I/O unit	20 mm	2-wire screw + 2-wire power	CJ1W-SRM21

Accessories

Description	Connection type	Order code
RS-232C to RS-422/RS-485 signal converter. Mounts directly on serial port.	9-pin D-sub to screw clamp terminals	CJ1W-CIF11
Controller link PCI board with support software	PCI, wired CLK	3G8F7-CLK23-E
Controller link repeater unit (wire to wire)	Screw - Screw	CS1W-RPT01
Controller link repeater unit (wire to HPCF fiber)	Screw - HPCF connector	CS1W-RPT02
Controller link repeater unit (wire to graded-index glass fiber)	Screw - ST connector	CS1W-RPT03
PROFIBUS DP to RS-422/RS-485 Serial Gateway. User-configurable, with Omron protocols built-in.	9-pin D-sub to screw clamp terminals	PRT1-SCU11
PROFINET IO + ModBus/TCP to Modbus/RTU (RS-485) Gateway.	3 × RJ45 to screw clamp terminals	EJ1N-HFU-ETN

Note: For Ethernet Cables and Accessories, see page 85



Fast and powerful CPUs for any task

Omron's CS1-series CPUs are available in two processor speeds, each in various memory capacities. Besides the basic CPU models, versions are available for dual redundant operation, supporting I/O hot-swapping. All CPUs have one dedicated board slot with a direct CPU-bus connection, in which a serial communication board or a loop control board can be mounted. All CPU units support IEC61131-3 structured text and ladder language.


Omron's extensive function block library helps to reduce your programming effort, while you can create your own function blocks to suit your specific needs.

Ordering information

Max. Digital I/O points	Program capacity	Data memory capacity	Logic execution speed	Max. I/O units	Additional functions	Order code
5120	250K steps	448K words	20 ns	80	—	CS1H-CPU67H
				71	Supports duplex power supply and I/O hot-swapping	CS1D-CPU67S
				68	CPU for full dual-redundancy	CS1D-CPU67H
					CPU for full dual-redundancy, with loop control board	CS1D-CPU67P
	120K steps	256K words		80	—	CS1H-CPU66H
	60K steps	128K words		80	—	CS1H-CPU65H
				71	Supports duplex power supply and I/O hot-swapping	CS1D-CPU65S
				68	CPU for full dual-redundancy	CS1D-CPU65H
					CPU for full dual-redundancy, with loop control board	CS1D-CPU65P
	30K steps	64K words		80	—	CS1H-CPU64H
	20K steps				—	CS1H-CPU63H
	60K steps				—	CS1G-CPU45H
1280			30K steps		40	—
960	20K steps	10K steps	35	Supports duplex power supply and I/O hot-swapping	CS1D-CPU44S	
			30	—	CS1G-CPU43H	
				—	CS1G-CPU42H	
			26	Supports duplex power supply and I/O hot-swapping	CS1D-CPU42S	

Accessories

Description	Remarks	Order code
High-speed data collection and storage unit, with CF card slot and Ethernet port	CPU bus unit	CS1W-SPU01-V2
High-speed data collection and storage unit, with CF card slot and 2 Ethernet ports	CPU bus unit	CS1W-SPU02-V2
Duplex unit, required for CS1D-CPU6_H systems	—	CS1D-DPL01
Serial communication option board, 2 x RS-232C	—	CS1W-SCB21-V1
Serial communication option board, 1 x RS-232C + 1 x RS422/RS-485	—	CS1W-SCB41-V1
Loop control option board	50 control blocks max.	CS1W-LCB01
Loop control option board	300 control blocks max.	CS1W-LCB05
Replacement battery set, for all CS1 CPUs	—	CS1W-BAT01
Compact Flash memory card, 128 MB, for all models (not required for operation)	Industrial grade	HMC-EF183
Compact Flash memory card, 256 MB, for all models (not required for operation)	Industrial grade	HMC-EF283
Compact Flash memory card, 512 MB, for all models (not required for operation)	Industrial grade	HMC-EF583
Compact Flash PC-Card adapter	—	HMC-AP001
CX-One, integrated software for programming and configuration of all Omron control system components	—	CX-ONE-AL__C-E
Connection cable, D-Sub 9-pin PC serial port to PLC peripheral port	length: 2.0 m	CS1W-CN226
Connection cable, D-Sub 9-pin PC serial port to PLC peripheral port	length: 6.0 m	CS1W-CN626
USB to serial conversion cable	—	CS1W-CIF31

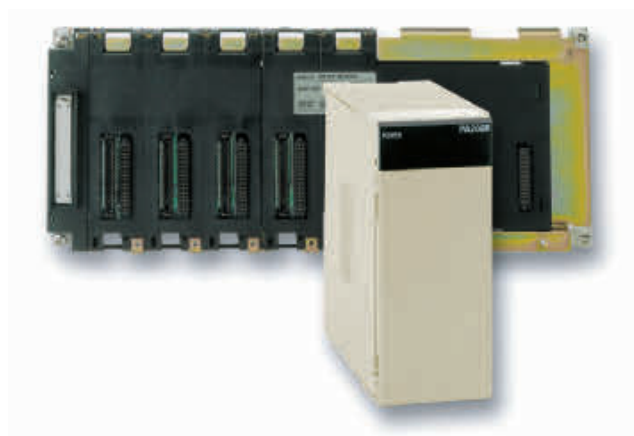

Expand with up to 7 racks

CS1 systems can operate on 24 VDC power supply, or on 100-240 VAC mains. For small-scale systems with mainly digital I/O a low cost, small capacity power supply can be used. For systems with many analogue I/Os and control/communication units, it may be necessary to use a larger power supply unit.

PLC racks are available in several sizes, from 2 to 10 slots wide. Special backplanes are required for duplex systems. Depending on the CPU type, up to 7 expansions can be connected to the CPU rack, giving a total capacity of 80 I/O units. The total length of the expansion cables of one system may be up to 12 m.

Ordering information

Power supplies

Input range	Power consumption	Output capacity 5 VDC	Output capacity 26 VDC	Max. output power	Extra functions	Order code
19.2 to 28.8 VDC	40 W max.	6.6 A	0.62 A	30 W	—	C200HW-PD024
		4.3 A	0.56 A	28 W	Power supply for dual-redundant system	CS1D-PD024
	55 VA max.	5.3 A	1.3 A	40 W	—	C200HW-PD025
					Power supply for dual-redundant system	CS1D-PD025
85 to 264 VAC 50/60 Hz	120 VA max.	4.6 A	0.62 A	30 W	Maintenance status display	C200HW-PA204C
85 to 132 VAC, 170 to 264 VAC, 50/60 Hz					—	C200HW-PA204
					Service output 24 VDC, 0.8 A	C200HW-PA204S
					Run status output (SPST relay)	C200HW-PA204R
					Run status output (SPST relay)	C200HW-PA209R
180 VA max.		9.0 A	1.3 A	45 W	Run status output (SPST relay)	C200HW-PA209R
150 VA max.	7.0 A	1.3 A	35 W	Power supply for dual-redundant system	CS1D-PA207R	

Specifications

Type	Slots	Expansion connector	Width	Special functions	Order code
CPU backplane	2	No	200 mm	—	CS1W-BC023
CPU backplane	3	Yes	260 mm	—	CS1W-BC033
CPU backplane	5	Yes	330 mm	—	CS1W-BC053
CPU backplane	8	Yes	435 mm	—	CS1W-BC083
CPU backplane	10	Yes	505 mm	—	CS1W-BC103
Expansion backplane	3	Yes	260 mm	—	CS1W-BI033
Expansion backplane	5	Yes	330 mm	—	CS1W-BI053
Expansion backplane	8	Yes	435 mm	—	CS1W-BI083
Expansion backplane	10	Yes	505 mm	—	CS1W-BI103
CPU backplane	5	Yes	505 mm	For Duplex CPU + Power supplies	CS1D-BC052
CPU backplane	8	Yes	505 mm	For Duplex Power supplies	CS1D-BC082S
Expansion backplane	9	Yes	505 mm	For Duplex Power supplies	CS1D-BI092

Type	Remarks	Order code
I/O Expansion cable to connect CS1 CPU backplane or Expansion backplane to next Expansion backplane.	0.3 m	CS1W-CN313
	0.7 m	CS1W-CN713
	2.0 m	CS1W-CN223
	3.0 m	CS1W-CN323
	5.0 m	CS1W-CN523
	10.0 m	CS1W-CN133
	12.0 m	CS1W-CN133-B2



Up to 96 I/O points per unit – input, output or mixed

Digital I/O units serve as the PLC's interface to achieve fast, reliable sequence control. A full range of units, from high-speed DC inputs to relay outputs, let you adapt CS1 to your needs.

CS1 units are available with various I/O densities and connection technologies. Up to 16 I/O points can be wired to units with detachable M3 screw terminals directly. High-density 32- and 64- point I/O units are equipped with standard 40-pin connectors. Prefabricated cables and wiring terminals are available for easy interfacing to high-density I/O units.

Ordering information

Points	Type	Rated voltage	Rated current	Remarks	Connection type	Order code ^{*1}
16	AC or DC input	120 VAC or VDC	10 mA	–	M3	CS1W-IA111
16	AC input	240 VAC	10 mA	–	M3	CS1W-IA211
16	DC input	24 VDC	7 mA	–	M3	CS1W-ID211
16	DC input	24 VDC	7 mA	Inputs start interrupt tasks in PLC program	M3	CS1W-INT01
16	DC input	24 VDC	7 mA	Latches pulses down to 50 µs pulse width	M3	CS1W-IDP01
32	DC input	24 VDC	6 mA	–	1×40 pt Fujitsu	CS1W-ID231
64	DC input	24 VDC	6 mA	–	2×40 pt Fujitsu	CS1W-ID261
96	DC input	24 VDC	5 mA	–	2×56 pt Fujitsu	CS1W-ID291
8	Triac output	250 VAC	1.2 A	–	M3	CS1W-OA201
16	Triac output	250 VAC	0.5 A	–	M3	CS1W-OA211
8	Relay output	250 VAC	2.0 A	–	M3	CS1W-OC201
16	Relay output	250 VAC	2.0 A	–	M3	CS1W-OC211
16	DC output (sink)	12 to 24 VDC	0.5 A	–	M3	CS1W-OD211
16	DC output (source)	24 VDC	0.5 A	With short-circuit protection, alarm	M3	CS1W-OD212
32	DC output (sink)	12 to 24 VDC	0.5 A	–	1×40 pt Fujitsu	CS1W-OD231
32	DC output (source)	24 VDC	0.5 A	With short-circuit protection, alarm	1×40 pt Fujitsu	CS1W-OD232
64	DC output (sink)	12 to 24 VDC	0.3 A	–	2×40 pt Fujitsu	CS1W-OD261
64	DC output (source)	24 VDC	0.3 A	With short-circuit protection, alarm	2×40 pt Fujitsu	CS1W-OD262
96	DC output (sink)	12 to 24 VDC	0.1 A	–	2×56 pt Fujitsu	CS1W-OD291
96	DC output (source)	24 VDC	0.1 A	–	2×56 pt Fujitsu	CS1W-OD292
32+32	DC output (sink)	12 to 24 VDC	0.3 A	–	2×40 pt Fujitsu	CS1W-MD261
32+32	DC in+out (source)	24 VDC	0.3 A	With short-circuit protection, alarm	2×40 pt Fujitsu	CS1W-MD262
48+48	DC output (sink)	12 to 24 VDC	0.1 A	–	2×56 pt Fujitsu	CS1W-MD291
48+48	DC in+out (source)	12 to 24 VDC	0.1 A	–	2×56 pt Fujitsu	CS1W-MD292

^{*1} C200H I/O units can also be mounted, except on CS1D systems.

Note: All Digital I/O units are designated as Basic I/O units.

Accessories

Description	Connection type	Order code
Connection cable between I/O terminal block and I/O unit with 40-pt Fujitsu connector (_ _ _ = length in cm)	Fujitsu (40pt)	XW2Z- _ _ B
I/O terminal block for input unit with 40-pt Fujitsu connector	Push-in	XW2R-P34G-C1
I/O terminal block for output unit with 40-pt Fujitsu connector	Push-in	XW2R-P34G-C3
I/O terminal block for input unit with 40-pt Fujitsu connector	Clamp	XW2R-E34G-C1
I/O terminal block for output unit with 40-pt Fujitsu connector	Clamp	XW2R-E34G-C3
I/O terminal block for input unit with 40-pt Fujitsu connector	M3 Screws	XW2R-J34G-C1
I/O terminal block for output unit with 40-pt Fujitsu connector	M3 Screws	XW2R-J34G-C3

Note: For I/O Cables and Terminal Blocks, see page 76



From basic analogue I/O to process control

CS1 offers a wide choice of analogue input units, fit for any application, from low-speed, multi-channel temperature measurement to high-speed, high-accuracy data acquisition. Analogue outputs can be used for accurate control or external indication.

Advanced units with built-in scaling, filtering and alarm functions reduce the need for complex PLC programming. High-accuracy process I/O units support an extensive range of sensors, for fast and accurate data acquisition. All process and temperature I/O units provide isolation between all individual channels.

Ordering information

Points	Type	Ranges	Resolution	Accuracy* ¹	Conversion time	Remarks	Connection type	Order code
4	Analogue input	0 to 5 V, 0 to 10 V,	1/8,000	V: 0.2% of PV I: 0.4% of PV	250 µs/point	Offset/gain adjustment, peak hold, moving average, alarms	M3	CS1W-AD041-V1
8	Analogue input	-10 to 10 V,		0.2% of PV			M3	CS1W-AD081-V1
16	Analogue input	1 to 5 V, 4 to 20 mA					2 x MIL (34p.)	CS1W-AD161
4	Analogue output	0 to 5 V, 0 to 10 V, -10 to 10 V, 1 to 5 V, 4 to 20 mA	1/4,000	V: 0.3% of PV I: 0.5% of PV	1 ms/point	Offset/gain adjustment	M3	CS1W-DA041
8	Voltage output	0 to 5 V, 0 to 10 V, -10 to 10 V, 1 to 5 V		0.3% of PV		Offset/gain adjustment, output hold	M3	CS1W-DA08V
8	Current output	4 to 20 mA		0.5% of PV			M3	CS1W-DA08C
4 + 4	Analogue in + output	0 to 5 V, 0 to 10 V, -10 to 10 V, 1 to 5 V (4 to 20 mA input)	1/8,000	V in: 0.2% of PV I in: 0.4% of PV out: 0.3% of PV	1 ms/point	Offset/gain adjustment, scaling, peak hold, moving average, alarms, output hold	M3	CS1W-MAD44
4	Process input	4 to 20 mA, 0 to 20 mA, 0 to 10 V, -10 to 10 V, 0 to 5 V, -5 to 5 V, 1 to 5 V, 1 to 1.25 V, -1.25 to 1.25 V	1/64,000	0.05% of PV	5 ms/point	Configurable alarms, maintenance functions, user-defined scaling, zero/span adjustment, square root, totaliser.	M3	CS1W-PDC11
8	Process input	-10 to 10 V, 0 to 5 V, 1 to 5 V, 4 to 20 mA	1/16,000	0.3% of PV	62.5 ms/point	Configurable alarms, zero/span adjustment, square root	M3	CS1W-PDC55
4	Thermocouple input	B, E, J, K, L, N, R, S, T, U, WRe5-26, PLII, -100 to 100 mV	1/64,000	0.05% of PV	5 ms/point	Configurable alarms (absolute + rate-of-change), peak hold, maintenance functions	M3	CS1W-PTS11
4	Resistance thermometer input	Pt50, Pt100 JPt100, Ni508.4	1/64,000	0.05% of PV	5 ms/point	Configurable alarms (absolute + rate-of-change), peak hold, maintenance functions	M3	CS1W-PTS12
4	Thermocouple input	B, J, K, L, R, S, T	0.1°C	0.3% of PV	62.5 ms/point	4 configurable alarm outputs	M3	CS1W-PTS51
4	Resistance thermometer input	Pt100, JPt100	0.1°C	0.3% of PV	62.5 ms/point	4 configurable alarm outputs	M3	CS1W-PTS52
8	Thermocouple input	B, J, K, L, R, S, T	0.1°C	0.3% of PV	31.2 ms/point	Configurable alarms per channel	M3	CS1W-PTS55
8	Resistance thermometer input	Pt100, JPt100	0.1°C	0.3% of PV	31.2 ms/point	Configurable alarms per channel	M3	CS1W-PTS56
4	2-Wire transmitter input	1 to 5 V, 4 to 20 mA	1/4,096	0.2% of FS	25 ms/point	Built-in power supply for transmitter, configurable alarms, square root, rate-of-change, etc.	M3	CS1W-PTW01
8	Power transducer input	-1 to 1 mA, 0 to 1 mA	1/4,096	0.2% of FS	25 ms/point	Inrush current limiter, configurable alarms, averaging, etc.	M3	CS1W-PTR01
8	Power transducer input	-100 to 100 mV, 0 to 100 mV	1/4,096	0.2% of FS	25 ms/point	Inrush current limiter, configurable alarms, averaging, etc.	M3	CS1W-PTR02
4	Pulse rate input	20000 pps, voltage, open collector, contact	up to 1/32,000	—	25 ms/point	Averaging, totaliser	M3	CS1W-PPS01

Points	Type	Ranges	Resolution	Accuracy*1	Conversion time	Remarks	Connection type	Order code
4	Isolated control output	1 to 5 V, 4 to 20 mA	1/4,000	I: 0.1% of FS V: 0.2% of FS	25 ms/point	Output readback, high/low/rate limiting, disconnection alarm, zero/span adjustment	M3	CS1W-PMV01
4	Isolated control output	-10 to 10 V, 0 to 10 V, -5 to 5 V, 0 to 5 V, -1 to 1 V, 0 to 1 V	1/4,000	0.1% of FS	10 ms/point	High/low/rate limiting, output hold, zero/span adjustment	M3	CS1W-PMV02

*1 Accuracy for Voltage and Current Inputs/Outputs as percentage of full scale and typical value at 25°C ambient temperature (Consult the operation manual for details)
Accuracy for Temperature Inputs/Outputs as percentage of process value and typical value at 25°C ambient temperature (Consult the operation manual for details)

Note: All analogue I/O units are designated as special I/O units



Add motion control to any CS1 PLC

From simple position measurement to multi-axis synchronised motion control, CS1 offers a full range of units:

- Counter units gather position information from SSI- or incremental encoders. Actual positions are compared with internally stored target values.
- Position control units are used for point-to-point positioning with servo drives or stepper motors. Target data and acceleration/deceleration curves can be adjusted on-the-fly.
- Position- and motion control units equipped with MECHATROLINK-II interface can control multiple drives through a single high-speed link. Message routing through multiple communication layers allows the attached drives to be configured from any point in the control network.

Ordering information

Channels/ Axes	Type	Signal type	Unit class	Remarks	Connection type	Order code
2	SSI inputs (absolute position data)	Synchronous serial protocol	Special I/O unit	Baud rate, encoding type, data length, etc. can be set per channel 2 digital outputs, NPN/PNP selectable.	M3 screw	CS1W-CTS21
2	500 kHz Counter	24 V, 12V, line driver	Special I/O unit	4 configurable digital inputs + 4 configurable digital outputs Target values trigger interrupt to CPU	1 × Fujitsu (40 pt)	CS1W-CT021
4					2 × Fujitsu (40 pt)	CS1W-CT041
1	Position control unit	24V open collector	Special I/O unit	500 kpps pulse outputs, inputs for origin, limit switches, stop, interrupt	1 × Fujitsu (40 pt)	CS1W-NC113
2	Position control unit	24V open collector	Special I/O unit	500 kpps pulse outputs, inputs for origin, limit switches, stop, interrupt	1 × Fujitsu (40 pt)	CS1W-NC213
4	Position control unit	24V open collector	Special I/O unit	500 kpps pulse outputs, inputs for origin, limit switches, stop, interrupt	2 × Fujitsu (40 pt)	CS1W-NC413
1	Position control unit	Line driver	Special I/O unit	500 kpps pulse outputs, inputs for origin, limit switches, stop, interrupt	1 × Fujitsu (40 pt)	CS1W-NC133
2	Position control unit	Line driver	Special I/O unit	500 kpps pulse outputs, inputs for origin, limit switches, stop, interrupt	1 × Fujitsu (40 pt)	CS1W-NC233
4	Position control unit	Line driver	Special I/O unit	500 kpps pulse outputs, inputs for origin, limit switches, stop, interrupt	2 × Fujitsu (40 pt)	CS1W-NC433
2	Motion control unit	Analogue	Special I/O unit	Closed loop with automatic trapezoid or S-curve acceleration/deceleration	Snap-on connectors (3M)	CS1W-MC221-V1
4	Motion control unit	Analogue	Special I/O unit	Closed loop with automatic trapezoid or S-curve acceleration/deceleration	Snap-on connectors (3M)	CS1W-MC421-V1

Accessories

Description	Connection type	Order code
Servo relay unit 1-Axis position control unit	—	XW2B-20J6-1B
Servo relay unit 2-Axes position control unit	—	XW2B-40J6-2B
Cable connecting servo relay unit to Position control unit CS1W-NC113, cable length 1 m. For Accurax G5 servo drives.	—	XW2Z-100J-A6
Cable connecting servo relay unit to Position control unit CS1W-NC213/413, cable length 1 m. For Accurax G5 servo drives.	—	XW2Z-100J-A7
Cable connecting servo relay unit to Position control unit CS1W-NC113, cable length 1 m. For SmartStep 2 servo drives.	—	XW2Z-100J-A6
Cable connecting servo relay unit to Position control unit CS1W-NC213/413, cable length 1 m. For SmartStep 2 servo drives.	—	XW2Z-100J-A7
Cable connecting servo relay unit to Position control unit CS1W-NC133, cable length 1 m. For Accurax G5 servo drives.	—	XW2Z-100J-A10
Cable connecting servo relay unit to Position control unit CS1W-NC233/433, cable length 1 m. Accurax G5 servo drives.	—	XW2Z-100J-A11
Cable connecting servo relay unit to Position control unit CS1W-NC133, cable length 1 m. For SmartStep 2 servo drives.	—	XW2Z-100J-A10
Cable connecting servo relay unit to Position control unit CS1W-NC233/433, cable length 1 m. For SmartStep 2 servo drives.	—	XW2Z-100J-A11
Cable connecting servo relay unit to Accurax G5 servo drives, cable length 1 m.	—	XW2Z-100J-B25
Cable connecting servo relay unit to SmartStep 2 servo drive, cable length 1 m.	—	XW2Z-100J-B29

Note: For General-purpose I/O Cables and Terminal Blocks, see page 76



Open to any communication, standard or user-defined

CS1 provides both standardised open networks interfaces, and cost efficient, high-speed proprietary network links. Datalinks between PLCs, or to higher-level information systems can be made using Serial or Ethernet links, or the easy-to-use Controller Link network.

Omron supports the 2 major field networks, DeviceNet and PROFIBUS-DP. For high-speed field I/O, Omron's own CompoBus/S offers an unsurpassed ease of installation. Fully user-configurable serial and CAN-based communication can be used to emulate a variety of application-specific protocols. EtherNet/IP units provide data link functions to share large amounts of data between PLCs. The PROFINET-IO controller together with the SmartSlice modular I/O system offers ethernet-based I/O with controller- and network redundancy.

Ordering information

Type	Ports	Protocols	Unit class	Remarks	Connection type	Order code
Serial	2 × RS-232C	CompoWay/F, Host Link, NT link, Modbus, User-defined	CPU bus unit	—	9-pin D-Sub	CS1W-SCU21-V1
Serial	2 × RS-232C/RS-485	CompoWay/F, Host Link, NT link, Modbus, User-defined	CPU bus unit	—	9-pin D-Sub	CS1W-SCU31-V1
Serial	2 × RS-232C	CompoWay/F, Host Link, NT link, Modbus, User-defined	CPU option board	—	9-pin D-Sub	CS1W-SCB21-V1
Serial	1 × RS-232C + 1 × RS-422/RS-485	CompoWay/F, Host Link, NT link, Modbus, User-defined	CPU option board	—	9-pin D-Sub	CS1W-SCB41-V1
GP-IB	Master/Slave selectable	GP-IB instrument communication	Special I/O unit	—	GP-IB	CS1W-GPI01
Ethernet	1 × 100 Base-Tx	UDP, TCP/IP, FTP server, SMTP (e-mail), SNMP (time adjust), FINS routing, socket service	CPU bus unit	—	RJ45	CS1W-ETN21
Controller link	2-wire twisted pair	Omron proprietary	CPU bus unit	—	2-wire screw + GND	CS1W-CLK23
	Optical HPCF			—	2 × HPCF connector	CS1W-CLK13
	Optical graded-index fiber			—	4 × ST connector	CS1W-CLK53
EtherNet/IP	1 × 100 Base-Tx	EtherNet/IP, UDP, TCP/IP, FTP server, SNMP, SNMP	CPU Bus unit	31 mm	RJ45	CS1W-EIP21
DeviceNet	1 × CAN	DeviceNet	CPU bus unit	—	5-p detachable	CS1W-DRM21-V1
CompoNet	4-wire, data + power to slaves (Master)	CompoNet (CIP-based)	Special I/O unit	—	4-p detachable IDC or screw	CS1W-CRM21
PROFIBUS-DP	1 × RS-485 (Master)	DP, DPV1	CPU bus unit	—	9-pin D-Sub	CS1W-PRM21
CAN	1 × CAN	CANopen, User-defined	CPU bus unit	—	5-p detachable	CS1W-CORT21
PROFINET IO	1 × 100 Base-Tx PROFINET IO controller	FINS UDP	CPU bus unit	—	RJ45	CS1W-PNT21
PROFIBUS-DP	1 × RS-485 (Slave)	DP	C200H special I/O unit	C200H units cannot be used on CS1D systems	9-pin D-Sub	C200HW-PRT21
CompoBus/S	2-wire (Master)	Omron proprietary	C200H special I/O unit		2-wire screw + 2-wire power	C200HW-SRM21-V1

Accessories

Description	Connection type	Order code
RS-232C to RS-422/RS-485 signal converter. Mounts directly on serial port.	9-pin D-sub to screw clamp terminals	CJ1W-CIF11
Controller link PCI board with support software	PCI, wired CLK	3G8F7-CLK23-E
Controller link PCI board with support software	PCI, HPCF connectors	3G8F7-CLK13-E
Controller link PCI board with support software	PCI, ST connectors	3G8F7-CLK53-E
Controller link repeater unit (wire to wire)	Screw - Screw	CS1W-RPT01
Controller link repeater unit (wire to HPCF fiber)	Screw - HPCF connector	CS1W-RPT02
Controller link repeater unit (wire to graded-index glass fiber)	Screw - ST connector	CS1W-RPT03
PROFIBUS DP to RS-422/RS-485 Serial Gateway. User-configurable, with Omron protocols built-in.	9-pin D-sub to screw clamp terminals	PRT1-SCU11
PROFINET IO + Modbus/TCP to Modbus/RTU (RS-485) Gateway.	3 × RJ45 to screw clamp terminals	EJ1N-HFU-ETN


Note: For Ethernet Cables and Accessories, see page 85



I/O SYSTEMS TO MEET EVERY NEED

Choose by network, style and flexibility

Compact remote I/O units combine a fixed number of I/O points in a space-saving housing. Built-in smart monitoring functions for voltage level, broken wire, actuator and cycle time will assist in planning preventive maintenance for machines and eliminating costly downtime. Compact smart slaves are available for the open EtherCAT, DeviceNet and CompoNet networks, and Omron's CompoBus/S offers a more simple and cost-efficient solution.

Modular remote I/O systems offer the possibility to install just the right number and type of I/O's where you need them. I/O modules range from basic and economical digital I/O's to high-performance modules with intelligent functions. With a choice of communication couplers for various open networks, you can adapt to existing installations and end-user demands, or make the right trade-off between performance and ease-of-use. Besides EtherCAT as main machine automation network, Omron offers connectivity to DeviceNet, CompoNet, PROFINET IO, PROFIBUS DP, and MECHATROLINK-II.

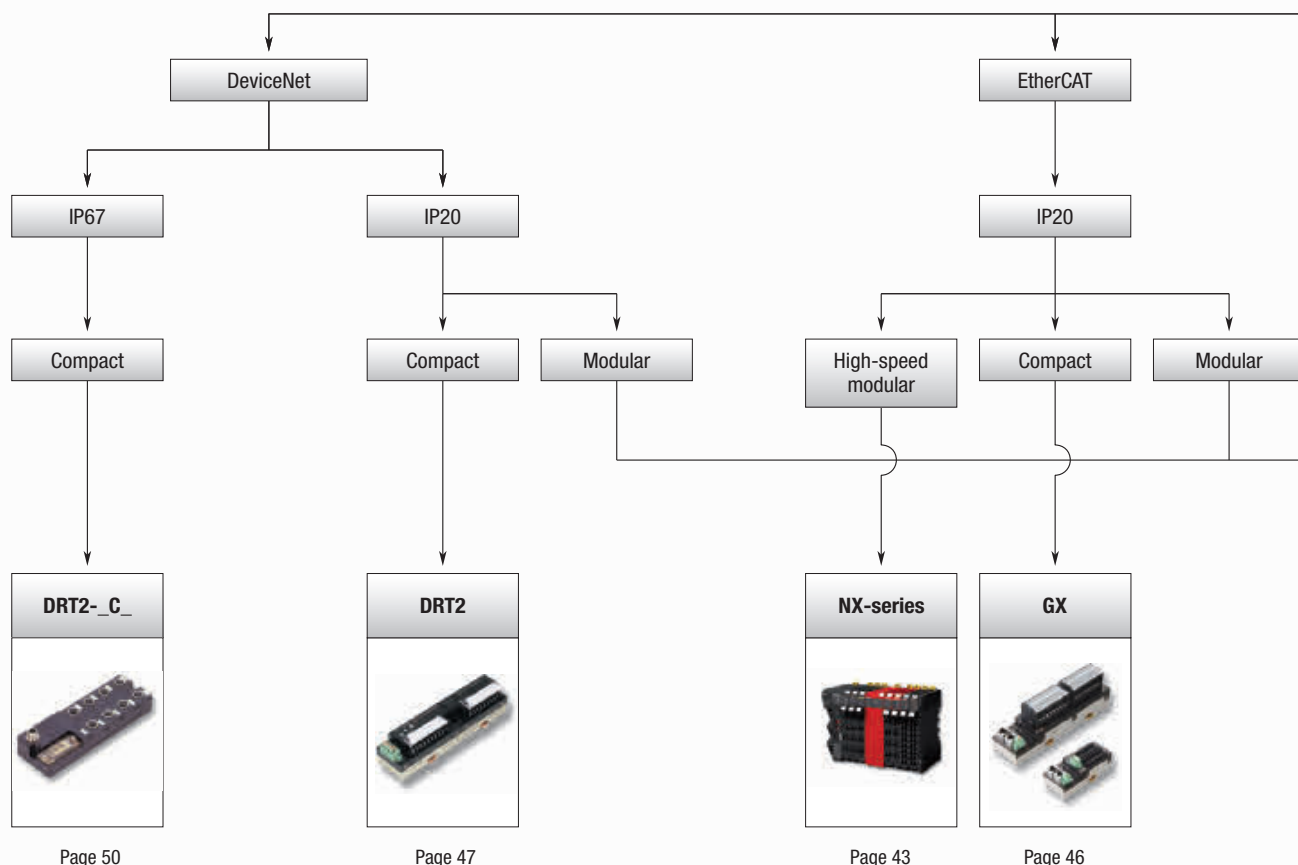

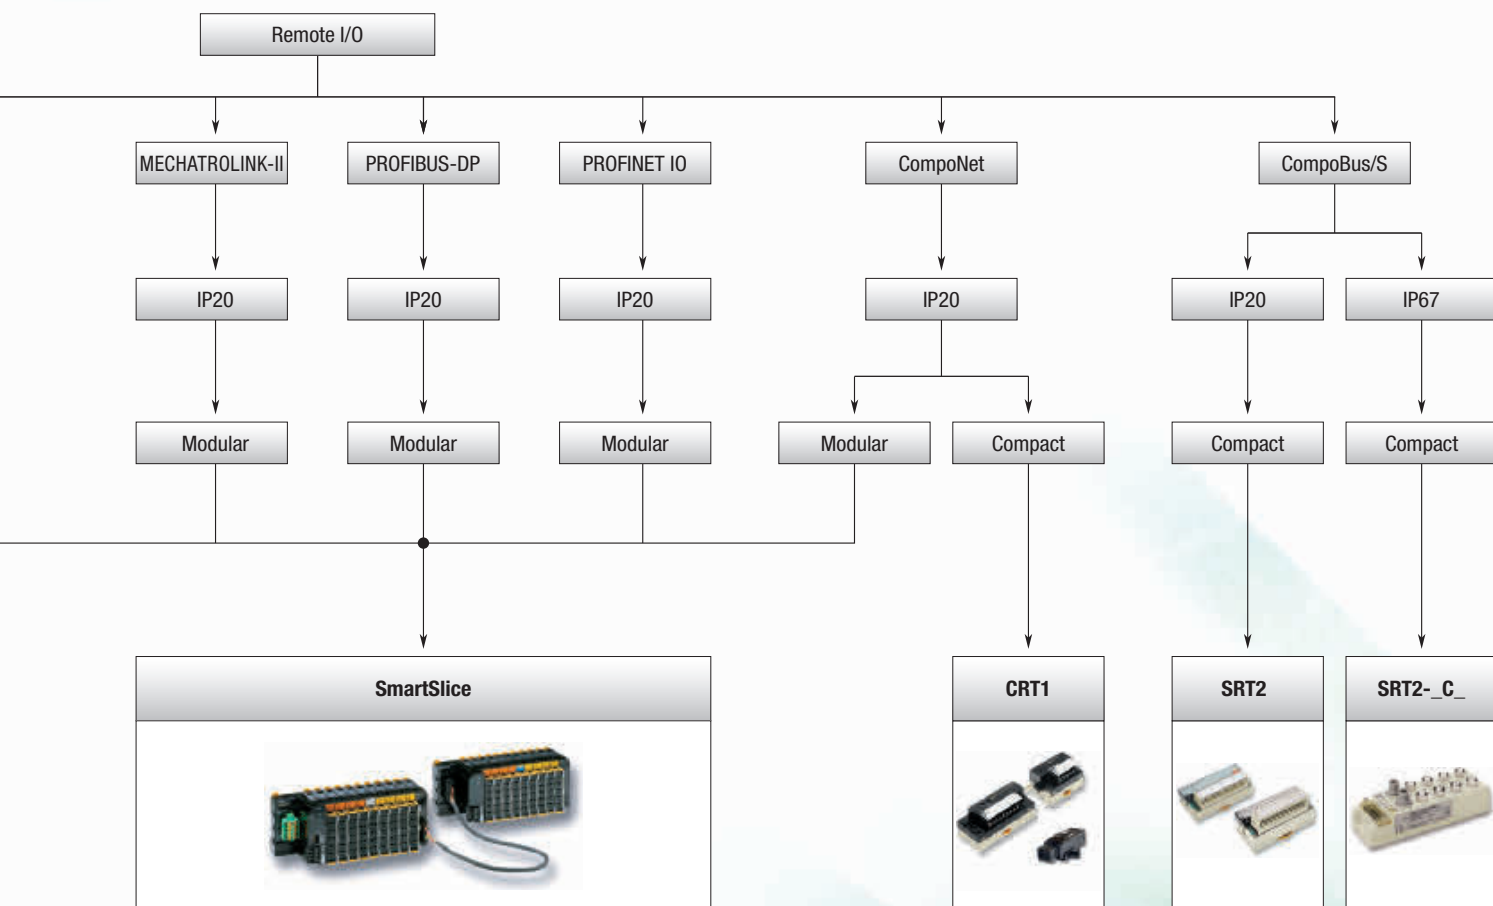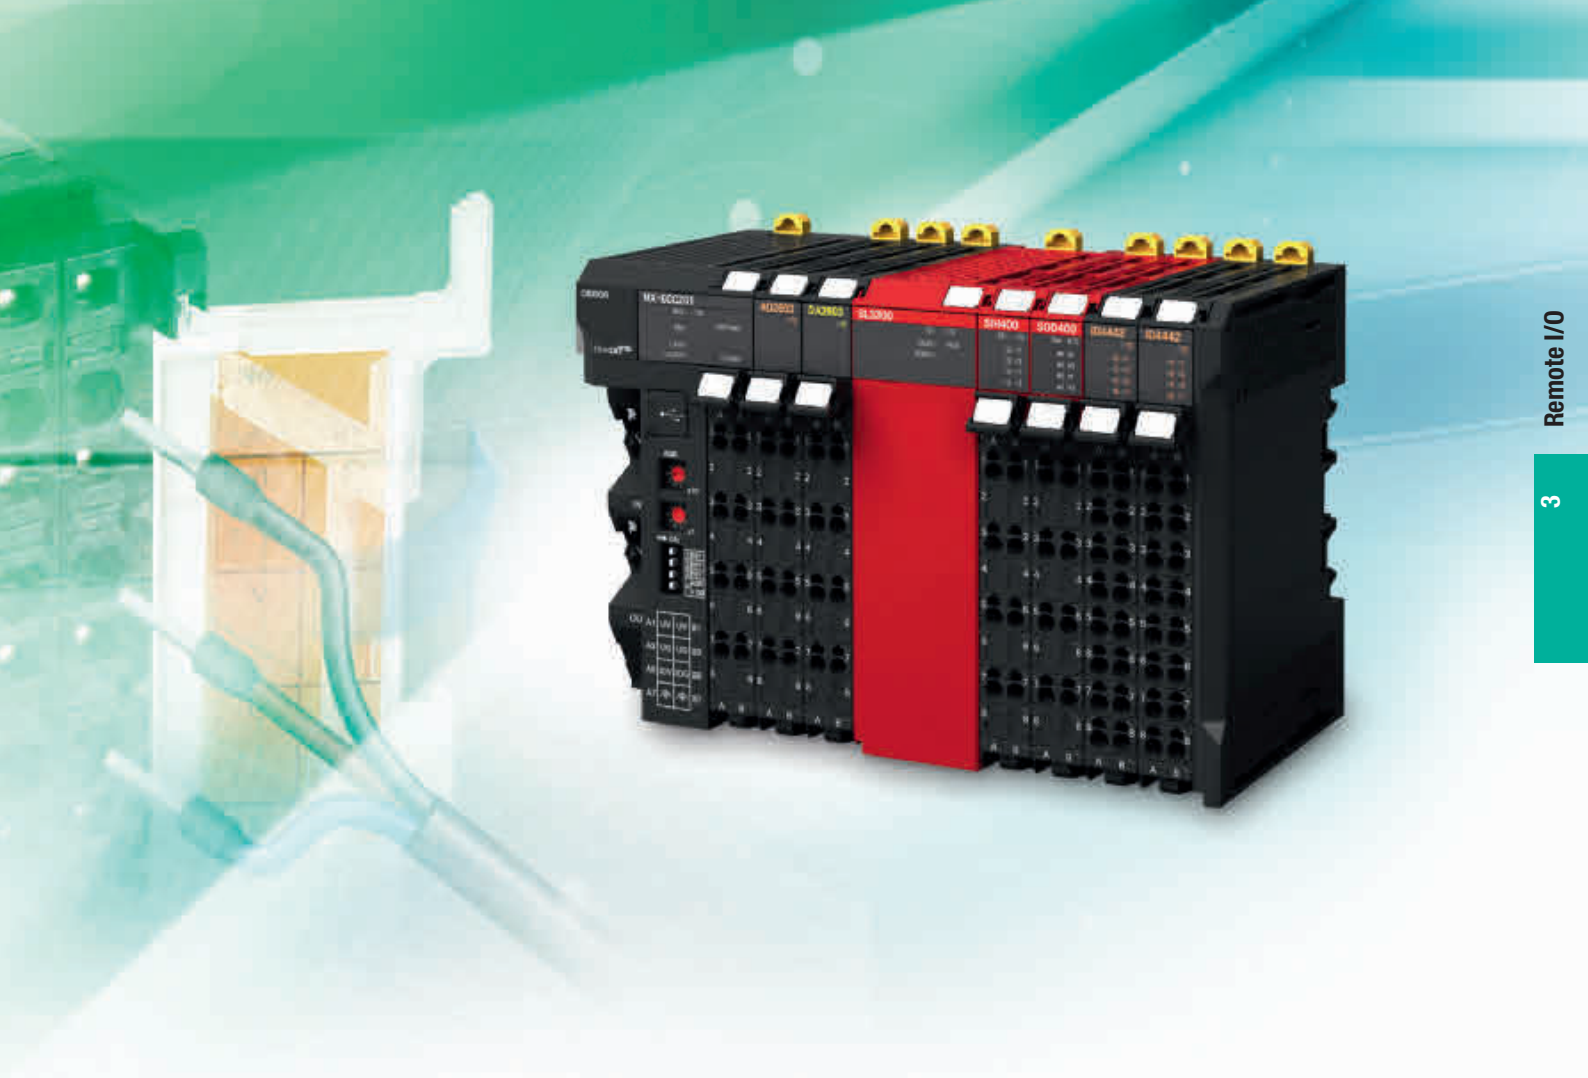

	Modular I/O		Compact I/O		
					
Model	NX-series	SmartSlice	GX	DRT2	CRT1
Network connection	EtherCAT in- and outgoing connections by RJ45 ethernet plug	DeviceNet, CompoNet, PROFIBUS DP, PROFINET I/O, EtherCAT, MECHATROLINK-II	EtherCAT in- and outgoing connections by RJ45 ethernet plug	DeviceNet with open-style push-in terminal block	CompoNet, unshielded 4-wire flat cable and IDC connectors, or general-purpose 2-wire cable by screw terminals
I/O types	Digital standard and high-speed synchronous, analogue standard and high-speed, temperature, encoders, pulse output	Digital I/O, analogue I/O, temperature inputs, high-speed counter with control outputs	8 DI + 8 DO 16 DI+extension 16 DO+extension 16 relay out 4 AI (V/I) 2 AO (V/I) Incremental encoder (24 V/line driver)	8/16 DI+extension, 8/16 DO+extension, 8 DI + 8 DO 16 relay out, 4 AI (V/I, TC, Pt100), 2 AO (V/I),	8/16 DI+extension, 8/16 DO+extension, 8 DI + 8 DO 4 AI, 2 AO, 2 DI, 2 DO
I/O Connection technology	Push-in wiring on removable terminal block	Push-in wiring on removable terminal block	M3 screw terminals (1- or 3-wire DI)	M3 screw terminals (1- or 3-wire DI)	M3 screw terminals
Smart features	Synchronous I/O over EtherCAT, timestamping, safety I/O	I/O and power supply diagnostics, operation timers and counters per I/O point	automatic or fixed address allocation	I/O and power supply diagnostics, operation timers and counters per I/O point, analogue value calculations and alarms	I/O and power supply diagnostics, operation timers and counters for each I/O point, analogue value calculations and alarms
Ingress Protection class	IP20 (DIN rail mounting in cabinets)	IP20 (DIN rail mounting in cabinets)	IP20 (DIN rail mounting in cabinets)	IP20 (DIN rail mounting in cabinets)	IP20 (DIN rail mounting in cabinets)
Page	43	45	46	47	48

	Compact I/O	Field I/O	
			
Model	SRT2	DRT2- C_	SRT2- C_
Network connection	CompoBus/S, (2-wire + power) by M3 screw terminals	DeviceNet with M12 micro connector	CompoBus/S, by 4-wire M12 connector, unshielded
Отдалечени входно / изходни модули			
I/O types	4/8/16 DI, 4/8/16 DO, 8/16 relay out, 4 AI (V/I) 2 AO (V/I)	8/16 DI, 8/16 DO, 8DI + 8 DO	4/8 DI, 4/8 DO
I/O Connection technology	M3 screw terminals (1- or 3-wire DI)	M12, 1 or 2 I/O signals per connector, 7/8" I/O Power connector	M12 connectors, one I/O point per connector
Smart features	I/O isolation, status indication	I/O and power supply diagnostics, operation timers and counters per I/O point	I/O isolation, status indication
Ingress Protection class	IP20 (DIN rail mounting in cabinets)	IP67, flat mounting by two M5 screws	IP67, flat mounting by three M5 screws
Page	49	50	51



Performance and practicality for machine control

Modern machine control requires system-wide synchronisation of motion axes with microsecond accuracy. The NX I/O system offers this timing accuracy and repeatability for a wide variety of in- and outputs. Its ultra-fast internal bus system is synchronised with the Distributed Clock of the EtherCAT network, resulting in system-wide deterministic I/O operation.

NX-series I/O covers a full range of units, including standard and high-speed digital I/O's, various performance levels in analog I/O, encoder inputs and pulse outputs. The series continues to expand with time-stamped I/O, safety I/O and application-specific modules.


- Ideal match with Sysmac machine automation controllers
- Synchronous I/O updates, system-wide, with less than 1 µs jitter
- High density: up to 16 digital or 8 analog signals in 12 mm width
- Removable wiring terminals for easy system assembly and testing

Ordering information

Module type	Signal type	Performance	Channels	Width	Order code
Communication coupler	EtherCAT slave	Up to 63 I/O units Max. 1,024 bytes in + 1,024 bytes out Supports Distributed Clock Maximum I/O power supply 4 A	2	46 mm	NX-ECC201
		Up to 63 I/O units Max. 1,024 bytes in + 1,024 bytes out Supports Distributed Clock Maximum I/O power supply 10 A			NX-ECC202
Safety controller	Safety over EtherCAT protocol	For up to 256 Safety I/O points	32	30 mm	NX-SL3300
		For up to 1,024 Safety I/O points	128	30 mm	NX-SL3500
Digital input	NPN type	Standard (< 0.4 ms On/Off-delay)	4	12 mm	NX-ID3317
			8	12 mm	NX-ID4342
			16	12 mm	NX-ID5342
		High-speed (< 0.1 µs On/Off-delay)	4	12 mm	NX-ID3343
		High-speed with Time-stamp	4	12 mm	NX-ID3344
		PNP type	4	12 mm	NX-ID3417
			8	12 mm	NX-ID4442
			16	12 mm	NX-ID5442
		High-speed (< 0.1 µs On/Off-delay)	4	12 mm	NX-ID3443
		High-speed with Time-stamp	4	12 mm	NX-ID3444
	Safety inputs (PNP type)	with connectivity to Omron safety devices	4	12 mm	NX-SIH400
		High-density unit	8	12 mm	NX-SID800
	AC input, 240 VAC	Individually isolated inputs	4	12 mm	NX-IA3117
Digital output	NPN type	Standard (< 0.8 ms On/Off-delay)	4	12 mm	NX-OD3121
			8	12 mm	NX-OD4121
			16	12 mm	NX-OD5121
		High-speed (< 0.3 µs On/Off-delay)	4	12 mm	NX-OD3153
		High-speed with Time-stamp	2	12 mm	NX-OD2154
		PNP type	4	12 mm	NX-OD3256
			8	12 mm	NX-OD4256
			16	12 mm	NX-OD5256
		High-speed (< 0.3 µs On/Off-delay)	4	12 mm	NX-OD3257
		High-speed with Time-stamp	2	12 mm	NX-OD2258
	Safety outputs (PNP type)	0.5 A per point	4	12 mm	NX-SOD400
		2.0 A per point	2	12 mm	NX-SOH200
	Relay, 250 VAC, 2 A	Normally Open (SPST)	2	12 mm	NX-OC2633
		Normally Open + Normally Closed (SPDT)	2	12 mm	NX-OC2733
Encoder input	Incremental encoder	PNP type, 500 kHz	1	12 mm	NX-EC0122
			2	12 mm	NX-EC0222
		Line driver, 4 MHz	1	24 mm	NX-EC0142
	SSI encoder	Synchronous serial, 2 MHz	1	12 mm	NX-ECS112
			2	12 mm	NX-ECS212
Pulse output	Pulse Up/Down, Pulse + Direction	PNP type, 500 kHz	1	12 mm	NX-PG0122

Module type	Signal type	Performance	Channels	Width	Order code	
Analog input	4 to 20 mA single ended	1/8,000 resolution 250 μs/channel	2	12 mm	NX-AD2203	
			4	12 mm	NX-AD3203	
			8	12 mm	NX-AD4203	
	4 to 20 mA differential		2	12 mm	NX-AD2204	
			4	12 mm	NX-AD3204	
			8	12 mm	NX-AD4204	
	1/30,000 resolution 10 μs/channel	2	12 mm	NX-AD2208		
		4	12 mm	NX-AD3208		
		8	12 mm	NX-AD4208		
	±10 V single ended	1/8,000 resolution 250 μs/channel	2	12 mm	NX-AD2603	
			4	12 mm	NX-AD3603	
			8	12 mm	NX-AD4603	
	±10 V differential		2	12 mm	NX-AD2604	
			4	12 mm	NX-AD3604	
			8	12 mm	NX-AD4604	
1/30,000 resolution 10 μs/channel	2	12 mm	NX-AD2608			
	4	12 mm	NX-AD3608			
	8	12 mm	NX-AD4608			
Temperature sensor input	Thermocouple type B, E, J, K, L, N, R, S, T, U, WRe5-26, PL II	0.1°C resolution 250 ms/unit	2	12 mm	NX-TS2101	
			4	24 mm	NX-TS3101	
		0.01°C resolution 10 ms/unit	2	12 mm	NX-TS2102	
			4	24 mm	NX-TS3102	
	0.001°C resolution 60 ms/unit	2	12 mm	NX-TS2104		
			4	24 mm	NX-TS3104	
		RTD type Pt100 (3-wire), Pt1000, Ni508.4	0.1°C resolution 250 ms/unit	2	12 mm	NX-TS2201
				4	24 mm	NX-TS3201
	0.01°C resolution 10 ms/unit		2	12 mm	NX-TS2202	
			4	24 mm	NX-TS3202	
	0.001°C resolution 60 ms/unit	2	12 mm	NX-TS2204		
			4	24 mm	NX-TS3204	
Analog output		4 to 20 mA	1/8,000 resolution 250 μs/channel	2	12 mm	NX-DA2203
				4	12 mm	NX-DA3203
	1/30,000 resolution 10 μs/channel		2	12 mm	NX-DA2205	
			4	12 mm	NX-DA3205	
	±10 V	1/8,000 resolution 250 μs/channel	2	12 mm	NX-DA2603	
			4	12 mm	NX-DA3603	
		1/30,000 resolution 10 μs/channel	2	12 mm	NX-DA2605	
			4	12 mm	NX-DA3605	
Power unit	NX bus power feed unit, 24 VDC input, non-isolated			12 mm	NX-PD1000	
	I/O power feed unit, for separation of power groups, maximum capacity 4 A			12 mm	NX-PF0630	
	I/O power feed unit, for separation of power groups, maximum capacity 10 A			12 mm	NX-PF0730	
	I/O power connection unit, 16 × IOV			12 mm	NX-PC0020	
	I/O power connection unit, 16 × IOG			12 mm	NX-PC0010	
	I/O power connection, 8 × IOV + 8 × IOG			12 mm	NX-PC0030	
System unit/Accessories	Grounding terminal, 16 points			12 mm	NX-TBX01	
	End cover (included with Communication Coupler)			12 mm	NX-END01	
	Replacement front connector with 8 wiring terminals (A+B)			12 mm	NX-TBA082	
	Replacement front connector with 8 wiring terminals (A+B with FG)			12 mm	NX-TBC082	
	Replacement front connector with 12 wiring terminals (A+B)			12 mm	NX-TBA122	
	Replacement front connector with 12 wiring terminals (C+D)			12 mm	NX-TBB122	
	Replacement front connector with 16 wiring terminals (A+B)			12 mm	NX-TBA162	
	Replacement front connector with 16 wiring terminals (C+D)			12 mm	NX-TBB162	
	Replacement front connector with 16 wiring terminals (A+B with FG)			12 mm	NX-TBC162	
	DIN rail insulation spacers (one set of 3 pcs)				NX-AUX01	
	Keying pins to prevent mismatch of unit and terminal block (one set for 10 units)				NX-AUX02	

Note: For Ethernet cables and Accessories, see page 85

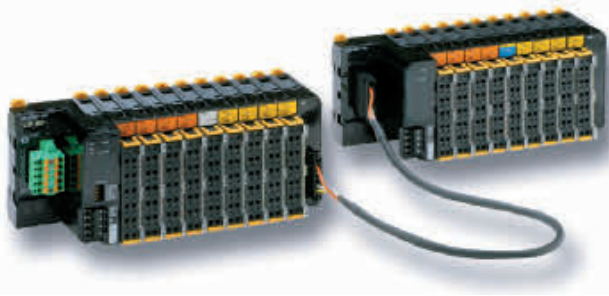

The smartest modular I/O system

Omron's SmartSlice I/O system is compact, intelligent and easy. When used with Omron's CS1/CJ1 DeviceNet master units it is plug-and-work, no configuration tool is required. By using built-in functions such as pre-scaling, totalising, differentiation and alarming in analogue I/O units, PLC programming can be minimised. Preventive maintenance data can be accessed using CX-Integrator software, standard PLC function blocks or NS-series Smart Active Parts.

- Most compact in the market (84 mm high)
- Easy set-up, backup and restore functions
- Diagnostics and preventive maintenance data at I/O level
- Detachable terminal blocks allow hot-swapping without re-wiring
- 3-wire connection with 'push-in' technology, no screwdriver required for installation

Ordering information

Model	Function	Specifications	Size in mm (HxWxD)	Order code
Interface units	DeviceNet interface unit	For up to 64 I/O units	84x58x70	GRT1-DRT
	CompoNet interface unit	For up to 64 I/O units (limited to 32 byte in + 32 byte out)	84x58x70	GRT1-CRT
	PROFIBUS-DP interface unit	For up to 64 I/O units	84x58x70	GRT1-PRT
	PROFINET-IO interface unit	For up to 64 I/O units	84x58x70	GRT1-PNT
	MECHATROLINK-II interface unit	For up to 64 I/O units (slave to Trajexia motion controller)	84x58x70	GRT1-ML2
	EtherCAT interface unit	For up to 64 I/O units (slave to Trajexia and Sysmac controller)	84x58x70	GRT1-ECT
	End plate	One unit required per bus interface	84x20x58	GRT1-END
	End plate with memory function	Supports toolless replacement of PROFINET-IO interface unit	84x20x58	GRT1-END-M
I/O units	4 NPN inputs	24 VDC, 6 mA, 3-wire connection	84x15x74	GRT1-ID4
	4 PNP inputs	24 VDC, 6 mA, 3-wire connection	84x15x74	GRT1-ID4-1
	8 NPN inputs	24 VDC, 4 mA, 1-wire connection + 4xG	84x15x74	GRT1-ID8
	8 PNP inputs	24 VDC, 4 mA, 1-wire connection + 4xV	84x15x74	GRT1-ID8-1
	4 AC inputs	110 VAC, 2-wire connection	84x15x74	GRT1-IA4-1
	4 AC inputs	230 VAC, 2-wire connection	84x15x74	GRT1-IA4-2
	4 NPN outputs	24 VDC, 500 mA, 2-wire connection	84x15x74	GRT1-OD4
	4 PNP outputs	24 VDC, 500 mA, 2-wire connection	84x15x74	GRT1-OD4-1
	4 PNP outputs with short-circuit protection	24 VDC, 500 mA, 3-wire connection	84x15x74	GRT1-OD4G-1
	4 PNP outputs with short-circuit protection	24 VDC, 2 A, 2-wire connection	84x15x74	GRT1-OD4G-3
	8 NPN outputs	24 VDC, 500 mA, 1-wire connection + 4xV	84x15x74	GRT1-OD8
	8 PNP outputs	24 VDC, 500 mA, 1-wire connection + 4xG	84x15x74	GRT1-OD8-1
	8 PNP outputs with short-circuit protection	24 VDC, 500 mA, 1-wire connection + 4xG	84x15x74	GRT1-OD8G-1
	2 relay outputs	240 VAC, 2A, normally-open contacts	84x15x74	GRT1-ROS2
	60 kHz Counter unit, NPN	A+B encoder inputs + 1 Z/control input + 1 output (NPN-type)	84x15x74	GRT1-CT1
	60 kHz Counter unit, PNP	A+B encoder inputs + 1 Z/control input + 1 output (PNP-type)	84x15x74	GRT1-CT1-1
	100 kHz Counter / Positioner unit	A+B+Z encoder inputs (line driver or 24 V selectable) + 1 control input + 2 outputs (PNP-type)	84x15x74	GRT1-CP1-L
	2 analogue inputs, current/voltage	±10 V, 0-10 V, 0-5 V, 1-5 V, 0-20 mA, 4-20 mA	84x15x74	GRT1-AD2
	2 analogue outputs, voltage	±10 V, 0-10 V, 0-5 V, 1-5 V	84x15x74	GRT1-DA2V
	2 analogue outputs, current	0-20 mA, 4-20 mA	84x15x74	GRT1-DA2C
	2 Pt100 inputs	Pt100, 2-wire or 3-wire connection	84x15x74	GRT1-TS2P
2 Pt1000 inputs	Pt1000, 2-wire or 3-wire connection	84x15x74	GRT1-TS2PK	
2 Thermocouple inputs	Types B, E, J, K, N, R, S, T, U, W, PL2, with cold junction compensation	84x15x74	GRT1-TS2T	
Model	Description		Size in mm (HxWxD)	Order code
Other units	I/O power feed unit, separates power supply between groups of I/O units		84x15x74	GRT1-PD2
	I/O power feed unit with electronic overload protection, separates power supply between groups of I/O units		84x15x74	GRT1-PD2G
	I/O power feed and distribution unit, separates power supply between groups of I/O units, 8xV + 4xG		84x15x74	GRT1-PD8
	I/O power feed and distribution unit, separates power supply between groups of I/O units, 4xV + 8xG		84x15x74	GRT1-PD8-1
	I/O power connection unit, 8xV + 4xG		84x15x74	GRT1-PC8
	I/O power connection unit, 4xV + 8xG		84x15x74	GRT1-PC8-1
	Turnback unit, right-hand side		84x20x58	GRT1-TBR
	Turnback unit, left-hand side		84x58x70	GRT1-TBL
	Turnback cable, one meter		1 m	GCN2-100

Accessories

Description	Order code
Replacement front connectors, pack of 5 pcs.	GRT1-BT1-5
PROFIBUS-DP connector, 9-pin D-sub	PROFIBUS Connector 839550
PROFIBUS-DP connector, 9-pin D-sub, with bus termination	PROFIBUS Term. Conn. 846086
PROFINET RJ45 connector	IE-PS-RJ45-FH-BK
CompoNet connectors	See page 48



When speed counts: EtherCAT I/O

EtherCAT is an extremely fast industrial automation network, which uses standard ethernet cabling. It makes very efficient use of the standard Ethernet transmission frame, with each node accessing the entire frame on the fly. This reduces the delay in each slave to microsecond level.

Its deterministic nature makes EtherCAT extremely suitable for motion control. Omron provides PLC-based as well as stand-alone motion control solutions based on EtherCAT.

The GX-series I/O units provide the basic in- and outputs for such systems, including high-speed encoder inputs which can feed position information into the controller.


Ordering information

Unit Type	Specification	Size in mm (HxWxD)	Remarks	Order code
16-point NPN input unit	24 VDC, 6 mA per point	52 x 135 x 57	Expandable with one XWT unit	GX-ID1611
16-point NPN input unit	24 VDC, 6 mA per point	52 x 200 x 69	3-tier connection for direct sensor wiring	GX-ID1612
16-point PNP input unit	24 VDC, 6 mA per point	52 x 135 x 57	Expandable with one XWT unit	GX-ID1621
16-point PNP input unit	24 VDC, 6 mA per point	52 x 200 x 69	3-tier connection for direct sensor wiring	GX-ID1622
16-point relay output unit	2 A per point, max. 8 A per common	52 x 160 x 58	with easy-to-replace relays, expandable with one XWT unit	GX-OC1601
16-point NPN output unit	24 VDC, 0.5 A per point	52 x 135 x 57	Expandable with one XWT unit	GX-OD1611
16-point NPN output unit	24 VDC, 0.5 A per point	52 x 200 x 69	3-tier connection for direct sensor wiring	GX-OD1612
16-point PNP output unit	24 VDC, 0.5 A per point	52 x 135 x 57	Expandable with one XWT unit	GX-OD1621
16-point PNP output unit	24 VDC, 0.5 A per point	52 x 200 x 69	3-tier connection for direct sensor wiring	GX-OD1622
8-point input + 8-point output unit (NPN)	24 VDC, input 6 mA, output 0.5 A per point	52 x 135 x 57	—	GX-MD1611
8-point input + 8-point output unit (NPN)	24 VDC, input 6 mA, output 0.5 A per point	52 x 200 x 69	3-tier connection for direct sensor wiring	GX-MD1612
8-point input + 8-point output unit (PNP)	24 VDC, input 6 mA, output 0.5 A per point	52 x 135 x 57	—	GX-MD1621
8-point input + 8-point output unit (PNP)	24 VDC, input 6 mA, output 0.5 A per point	52 x 200 x 69	3-tier connection for direct sensor wiring	GX-MD1622
4-Channel analogue input unit	1 to 5 V, 1 to 5 V, 0 to 10 V, -10 to 10 V, 4 to 20 mA,	52 x 135 x 57	Resolution 1/6000, conversion time 4 ms (4 inputs)	GX-AD0471
2-Channel analogue output unit	1 to 5 V, 1 to 5 V, 0 to 10 V, -10 to 10 V, 4 to 20 mA,	52 x 135 x 57	Resolution 1/6000, conversion time 2 ms (2 outputs)	GX-DA0271
1-Channel incremental encoder input (24V)	Open collector, up to 125 kHz	52 x 215 x 69	A, B, Z, 2 x Latch, Reset inputs	GX-EC0211
1-Channel incremental encoder input (line driver)	RS422 signal level, up to 1 MHz	52 x 215 x 69	A, B, Z, 2 x Latch, Reset inputs	GX-EC0241

Expansion units

Unit Type	Specification	Size in mm (HxWxD)	Remarks	Order code
8-point PNP input expansion unit	24 VDC, 6 mA per point	50x66x50	Expansion unit for GX, DRT2 and CRT1 series	XWT-ID08-1
16-point PNP input expansion unit	24 VDC, 6 mA per point	50x94x50	Expansion unit for GX, DRT2 and CRT1 series	XWT-ID16-1
8-point PNP output expansion unit	24 VDC, 0.5 A per point	50x66x50	Expansion unit for GX, DRT2 and CRT1 series	XWT-OD08-1
16-point PNP output expansion unit	24 VDC, 0.5 A per point	50x94x50	Expansion unit for GX, DRT2 and CRT1 series	XWT-OD16-1
3 port branching unit	24 VDC, 3 x RJ45	90x25x78	EtherCAT junction box for T-branching	GX-JC03
6 port branching unit	24VDC, 6 x RJ45	90x48x78	EtherCAT junction box for star branching	GX-JC06

Note: To order models with NPN (sinking) outputs and corresponding inputs (+V common), omit the "-1" from the model code.

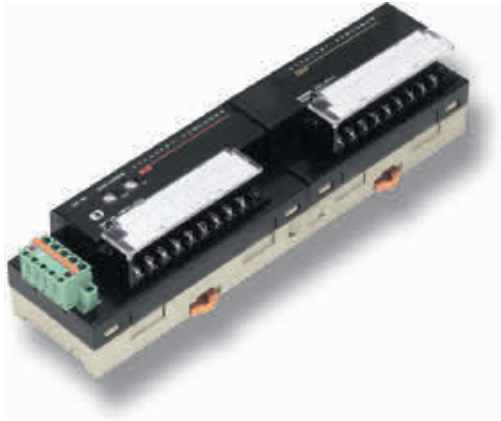

Smart DeviceNet I/O

Compact DeviceNet I/O units with extensive diagnostic functions. Data regarding power supply status, I/O response times, operation counters and on-time are continuously recorded and checked against user-defined limits. Any deviation is reported to the control system, as indication to perform machine maintenance and prevent unplanned downtime. Smart DeviceNet I/Os are supported by PLC Function Blocks and HMI Smart Active Parts, allowing program-less visualisation and monitoring from the CJ1 PLCs and NS operator terminals.

- Compact size IP20 housing
- Expandable digital I/Os
- Built-in diagnostics and preventive maintenance functions
- Detachable I/O terminal blocks
- Analogue I/O with data pre-processing and alarm functions

Ordering information

Unit type	Specifications	Size in mm (HxWxD)	Remarks	Order code
8-point PNP input unit	24 VDC, 6 mA per point	50x115x50	—	DRT2-ID08-1
16-point PNP input unit	24 VDC, 6 mA per point	50x115x50	Expandable with one XWT unit	DRT2-ID16-1
16-point PNP input unit	24 VDC, 6 mA per point	50x180x58	3-tier connection for direct sensor wiring	DRT2-ID16TA-1
8-point PNP output unit	24 VDC, 0.5 A per point	50x115x50	—	DRT2-OD08-1
16-point PNP output unit	24 VDC, 0.5 A per point	50x115x50	Expandable with one XWT unit	DRT2-OD16-1
16-point PNP output unit	24 VDC, 0.5 A per point	50x180x58	3-tier connection for direct actuator wiring	DRT2-OD16TA-1
16-point relay output unit	2 A per point, max. 8 A per common	50x125x52	with easy-to-replace relays, expandable with one XWT unit	DRT2-ROS16
8-point input + 8-point output unit (PNP)	24 VDC, input 6 mA, output 0.5 A per point	50x115x50	—	DRT2-MD16-1
8-point input + 8-point output unit (PNP)	24 VDC, input 6 mA, output 0.5 A per point	50x180x58	3-tier connection for direct sensor/actuator wiring	DRT2-MD16TA-1
4-Channel analogue input unit	0 to 5 V, 1 to 5 V, 0 to 10 V, -10 to 10 V, 0 to 20 mA, 4 to 20 mA	50x115x50	Resolution 1/6000, conversion time 4 ms (4 inputs)	DRT2-AD04
4-Channel analogue input unit	1 to 5 V, 1 to 5 V, 0 to 10 V, -10 to 10 V, 0 to 20 mA, 4 to 20 mA	50x115x50	Resolution 1/30000, conversion time 250 ms (4 inputs)	DRT2-AD04H
2-Channel analogue output unit	0 to 5 V, 1 to 5 V, 0 to 10 V, -10 to 10 V, 0 to 20 mA, 4 to 20 mA	50x115x50	Resolution 1/6000, conversion time 2 ms (2 outputs)	DRT2-DA02
4-Channel temperature input unit	Platinum Resistance Thermometer types Pt100, JPt100	50x115x50	0.3% accuracy, conversion time 250 ms (4 inputs)	DRT2-TS04P
4-Channel temperature input unit	Thermocouple types R, S, K, J, T, B, L, E, U, N, W, and PL2	50x115x50	0.3% accuracy, conversion time 250 ms (4 inputs)	DRT2-TS04T

Expansion units

Unit type	Specifications	Size in mm (HxWxD)	Remarks	Order code
8-point PNP input expansion unit	24 VDC, 6 mA per point	50x66x50	Expansion unit for GX, DRT2 and CRT1 series	XWT-ID08-1
16-point PNP input expansion unit	24 VDC, 6 mA per point	50x94x50	Expansion unit for GX, DRT2 and CRT1 series	XWT-ID16-1
8-point PNP output expansion unit	24 VDC, 0.5 A per point	50x66x50	Expansion unit for GX, DRT2 and CRT1 series	XWT-OD08-1
16-point PNP output expansion unit	24 VDC, 0.5 A per point	50x94x50	Expansion unit for GX, DRT2 and CRT1 series	XWT-OD16-1

Note: To order models with NPN (sinking) outputs and corresponding inputs (+V common), omit the "-1" from the model code.

Accessories

Type	Order code
Power supply tap with 2 fuses, 2 bus connectors and termination resistor	DCN1-1P
T-branch tap with 3 bus connectors (screw clamp) and terminating resistor	DCN1-1C
T-branch tap with 3 bus connectors (screwless)	DCN1-1NC
T-branch tap with 5 bus connectors (screw clamp) and terminating resistor	DCN1-3C
T-branch tap with 5 bus connectors (screwless)	DCN1-3NC
Terminating resistor with screw terminals	DRS1-T



Smart CompoNet I/O

Combining the smart features of DRT2 DeviceNet I/O and the speed and ease of use of CompoBus/S, CompoNet is ideal for high-speed machine control with a flexible and expandable architecture. The special flat cable and IDC connectors make installation quick and easy. The use of repeaters allows wide-area networks with free topology, ideal for conveyor- and warehouse automation.

- Compact size IP20 housing
- Expandable digital I/Os with detachable terminal blocks
- Easy network wiring with IDC connections
- Built-in diagnostics and preventive maintenance functions
- Analogue I/O with data pre-processing and alarm functions

Ordering information

Unit type	Specifications	Size in mm (HxWxD)	Remarks	Order code
4-point PNP input unit	24 VDC, 6 mA per point	24x80x20	Screwless I/O connector, power supply via CompoNet cable	CRT1B-ID04SL-1-300
8-point PNP input unit	24 VDC, 6 mA per point	50x115x57.6	Screw terminals, common power terminals per 8 points	CRT1-ID08-1
8-point PNP input unit	24 VDC, 6 mA per point	50x96x60	3 push-in terminals per I/O point (signal + power)	CRT1-ID08SL-1
16-point PNP input unit	24 VDC, 6 mA per point	50x115x50	Expandable with one XWT unit.	CRT1-ID16-1
16-point PNP input unit	24 VDC, 6 mA per point	52x180x69	3 terminals per I/O point (for power distribution)	CRT1-ID16TA-1
4-point PNP output unit	24 VDC, 0.2 A per point	24x80x20	Screwless I/O connector, power supply via CompoNet cable	CRT1B-OD04SL-1-300
8-point PNP output unit	24 VDC, 0.5 A per point	50x115x57.6	Screw terminals, common power terminals per 8 points	CRT1-OD08-1
8-point PNP output unit	24 VDC, 0.5 A per point	50x96x60	3 push-in terminals per I/O point (signal + power)	CRT1-OD08SL-1
16-point PNP output unit	24 VDC, 0.5 A per point	50x115x50	Expandable with one XWT unit.	CRT1-OD16-1
16-point PNP output unit	24 VDC, 0.5 A per point	52x180x69	3 terminals per I/O point (for power distribution)	CRT1-OD16TA-1
8-point SSR output unit	265 V AC, 0.3 A per point	50x95x57.6	Screw terminals, common power terminals per 8 points	CRT1-ROF08
8-point relay output unit	250 VAC, 2 A per point, 8 A per common	50x95x57.6	Screw terminals, common power terminals per 8 points	CRT1-ROS08
16-point relay output unit	250 VAC, 2 A per point, 8 A per common	50x140x57.6	8 outputs per common	CRT1-ROS16
2-point input + 2-point output unit, PNP	24 VDC, 0.1 A per point	24x80x20	Screwless I/O connector, power supply via CompoNet cable	CRT1-MD04SL-1-300
8-point input + 8-point output unit, PNP	24 VDC, 0.5 A per point	50x115x57.6	Screw terminals, common power terminals	CRT1-MD16-1
8-point input + 8-point output unit, PNP	24 VDC, 0.5 A per point	50x170x60	3 push-in terminals per I/O point (signal + power)	CRT1-MD16SL-1
8-point input + 8-point output unit PNP	24 VDC, 0.5 A per point	52x180x69	3 terminals per I/O point (for power distribution)	CRT1-MD16TA-1
4-Channel analogue input unit	0 to 5 V, 1 to 5 V, 0 to 10 V, -10 to 10 V, 0 to 20 mA, 4 to 20 mA	50x115x50	Resolution 1/6000, conversion time 4 ms (4 inputs)	CRT1-AD04
2-Channel analogue output unit	0 to 5 V, 1 to 5 V, 0 to 10 V, -10 to 10 V, 0 to 20 mA, 4 to 20 mA	50x115x50	Resolution 1/6000, conversion time 2 ms (2 outputs)	CRT1-DA02
4-Channel Temperature input unit	Platinum Resistance Thermometer type Pt100	50x115x50	0.3% accuracy, conversion time 250 ms (4 inputs)	CRT1-TS04P
4-Channel Temperature input unit	Thermocouple types R, S, K, J, T, B, L, E, U, N, W and PL2	50x115x50	0.3% accuracy, conversion time 250 ms (4 inputs)	CRT1-TS04T


Expansion units

Unit type	Specifications	Size in mm (HxWxD)	Remarks	Order code
8-point PNP input expansion unit	24 VDC, 6 mA per point	50x66x50	Expansion unit for GX, DRT2 and CRT1 series	XWT-ID08-1
16-point PNP input expansion unit	24 VDC, 6 mA per point	50x94x50	Expansion unit for GX, DRT2 and CRT1 series	XWT-ID16-1
8-point PNP output expansion unit	24 VDC, 0.5 A per point	50x66x50	Expansion unit for GX, DRT2 and CRT1 series	XWT-OD08-1
16-point PNP output expansion unit	24 VDC, 0.5 A per point	50x94x50	Expansion unit for GX, DRT2 and CRT1 series	XWT-OD16-1

Note: To order models with NPN (sinking) outputs and corresponding inputs (+V common), omit the "-1" from the model code.

Accessories

Unit type	Specifications	Size in mm (HxWxD)	Remarks	Order code
CompoNet Repeater unit	1 upstream port + 1 downstream port	50x95x43	For extending CompoNet trunk lines, or creating branch lines	CRS1-RPT01
CompoNet 4-wire flat cable	For IP20 use	100 m	For power supply + communication, use with DCN4-connectors	DCA4-4F10
CompoNet Branch connector for trunk line	For IP20 use	—	To create a branching point on a trunk line	DCN4-TR4
CompoNet Branch line end connector	For IP20 use	—	To connect a branch line to a trunk line	DCN4-BR4
CompoNet Y-connector	For IP20 use	—	To connect two line connectors to one slave unit	DCN4-MD4
CompoNet Screw terminal connector	For IP20 use	—	To provide conventional screw terminals for masters or slaves	DCN4-TB4
CompoNet Terminator	For IP20 use	—	Plugs in to DCN4-MD4 or DCN4-TR4	DCN4-TM4
CompoNet connector tool	For DCN4-connectors	—	To attach DCN4-connectors to DCA4-4F10 flat cable	DWT-A01
CompoNet Screw terminal connector	For IP20 use, box of 10 pcs	—	To provide conventional screw terminals for 4-point bit slaves	HCN-TB4LMZG-B10+
Bit slave flat cable plug	For CRT1B-_D04SL-1-300 slaves	—	Allows mounting bit slaves directly on flat cable	DCN4-MR4
Bit slave mounting plate	For CRT1B-_D04SL-1-300 slaves	—	Mount with two screws, bit slave clips in place	CRT1-ATT03

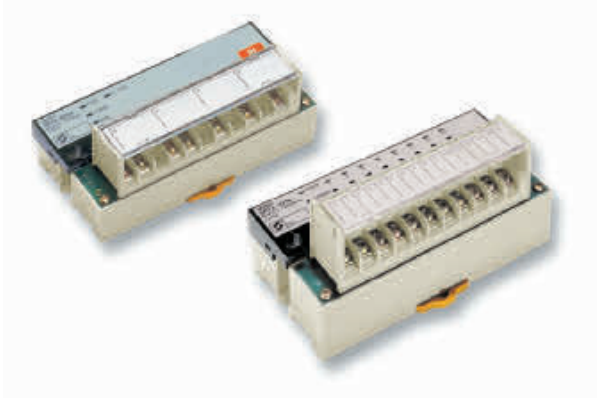

Fast and easy over CompoBus/S

Omron's unique CompoBus/S is the original I/O bus for machine automation. With free topology and up to 500 m bus length in long-distance mode, it can be used as a remote I/O system. In high-speed mode (100 m max.) the guaranteed sub-millisecond cycle time makes it ideal for efficient machine control. Used with the compact CPM2C-S PLC as master, your machine control system will fit in the smallest spaces.

- Compact size in IP20 housing
- Fast cycle time; less than 1 ms per 256 I/O points
- Easy set-up; no software required
- Choice of 4- 8- and 16-point Digital I/O; transistor-, and relay models
- Analogue In/Outputs and customisable modules available

Ordering information

Unit type	Specifications	Size in mm (HxWxD)	Remarks	Order code
4-point PNP input unit	24 VDC, 6 mA per point	48x80x50	Compact IP20 I/O	SRT2-ID04-1
8-point PNP input unit	24 VDC, 6 mA per point	48x80x50	Compact IP20 I/O	SRT2-ID08-1
16-point PNP input unit	24 VDC, 6 mA per point	48x105x50	Compact IP20 I/O	SRT2-ID16-1
16-point PNP input unit	24 VDC, 6 mA per point	50x180x59	3-tier connection for direct sensor wiring	SRT2-ID16T-1
4-point PNP output unit	24 VDC, 0.3 A per point	48x80x50	Compact IP20 I/O	SRT2-OD04-1
8-point PNP output unit	24 VDC, 0.3 A per point	48x80x50	Compact IP20 I/O	SRT2-OD08-1
16-point PNP output unit	24 VDC, 0.3 A per point	48x105x50	Compact IP20 I/O	SRT2-OD16-1
16-point PNP output unit	24 VDC, 0.5 A per point	50x180x59	3-tier connection for direct sensor/actuator wiring	SRT2-OD16T-1
8-point input + 8-point output unit (PNP)	24 VDC, input 6 mA, output 0.3 A per point	50x180x59	3-tier connection for direct actuator wiring	SRT2-MD16T-1
8-point relay output unit	Max. 3 A per point	50x100x50	with easy-to-replace relays	SRT2-ROC08
16-point relay output unit	Max. 3 A per point	50x155x50	with easy-to-replace relays	SRT2-ROC16
4-Channel analogue input unit	0 to 5 V, 1 to 5 V, 0 to 10 V, -10 to 10 V, 0 to 20 mA, 4 to 20 mA	48x105x50	Resolution 1/6000, conversion time 4 ms (4 inputs)	SRT2-AD04
2-Channel analogue output unit	0 to 5 V, 1 to 5 V, 0 to 10 V, -10 to 10 V, 0 to 20 mA, 4 to 20 mA	48x105x50	Resolution 1/6000, conversion time 2 ms (2 outputs)	SRT2-DA02

Note: To order models with NPN (sinking) outputs and corresponding inputs (+V common), omit the "-1" from the model code.

Accessories

Type	Order code
CompoBus/S 4-wire flatcable for power and communication (100 m)	SCA1-4F10
CompoBus/S branch connector (IDC) for flatcable	SCN1-TH4
CompoBus/S termination connector (IDC) for flatcable	SCN1-TH4T
CompoBus/S termination block (screw connection)	SRS1-T



DeviceNet I/O for harsh environments

Rugged I/O units for field mounting. The DRT2 slave units feature internal diagnostic and maintenance data collection, which can be accessed over the network. Power supply status, I/O response times, operation counters and on-time monitor data is available at all times, and is internally checked against user-defined limits. Maintenance warnings will be generated when limits are exceeded. Using CX-One or NS-series HMI with Smart Active Parts for visualisation, this allows more efficient system setup, commissioning and troubleshooting without any additional programming.

- IP67 protection, DRT2 versions are also oil- and welding-spatter proof
- Internal circuits powered by DeviceNet; fewer connections means less installation errors
- Smart Slave functions for diagnostics and preventive maintenance
- Indication of broken wire and short-circuit in I/O signals
- M12 connectors for fast installation

Ordering information

Unit type	Specifications	Size in mm (HxWxD)	Remarks	Order code
4-point PNP input unit	24 V, 6 mA	123x60x44	Separate I/O power supply connection	DRT2-ID04CL-1
8-point PNP input unit	24 V, 6 mA	175x60x44	Separate I/O power supply connection	DRT2-ID08CL-1
8-point PNP input unit	24 V, 11 mA, with power short-circuit and sensor disconnection detection	175x60x38	Unit power supply via DeviceNet cable	DRT2-ID08C-1
16-point PNP input unit	24 V, 6 mA, 2 inputs per M12 connector	175x60x44	Separate I/O power supply connection	DRT2-HD16CL-1
16-point PNP input unit	24 V, 11 mA, 2 inputs per M12 connector, with power short-circuit and sensor disconnection detection	175x60x38	Unit power supply via DeviceNet cable	DRT2-HD16C-1
4-point PNP output unit	24 V, 0.5 A per point	123x60x44	Separate I/O power supply connection	DRT2-OD04CL-1
8-point PNP output unit	24 V, 0.5 A per point	175x60x44	Separate I/O power supply connection	DRT2-OD08CL-1
8-point PNP output unit	24 V, 1.5 A per point (8 A total), with short-circuit protection + indication	175x60x44	Separate I/O power supply connection	DRT2-OD08C-1
16-point PNP output unit	24 V, 0.5 A per point, 2 points per M12 connector	175x60x44	Separate I/O power supply connection	DRT2-WD16CL-1
8-point input + 8-point PNP output unit	24 V, 6 mA input, 0.5 A output per point, 2 points per M12 connector	175x60x44	Separate I/O power supply connection	DRT2-MD16CL-1

Note: To order models with NPN (sinking) outputs and corresponding inputs (+V common), omit the "-1" from the model code.

Accessories

Unit type	Specifications	Order code
DeviceNet thin cable	with one M12 socket connector (female), 1 m	DCA1-5CN01F1
DeviceNet thin cable	with one M12 socket connector (female), 2 m	DCA1-5CN02F1
DeviceNet thin cable	with one M12 socket connector (female), 5 m	DCA1-5CN05F1
DeviceNet thin cable	with one M12 socket connector (female) and one M12 plug connector (male), 1 m	DCA1-5CN01W1
DeviceNet thin cable	with one M12 socket connector (female) and one M12 plug connector (male), 2 m	DCA1-5CN02W1
DeviceNet thin cable	with one M12 socket connector (female) and one M12 plug connector (male), 5 m	DCA1-5CN05W1
DeviceNet T-connector for thin cable	with two M12 socket connectors (female) + one M12 plug connector (male)	DCN2-1
DeviceNet terminator	with M12 plug connector	DRS2-1
Power supply cable	with one 7/8 inches socket connector (female), 2 m	XS4F-D421-102-A
Power supply cable	with one 7/8 inches socket connector (female), 5 m	XS4F-D421-105-A
Power supply cable	with one 7/8 inches socket connector (female) and one 7/8 inches plug connector (male), 2 m	XS4W-D421-102-A
Power supply cable	with one 7/8 inches socket connector (female) and one 7/8 inches plug connector (male), 5 m	XS4W-D421-105-A
Power supply T-connector	with two 7/8 inches socket connectors (female) + one 7/8 inches plug connector (male)	XS4R-D424-5
4-wire I/O connection cable	with one M12 plug connector (male), 1 m	XS2H-D421-C80-A
4-wire I/O connection cable	with one M12 plug connector (male), 2 m	XS2H-D421-D80-A
4-wire I/O connection cable	with one M12 plug connector (male), 5 m	XS2H-D421-G80-A
4-wire I/O connection cable	with one M12 socket connector (female) and one M12 plug connector (male), 1 m	XS2W-D421-C81-A
4-wire I/O connection cable	with one M12 socket connector (female) and one M12 plug connector (male), 2 m	XS2W-D421-D81-A
4-wire I/O connection cable	with one M12 socket connector (female) and one M12 plug connector (male), 5 m	XS2W-D421-G81-A
Y-connector for 16-point I/O units	Splits the 2 I/O points per M12 connector to two M12 connectors	XS2R-D426-1
Y-connector cable for 16-point I/O units	Splits the 2 I/O points per M12 connector to two M12 connectors, 1 m	XS2R-D426-C11-F
M12 connector	M12 plug connector (male), solder type	XS2G-D421
M12 connector	M12 socket connector (female), solder type	XS2C-D421
IP67 cap for M12 sockets	Metal cap for unused I/O connections	XS2Z-12



Dust- and waterproof CompoBus I/O

Rugged I/O units for field mounting. Omron's unique CompoBus/S is the most efficient I/O bus for machine automation. With free topology and up to 500 m bus length in long-distance mode, it can be used as a remote I/O system. In high-speed mode (100 m max.) the guaranteed sub-millisecond cycle time makes it ideal for efficient machine control. With IP67 slave modules distributed throughout the machine, the need for protective enclosures is minimised.

- IP67 protection against dust and water
- Fast cycle time; less than 1 ms for 256 I/O points
- Easy setup; no software required
- Choice of 4- and 8-point Digital I/O
- M12 connectors for easy field wiring

Ordering information

Unit type	Specifications	Size in mm (HxWxD)	Order code
4-point PNP input unit	24 V, 6 mA	114x54x45	SRT2-ID04CL-1
8-point PNP input unit	24 V, 6 mA	114x54x45	SRT2-ID08CL-1
4-point PNP output unit	24 V, 0.5 A per point	114x54x45	SRT2-OD04CL-1
8-point PNP output unit	24 V, 0.5 A per point	114x54x45	SRT2-OD08CL-1

Note: To order models with NPN (sinking) outputs and corresponding inputs (+V common), omit the "-1" from the model code.

Accessories

Unit type	Specifications	Remarks	Order code
CompoBus/S terminator	with M12 plug connector	—	SRS2-1
M12 connector	M12 plug connector (male), screw type	For CompoBus/S 4-wire round cable	XS2G-D4S7
M12 connector	M12 socket connector (female), screw type	For CompoBus/S 4-wire round cable	XS2C-D4S7
M12 T-connector (4-wire)	with two M12 socket connectors (female) + one M12 plug connector (male)	—	XS2R-D427-5
4-wire I/O connection cable	with one M12 plug connector (male), 1 m	—	XS2H-D421-C80-A
4-wire I/O connection cable	with one M12 plug connector (male), 2 m	—	XS2H-D421-D80-A
4-wire I/O connection cable	with one M12 plug connector (male), 5 m	—	XS2H-D421-G80-A
4-wire I/O connection cable	with one M12 socket connector (female) and one M12 plug connector (male), 1 m	—	XS2W-D421-C81-A
4-wire I/O connection cable	with one M12 socket connector (female) and one M12 plug connector (male), 2 m	—	XS2W-D421-D81-A
4-wire I/O connection cable	with one M12 socket connector (female) and one M12 plug connector (male), 5 m	—	XS2W-D421-G81-A
Y-connector for 16-point I/O units	Splits the 2 I/O points per M12 connector to two M12 connectors	—	XS2R-D426-1
Y-connector cable for 16-point I/O units	Splits the 2 I/O points per M12 connector to two M12 connectors, 1 m	—	XS2R-D426-C11-F
M12 connector	M12 plug connector (male), solder type	—	XS2G-D421
M12 connector	M12 socket connector (female), solder type	—	XS2C-D421
IP67 cap for M12 sockets	Metal cap for unused I/O connections	—	XS2Z-12

NB SERIES – The feature-rich, cost-effective HMI

A complete series with comprehensive features

Omron's new NB HMI series is simply as smart and as dependable as it looks. A feature-rich HMI with Omron's high quality extending throughout the complete series, this new HMI generation offers you the utmost in reliability. The logical choice for use with Omron's popular CP1 family of compact machine controllers, the NB series has just the right model to suit your application, no matter for what branch of industry.

Best-in-class display

- LED backlighting TFT LCD
- Wide viewing angle
- More than 65,000 display colours
- Stores up to 120 MBs of screen data

Smart design


- Portrait or landscape display mode
- Connection to Omron and non-Omron devices, e.g. PLCs/inverters
- Serial, USB or Ethernet connectivity
- PictBridge printer connection


Saving you time

- USB memory stick support
- Animations and easy-to-use functions
- Multi-language support and tool
- On/off-line simulation



For more information please visit:
industrial.omron.eu/nb

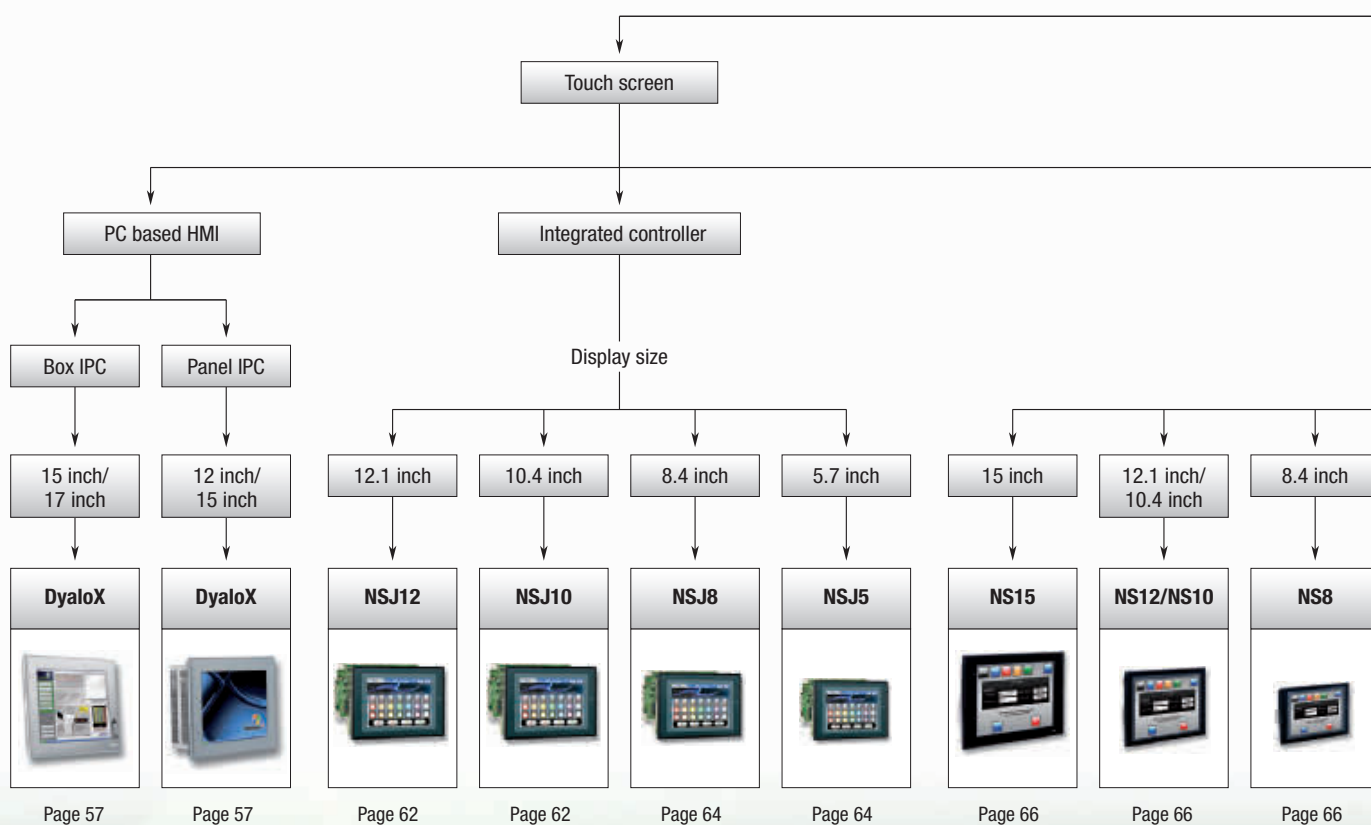

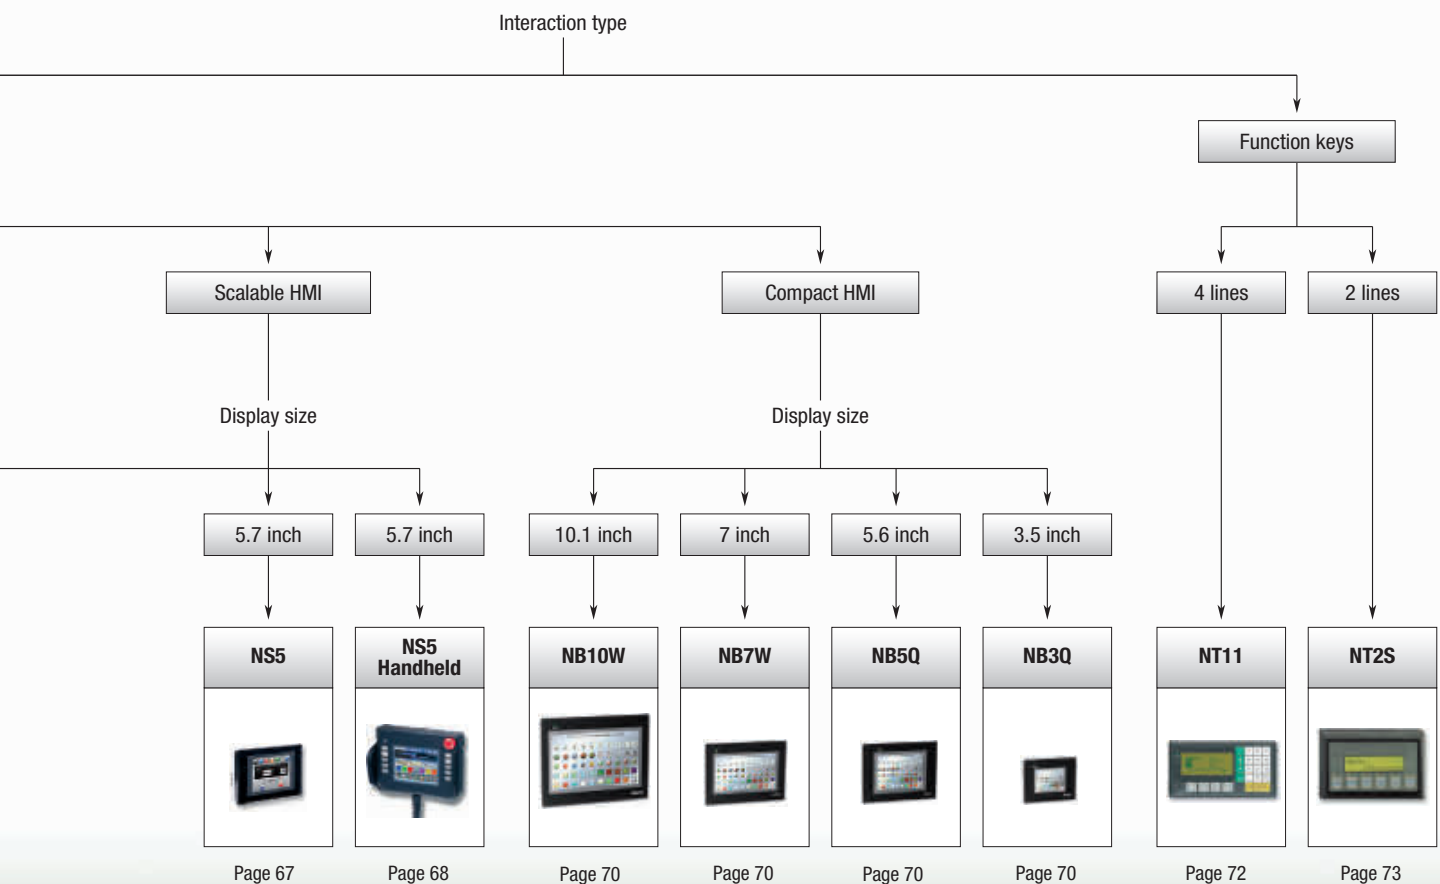

	Integrated controller			
				
Model	NSJ12	NSJ10	NSJ8	NSJ5
Display	12.1 inch colour TFT	10.4 inch colour TFT	8.4 inch colour TFT	5.7 inch colour TFT
Resolution	800 × 600 pixels	640 × 480 pixels	640 × 480 pixels	320 × 240 pixels
Control	CJ1G-CPU45H; 60k-steps program memory, 128k-words data memory, logic instruction time 0.04 µs	CJ1G-CPU45H; 60k-steps program memory, 128k-words data memory, logic instruction time 0.04 µs	CJ1G-CPU45H; 60k-steps program memory, 128k-words data memory, logic instruction time 0.04 µs	CJ1G-CPU45H; 60k-steps program memory, 128k-words data memory, logic instruction time 0.04 µs
Communication	DeviceNet Master/Slave or PROFIBUS Master and Ethernet interface	DeviceNet Master/Slave or PROFIBUS Master and Ethernet interface	DeviceNet Master/Slave or PROFIBUS Master and Ethernet interface	DeviceNet Master/Slave or PROFIBUS Master and Ethernet interface
Expansion (1 board max.)	I/O extension	I/O extension	I/O extension	I/O extension
Dimensions in mm (H×W×D)	Without expansion unit 241×315×73.3 With expansion unit 241×315×89.3	Without expansion unit 241×315×73.3 With expansion unit 241×315×89.3	Without expansion unit 177×232×73.3 With expansion unit 177×232×89.3	Without expansion unit 142×195×79 With expansion unit 142×195×95
Page	62		64	

	Scalable HMI					
						
Model	NS15	NS12	NS10	NS8	NS5	NS5 handheld
Display	15 inch TFT colour	12.1 inch TFT colour	10.4 inch TFT colour	8.4 inch TFT colour	5.7 inch TFT colour	5.7 inch STN colour
Resolution	1024 × 768 pixels (XGA)	800 × 600 pixels (SVGA)	640 × 480 pixels (VGA)	640 × 480 pixels (VGA)	320 × 240 pixels (QVGA)	320 × 240 pixels (QVGA)
Number of colours	256 (32,768 for image data)	256 (32,768 for image data)	256 (32,768 for image data)	256 (32,768 for image data)	256 (32,768 for image data)	256 (4,096 for image data)
Memory Size	60 MB screen memory	60 MB screen memory, 32,768 words + 32,768 bits internal memory and 8192 words + 8192 bits retentative memory	60 MB screen memory, 32,768 words + 32,768 bits internal memory and 8192 words + 8192 bits retentative memory	60 MB screen memory, 32,768 words + 32,768 bits internal memory and 8192 words + 8192 bits retentative memory	60 MB screen memory, 32,768 words + 32,768 bits internal memory and 8192 words + 8192 bits retentative memory	60 MB screen memory, 32,768 words + 32,768 bits internal memory and 8192 words + 8192 bits retentative memory
Options	Controller Link, Video input board (NS-CA002)	Ethernet, Controller Link, Video input board (RGB/Composite)	Ethernet, Controller Link, Video input board (RGB/Composite)	Ethernet, Video input board (RGB/Composite)	Ethernet	RS-232 or RS-422 communication depending on cable
Dimensions in mm (H×W×D)	300×400×80	241×315×48.5	241×315×48.5	177×195×48.5	142×195×54	176×223×70.5 (excl. emergency button)
Page	66				67	68

Compact HMI				
				
				
Model		NB10W	NB7W	NB5Q
Display		10.1 inch Wide TFT LCD	7 inch Wide TFT LCD	5.6 inch TFT LCD
Resolution		800 × 480 pixels	800 × 480 pixels	320 × 234 pixels
Number of colours		65,536	65,536	65,536
Memory		128 MB (including system area)	128 MB (including system area)	128 MB (including system area)
Communication ports	Serial Communication	1 × RS-232C & 1 × RS-232C/422A/485	1 × RS-232C & 1 × RS-232C/422A/485	1 × RS-232C & 1 × RS-232C/422A/485
	USB (USB Host only on TW01 model)	1 × USB Host & 1 × USB Slave	1 × USB Host & 1 × USB Slave	1 × USB Host & 1 × USB Slave
	Ethernet	1 × Ethernet	1 × Ethernet (TW01 model)	1 × Ethernet (TW01 model)
Dimensions in mm (H×W×D)		210.8×268.8×54.0	148×202×46	142×184×46
Page		70		

Function-key HMI				
				
Model		NT11	NT2S	
Type of Display		LED backlight LCD	LED backlight LCD	
Number of F-keys		22	6 or 20 depending on model	
Number of characters		20 × 4 lines	16 × 2 lines	
Printer connection		Yes	Depending on model	
Number of screens		250	65,000 (limited by memory)	
Size in mm (H×W×D)		113×218×38.2	6 F-keys 60×109×43 20 F-keys 107×107×43	
Page		72	73	





Industrial PC created for 24/7 operation in the most demanding industrial environments

The DyaloX Industrial PC is designed to provide exceptional performance operating around-the-clock throughout its lifetime. Drawing on our many years of experience in industrial-class standalone PC-based equipment, we have created unique self-diagnostic hardware and software, such as the Omron RAS solution, to ensure that DyaloX IPCs will keep on running long after other IPCs have given up.

- Omron RAS solution
- Industrial-grade 600 MHz or 1.3 GHz Intel Celeron CPU
- Reliable silicon storage up to 8GB
- Fan-less heat sink cooling for enhanced reliability
- 3 year warranty, 5 year minimum availability, 7 year courier repair service

Ordering information

DyaloX IPC

Type		Order Code
Industrial PC panel, 600 MHz CPU	12 inches, 600 MHz, 1 GB internal, black	NSA12-TX12B
	12 inches, 600 MHz, 1 GB internal, silver	NSA12-TX12S
	15 inches, 600 MHz, 1 GB internal, black	NSA15-TX12B
	15 inches, 600 MHz, 1 GB internal, silver	NSA15-TX12S
Industrial PC panel, 1.3 GHz CPU	12 inches, 1.3 GHz, 1 GB internal, 4 GB storage, black	NSA12-TX01B-E
	12 inches, 1.3 GHz, 1 GB internal, 4 GB storage, silver	NSA12-TX01S-E
	15 inches, 1.3 GHz, 1 GB internal, 4 GB storage, black	NSA15-TX01B-E
	15 inches, 1.3 GHz, 1 GB internal, 4 GB storage, silver	NSA15-TX01S-E
Industrial PC box, 1.3 GHz CPU	1.3 GHz, RAM: 1 GB, storage: 4 GB	NSA-CPU04-E

Touch panel

Type		Order Code
Touchscreen panel	15 inches, black	NSA-TX151B
	15 inches, silver	NSA-TX151S
	17 inches, black	NSA-TY171B
	17 inches, silver	NSA-TY171S

Accessories

Type	Order Code
4 GB CF with XP Embedded English	NSA-CEX04-E
8 GB CF with XP Embedded English	NSA-CEX08-E
16 GB CF with XP Embedded English	NSA-CEX16-E
1 GB DDR-SD RAM (non-ECC)	NSA-MR191
DVI & USB cable 0.1 m	NSA-DU02
DVI & USB cable 2 m	NSA-DU22
DVI & USB cable 5 m	NSA-DU52
DVI cable 10 m	NSA-DV101
Set of 5 Anti-reflection sheets for 12 inches	NS12-KBA04
Set of 5 Anti-reflection sheets for 15 inches	NS15-KBA04
Battery for NSA12/15-TX01, NSA-CPU	NSA-BAT01
Battery for NSA12/15-TX12	NSA-BAT03

DyaloX IPC specifications

Main specifications

Item		NSA1_-TX12	NSA1_-TX01_-E	NSA-CPU04-E
OS		CF with Windows XP embedded ^{*1}	Preinstalled Windows XP embedded	
Processor		600 MHz Intel Celeron-M Processor	1.3 GHz Intel Celeron-M Processor	
Storage device	Type	Industrial CF memory or HDD ^{*1}	DiskOnModule (Flash memory)	
	Capacity	CF: 4/8 GB (with OS) IDE I/F ^{*1}	4 GB	4 GB
	Service life (write cycles)	CF: 100,000 write cycle/block HDD: 2 years at 24 hours/day operation, 3 years at 8 hours/day operation	NAND flash memory: 100,000 write cycles (to the same block) ^{*2}	
Memory	Main memory	1 GB DDR-SDRAM (non-ECC)	1 GB DDR-SDRAM (non-ECC)	1 GB DDR-SDRAM (non-ECC)
	Cache memory	512 KB Level 2 cache memory (built into the CPU)		
Interface	Keyboard	—	PS/2 keyboard with 6-pin MINI DIN connector	
	Mouse	—	PS/2 mouse with MINI DIN connector	
	Serial ports	2 ports conforming to EIA RS-232C for 9-pin D-SUB male connectors		
	Ethernet	2 × 10 BASE-T/100 BASE-TX RJ45 connector	One 10 BASE-T/100 BASE-TX port for an RJ45 connector	
	USB ports	4 × USB 2.0/1.1 ports for USB type-A connectors. (2 on front panel, cable 3 m max.)	2 USB 2.0/1.1 ports for USB type-A connectors	2 USB 2.0/1.1 ports for USB type-A connectors 2 USB 1.1 for USB type-A connectors
	Memory Card	1 CF Card slot		
	Video output	—	1 DVI port for DVI-I connector	
	Audio	—	Line-In/Line-Out/Mic-In for mini jack	
Expansion slots		PCI expansion bus, 1 slot	PCI expansion bus, 2 slots	
Special RAS board	External input port	3-pin connector port for the UPS power interruption signal		
	Status LED indicators	4 (RUN/BATLOW/ERR/DIAG)		
RAS functions	Special RAS board functions	Alive connection monitoring, device restart, timer start, startup and shutdown monitoring, backlight lit time measurement, UPS power interrupt signal output, and logging functions		
	Motherboard RAS functions	Standard PC RAS info, post error logging, post error retry, CMOS data recovery		
POWER LED indicator		Yes (green)		
Service life ^{*3}		50,000 hours at 40°C		50,000 hours at 30°C
Battery life	Main board	5 years at 25°C (NSA-BAT03)	5 years at 25°C (NSA-BAT01)	
	RAS board	5 years at 25°C (NSA-BAT03)	5 years at 25°C (NSA-BAT01)	

^{*1} Sold separately

^{*2} Calculate condition

Free area: 500 MB (*excluding OS & Application)

Overwrite data size/time: 0.5 MB/time

Overwrite times/day: 10,000 times/day

MTBF: (500 MB * 100,000 times) / (0.5 MB * 10,000 times/day) = 10,000 days = 27 years

^{*3} The service life is a guideline that is provided strictly for reference. It varies with factors such as the installation location and operating conditions.

Touch Panel specifications

Item		NSA12-TX12_-E	NSA15-TX12_-E	NSA12-TX01_-E	NSA15-TX01_-E
Display panel	Type	TFT colour LCD			
	Size	12.1 inches	15 inches	12.1 inches	15 inches
	Resolution	1024×768 dots			
	Brightness	300 cd/m ² (typical)			
	Viewing angle	130° left to right, 90° up and down			
	Colours displayed	262,144			
Backlight	Type	2 CCFL	4 CCFL	2 CCFL	4 CCFL
	Brightness adjustment	Three-level software adjustment ^{*1}			
	Backlight not lit detection	The software reads the lamp burnout detection signal from the inverter ^{*2}			
	Service life	50,000 hours min. ^{*3}			
Touch panel	Type	Analogue resistive type			
	Effective input area Size in mm (H×W)	185.5×247	229×305	185.5×247	229×305
	Operating service life	10,000,000 operations (with non-stop key stroking using fingers to input) 100,000 characters (with non-stop character entry using a stylus to input)			
Interface	USB ports	4 x USB2.0/1.1 for type-A connectors (2 on front side)		2 x USB2.0/1.1 for type-A connectors	
	Video Input	-			
POWER LED indicator		Yes (green)			
Service life ^{*4}		50,000 hours at 25°C		50,000 hours at 40°C	

^{*1} The contrast cannot be adjusted significantly.

^{*2} It is not the service life, but rather lamp failure due to hardware problems such as a broken wire that is detected. Backlight not lit detection means both backlight lamps have burnt out.

^{*3} The service life is a guideline for maximum contrast at room temperature with normal humidity and is provided strictly for reference. It varies significantly with the ambient temperature.

The service life will be shorter under extreme (high or low) temperature conditions and falls off sharply particularly under low-temperature conditions.

^{*4} The service life is a guideline that is provided strictly for reference. It varies with factors such as the installation location and operating conditions.

General specifications

Item	NSA1_-TX12_-E	NSA1_-TX01_-E	NSA-CPU0_-E
Rated supply voltage	24 VDC		
Allowable supply voltage range	20.4 VDC to 27.6 VDC (24 VDC $\pm$ 15%)		20.0 VDC to 27.6 VDC (24 VDC $\pm$ 15%)
Power consumption	12 inches: 65 W max. 15 inches: 75 W max.	12 inches: 80 W max. 15 inches: 100 W max.	60 W max.
Ambient operating temperature	0 to 50°C ^{*1}		
Ambient storage temperature	-10 to 60°C ^{*1}		
Ambient operating humidity	10% to 80% with no condensation ^{*1}		
Ambient storage humidity	10% to 85% with no condensation ^{*1}		
Operating atmosphere	Must be free of corrosive gases. Must be fairly dust free.		
Noise resistance	Conforms to IEC6100-4-4, power supply line: 2 kV		
Vibration resistance (in operation)	Conforms to JIS C0041, 0.05 mm amplitude at 10 to 55 Hz for 50 min. Each in the X, Y, and Z directions		
Shock resistance (in operation)	Conforms to JIS C0041, 196 m/s ² three times each in the X, Y, and Z directions		
Degree of protection	Front panel: IP65 or the equivalent ^{*1}		—
Weight	12 inches: 5 kg max. 15 inches: 7 kg max.	12 inches: 5 kg max. 15 inches: 7 kg max.	4 kg max.
Dimensions in mm (HxWxD)	12 inches: 281×342×98 15 inches: 296.5×397.5×103	12 inches: 264×322×100 15 inches: 312×384×108	233x308x76.5

^{*1} For more information, please check the user manual.

CF & HDD

Item	NSA-CEX04	NSA-CEX08
Storage capacity	4 GB	8 GB

Touch panel specifications (box model)

Item	NSA-TX151	NSA-TY171
Display panel	Type	TFT colour LCD
	Size	15.0 inches
	Resolution	1024×768 dots
	Brightness	270 cd/m ² (typical)
	Viewing angle	130° left to right, 90° up and down
	Colours displayed	262,144
Backlight	Type	2 CCFL
	Brightness adjustment	10 level adjustment by rotary switch
	Service life	50,000 hours min. ^{*1}
Touch panel	Type	Analogue resistive type
	Effective input area	229×305
	Size in mm (H×W)	272×340
	Operating service life	10,000,000 operations (with non-stop key stroking using fingers to input) 100,000 characters (with non-stop character entry using a stylus to input)
Interface	USB ports	3 x USB 1.1 for type-A connectors (2 on front side) 1 x USB 1.1 (used for touch) for type-B connector
	Video Input	1 x DVI-D port
POWER LED indicator	Yes (green)	
Service life ^{*2}	50,000 hours at 30°C	

^{*1} The service life is a guideline for maximum contrast at room temperature with normal humidity and is provided strictly for reference. It varies significantly with the ambient temperature.

The service life will be shorter under extreme (high or low) temperature conditions and falls off sharply particularly under low-temperature conditions.

^{*2} The service life is a guideline that is provided strictly for reference. It varies with factors such as the installation location and operating conditions.

General specifications (box model)


Item	NSA-TX151	NSA-TY171
Rated supply voltage	24 VDC	
Allowable supply voltage range	20.0 VDC to 27.6 VDC (24 VDC $\pm$ 15%)	
Power consumption	40 W max.	55 W max.
Ambient operating temperature	0 to 50°C ^{*1}	
Ambient storage temperature	-10 to 60°C ^{*1}	
Ambient operating humidity	10% to 80% with no condensation ^{*1}	
Ambient storage humidity	10% to 85% with no condensation ^{*1}	
Operating atmosphere	Must be free of corrosive gases. Must be fairly dust free.	
Noise resistance	Conforms to IEC6100-4-4, power supply line: 2 kV	
Vibration resistance (in operation)	Conforms to JIS C0041, 0.05 mm amplitude at 10 to 55 Hz for 50 min. Each in the X, Y, and Z directions	
Shock resistance (in operation)	Conforms to JIS C0041, 196 m/s ² three times each in the X, Y, and Z directions	
Degree of protection	IP65F (front panel oil protection) ^{*1}	
Weight	6 kg max.	7 kg max.
Dimensions in mm (HxWxD)	328x404x57	371x436x57

^{*1} For more information, please check the user manual.



System configuration

(Picture represents backside of a SYSMAC One unit)

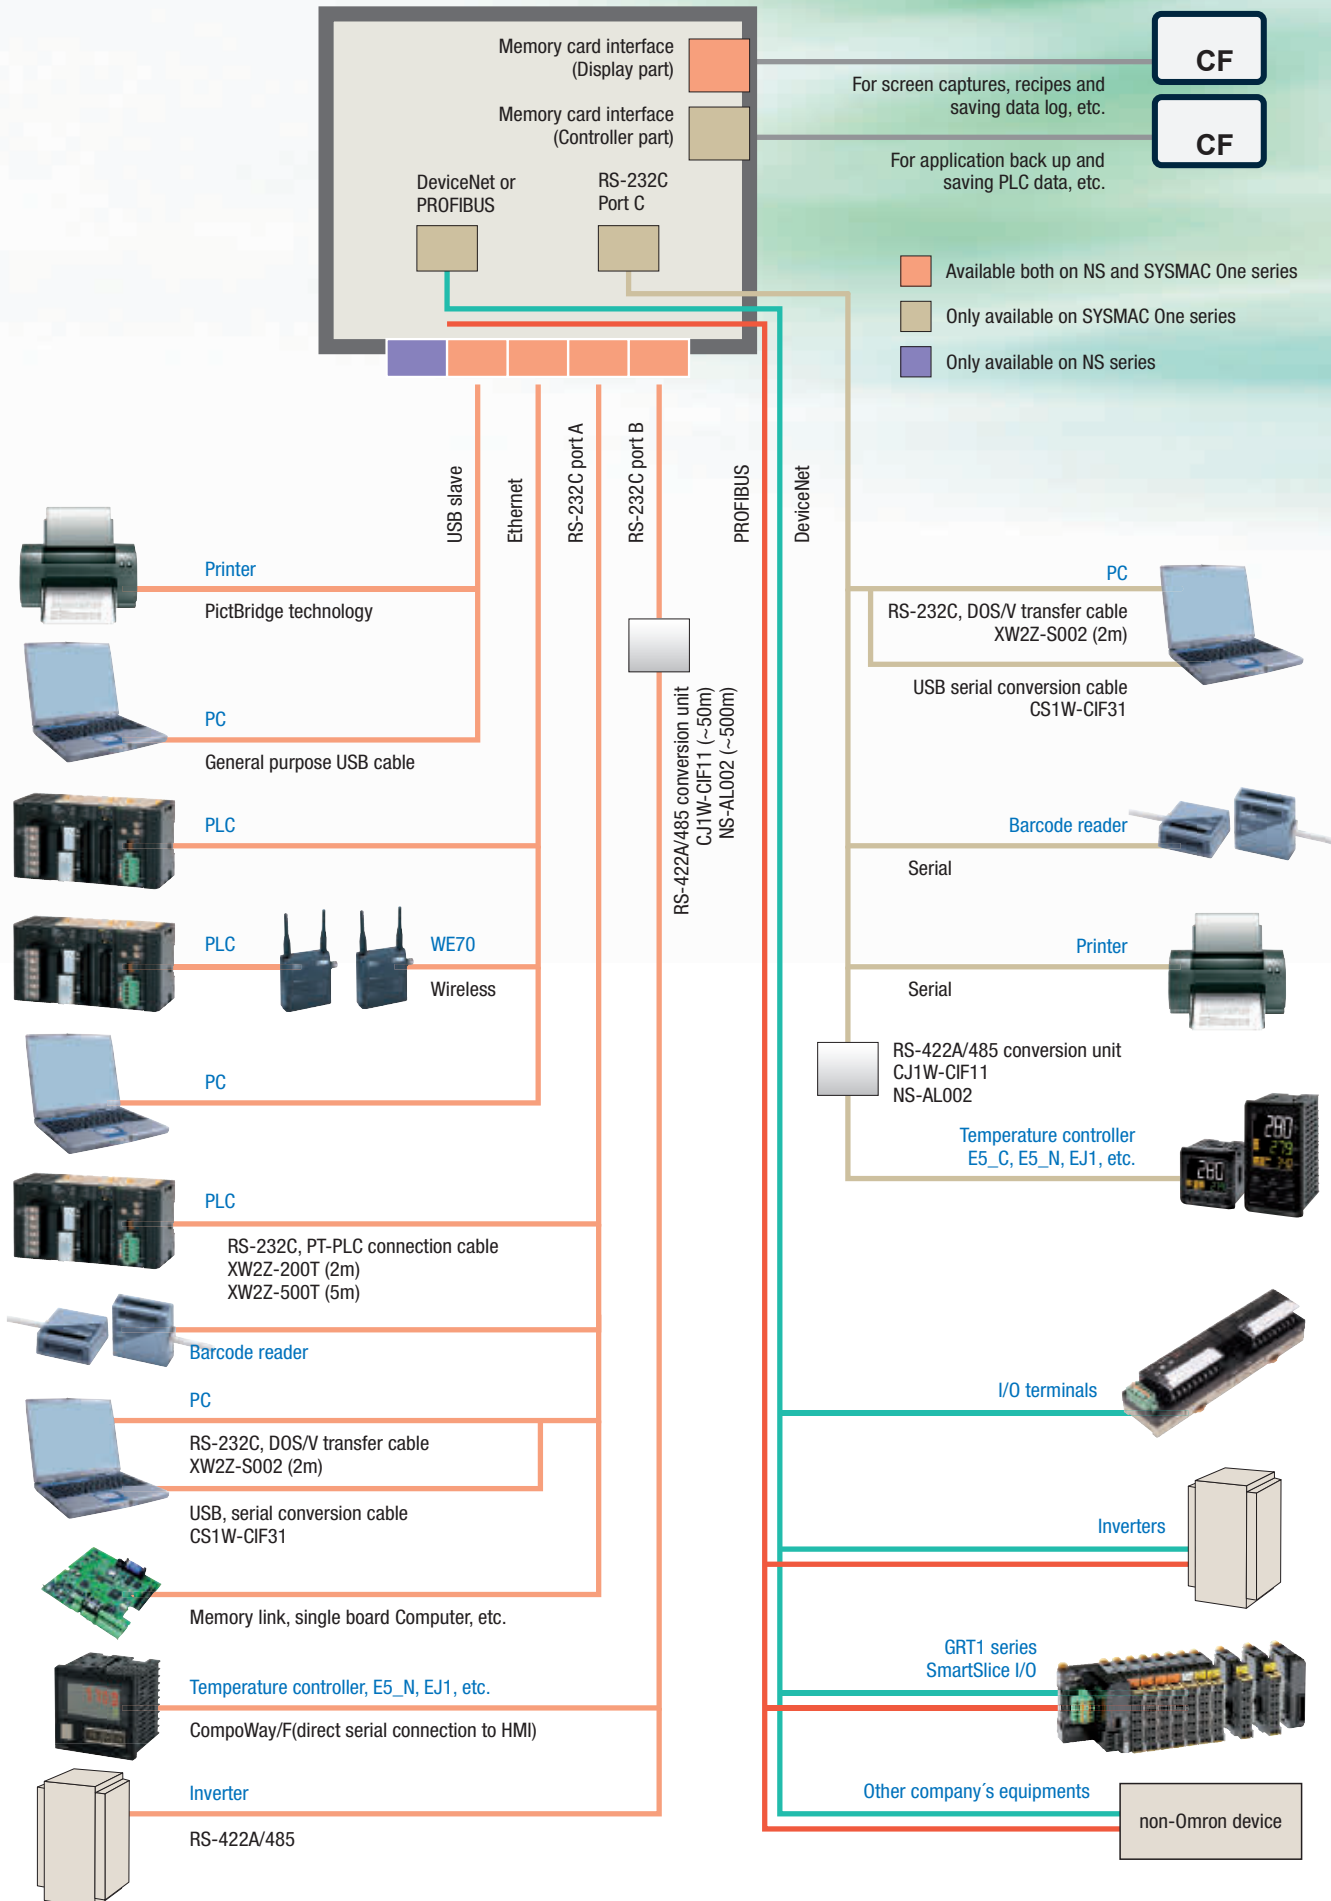



HMI with integrated PLC and Network interface

The NSJ12 and NSJ10 are combined with a CJ1G-CPU 45H and a DeviceNet or PROFIBUS interface fitted into a compact housing occupying less panel space than the separate products. Programming can be done via the standard high-speed USB port. The SYSMAC One is completely transparent, so the PLC, network (including field devices) and HMI can be accessed via a single port. A great advantage when servicing your machine remotely.

- HMI + PLC with 2 separate CPUs for greater performance and reliability
- Transparent architecture for easy remote maintenance
- Compact design occupying less panel space
- Flexible and cost-effective solution with multiple screen sizes, CPUs & networks
- Smart Active Parts for graphical interaction to field devices

Ordering Information

Type					Order Code
SYSMAC One 12.1" TFT	CJ1G-CPU45H	PROFIBUS	with Ethernet	Black	NSJ12-TS01B-G5P
				Ivory	NSJ12-TS01-G5P
SYSMAC One 10" TFT	CJ1G-CPU45H	PROFIBUS	with Ethernet	Black	NSJ10-TV01B-G5P
				Ivory	NSJ10-TV01-G5P

Type					Order Code
SYSMAC One 12.1" TFT	CJ1G-CPU45H	DeviceNet	with Ethernet	Black	NSJ12-TS01B-G5D
				Ivory	NSJ12-TS01-G5D
SYSMAC One 10" TFT	CJ1G-CPU45H	DeviceNet	with Ethernet	Black	NSJ10-TV01B-G5D
				Ivory	NSJ10-TV01-G5D

Note: For the accessories, please refer to page 69


Specifications

Item		NSJ12-TS01-G5D	NSJ10-TV01-G5D
Supply voltage		24 VDC	
Allowable supply voltage range		20.4 to 27.6 VDC (24 VDC $\pm 15\%$)	
Power consumption		30 W max.	
Current consumption		Controller Section Internal 5 V: 500 mA max. DeviceNet Section Internal 5 V: 200 mA max., External 24 V: 18 mA max.	
Inrush current *1		At 24 VDC: 10 A/20 ms max. for cold start at room temperature	
Ambient operating temperature (depending on angle of display surface off horizontal) *2		90° to 60°: 0 to 50°C 60° to 30°: 0 to 45°C 30° to 0°: Use prohibited	
Ambient storage temperature		-20 to 60°C	
Ambient operating humidity		0 to 40°C: 35% to 85% (with no condensation) 40 to 50°C: 35% to 60% (with no condensation)	
Ambient operating environment		No corrosive gases	
Insulation resistance		20 M Ω min. (at 100 VDC) between DC external and GR terminals	
Dielectric strength		800 VDC for 1 min between DC external and GR terminals, leakage current: 10 mA max.	
Noise immunity		2 kV on power supply line (conforming to IEC 61000-4-4)	
Vibration resistance (during operation)		10 to 57 Hz, 0.075-mm amplitude, 57 to 150 Hz, acceleration: 9.8 m/s ² in X, Y and Z directions for 80 minutes	
Shock resistance (during operation)		147 m/s ² , 3 times each in X, Y and Z directions	
External dimensions in mm (W×H×D)	Without Expansion unit	315x241x73.3	
	With Expansion unit	315x241x89.3	
Panel output dimensions		302 ⁺¹ ₀ ×228 ⁺¹ ₀ mm (W×H) Panel thickness: 1.6 to 4.8	
Grounding		100 Ω or less	
Weight		2.7 kg max.	2.5 kg max.
Degree of protection		Front operating panel: Equivalent to IP65F and NEMA4 *3	

Item	NSJ12-TS01-G5D	NSJ10-TV01-G5D
Battery life	5 years (at 25°C) The SRAM and RTC will be backed up for 5 days after the battery runs low (i.e., after the indicator lights orange). The SRAM and RTC will be backed up by a super capacitor for 5 minutes after removing the old battery (i.e., after turning ON power after 5 minutes).	
International standards	Conforms to cULus and EC Directives.	

*1 A delay circuit that charges a capacitor is used to limit the inrush current. If a hot start is performed when the power supply has been OFF only a short period of time, the capacitor will still be charged and the inrush current specified above will be exceeded by up to approximately five times the specified value. When selecting fuses or breakers for external circuits, allow sufficient margin in the melting temperatures, detection characteristics, and inrush current.

*2 Display angles off horizontal are as follows:



*3 May not be applicable in locations with long-term exposure to oil.



HMI with integrated PLC and Network interface

The NSJ8 and NSJ5 are combined with a CJ1G-CPU 45H PLC and a DeviceNet or PROFIBUS interface. It is fitted into a compact housing occupying less panel space than the separate products. Programming can be done via the standard high-speed USB port. The SYSMAC One is completely transparent, so the PLC, network (including field devices) and HMI can be accessed via a single port. A great advantage when servicing your machine remotely.

- HMI + PLC with 2 separate CPUs for greater performance and reliability
- Transparent architecture for easy remote maintenance
- Compact design taking up less panel space
- Flexible and cost effective solution with multiple screen sizes, CPUs & networks
- Smart Active Parts for graphical interaction to field devices

Ordering Information

Type					Order Code
SYSMAC One 8.4" TFT	CJ1G-CPU45H	PROFIBUS	with Ethernet	Black	NSJ8-TV01B-G5P
				Ivory	NSJ8-TV01-G5P
SYSMAC One 5.7" TFT	CJ1G-CPU45H	PROFIBUS	with Ethernet	Black	NSJ5-TQ11B-G5P
				Ivory	NSJ5-TQ11-G5P

Type					Order Code
SYSMAC One 8.4" TFT	CJ1G-CPU45H	DeviceNet	with Ethernet	Black	NSJ8-TV01B-G5D
				Ivory	NSJ8-TV01-G5D
SYSMAC One 5.7" TFT	CJ1G-CPU45H	DeviceNet	with Ethernet	Black	NSJ5-TQ11B-G5D
				Ivory	NSJ5-TQ11-G5D

Function	CJ1G-CPU45H
UM capacity	60K steps
I/O	1,280 points
Extended data memory	32K words × 3 banks
EM file memory	Yes
Maximum number of Expansion Racks	3
FB program memory capacity	1024 KB
Maximum number of FB definitions	1,024
Maximum number of FB instances	2,048
Variable table sizes	128 KB

Note: For the accessories, please refer to page 69


Specifications

Item	NSJ8-TV01-G5D	NSJ5-TQ11-G5D
Supply voltage	24 VDC	
Allowable supply voltage range	20.4 to 27.6 VDC (24 VDC ±15%)	
Power consumption	30 W max.	SQ0_: 21 W max. TQ0_: 22 W max.
Current consumption	Controller Section Internal 5 V: 500 mA max. DeviceNet Section Internal 5 V: 200 mA max., External 24 V: 18 mA max.	
Inrush current *1	At 24 VDC: 10 A/20 ms max. for cold start at room temperature	
Ambient operating temperature (depending on angle of display surface off horizontal) *2	90° to 60°: 0 to 50°C 60° to 30°: 0 to 45°C 30° to 0°: Use prohibited	90° to 30°: 0 to 50°C 30° to 0°: 0 to 40°C
Ambient storage temperature	-20 to 60°C	
Ambient operating humidity	0 to 40°C: 35% to 85% (with no condensation) 40 to 50°C: 35% to 60% (with no condensation)	
Ambient operating environment	No corrosive gases	
Insulation resistance	20 MΩ min. (at 100 VDC) between DC external and GR terminals	
Dielectric strength	800 VDC for 1 min between DC external and GR terminals, leakage current: 10 mA max.	
Noise immunity	2 kV on power supply line (conforming to IEC 61000-4-4)	
Vibration resistance (during operation)	10 to 57 Hz, 0.075-mm amplitude, 57 to 150 Hz, acceleration: 9.8 m/s ² in X, Y and Z directions for 80 minutes	
Shock resistance (during operation)	147 m/s ² , 3 times each in X, Y and Z directions	
External dimensions in mm (W×H×D)	Without Expansion unit	232×177×73.3
	With Expansion unit	232×177×89.3
Panel output dimensions	220.5 ^{+0.50} ₀ ×165.5 ^{+0.50} ₀ mm (W×H) Panel thickness: 1.6 to 4.8	184 ^{+0.50} ₀ ×131 ^{+0.50} ₀ mm (W×H) Panel thickness: 1.6 to 4.8
Grounding	100 Ω or less	
Weight	2.0 kg max.	1.1 kg max.
Degree of protection	Front operating panel: Equivalent to IP65F and NEMA4 *3	

Item	NSJ8-TV01-G5D	NSJ5-TQ11-G5D
Battery life	5 years (at 25°C) The SRAM and RTC will be backed up for 5 days after the battery runs low (i.e., after the indicator lights orange). The SRAM and RTC will be backed up by a super capacitor for 5 minutes after removing the old battery (i.e., after turning ON power after 5 minutes).	
International standards	Conforms to cULus and EC Directives.	

*1 A delay circuit that charges a capacitor is used to limit the inrush current. If a hot start is performed when the power supply has been OFF only a short period of time, the capacitor will still be charged and the inrush current specified above will be exceeded by up to approximately five times the specified value. When selecting fuses or breakers for external circuits, allow sufficient margin in the melting temperatures, detection characteristics, and inrush current.

*2 Display angles off horizontal are as follows:



*3 May not be applicable in locations with long-term exposure to oil.



One-touch machine management

The NS-series is our advanced HMI series that covers a large range from 5.7" Monochrome STN to 15" TFT. Easily programmed it offers advanced features like, multiple communication possibilities, good synergy with our PLC's and other devices with Ladder monitor, Smart Active Parts and proven reliability.

- Perfect clarity and fast switching screens
- Extremely long backlight life (up to 50,000 hours)
- Support all European languages, Asian and Cyrillic
- Easy data logging on compact flash
- Large Memory size (60 MB)
- Support for several non-Omron PLC's

Ordering information

Type			Order Code
TFT, 15", 1024 x 768 pixels	with Ethernet	Black	NS15-TX01B-V2
		Silver	NS15-TX01S-V2
TFT, 12", 800 x 600 pixels	no Ethernet	Black	NS12-TS00B-V2
		Ivory	NS12-TS00-V2
	with Ethernet	Black	NS12-TS01B-V2
		Ivory	NS12-TS01-V2
TFT, 10", 640 x 480 pixels	no Ethernet	Black	NS10-TV00B-V2
		Ivory	NS10-TV00-V2
	with Ethernet	Black	NS10-TV01B-V2
		Ivory	NS10-TV01-V2
TFT, 8.4", 640 x 480 pixels	no Ethernet	Black	NS8-TV00B-V2
		Ivory	NS8-TV00-V2
	with Ethernet	Black	NS8-TV01B-V2
		Ivory	NS8-TV01-V2

Note: For the accessories, please refer to page 69

Specifications

Item	NS15	NS12	NS10	NS8
Display type	15 inch colour TFT	12 inch colour TFT	10 inch colour TFT	8 inch colour TFT
Display resolution	1024×768 (XGA)	800×600 (SVGA)	640×480 (VGA)	
Number of colours	256 (32,768 for image data)			
Backlight	2×CCFL	1×LED		
Backlight lifetime	Min. 50000 hours			
View angle	Left/right ±85°, Top 70°, Bottom 80°	Left/right ±60°, Top 45°, Bottom 75°	Left/right ±60°, Top 35°, Bottom 65°	Left/right ±65°, Top 50°, Bottom 60°
Touch panel	Analogue resistive touch	Matrix resistive touch		
Number of functional keys	3	—		
Dimensions in mm (H×W×D)	304×405×75.8	241×315×48.5		177×232×48.5
Weight	4.2 kg max.	2.5 kg max.		2.0 kg max.
Screen data capacity	60 MB			
Internal memory	Bit memory: 32,767 bits, Word memory: 32,767 words, Retentative memory: 8,192 bits and 8,192 words.			
Memory card interface	1 slot ATA Compact Flash card			
Printer connection	PictBridge support			
Serial (COM1)	1×RS-232			
Serial (COM2)	1×RS-232/422/485	1×RS-232		
USB Slave	For programming & printing			
Ethernet	IEEE 802.3u 10Base-T/100Base-TX			
Expansion module	Optional network/video unit			Optional video unit
Line voltage	24 VDC ±15%			
Power consumption	45 W max.	25 W max.		
Battery	CJ1W-BAT01			
Battery lifetime	5 years (at 25°C)			
Enclosure rating (front side)	IP65F (equivalent to NEMA4)			
Obtained standards	UL 1604 Class 1 Diff. 2, cUL, CE, Lloyds, DNV			
Operating environment	No corrosive gases			
Noise immunity	Conforms to IEC61000-4-4, 2 KV (power lines)			
Ambient operating temperature	0 to 50°C ^{*1}			
Ambient operating humidity	35% to 85% (0 to 40°C) with no condensation, 35% to 60% (40 to 50°C) with no condensation			

^{*1} see manual for details.



More power, smaller size

The smallest NS HMI is available in two brightness variations, both with a vivid color TFT touchscreen. It is equipped with a USB connection for project download/upload and the possibility to communicate over Ethernet. One great advantage with the NS is that you can make use of Omron's unique Smart Active Parts (SAP) that save you time when configuring, commissioning and maintaining your machine. SAP are pre-programmed, pre-tested visualisation objects with embedded communication code, bringing 'drag and drop' simplicity to HMI design.

- Perfect clarity and fast switching screens
- Extremely long backlight life (up to 75,000 hours)
- Support all European languages, Asian and Cyrillic
- Easy data logging on compact flash
- Large Memory size (60 MB)
- Support for several non-Omron PLC's

Ordering information

Type				Order Code
NS5-TQ	TFT, 5.7", 320×240 pixels	no Ethernet	Black	NS5-TQ10B-V2
			Ivory	NS5-TQ10-V2
		with Ethernet	Black	NS5-TQ11B-V2
			Ivory	NS5-TQ11-V2
NS5-SQ	TFT, 5.7", 320×240 pixels	no Ethernet	Black	NS5-SQ10B-V2
			Ivory	NS5-SQ10-V2
		with Ethernet	Black	NS5-SQ11B-V2
			Ivory	NS5-SQ11-V2

Note: For the accessories, please refer to page 69

Specifications

Item	NS5-TQ	NS5-SQ
Display type	5.7 inch colour TFT	
Display resolution	340×240 (QVGA)	
Number of colours	256 (32,768 for image data)	
Backlight	LED	
Backlight lifetime	Min. 75000 hours	
View angle	Left/right ±80°, Top 80°, Bottom 60°	
Touch panel	Matrix resistive touch	
Number of functional keys	—	
Dimensions in mm (H×W×D)	142×195×54	
Weight	1.0 kg max.	
Screen data capacity	60 MB	
Internal memory	Bit memory: 32,767 bits, Word memory: 32,767 words, Retentative memory: 8,192 bits and 8,192 words.	
Memory card interface	1 slot ATA Compact Flash card	
Printer connection	PictBridge support	
Serial (COM1)	1×RS-232	
Serial (COM2)	1×RS-232	
USB Slave	For programming & printing	
Ethernet	IEEE 802.3u 10Base-T/100Base-TX	
Expansion module	—	
Line voltage	24 VDC ±15%	
Power consumption	15 W max.	
Battery	CJ1W-BAT01	
Battery lifetime	5 years (at 25°C)	
Enclosure rating (front side)	IP65F (equivalent to NEMA4)	
Obtained standards	UL 1604 Class 1 Diff. 2, cUL, CE, Lloyds, DNV	
Operating environment	No corrosive gases	
Noise immunity	Conforms to IEC61000-4-4, 2 KV (power lines)	
Ambient operating temperature	0 to 50°C ^{*1}	
Ambient operating humidity	35% to 85% (0 to 40°C) with no condensation, 35% to 60% (40 to 50°C) with no condensation	

^{*1} See manual for details.



NS5 handheld, suitable for use in harsh conditions

The NS series has evolved into a mobile format. Based on the standard 5.7" TFT colour version, we can offer a handheld version of the NS series. Offering 10 Function keys for the most used functions and with a protection degree of IP65 it is the product to use in harsh environment where freedom of movement is needed.

- 10 Function keys, 4 hardwired for inching
- Emergency switch on front plus enable switch on back of unit
- Well protected against water, IP65
- Compact Flash, Serial and USB interface

Ordering information

Type				Order code
NSH5	TFT, 5.7", 320×240 pixels	Black		NSH5-SQR10B-V2

Accessories

Type	Order code
Bracket NS handheld protecting emergency button from accidental activation	NSH5-ATT01
Bracket NS handheld for wall mounting	NSH5-ATT02
Cable NS handheld, RS-422, 10m UL	NSH5-422UL-10M
Cable NS handheld, RS-232, 10m UL	NSH5-232UL-10M
Cable NS handheld, RS-232, 3m UL	NSH5-232UL-3M

Specifications

Memory card interface	1 slot ATA Compact Flash card
Serial (COM1)	1×RS-232/RS-422A
USB Slave	For programming
Line voltage	24 VDC ±15%
Power consumption	10 W max.
Battery	CJ1W-BAT01
Battery lifetime	5 years (at 25°C)
Enclosure rating	IP65 ^{*1}
Obtained standards	UL 1604 Class 1 Diff. 2, cUL, CE, NEMA equivalent
Operating environment	No corrosive gases
Noise immunity	Conforming to IEC 61000-4-4: 2 kV (power supply line)
Ambient operating temperature	0 to 40°C
Ambient operating humidity	35% to 85% max. (with no condensation)
Vibration resistance (during operation)	10 to 57 Hz with amplitude of 0.075 mm, 57 to 150 Hz with acceleration of 9.8 m/s ² three minutes each in X, Y, and Z directions
Shock resistance (during operation)	147 m/s ² three times each in X, Y, and Z directions
Drop test ^{*1}	Dropped from 1 m. Conforming to JIS B 3502/IEC61131-2

^{*1} see manual for details.

Ordering information

Type	Description		Order code
Cable	Serial programming cable		XW2Z-S002
	USB programming cable, 2 m		CP1W-CN221
PT-to-PLC Connecting Cable	PT connection: 9 pins	Length: 2 m	XW2Z-200T
	PLC connection: 9 pins	Length: 5 m	XW2Z-500T
Accessories	Video input	Inputs: 4 channels NTSC / PAL	NS-CA001
		Inputs: 2 channels NTSC / PAL, 1 channel RGB	NS-CA002
	Cable to connect NS-CA00_ to Video console unit		F150-VKP (2 m)
			F150-VKP (5 m)
	Controller link interface unit		NS-CLK21
	RS-422A/485 adapter (50 m)		CJ1W-CIF11
	RS-422A adapter (500 m)		NS-AL002
	Anti-reflection sheets (5 sheets)	NS15	NS15-KBA04
		NS12/10	NS12-KBA04
		NS8	NS7-KBA04
		NS5	NT30-KBA04
	Anti-reflection protective covers (5 pack)	NS12/10	NS12-KBA05
		NS8	NS7-KBA05
		NS5	NT31C-KBA05
	Transparent protective covers (5 pack)	NS15 (1 cover)	NS15-KBA05N
		NS12/10	NS12-KBA05N
		NS8	NS7-KBA05N
		NS5	NT31C-KBA05N
	Chemical-resistant cover (1 cover)	NS5	NT30-KBA01
	Attachment adapter	(NT625C/631/631C series to NS12 series)	NS12-ATT01
		(NT625C/631/631C series to NS12 series) Black	NS12-ATT01B
		(NT620S/620C/600S series to NS8 series)	NS8-ATT01
		(NT600M/600G/610G/612G series to NS8 series)	NS8-ATT02
	Memory card	128 MB	HMC-EF183
		256 MB	HMC-EF283
		512 MB	HMC-EF583
	Memory card adapter for PC		HMC-AP001
	Battery		CJ1W-BAT01



The feature-rich, cost-effective HMI

The combination of high quality and rich features add up to give outstanding value for an HMI in the economy class. The NB-Designer software to create your HMI application is free of charge and can be downloaded from our website.

- More than 65,000 display colors TFT touch screen
- Available in sizes ranging from 3.5 to 10 inches
- Long-life LED backlight
- Serial, USB or Ethernet communication
- USB memory stick support (TW01 model only)
- 128 MB internal memory
- Vector and bitmap graphics

Ordering information

HMI panels

Product name	Specifications	Order code
NB3Q	3.5 inch, TFT LCD, Color, 320 × 240 dots	NB3Q-TW00B
	3.5 inch, TFT LCD, Color, 320 × 240 dots, USB Host, Ethernet	NB3Q-TW01B
NB5Q	5.6 inch, TFT LCD, Color, 320 × 234 dots	NB5Q-TW00B
	5.6 inch, TFT LCD, Color, 320 × 234 dots, USB Host, Ethernet	NB5Q-TW01B
NB7W	7 inch, TFT LCD, Color, 800 × 480 dots	NB7W-TW00B
	7 inch, TFT LCD, Color, 800 × 480 dots, USB Host, Ethernet	NB7W-TW01B
NB10W	10.1 inch, TFT LCD, Color, 800 × 480 dots, USB Host, Ethernet	NB10W-TW01B

Options

Product item	Specifications	Order code
NB-to-PLC Connecting cable	For NB to PLC via RS-232C (CP/CJ/CS), 2m	XW2Z-200T
	For NB to PLC via RS-232C (CP/CJ/CS), 5m	XW2Z-500T
	For NB to PLC via RS-422A/485, 2m	NB-RSEXT-2M
Software	Supported Operating Systems: Windows 7, Windows Vista®, Windows XP ^{*1} (SP1 or higher). Download from the Omron website.	NB-Designer ^{*2}
Display protective sheets	For the NB3Q contains 5 sheets	NB3Q-KBA04
	For the NB5Q contains 5 sheets	NB5Q-KBA04
	For the NB7W contains 5 sheets	NB7W-KBA04
	For the NB10W contains 5 sheets	NB10W-KBA04
Attachment	Mounting bracket for NT31/NT31C series to NB5Q series	NB5Q-ATT01

^{*1} Except for Windows XP 64-bit version

^{*2} The NB5Q-TW01B and NB7W-TW01B are supported by NB-Designer version 1.10 or higher.
The NB3Q-TW0_B and NB10W-TW01B are supported by NB-Designer version 1.20 or higher.

Model	Panel cutout (H × V mm)
NB3Q	119.0 (+0.5/−0) × 93.0 (+0.5/−0)
NB5Q	172.4 (+0.5/−0) × 131.0 (+0.5/−0)
NB7W	191.0 (+0.5/−0) × 137.0 (+0.5/−0)
NB10W	258.0 (+0.5/−0) × 200.0 (+0.5/−0)

Note: Applicable panel thickness: 1.6 to 4.8 mm.

Specifications

HMI

Specifications	NB3Q		NB5Q		NB7W		NB10W
	TW00B	TW01B	TW00B	TW01B	TW00B	TW01B	TW01B
Display type	3.5 inch TFT LCD		5.6 inch TFT LCD		7 inch TFT LCD		10.1 inch TFT LCD
Display resolution (H×V)	320×240		320×234		800×480		800×480
Number of colors	65,536						
Backlight	LED						
Backlight lifetime	50,000 hours of operating time at the normal temperature (25°C)* ¹						
Touch panel	Analog resistive membrane, resolution 1024×1024, life: 1 million touch operations						
Dimensions in mm (H×W×D)	103.8×129.8×52.8		142×184×46		148×202×46		210.8×268.8×54.0
Weight	310 g max.	315 g max.	620 g max.	625 g max.	710 g max.	715 g max.	1.545 g max.

*1 This is the estimated time when the luminous intensity is decreased by 50% per LED at room temperature and humidity. It is a typical value.

Functionality

Specifications	NB3Q		NB5Q		NB7W		NB10W
	TW00B	TW01B	TW00B	TW01B	TW00B	TW01B	TW01B
Internal memory	128MB (including system area)						
Memory interface	–	USB Memory	–	USB Memory	–	USB Memory	USB Memory
Serial (COM1)	RS-232C/422A/485 (not isolated), Transmission distance: 15m Max. (RS-232C), 500m Max. (RS-422A/485), Connector: D-Sub 9-pin		RS-232C, Transmission distance: 15 m Max., Connector: D-Sub 9-pin				
Serial (COM2)	–		RS-232C/422A/485 (not isolated), Transmission distance: 15m Max. (RS-232C), 500m Max. (RS-422A/485), Connector: D-Sub 9-pin				
USB Host	Equivalent to USB 2.0 full speed, type A, Output power 5V, 150mA						
USB Slave	Equivalent to USB 2.0 full speed, type B, Transmission distance: 5m						
Printer connection	PictBridge support						
Ethernet	–	10/100 base-T	–	10/100 base-T	–	10/100 base-T	10/100 base-T

General

Specifications	NB3Q		NB5Q		NB7W		NB10W
	TW00B	TW01B	TW00B	TW01B	TW00B	TW01B	TW01B
Line voltage	20.4 to 27.6 VDC (24 VDC –15 to 15%)						
Power consumption	5 W	9 W	6 W	10 W	7 W	11 W	14 W
Battery lifetime	5 years (at 25°C)						
Enclosure rating (front side)	Front operation part: IP65 (Dust proof and drip proof only from the front of the panel)						
Obtained standards	EC Directives, KC, cUL508						
Operating environment	No corrosive gases.						
Noise immunity	Compliant with IEC61000-4-4, 2KV (Power cable)						
Ambient operating temperature	0 to 50°C						
Ambient operating humidity	10% to 90% RH (without condensation)						

Applicable Controllers

Brand	Series
OMRON	Omron C Series Host Link
	Omron CJ/CS Series Host Link
	Omron CP Series
Mitsubishi	Mitsubishi Q_QnA (Link Port)
	Mitsubishi FX-485ADP/485BD/422BD (Multi-station)
	Mitsubishi FX0N/1N/2N/3G
	Mitsubishi FX1S
	Mitsubishi FX2N-10GM/20GM
	Mitsubishi FX3U
	Mitsubishi Q series (CPU Port)
	Mitsubishi Q00J (CPU Port)
	Mitsubishi Q06H
Panasonic	FP series
Siemens	Siemens S7-200
	Siemens S7-300/400 (PC Adapter Direct)
Allen-Bradley*1 (Rockwell)	AB DF1
	AB CompactLogix/ControlLogix

Brand	Series
Schneider	Schneider Modicon Uni-TelWay
	Schneider Twido Modbus RTU
Delta	Delta DVP
LG (LS)	LS Master-K Cnet
	LS Master-K CPU Direct
	LS Master-K Modbus RTU
	LS XGT CPU Direct
	LS XGT Cnet
GE Fanuc Automation*1	GE Fanuc Series SNP
	GE SNP-X
Modbus	Modbus ASCII
	Modbus RTU
	Modbus RTU Slave
	Modbus RTU Extend
	Modbus TCP

*1 AB and GE will be supported by NB-Designer version 1.20 or higher.

Note: For details, refer to NB Series Host Connection Manual (Cat.No V108).

HMI with four text lines and 22 F-keys



The NT11 is a Function key HMI with four text lines that can each hold up to 20 characters. It has a parallel printer connection next to a serial port for connection to a PLC. It has a LED backlight that has a life expectancy of at least 50,000 hours.

- Easy programming software.
- Small size and installation depth.
- Customisable F-Keys
- Printer connection.
- Cost effective solution.

Ordering information

Type			Order code
STN monochrome	Ten-key type	Ivory	NT11-SF121-EV1
		Black	NT11-SF121B-EV1

Accessories

Type	Description			Order code
Cables	For screen transfer			XW2Z-S002
	For PLC connection	PT: 9-pin	Cable length: 2 m	XW2Z-200T
		PLC: 9-pin	Cable length: 5 m	XW2Z-500T
		PT: 9-pin	Cable length: 2 m	NT-CN221
		PLC: Mini-peripheral		

Software

Type	Order code
NTST Version 4.8	NTZJCAT1EV4
Upgrade NTST Version 4.8	NTZJCAT1EV4S

Specifications

Size in mm (HxWxD)	113×218×38.2
Effective display area	100×40mm (160×64 pixels)
Line voltage	24 VDC ±15%
Function keys	22 keys
Touch panel	–
Obtained standards	CE, cULus
No. of display characters (standard characters)	20 characters × 4 lines
No. of registered screens	250
Screen data capacity (standard)	32 KB
Expansion memory	–
Memory card interface	–
Printer connection	Supported
Backlight life	50,000 hours average



HMI with two text lines, 6 or 20 F-keys and up to two serial ports

The NT2S is the smallest HMI that we can offer you. It is based on a 16 × 2 lines LCD display with 6 or 20 Function keys. It offers IP65 protection, an optional RTC and printer connection.

- Easy and free programming software.
- Small size and installation depth.
- Real Time Clock (depending on model).
- Printer connection (depending on model).
- Cost effective solution.

Ordering information

Type			Order code
STN monochrome	Programmable	6-key type, Black	NT2S-SF121B-EV2
	PLC controlled		NT2S-SF122B-EV2
	Programmable	20-key type, Black	NT2S-SF123B-EV2
	PLC controlled		NT2S-SF125B-E
			NT2S-SF126B-E
			NT2S-SF127B-E

Accessories

Type	Description	Order code
NT2S-SF121/125 and NT3S	peripheral port CPM series except CPM2C, 2 m	NT2S-CN212-V1
NT2S-SF121/125 and NT3S	peripheral port CPM series except CPM2C, 5 m	NT2S-CN215-V1
NT2S-SF122/SF123/SF126/SF127	peripheral port CPM series except CPM2C, 2 m	NT2S-CN222-V1
NT2S-SF122/SF123/SF126/SF127	peripheral port CPM series except CPM2C, 5 m	NT2S-CN225-V2
NT2S-SF121/125 and NT3S	mini-peripheral port CJ1/CS1 and CPM2C series, 2 m	NT2S-CN223-V2
NT2S-SF122/SF123/SF126/SF127	mini-peripheral port CJ1/CS1 and CPM2C series, 2 m	NT2S-CN224-V1
NT2S-SF121/125 and NT3S	serial port CJ1/CS1/CP1/CPM2/CQM1(H), 2 m	NT2S-CN232-V1
NT2S-SF121/125 and NT3S	serial port CJ1/CS1/CP1/CPM2/CQM1(H), 5 m	NT2S-CN235-V1
NT2S-SF122/SF126	serial port CJ1/CS1/CP1/CPM2/CQM1(H), 2 m	NT2S-CN242-V1
All NT2S and NT3S models	serial programming cable, 2 m	NT2S-CN002

Software

Type	Order code
This software is provided free of charge and features Windows fonts, a Multi language import/export utility, a character map to design your own characters and can be used to place bitmaps in your application.	NTXS

Specifications

Size in mm (H×W×D)	60×109×43 (6 F-keys), 107×107×43 (20 F-keys)
Effective display area	56×11 mm
Line voltage	24 VDC ±10%
Touch panel	—
Obtained standards	CE, cULus
No. of display characters (standard characters)	16 characters x 2 lines
No. of registered screens	65,000 max.
Screen data capacity (standard)	24 KB in Programmable models
Expansion memory	—
Memory card interface	—
Internal memory	1K words data, 1K words retentative memory
Printer connection	Supported
Multi-Vendor support	Supported for several non-Omron PLCs. *1
Backlight life	LED, min. 50,000 hours

*1 Please contact Omron for a list of available drivers.





Coming soon


The next generation of Machine Interface

An HMI that is dynamic, intuitive and predictive makes industrial machines more attractive and competitive. The Omron Sysmac HMI enables faster, more efficient control and monitoring—and a more natural, proactive relationship between operator and machine.

The design has been based on real applications and customer requirements, a future-proofed, scalable platform that will evolve with their ever-changing needs, allowing real time reaction to events

- Complete functionality scalable with widescreen across 7", 9", 12", 15" range
- Available in black or silver
- High resolution (1280 × 800 pixel for 12" and 15", 800 × 480 pixel for 7" and 9")
- Coming soon. Please contact your Omron representative


System overview

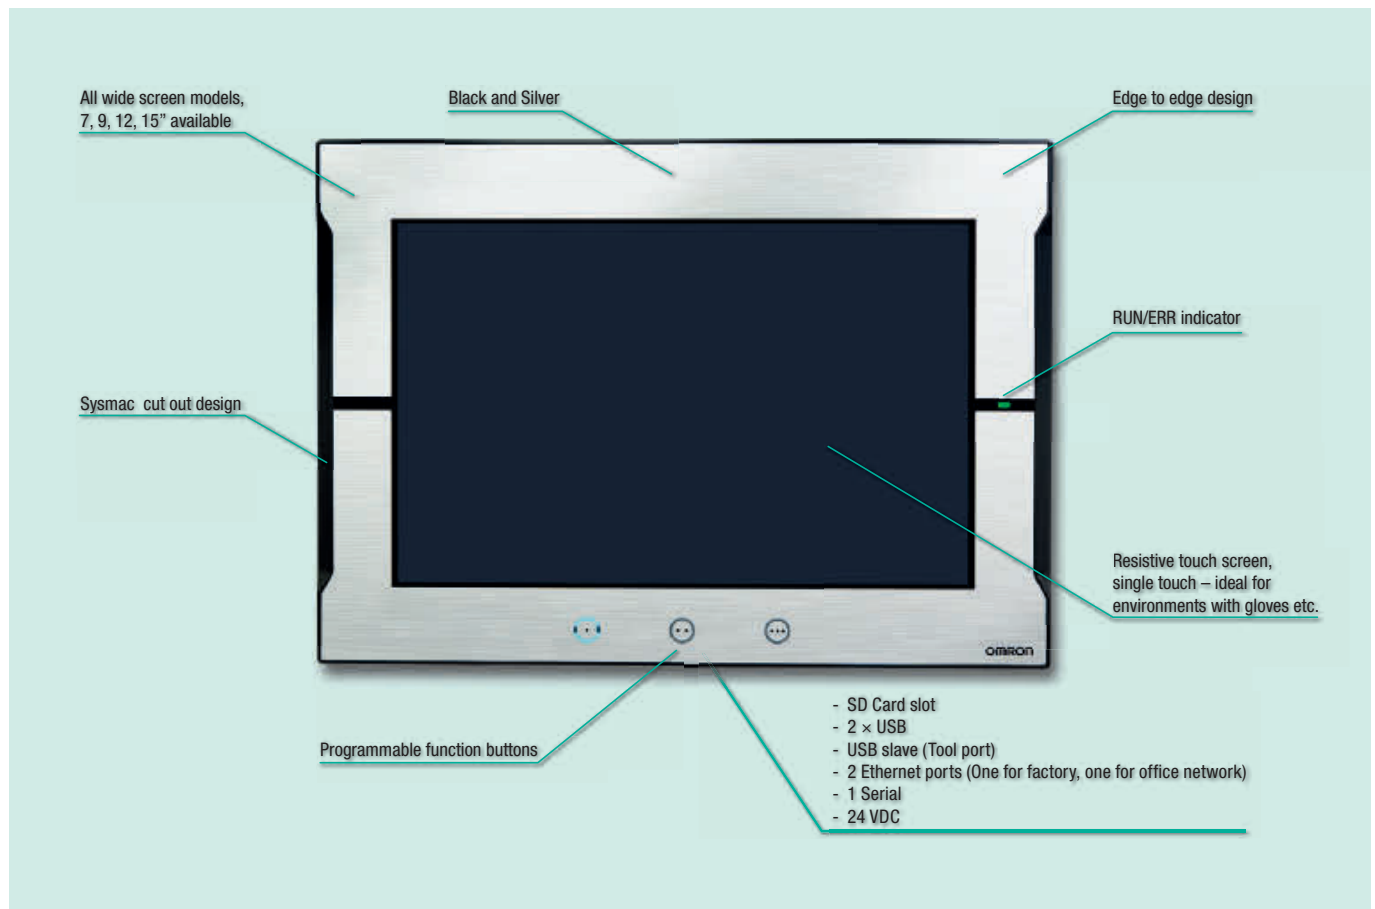

Note: Coming soon. Please contact your Omron representative.

Ordering information

I/O cables


Shape	PLC connection	Terminal connection	Length in cm										Wiring	Order code
			30	50	75	100	150	200	250	300	400	500		
	FCN24	MIL20	—	■	—	■	—	■	—	■	—	—	Straight	XW2Z-[...]AD-L
		Open ends	—	—	—	■	—	■	—	■	—	—	n. a.	XW2Z-[...]AL-L
	FCN40	MIL20 × 2	—	—	—	■	■	■	—	■	■	■	Straight	XW2Z-[...]BH-L01
													Reverse	XW2Z-[...]BH-L02
		MIL40	—	■	—	■	■	■	—	■	—	■	Straight	XW2Z-[...]BF-L
		Open ends	—	—	—	■	—	■	—	■	—	■	n. a.	XW2Z-[...]BN-L
	FCN56	MIL20 × 3	—	—	—	—	■	■	—	■	—	—	Straight	XW2Z-[...]CJ-L01
													Reverse	XW2Z-[...]CJ-L02
		MIL20 + MIL40	—	—	—	—	■	■	—	—	—	—	Straight	XW2Z-[...]CK-L01
													Reverse	XW2Z-[...]CK-L02
		MIL60	—	—	—	■	—	■	—	■	—	—	Straight	XW2Z-[...]CG-L
	MIL20	MIL20	—	■	—	■	—	■	—	—	—	—	Straight	XW2Z-[...]DD-L
		Open ends	—	■	—	■	■	■	—	■	—	■	n. a.	XW2Z-[...]DL-L
		Fork terminals	—	■	—	■	■	■	—	■	—	■	n. a.	XW2Z-[...]DM-L
	MIL34	MIL34	—	—	—	—	—	■	—	—	—	—	Straight	XW2Z-[...]EE-L
	MIL40	MIL20 × 2	—	—	■	■	—	■	—	■	—	■	Reverse	XW2Z-[...]FH-L01
													Straight	XW2Z-[...]FH-L02
		MIL40	■	■	—	■	■	■	—	■	—	■	Straight	XW2Z-[...]FF-L
		Open ends	—	—	—	■	■	■	■	■	—	■	n. a.	XW2Z-[...]FN-L

Note: For [...] fill in the 4-digit length in cm

I/O cables XW2Z


XW2Z- _AD-L

PLC connection	Terminal connection	Wiring	Length in cm (L)										Order code
			30	50	75	100	150	200	250	300	400	500	
24-pin FCN Connector	20-pin MIL Connector	Straight	-	■	-	-	-	-	-	-	-	-	XW2Z-0050AD-L
			-	-	-	■	-	-	-	-	-	-	XW2Z-0100AD-L
			-	-	-	-	■	-	-	-	-	-	XW2Z-0200AD-L
			-	-	-	-	-	-	■	-	-	-	XW2Z-0300AD-L

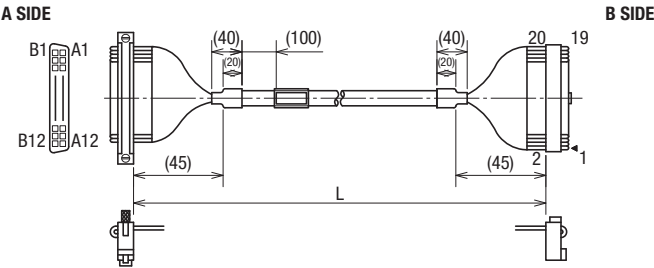


XW2Z- _AL-L

PLC connection	Terminal connection	Wiring	Length in cm (L)										Order code
			30	50	75	100	150	200	250	300	400	500	
24-pin FCN	Loose Wires	Straight	-	-	-	■	-	-	-	-	-	-	XW2Z-0100AL-L
			-	-	-	-	■	-	-	-	-	-	XW2Z-0200AL-L
			-	-	-	-	-	-	■	-	-	-	XW2Z-0300AL-L

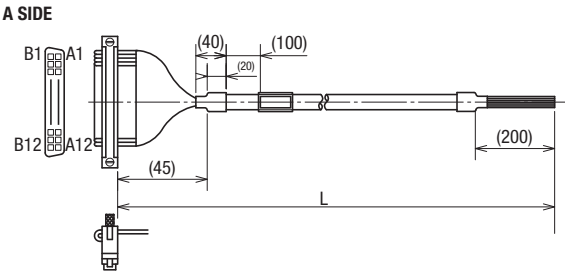


XW2Z- _BH-L01

PLC connection	Terminal connection	Wiring	Length in cm (L1)						Length in cm (L2)						Order code
			100	150	200	300	400	500	75	125	175	275	375	475	
40-pin FCN	Two 20-pin MIL	Straight	■	-	-	-	-	-	■	-	-	-	-	-	XW2Z-0100BH-L01
			-	■	-	-	-	-	-	■	-	-	-	-	XW2Z-0150BH-L01
			-	-	■	-	-	-	-	-	■	-	-	-	XW2Z-0200BH-L01
			-	-	-	■	-	-	-	-	-	■	-	-	XW2Z-0300BH-L01
			-	-	-	-	■	-	-	-	-	-	■	-	XW2Z-0400BH-L01
			-	-	-	-	-	■	-	-	-	-	-	■	XW2Z-0500BH-L01

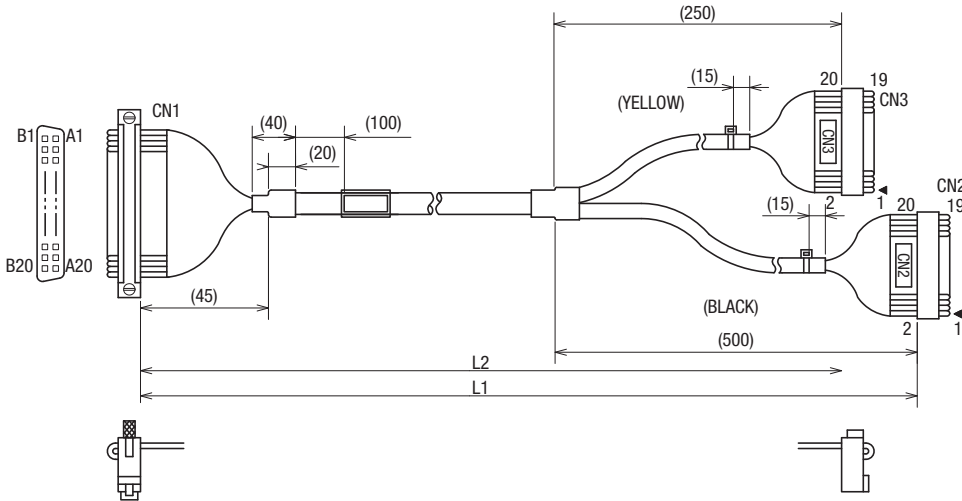


XW2Z- _BH-L02

PLC connection	Terminal connection	Wiring	Length in cm (L1)						Length in cm (L2)						Order code
			100	150	200	300	400	500	75	125	175	275	375	475	
40-pin FCN	Two 20-pin MIL	Reverse	■	-	-	-	-	-	■	-	-	-	-	-	XW2Z-0100BH-L02
			-	■	-	-	-	-	-	■	-	-	-	-	XW2Z-0150BH-L02
			-	-	■	-	-	-	-	-	■	-	-	-	XW2Z-0200BH-L02
			-	-	-	■	-	-	-	-	-	■	-	-	XW2Z-0300BH-L02
			-	-	-	-	■	-	-	-	-	-	■	-	XW2Z-0400BH-L02
			-	-	-	-	-	■	-	-	-	-	-	■	XW2Z-0500BH-L02

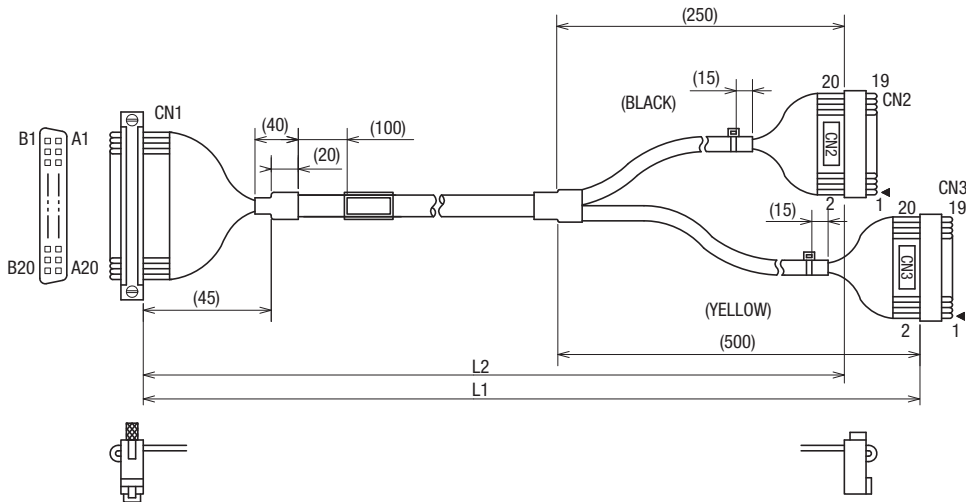


XW2Z- _BF-L

PLC connection	Terminal connection	Wiring	Length in cm (L)										Order code
			30	50	75	100	150	200	250	300	400	500	
40-pin FCN	40-pin MIL	Straight	-	■	-	-	-	-	-	-	-	-	XW2Z-0050BF-L
			-	-	-	■	-	-	-	-	-	-	XW2Z-0100BF-L
			-	-	-	-	■	-	-	-	-	-	XW2Z-0150BF-L
			-	-	-	-	-	■	-	-	-	-	XW2Z-0200BF-L
			-	-	-	-	-	-	■	-	-	-	XW2Z-0300BF-L
			-	-	-	-	-	-	-	■	-	-	XW2Z-0500BF-L

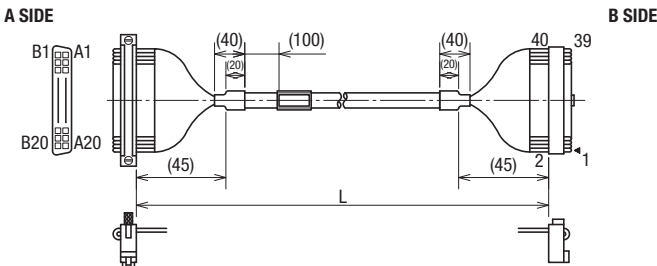


XW2Z- _BN-L

PLC connection	Terminal connection	Wiring	Length in cm (L)										Order code
			30	50	75	100	150	200	250	300	400	500	
40-pin FCN	Loose Wires	Straight	-	-	-	■	-	-	-	-	-	-	XW2Z-0100BN-L
			-	-	-	-	■	-	-	-	-	-	XW2Z-0200BN-L
			-	-	-	-	-	■	-	-	-	-	XW2Z-0300BN-L
			-	-	-	-	-	-	-	-	■	-	XW2Z-0500BN-L

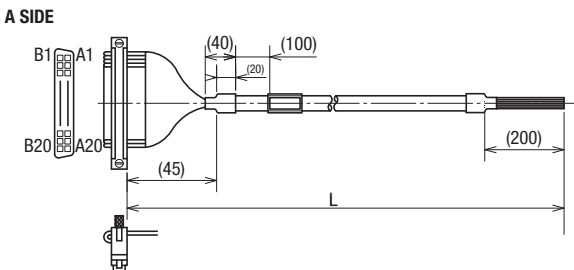


XW2Z- CJ-L01

PLC connection	Terminal connection	Wiring	Length in cm (L1)						Length in cm (L2)						Order code
			100	150	200	300	400	500	75	125	175	275	375	475	
56-pin FCN	Three 20-pin MIL	Straight	—	■	—	—	—	—	—	■	—	—	—	—	XW2Z-0150CJ-L01
			—	—	■	—	—	—	—	—	■	—	—	—	XW2Z-0200CJ-L01
			—	—	—	■	—	—	—	—	—	■	—	—	XW2Z-0300CJ-L01

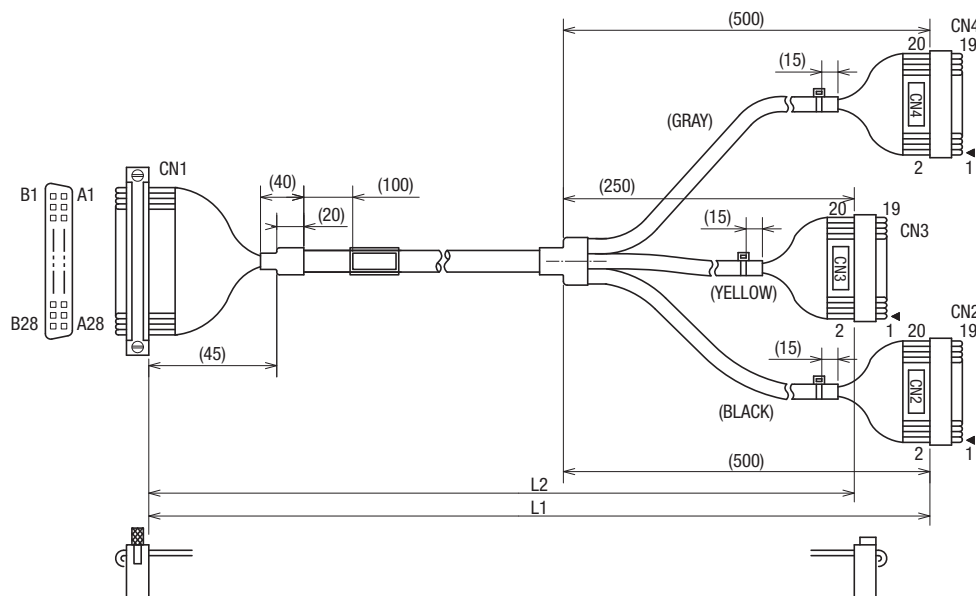


XW2Z-_CJ-L02

PLC connection	Terminal connection	Wiring	Length in cm (L1)							Length in cm (L2)							Length in cm (L3)					Order code
			100	150	200	300	400	500	75	125	175	275	375	475	50	100	150	250	300			
56-pin FCN	Three 20-pin MIL	Reverse	—	■	—	—	—	—	—	■	—	—	—	—	—	■	—	—	XW2Z-0150CJ-L02			
			—	—	■	—	—	—	—	—	■	—	—	—	—	—	■	—	XW2Z-0200CJ-L02			
			—	—	—	■	—	—	—	—	—	■	—	—	—	—	—	■	—			
			—	—	—	—	—	—	—	—	—	—	■	—	—	—	—	—	—			

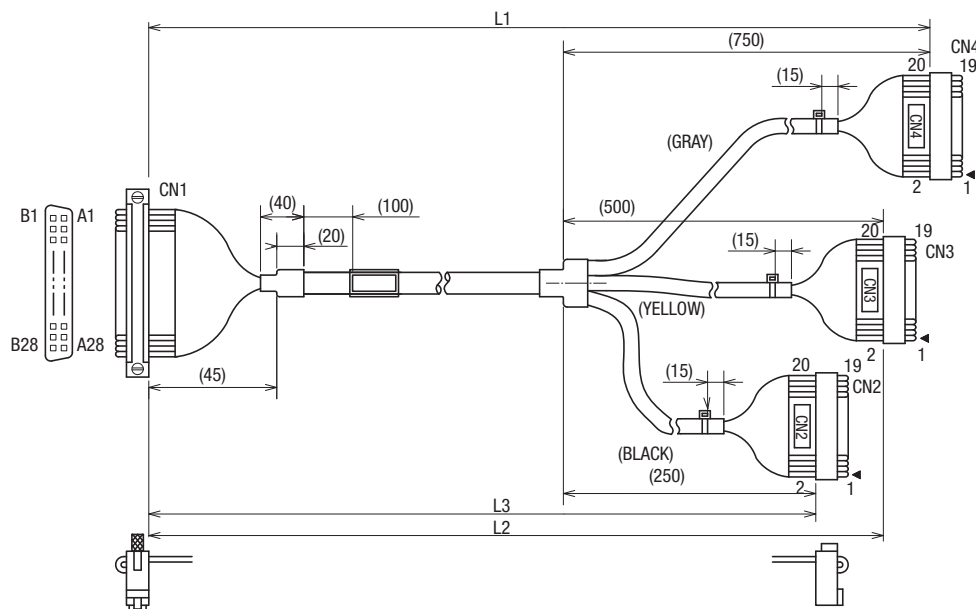


XW2Z- _CK-L0_

PLC connection	Terminal connection	Wiring	Length in cm (L1)						Length in cm (L2)						Order code
			100	150	200	300	400	500	75	125	175	275	375	475	
56-pin	40-pin MIL	Straight	-	■	-	-	-	-	-	■	-	-	-	-	XW2Z-0150CK-L01
		Reverse	-	■	-	-	-	-	-	■	-	-	-	-	XW2Z-0150CK-L02
		Straight	-	-	■	-	-	-	-	-	■	-	-	-	XW2Z-0200CK-L01
		Reverse	-	-	■	-	-	-	-	-	■	-	-	-	XW2Z-0200CK-L02

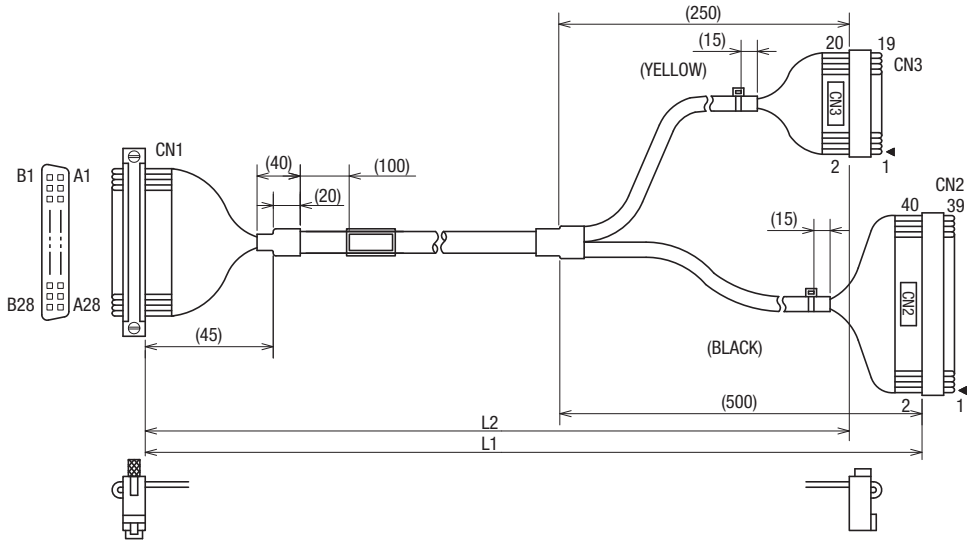


XW2Z- _CG-L

PLC connection	Terminal connection	Wiring	Length in cm (L)										Order code
			30	50	75	100	150	200	250	300	400	500	
56-pin FCN	60-pin MIL	Straight	-	-	-	■	-	-	-	-	-	-	XW2Z-0100CG-L
			-	-	-	-	-	■	-	-	-	-	XW2Z-0200CG-L
			-	-	-	-	-	-	-	■	-	-	XW2Z-0300CG-L

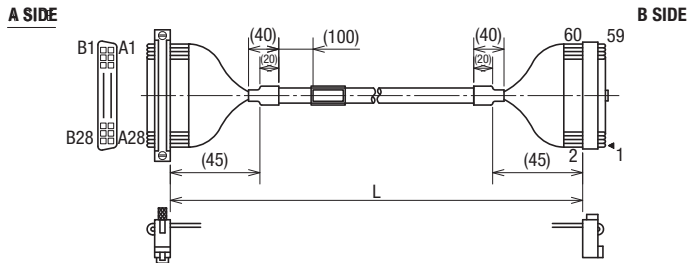

XW2Z- _DD-L


PLC connection	Terminal connection	Wiring	Length in cm (L)										Order code
			30	50	75	100	150	200	250	300	400	500	
20-pin MIL	20-pin MIL	Straight	-	■	-	-	-	-	-	-	-	-	XW2Z-0050DD-L
			-	-	-	■	-	-	-	-	-	-	XW2Z-0100DD-L
			-	-	-	-	-	■	-	-	-	-	XW2Z-0200DD-L

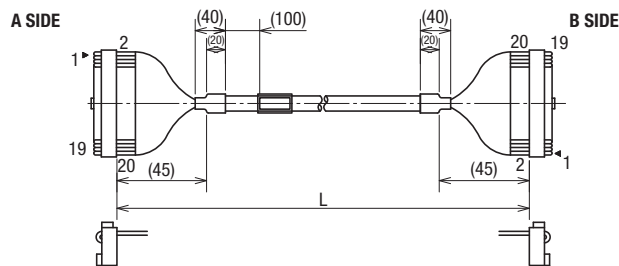

XW2Z- _DL-L

PLC connection	Terminal connection	Wiring	Length in cm (L1)										Order code
			30	50	75	100	150	200	250	300	400	500	
20-pin MIL	Loose Wires	Straight	-	■	-	-	-	-	-	-	-	-	XW2Z-0050DL-L
			-	-	-	■	-	-	-	-	-	-	XW2Z-0100DL-L
			-	-	-	-	■	-	-	-	-	-	XW2Z-0150DL-L
			-	-	-	-	-	■	-	-	-	-	XW2Z-0200DL-L
			-	-	-	-	-	-	-	■	-	-	XW2Z-0300DL-L
			-	-	-	-	-	-	-	-	-	■	XW2Z-0500DL-L


A SIDE

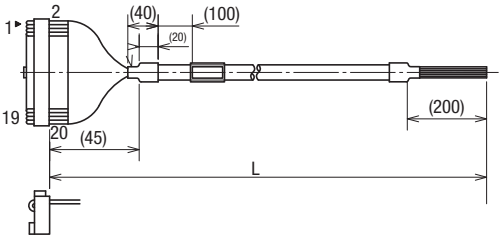

XW2Z- _DM-L

PLC connection	Terminal connection	Wiring	Length in cm (L1)										Order code
			30	50	75	100	150	200	250	300	400	500	
20-pin MIL	Loose Wires with Fork Terminals	Straight	-	■	-	-	-	-	-	-	-	-	XW2Z-0050DM-L
			-	-	-	■	-	-	-	-	-	-	XW2Z-0100DM-L
			-	-	-	-	■	-	-	-	-	-	XW2Z-0150DM-L
			-	-	-	-	-	■	-	-	-	-	XW2Z-0200DM-L
			-	-	-	-	-	-	-	■	-	-	XW2Z-0300DM-L
			-	-	-	-	-	-	-	-	-	■	XW2Z-0500DM-L

A SIDE

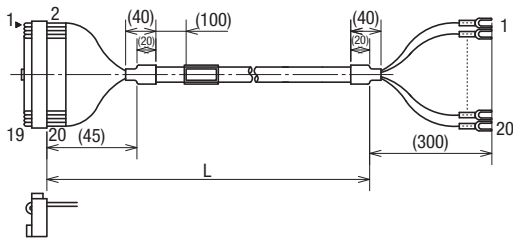


B SIDE

XW2Z-0200EE-L

PLC connection	Terminal connection	Wiring	Length in cm (L1)										Order code
			30	50	75	100	150	200	250	300	400	500	
34-pin MIL	34-pin MIL	Straight	-	-	-	-	-	■	-	-	-	-	XW2Z-0200EE-L


A SIDE

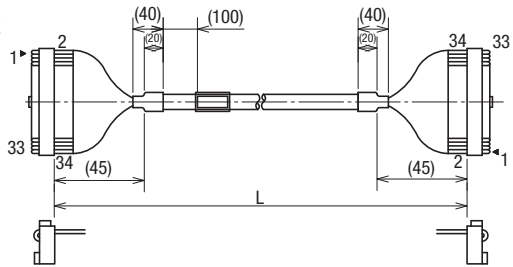

B SIDE


XW2Z-_FH-L01

PLC connection	Terminal connection	Wiring	Length in cm (L1)						Length in cm (L2)						Order code
			75	100	200	300	400	500	50	75	175	275	375	475	
40-pin MIL	Two 20-pin MIL	Reverse	■	—	—	—	—	—	■	—	—	—	—	—	XW2Z-0075FH-L01
			—	■	—	—	—	—	—	■	—	—	—	—	XW2Z-0100FH-L01
			—	—	■	—	—	—	—	—	■	—	—	—	XW2Z-0200FH-L01
			—	—	—	■	—	—	—	—	—	■	—	—	XW2Z-0300FH-L01
			—	—	—	—	—	■	—	—	—	—	—	■	XW2Z-0500FH-L01

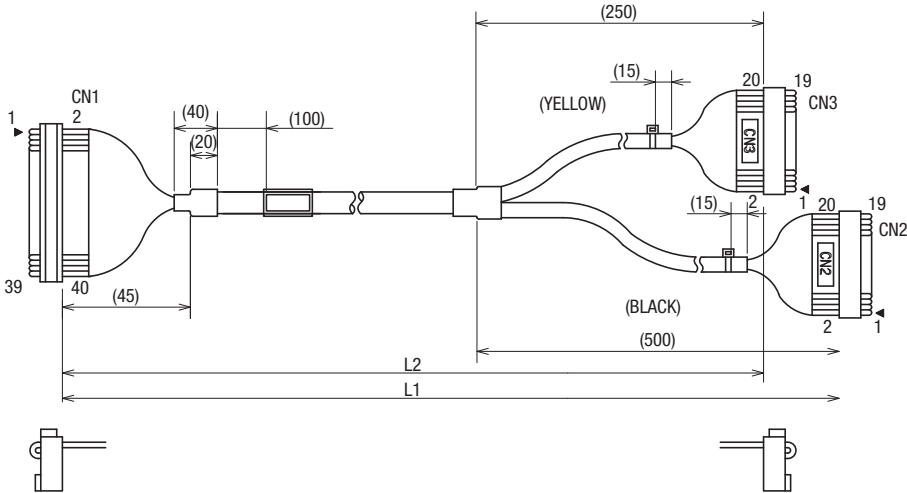


XW2Z-_FH-L02

PLC connection	Terminal connection	Wiring	Length in cm (L1)						Length in cm (L2)						Order code
			75	100	200	300	400	500	50	75	175	275	375	475	
40-pin MIL	Two 20-pin MIL	Straight	■	—	—	—	—	—	■	—	—	—	—	—	XW2Z-0075FH-L02
			—	■	—	—	—	—	—	■	—	—	—	—	XW2Z-0100FH-L02
			—	—	■	—	—	—	—	—	■	—	—	—	XW2Z-0200FH-L02
			—	—	—	■	—	—	—	—	—	■	—	—	XW2Z-0300FH-L02
			—	—	—	—	—	■	—	—	—	—	—	■	XW2Z-0500FH-L02

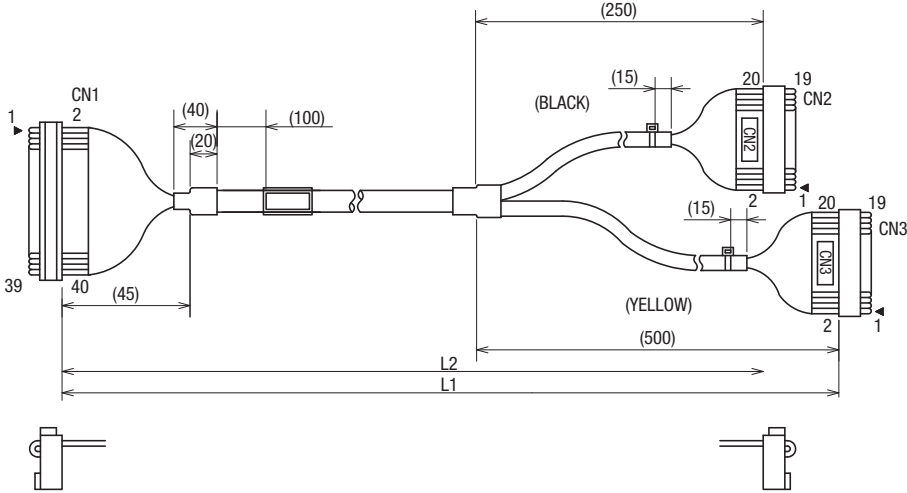


XW2Z- _FF-L

PLC connection	Terminal connection	Wiring	Length in cm (L1)										Order code
			30	50	75	100	150	200	250	300	400	500	
40-pin MIL	40-pin MIL	Straight	■										XW2Z-0030FF-L
				■									XW2Z-0050FF-L
						■							XW2Z-0100FF-L
							■						XW2Z-0150FF-L
								■					XW2Z-0200FF-L
										■			XW2Z-0300FF-L
											■		XW2Z-0500FF-L

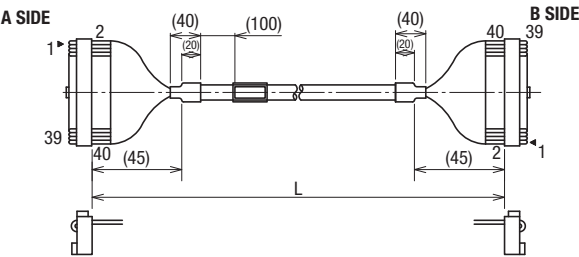


XW2Z- _FN-L

PLC connection	Terminal connection	Wiring	Length in cm (L1)										Order code
			30	50	75	100	150	200	250	300	400	500	
40-pin MIL	Loose Wires	Straight	-	-	-	■							XW2Z-0100FN-L
			-	-	-		■						XW2Z-0150FN-L
			-	-	-			■					XW2Z-0200FN-L
			-	-	-				■				XW2Z-0250FN-L
			-	-	-					■			XW2Z-0300FN-L
			-	-	-						■		XW2Z-0500FN-L


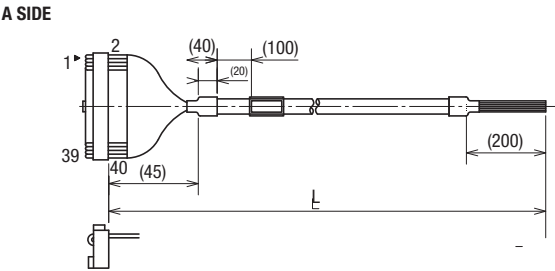


I/O terminal blocks

General purpose I/O terminals

Shape	Connection type	Number of points	Order code
	Push-in	20 pt	XW2R-P20G-T
		34 pt	XW2R-P34G-T
		40 pt	XW2R-P40G-T
		50 pt	XW2R-P50G-T
		60 pt	XW2R-P60G-T
	Clamp	20 pt	XW2R-E20G-T
		34 pt	XW2R-E34G-T
		40 pt	XW2R-E40G-T
		50 pt	XW2R-E50G-T
		60 pt	XW2R-E60G-T
	Screw	20 pt	XW2R-J20G-T
		34 pt	XW2R-J34G-T
		40 pt	XW2R-J40G-T
		50 pt	XW2R-J50G-T
		60 pt	XW2R-J60G-T

Omron PLC I/O terminals

Shape	Connection type	I/O unit type	Order code
	Push-in	32 inputs Fujitsu	XW2R-P34G-C1
		32 inputs MIL	XW2R-P34G-C2
		32 outputs Fujitsu	XW2R-P34G-C3
		32 outputs MIL	XW2R-P34G-C4
	Clamp	32 inputs Fujitsu	XW2R-E34G-C1
		32 inputs MIL	XW2R-E34G-C2
		32 outputs Fujitsu	XW2R-E34G-C3
		32 outputs MIL	XW2R-E34G-C4
	Screw	32 inputs Fujitsu	XW2R-J34G-C1
		32 inputs MIL	XW2R-J34G-C2
		32 outputs Fujitsu	XW2R-J34G-C3
		32 outputs MIL	XW2R-J34G-C4

Ethernet patch cables, standard RJ45 connectors

Shape	Connector 1	Connector 2	Material	Cable	Colour	Length in cm												Order code
						20	30	50	100	150	200	300	500	750	1000	1500	2000	
	RJ45 std.	RJ45 std.	LSZH	Cat6a S/FTP 4 pairs	Blue	■	■	■	■	■	■	■	■	■	■	■	■	XS6W-6LSZH8SS[...]CM-B
	RJ45 std.	RJ45 std.	LSZH	Cat6a S/FTP 4 pairs	Yellow	■	■	■	■	■	■	■	■	■	■	■	■	XS6W-6LSZH8SS[...]CM-Y
	RJ45 std.	RJ45 std.	LSZH	Cat6a S/FTP 4 pairs	Green	■	■	■	■	■	■	■	■	■	■	■	■	XS6W-6LSZH8SS[...]CM-G
	RJ45 std.	RJ45 std.	PUR	Cat5e S/FTP 4 pairs	Green	—	—	■	■	■	■	■	■	■	■	■	■	XS6W-5PUR8SS[...]CM-G

Note: For [...] fill in the length in cm.

Ethernet patch cables, RJ45/M12 connectors

Shape	Connector 1	Connector 2	Material	Cable	Colour	Length in cm								Order code
						30	50	100	200	300	500	1000	1500	
	RJ45	RJ45	PVC	Cat5e Shielded Quad	Light Blue	A	B	C	D	E	G	J	K	XS5W-T421-[.]JMD-K
	M12 straight	M12 straight	PVC	Cat5e Shielded Quad	Light Blue	—	B	C	D	E	G	J	K	XS5W-T421-[.]JM2-K
	M12 straight	RJ45	PVC	Cat5e Shielded Quad	Light Blue	A	B	C	D	E	G	J	K	XS5W-T421-[.]JMC-K
	M12 angled	M12 angled	PVC	Cat5e Shielded Quad	Light Blue	—	B	C	D	E	G	J	K	XS5W-T422-[.]JM2-K
	M12 angled	RJ45	PVC	Cat5e Shielded Quad	Light Blue	A	B	C	D	E	G	J	K	XS5W-T422-[.]JMC-K

Note: For [.] fill in the 1-character length code.

Specifications

Item	XS6W-6LSZH8SS_CM-__	XS6W-5PUR8SS_CM-G
Rated current	1 A (at 50°C)	
Withstand voltage	1,000 VDC for 60 s (leakage current: 1 mA max.)	
Ambient operating temperature	−20 to 60°C	−40 to 85°C
Ambient storage temperature	−20 to 60°C	−40 to 85°C
Ambient installation temperature	0 to 50°C	−10 to 60°C
Protective structure	IP20	IP20

Accessories

Type	Connector	Specification	Colour	Length	Order code
Ethernet installation cable	none	CAT 5, SF/UTP, 4 × 2 × AWG 24/1 (solid core), Polyurethane (PUR)	Green	100 m	WM IE5IC4x2xAWG24/1-PUR
	none	CAT 5, SF/UTP, 4 × 2 × AWG 26/7 (stranded core), Polyurethane (PUR)		100 m	WM IE5IC4x2xAWG26/7-PUR
Ethernet socket	RJ45 socket	DIN-rail mount socket to terminate installation cable in the cabinet	Grey	60 × 17.5 × 67 mm	WM IE-TO-RJ45-FJ-B
Ethernet field-mount plugs	Metal RJ45	for AWG22 to AWG26	Chrome	52 mm	WM IE-PS-RJ45-FH-BK
	Plastic RJ45	for AWG22 to AWG24	Black	52 mm	XS6G-T421-1

Industrial switching hubs

Shape	Functions	Ports	Failure detection	Power supply voltage	Order code	
	Quality of Service (QoS): EtherNet/IP control data priority Failure detection: Broadcast storm and LSI error detection 10/100BASE-TX, Auto-negotiation	3	—	24.0 VDC±5%	W4S1-03B	
		5			W4S1-05B	
					W4S1-05C	

EtherCAT junction slave

Shape	Functions	Ports	Power supply voltage	Order code
	Creation of star- and tree topologies in EtherCAT networks. Distributed Clock (DC) is supported.	3	20.4 to 28.8 VDC (24 VDC –15% to 20%)	GX-JC03
		6		GX-JC06



FA Wireless LAN unit

WE70 utilises spread-spectrum modulation technology based on radio waves to enable communication between devices in a limited area. This gives users the mobility to move around within a broad coverage area and still be connected to the network. The smart roaming function enables high speed roaming therefore moving equipment and mobile object can communicate at high speed.

- Conforms to IEEE 802.11a/b/g.
- Same noise and environment resistance level as a PLC.
- Features Omron's original security system.
- Signals can be observed with LED indicators.
- Conforms to radio wave standards for the USA, Europe, and China.

Ordering information

Area	Type	Order code
Europe	Access Point (Master)	WE70-AP-EU
	Client (Slave)	WE70-CL-EU
USA	Access Point (Master)	WE70-AP-US
	Client (Slave)	WE70-CL-US
China	Access Point (Master)	WE70-AP-CN
	Client (Slave)	WE70-CL-CN

Accessories

Type	Specifications	Order code
Directional Magnetic-base Antenna	1 set with two Antennas, 2.4 GHz/5 GHz Dual-band compatible	WE70-AT001H

Type	Order code
DIN Rail Mounting Bracket (for TH35 7.5)	WT30-FT001
DIN Rail Mounting Bracket (for TH35 15)	WT30-FT002
Antenna Extension Cable (5 m)	WE70-CA5M

Note: For Ethernet Cables and Accessories, see page 85



СИТЕЛ ООД - OMRON дистрибутор
www.sitel-omron.com

София - бул. Цариградско шосе 113А, ет.3,
офис 5 /в Лито Балкан, зад Shell и The Mall/
тел./факс: (02) 975 2282
sofia@sitel-omron.com

Плевен - бул. Русе 37А, ет. 3, офис 2
тел./факс: (064) 81 58 70
pleven@sitel-omron.com

Пловдив - ул. Белград 2, ет. 2, офис 104
(до Новотела)
тел./факс: (032) 96 91 55
plovdiv@sitel-omron.com

Стара Загора - ул. Захарий Княжески 21, ап. 5
тел./факс: (042) 62 11 65
starazagora@sitel-omron.com