

# CP-X255

XGA, 2000 ANSI Lumens

# CP-X250

XGA, 2000 ANSI Lumens

# CP-S240

SVGA, 2000 ANSI Lumens

# HITACHI

Inspire the Next

NEW FROM HITACHI COMES A RANGE OF LCD PROJECTORS OFFERING BRIGHT, DETAILED PICTURES FROM A COMPACT, LIGHTWEIGHT UNIT.

Just because you want portability, it doesn't mean you have to sacrifice performance.

A range of three LCD projectors, each weighing under 3Kg, gives you the freedom to take your presentations with you, while offering the promise of outstanding performance, with a choice of XGA or SVGA resolution.

Perfect performers. Perfectly portable.

- 2000 ANSI Lumens
- XGA Resolution (CP-X255 & CP-X250)
- SVGA Resolution (CP-X240)
- Full Connectivity
- Digital Gamma Correction
- Digital Keystone Correction
- PIN Code Security System
- Lightweight and Portable
- LAN Connection to PC (CP-X255)
- My Screen Memory Image Store
- Easy Access Filter and Lamp



# CP-X255

XGA, 2000 ANSI Lumens

# CP-X250

XGA, 2000 ANSI Lumens

# CP-S240

SVGA, 2000 ANSI Lumens

Presentation has always been important in business, but arguably, never more so than today. So when you arrive in the client's boardroom and set up your presentation, you want to be sure of making a good impression. That's where Hitachi's ultra-portable range of projectors come in. They are small, so easy to accommodate, quick and easy to set up and, perhaps most importantly, deliver excellent pictures, both graphics and full motion video.

## Advanced User Features

### Low Acoustic Noise

With an extremely low acoustic noise rating of just 38dB in Normal mode, and just 33dB in Whisper mode, all your audience will hear is what you have to say, not the operating noise of the projector.

### XGA Resolution


The CP-X255 and CP-X250 offer XGA-resolution pictures, delivering a highly-detailed, 1024 x 768-pixel image.

### High Brightness

All three projectors are rated at 2000 ANSI Lumens brightness. This means they will deliver crisp sharp images, with real punch in ideal low-lighting conditions. It also means that they can function perfectly well, and be seen perfectly well, in normal lighting conditions.

### Freeze Function

The Freeze function enables you to freeze a video image on the screen, useful if you want to stop the action and analyse something in more detail.

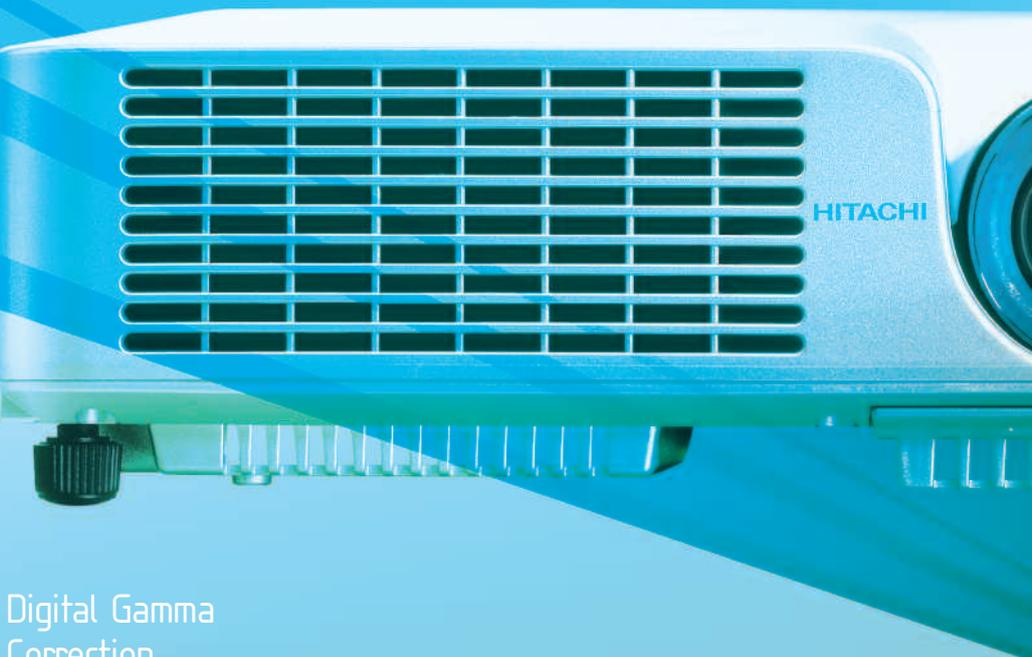

### Digital Gamma Correction

The Digital Gamma Correction feature enables the projectors to reproduce fine differences in light and shade, giving images a more credible, three-dimensional quality.

### Digital Keystone Correction


Digital Keystone Correction ensures that you get a perfectly-focused image, even if you can't line the projector up directly in front of the screen. The function corrects the image for vertical misalignment. When you don't know what sort of environment you're going to be presenting in, it gives you added confidence that you're going to be able to put on a good show.

### Projection Distances

The projectors can throw as small or as large a picture as you want, within reason, from a minimum of 0.8m (30") at 0.9m from the screen, to a maximum of 7.6m (300") at 9.3m from the screen.

### My Memory

The projectors have picture memory settings, where you can optimise the projector set-up for graphics or full motion video, for example, or for different ambient lighting conditions, then recall the appropriate setting via the menu system.

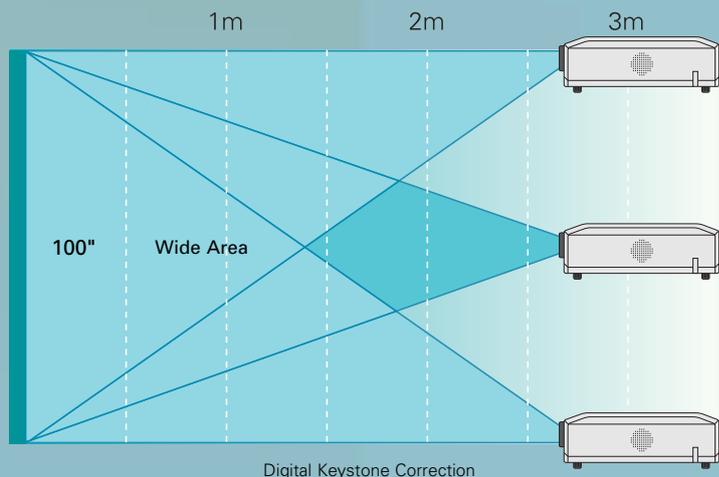


## Ease of Use Features

### My Screen

The My Screen feature helps your presentations look more professional even before you connect to a PC. It enables you to store an image, a company or brand logo for example, in the computer's memory. As soon as the projector is switched on, the image is displayed.

### Easy Lamp Access

The lamp in your Hitachi projector will run for around 2000 hours before it needs replacing. But when the time does come to replace it, accessing the lamp is easy, making the job of installing a new one quick and simple.

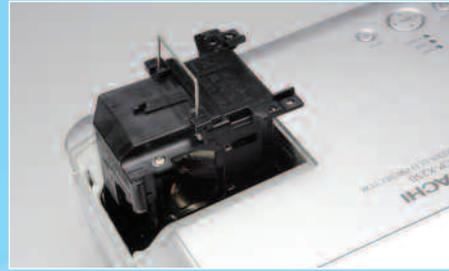

### Easy Filter Access

Like the lamp, the air filter is easily accessed, so if you receive an onscreen alert to clean the air filter, it is a quick and easy process that can be carried out without specialist expertise.



## 3 Way Security Features

### PIN Code Security System

A simple PIN Code Security System protects the projectors for unauthorised use, acting as a deterrent against theft.

### Start-Up Screen

Start-up screen can be customised (My Screen) with a security message and this start up screen can be locked by a user definable PIN code.




### Anti-Theft Security Bar

Portable projectors are notoriously difficult to secure. But in addition to the PIN Code, these come with a rigid metal bar which can be attached to the projector and then locked down to prevent theft.



### Ceiling Mountable

For permanent installations, the projectors are ceiling mountable. Simply choose the best position in relation to the screen, run the necessary cables, and then mount the projector.

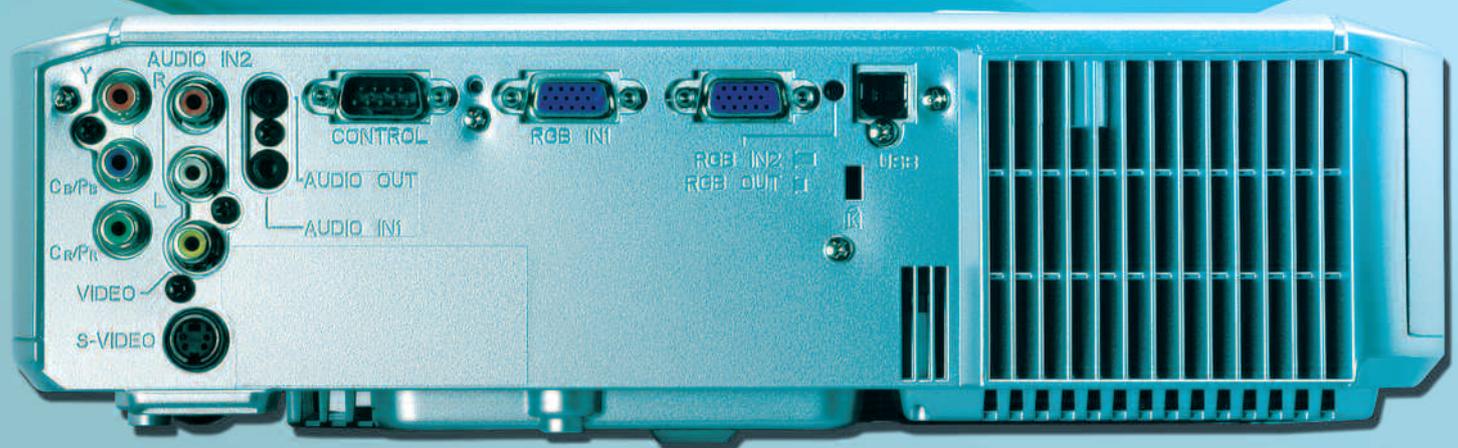

## Connectivity

The projectors have multiple audio, video and data inputs, to accommodate all your sources, from a DVD player to a PC. Socketry includes component, S-Video and composite video, plus stereo audio, and 15-pin Mini D-sub data input and output sockets. There is also a 9-pin D-sub for RS232 control, and a USB socket for mouse control. The projectors have a built-in monitor speaker, but audio can be routed out to an amplifier, TV or other device.

## Video Compatibility

For motion video, the projectors can handle PAL, NTSC, PAL-M, PAL-N, NTSC 4.43 and Secam sources. They are compatible with 525i (480i), 525p (480p) and 625i (576i) standard definition sources, as well as 750p (720p @60Hz) and 1125i (1080i @ 50/60Hz sources). There's very little they can't handle.

## Computer Compatibility

The projectors offer VGA, SVGA, XGA and SXGA compatibility with all types of PC.

# CP-X255, CP-X250 & CP-S240

## Technical Specifications

**HITACHI**  
Inspire the Next

OPTICAL	CP-X255	CP-X250	CP-S240
LCD Panel Resolution	0.6" P-Si TFT x 3 with micro Lens 1024 dots x 768 lines	0.6" P-Si TFT x 3 with micro Lens 1024 dots x 768 lines	0.6" P-Si TFT x 3 with micro Lens 800 dots x 600 lines

OPTICAL (ALL MODELS)		
Brightness (Normal)	2000 ANSI Lumens	
Brightness (Whisper)	1600 ANSI Lumens	
Contrast Ratio	400:1	
Lens	F=1.7-1.9, (f=18.9-22.6mm), Manual Zoom x 1.2	
Focus Distance	0.9-9.3m (WIDE), 1.1-11.2m (TELE)	
Distance to width ratio (:1)	1.52 (WIDE), 1.86 (TELE)	
Display Size	30"-300" (60" @ 1.8m, wide)	
Lamp	UHB180W	
Number of Colours	8bits/colour, 16.7M colours	
Colour Saturation	x=0.310, y=0.380 (6500K)	

COMPATIBILITY		
Computer Compatibility	IBM Compatible VGA, SVGA, XGA, SXGA Capability MAC16" (pixelworks Chip)	
Video Compatibility	NTSC/PAL (-BGDHI)/SECAM/PAL-M,N/NTSC4.43 SDTV: 525i(480i), 525p(480p), 625i(576i) HDTV: 750p (720p@60Hz), 1125i(1080i@50/60Hz)	
Plug & Play Frequency Range	DDC2B Horizontal: 15-91kHz, Vertical: (50-120Hz (Video/PC))	

FEATURES		
Keystone Correction Other	9:1 upward shift, fixed MENU: 17 Language (Including English, French, German, Spanish, Italian, Norwegian, Dutch, Japanese, Portuguese, Simplified Chinese, Korean, Traditional Chinese, Swedish, Russian, Finnish, Polish, Turkish), Freeze Function, Magnify (x4), Digital Gamma Correction, My Memory, 2-3 pull down, Electrical Vertical Keystone Correction, Auto Configuration (H-Phase, H-Size, Position), PIN Lock System, My Screen, Easy Operation: Quick On, Anti-Theft Security Bar, Variable Colour (RGB individual), Easy Lamp Access (top), Easy Filter Access (slide system)	
Speakers	1 x 1W	

CONNECTORS		
Video Input	1 x Composite Video RCA Jack 1 x S-Video Mini DIN 4-pin 3 x Component Video RCA Jack	
Computer Input	2 x 15-pin Mini D-sub	
Computer Output	1 x 15-pin Mini D-sub (shared with RGB2 input)	
Audio Input	1 x Stereo Mini Jack, 2 x Audio (L,R) RCA Jack	
Audio Output	1 x Stereo Mini Jack	
Control	1 x 9-pin D-sub for RS232 (serial) control 1 x USB for mouse control	

POWER		
Power Supply	100-120V/220-240V, 50/60Hz, Auto switching	
Power Consumption	290W	



PHYSICAL		
Dimensions (W x H x D)	306 x 86 x 249mm (excluding feet and extrusions)	
Weight	2.8Kg (CP-X250, CP-S240), 2.9Kg (CP-X255)	
Noise Level	38dB (Normal mode) 33dB (Whisper mode)	

CERTIFICATION		
UL60950/C-UL, FCC Part 15, Class B, CE, EN60950		

MISCELLANEOUS		
Lamp Indicator Light, Power Light, Ceiling Mount Image, Rear Projection Image		

ACCESSORIES SUPPLIED		
RGB Cable, Remote Control (no laser pointer), Batteries, Safety Instruction, Power Cord, Quick Guide, 14 Languages User Manual (English, French, German, Spanish, Italian, Norwegian, Dutch, Portuguese, Simplified Chinese, Korean, Swedish, Russian, Finnish, Polish), Soft Case, Video Cable		

OPTIONAL ACCESSORIES		
Replacement Lamp	DT00731	

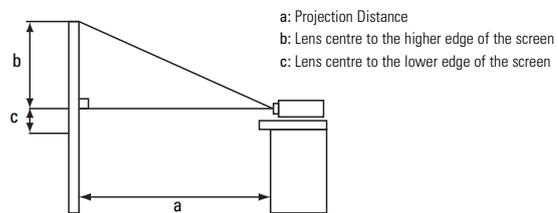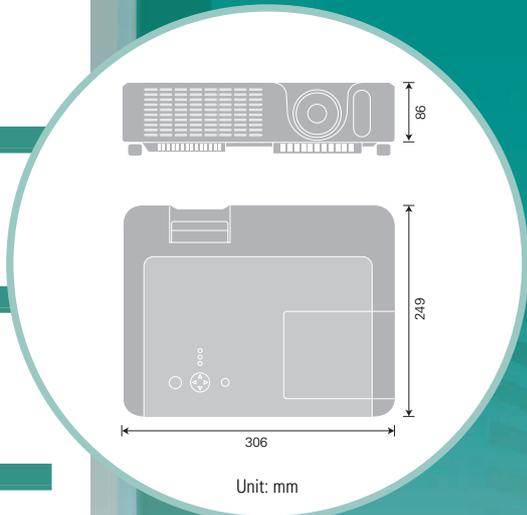

Screen Size (Diagonal)	Image Size 4:3		Projection Distance	
	a (min)	a (max)	b (top)	c (bottom)
30" (0.8m)	0.9m (36")	1.1m (43")	5cm (2")	41cm (16")
40" (1.0m)	1.2m (48")	1.5m (57")	6cm (2")	55cm (22")
50" (1.3m)	1.5m (60")	1.8m (72")	8cm (3")	69cm (27")
60" (1.5m)	1.8m (72")	2.2m (87")	9cm (4")	82cm (32")
70" (1.8m)	2.1m (84")	2.6m (101")	11cm (4")	96cm (38")
80" (2.0m)	2.4m (96")	2.9m (116")	12cm (5")	110cm (43")
90" (2.3m)	2.8m (109")	3.3m (130")	14cm (5")	123cm (49")
100" (2.5m)	3.1m (121")	3.7m (145")	15cm (6")	137cm (54")
120" (3.0m)	3.7m (145")	4.4m (174")	18cm (7")	165cm (65")
150" (3.8m)	4.6m (182")	5.5m (218")	23cm (9")	206cm (81")
200" (5.1m)	6.2m (242")	7.4m (291")	30cm (12")	274cm (108")
250" (6.4m)	7.7m (303")	9.3m (364")	38cm (15")	343cm (135")
300" (7.6m)	9.2m (364")	11.1m (437")	46cm (18")	411cm (162")

HITACHI DIGITAL MEDIA  
Hitachi Europe Ltd  
Whitebrook Park  
Lower Cookham Road  
Maidenhead  
Berkshire SL6 8YA  
Tel: 01628 585 000  
Fax: 01628 585 500  
www.hitachidigitalmedia.com

All brand or product names are trademarks or registered trademarks of their respective owners. Design and specifications are subject to change without notice.



Wedgwood AV Ltd  
Audio visual supplier since 1996

# Wedgwood AV Ltd

Specialise in the supply of audio visual equipment to UK medical, MOD, education and businesses

Tel: 01754 769967 / 0800 018 9967

FREE Repeat Signage Standalone digital signage software for Windows with every order over £500+VAT purchased from Wedgwood AV Ltd in 2015

## Full product list FREE AV guides



LCD monitors

Wedgwood are giving away Repeat Signage Standalone Edition worth £145+VAT with any products with a total order value of over £500+VAT purchased during 2015 from Wedgwood AV Ltd. sales@wedgwood-group.com (Order value £1,000 +VAT will receive two software licences; £1,500+VAT three licences).

Repeat Signage helps you get your message across, to promote your products or services. You can display still and moving images, scrolling text messages, RSS feeds (such as the BBC weather or your local news), show webcam or web browser, add audio, PowerPoint scheduler, Flash clocks, and even display pictures which text. [See 2 minute video](#). [Trial download](#)

### Contact us - how to order

For a quotation or to place your official purchase order and receive your FREE Repeat Signage digital signage software please telephone 01754 769967 or fax 01754 768036 Email sales@wedgwood-group.com [Special offers](#)

Wedgwood AV Ltd - 01754 769967 [www.wedgwood-group.com](http://www.wedgwood-group.com)



Mount solutions



Touch screens



Digital signage



Medical monitors



Lecterns



Audio



Whiteboards



Projectors



Projector lamps



Projector lenses



Projector screens