

## OPERATING INSTRUCTIONS & USER MANUAL

Congratulations on the purchase of your ELK Golf GT Lithium Golf Buggy.

Contained in this manual are detailed operation instructions and a guide to caring for your new GT Lithium Golf Buggy.

Your new golf buggy has been fully assembled and quality controlled checked for your convenience




**Opening the box** - Lift off the external promotional cover off the box and the internal packaging will be obvious.



Place your fingers in the holes provided and lift off the internal protective cover of the box.



You will now be able to see the golf buggy fully assembled and ready to be removed from the box.

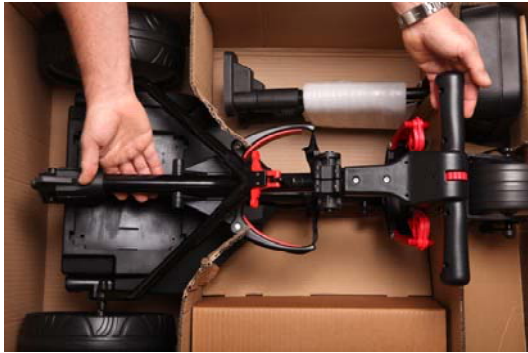

Place your hands on the buggy as per the photo and lift upwards to remove the buggy from the box.



On the top of the buggy, you will see two Red Levers, which lock the frame into the folded position.



Press either one or both of these Red Levers to release the frame lock and lift the rear support section of the frame until it is laying down, as per the photo.



Lift the top section of the handle until the main handle assembly is full extended and laying down as per the photo below.





Lift the fully extended handle upwards enough to allow the rear support section of the frame to join with the handle assembly as per the photos.



Once again press either or both of the Red Levers to lock the two sections of the frame together. The golf buggy is now fully erected and ready for use.

**Fitting the Seat Mount Bar** – remove the Seat Mount Bar from the box and remove the protective wrapping.

You will notice the seat mount bar has a label affixed showing which way up it should be fitted to the frame.



Slide the Seat Mount bar into the frame. For your convenience, provision has been made to fit the seat to either side of the buggy.



You will be able to see three optional settings, for the distance that the seat can be placed depending on the size of your golf bag. We highly recommend that you make a final adjustment of the seat position, once you have fitted your golf bag to the buggy. Please ensure that you only use the maximum setting if the width of your golf bag requires this to be so.



Once you have chosen the position that you would like to have your seat. Fit and tighten the screw by hand provided, to lock the Seat mount Bar into Position.



**Installing the seat** - Remove the seat from the box and remove the protective wrapping



Lower the seat down into position above the seat mount bar and place section highlighted by arrows into the opening on the seat mount bar.

The picture shows the seat mounted in its fully installed position

**Fitting the Sand Bucket Holder** - remove the sand bucket holder from the box and remove the protective wrapping.

Loosen the black screw enough to allow the Sand Bucket Holder to slide easily onto the opposite side of the Seat Mount Bar

.



Slide the Sand Bucket Holder on until it is fully attached and tighten by hand the securing screw, as per the photo.



**Fitting the Umbrella Holder -** Remove the Umbrella Holder from the box and remove the protective wrapping. The Umbrella Holder is designed to fit either side of the buggy.

Turn and tighten by hand, the knob on the mounting screw clockwise until firm and secure as per the photo.



**PLEASE NOTE -** We recommended that you do NOT attach your umbrella to the umbrella holder in windy conditions. Your new Gt Lithium Golf Buggy has been specifically designed to be extremely light for your convenience, including the battery. Attaching your umbrella to the golf buggy during high winds may cause damage to the buggy.

**The Battery** - Your new GT Lithium Golf Buggy, comes standard with our exclusive PoweOn light weight lithium Battery. To obtain maximum performance and many years of trouble free operation, please read the specific Battery and Charger instructions, enclosed within the box that houses your Battery and Charger.

Remove the box that contains the your new PowerOn Lithium Battery and Charger, form the golf buggy box. Open the box and remove the battery and charger, read the enclosed instructions carefully and charge the battery.

**Connecting the Battery -**

Place the battery into the battery tray on your buggy, as per the photos.



Connect the Battery Lead attached to the battery, onto the power connection of the buggy, as per the photos.

PLEASE NOTE - You will notice that both the battery lead and the power connection on the golf buggy have Red and Black connectors. It is Vitally important that these red and black connectors align - Red with Red & Black with Black. To assist you in this, there are stars on the battery lead and on the golf buggy that MUST align with each other.

With the Star on the Battery lead aligning with the Star on the Battery tray, push down on the lead until the connection is fully made and the plug will not go down any further, as per the photos.





### **Power indicator lights -**

Once you have connected the Battery to the Golf buggy, three Red Lights will appear on the Handle of the Golf Buggy and remain on 15 seconds. During the 15 seconds that the three red lights appear on the Top handle, a full systems check is taking place and once the three Red Lights have switched off, this is the all clear to go.

### **To Start the Buggy moving**

- Located on the back of the Top Handle assembly of the buggy, is a Red Speed Control Dial. Push the dial upwards to start the buggy moving and speed up the buggy. Push the Dial downwards to slow down and stop the buggy.

PLEASE NOTE - The speed control on your buggy requires very little effort to turn. To obtain maximum performance and years of trouble free operation, we recommend that you use only the required effort to turn the dial.

**Using the Preset Distance Control Function** - Your GT Lithium Golf Buggy comes with three pre set distance control options. 15 meters, 30 meters and 45 meters. The purpose of this function is to allow you to choose one of the three pre set distances and let the buggy travel on its own, for the distance that you have chosen and stop automatically when the chosen distance has been reached. Please Ensure, that when this distance function has been activated, the path that you wish the buggy to travel and stop on, must be smooth and clear of any obstacles, such as trees and bunkers. This function has been designed to be used, to move the buggy from one end of the green to the other only where the ground is level and smooth.



To Activate the Distance Function - Ensure that the buggy is completely stationary and the speed control is in the off position. Choose your desired distance by pressing and releasing the Distance on off button located on the Top Handle Display, until the distance setting you require is illuminated for 2 seconds and then the light will begin to flash warning the chosen distance has been activated. For your safety, the buggy will not start to move off for at least a couple of seconds and then come to a stop at the distance, that has been chosen.



PLEASE NOTE - The speed of the buggy when the Distance Control function has been activated and has been pre set for your convenience.

The buggy will only travel at the pre set speed, regardless of what position the speed control knob on the handle is set to. Once the buggy has traveled and stopped at the distance that has been chosen, the Distance Control Function turns off automatically, allowing the buggy speed, to be adjusted manually again by turning the speed control knob.

### **Attaching your Golf Bag -**


Disconnect the top bag strap completely and either side of the bottom golf bag securing straps, as per the photo.

Place your Golf bag onto the buggy, ensuring that the base of the bag is sitting securely on the top of the front wheel housing, as per the photo.

Wrap the upper bag strap around your Golf bag and adjust the length as required. Lock the two sections of the retaining clip together, as per the photo.

Pull on the upper bag strap until the bag is secure, as per the photo.

Wrap the lower bag strap around the bottom of your golf bag and pull on the elasticized strap to the required length and attach the strap to the lower bag support, as per the photos.

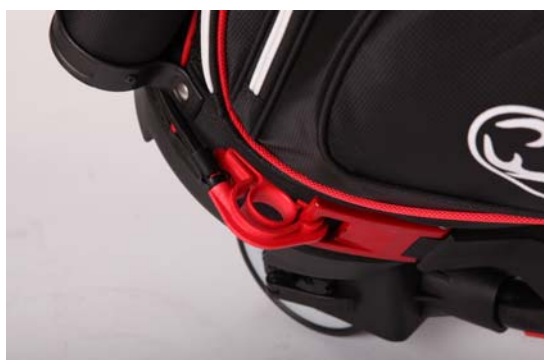



## **Collapsing the Buggy for transport and Storage -**

Begin by disconnecting and removing the Battery from the buggy completely.



Lift upwards on the Top Bag Support until the bag support is in the fully upward position, as per the photo.



Press down on either or both of the Red Frame Lock Levers and unlock the frame.

Fold down the upper section of the handle fully.



Lay the rear support section of the handle down and ensure that the folded handle is completely lowered down into the Battery Tray, as per the photo.



Lift and fold the rear support section of the frame which houses the two Red Levers, until it meets with the folded handle, as per the photo.

Press either or both of the two Red Levers and lock the rear support section of the frame and the folded handle assembly together, as per the photos. Your buggy is now ready for lifting and storage.

Removing The Rear Wheels - You may wish to remove your buggies rear wheels, please ensure that the following instructions are followed carefully.


The rear wheels of the buggy can only be fitted to the side of the buggy that they correspond with. There are markings on the inside of each wheel, L for left and R for right. When standing holding the handle of the buggy during normal operation, the wheel on your left side is the left wheel and the wheel on your right side, is your right wheel. Refer to the photos below for the wheel Left and Right markings.







**To Remove the Rear Wheels** - Press and hold the Red button located in the centre of the wheel and pull the wheel away from the buggy, as per the photo.

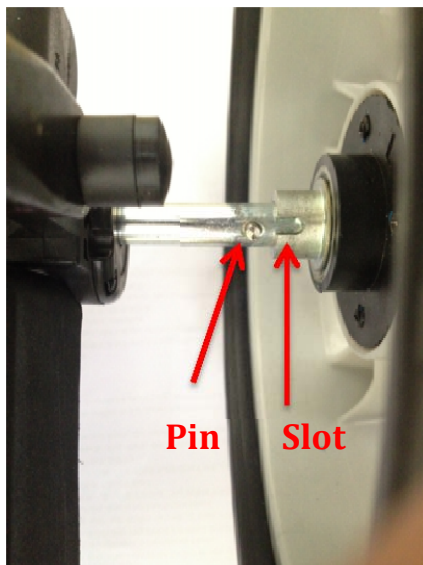

**To Refit the Rear Wheels** - Press and hold the Red button located in the centre of the wheel and slide the wheel inwards onto the axle, until the locating pin is aligned with the slot in the wheel hub, as per the photo.  
PLEASE NOTE - Ensure that the wheel is in the fully locked position and secure before attempting to use the buggy.



## **Adjusting the front wheel tracking.**

This function is designed to enable you to adjust the straight line tracking for your golf buggy if required. Firstly, you must release the cam lock mechanism as per the photo and adjust the thumb wheel.

Shortening the length of the adjusting screw by use of the thumb wheel will cause the buggy to track to the right and Lengthening the length of the adjusting screw will cause the buggy to track to the left.

PLEASE ensure that the cam lock mechanism is put back to the lock position before using the buggy. PLEASE NOTE if you are unsure on how to carry out this function, please visit one of our approved service centres listed on our website and they will assist you.

**Caring for your new GT Lithium golf buggy** - if you wish to clean your new golf buggy, this can be done by easily and safely by simply using a damp cleaning cloth. Avoid using any harsh cleaning chemicals as they may dis-color or damage the specially prepared UV resistant surfaces of the buggy. PLEASE NOTE - It is highly recommended that you DO NOT use a garden hose or any pressurized water cleaning machinery, to dean your golf buggy.

Your golf buggy has been specifically designed to handle normal and or raining operating conditions, but the use of high-pressure water may damage the electronics of your buggy.

Please read your Warranty Conditions card supplied with this golf buggy to ensure that you operate and treat this buggy in the correct manner, so it may provide you many years of golfing pleasure.