

WITH NEW ITEMS
AND PRICES!

© 2010 R. NOREPSE



PHOTOZUELA®
Live your passion well equipped.

2011 CATALOG

v6.19

WWW.PHOTOZUELA.COM

Message from The Management

There is more to the Photozuela brand than just a logo. Our involvement with our products begin from conceptualization, extended to execution on the factory floor and ends with our products reaching your hands faithfully delighting your expectations. We practice a stepwise supply chain monitoring process to ensure quality and performance of our products while supporting to maintain a reasonable and sustainable pricing mechanism. Photozuela pushes to open enhanced alternative avenues of growth for all levels of photographers and cinematographers; may you be an amateur, hobbyist, and professional. We achieve this by continuously offering accessories and equipment matched to your needs.

We believe in:

Innovation: Constant research, critical thinking and positive input towards transforming existing concepts


Quality: Stepwise and in-house quality control

Endurance: We reminisce the time when products were crafted to last and we try to embed this belief in our products

Asia is the biggest market in the world. The need for responsible e-commerce initiatives are enormous. In Photozuela we are like you, artists and entrepreneurs who want to contribute to society with passion and integrity.

Photozuela, live your passion well equipped.

PHOTOZUELA is a project of

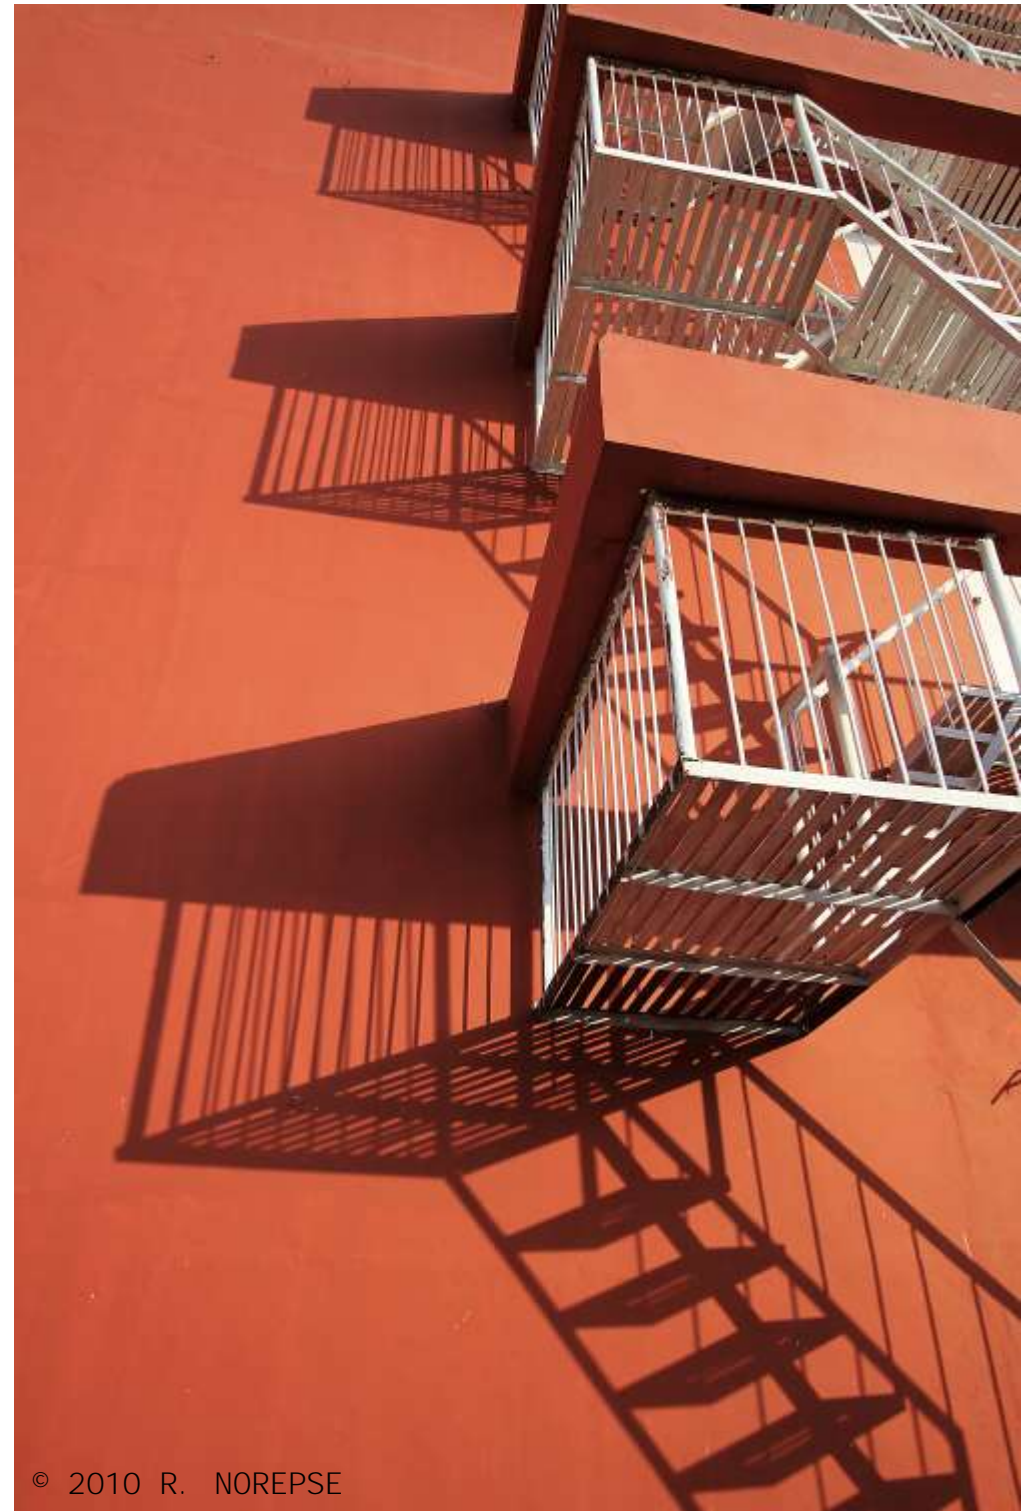

STUDIO FLASH

Kremlin 150 Code: MPM-150LE

Eiffel 200 Code: PSA-200EX

Shibuya 250 Code: ATD-250GS

Vegas 300 Code: RMF-300GT

Broadway 500 Code: MFA-500X

Milan 1000 Code: MFA-1000Z

Basic Kit Plus Code: CHP-216WR

Spares

Replacement Flash Tubes for New Flash Models.
Replacement Modeling Lamps.

Other Flash and Model Lamp Spares

Replacement Flash Tube for Basic Kit
Replacement Flash Tube for Basic Kit Plus
Replacement Flash Tube for Duo Kit Pro
Replacement Flash Tube for Trio Kit Pro
Replacement Flash Tube for Trio Kit Pro Plus
Spare Modeling Lamp for Duo and Trio Kits

Supports

Light Modifiers

Studio Accessories

How to Choose

Step 1. Choose your weapon.

Know what you are going to use it for.



All our flash units have a Guide Number (GN) value in each their specifications at full power. You can use the GN to calculate your flash-to-subject distance or workspace. The guide number of a flash is an indication of its power. The higher the number, the more powerful the flash.

A guide number is found by multiplying the flash-to-subject distance by the aperture for a well-exposed photograph. So if good results are produced by using f/8 for a subject 4m away, the guide number is 32. You need to know the film speed used (ISO), and that the distance was measured in meters, so guide numbers are usually written as '32 (ISO 100, meters)'.¹

Once the guide number has been determined, you can use it in reverse. Divide the number by the subject distance (in meters) to find the aperture needed for the exposure. For example, if the guide number is 32 (ISO 100, meters) and the subject is 4 meters away, you need an aperture of f/8. It will be possible to double your aperture when you increase your ISO.¹

Step 2. Choose your support.

We carry standard light stands as well as models with booms and air cushion features. We also have them at different height and length. Some of our light stands have a vertical and horizontal mounting feature as well.

Step 3. Choose your light modifier.

What quality of light do you need your subject be illuminated with? This is a starting point question to yourself. Adding a light modifier such as a softbox or bouncing the flash onto a reflective umbrella will reduce the effective GN of your flash unit. More so, there are modifiers which focus and shape your flash such as a snoot or honeycomb. Google is a very good tool to find out what you need as there are many opinions about light modifiers; but normally, you will be generally fine with a softbox and or an umbrella - it just depends on WHERE and HOW you modify, manipulate, and position them after.

Step 4. Choose accessories.

Don't forget to get a flash trigger unless you want to have them all on slave mode. Ask us about an extra receiver for a second, third or fourth studio flash.

In our Studio Accessories, we also carry adapters for your camera hot shoe to connect your sync cord when you have your camera in a stationary situation. If you do have a an existing Bowens mount light modifier, we can provide you with an Elinchrom-to-Bowens mount attachment so you can continue using your existing equipment.

Step 5. Purchase and Information

You may call, email, chat or text us freely - our contact information are located on the last pages of the catalog and in our products. We have multiple modes of payment avenues including online credit card check out. We are open to your questions about our products. You may also go to the TERMS section of this catalog for warranty information and support coverage.

*** ASSEMBLE YOUR VERY OWN KIT ACCORDING TO WHAT YOU NEED. SEE OUR OPTIONS GUIDE. CLICK THIS MESSAGE TO GO THERE.**

¹ with excerpts from the Canon Professional Network
<http://cpn.canon-europe.com/content/index.do>

PHOTOZUELA Kremlin 150 Code: MPM-150LE Available in RED only

GN32 Elinchrom Mount Only / Reflector Sold Separately



Flash Unit Only w/o Reflector
Kremlin 150
MPM-150LE
P4880
ea.



* All Models Include Protective Cover for Flash Tube, Sync and Power Cord

PHOTOZUELA Eiffel 200 Code PSA-200EX

GN42 Elinchrom Mount Only / Reflector Sold Separately



Flash Unit Only w/o Reflector
Eiffel 200
PSA-200EX
P5720
ea.



MODEL OPTIONS	KREMLIN 150 Code PSA-200EX MATTE RED	EIFFEL 200 Code PSA-200EX MATTE BLACK
Recycle Time	1-2s	1-2s
Output Power Control Range	Precise Control by Samsung Processor 1/16 - 1/1 Step-less Adjustment	Precise Control by Samsung Processor 1/16-1/1 Step-less Adjustment
Modeling Lamp	75W Included (Do Not Use A Lamp More than 75W)	75W Included (Do Not Use A Lamp More than 75W)
Color Temperature	5600K	5600K
Flash Duration	1/600-1/1000s	1/600-1/1000s
Flash Triggering Method	Photocell / Test Button / Wireless Trigger	Photocell / Test Button / Wireless Trigger
Triggering Voltage	5V	5V
Sync Distance	≥ 10m	≥ 10m
Working Voltage / Wattage	180-250V 50-60Hz / 150Ws	180-250V 50-60Hz / 200Ws
Safety Features	Cooling Fan, Over Heat / Over Work Protection Circuit	Cooling Fan, Over Heat / Over Work Protection Circuit
Standard Accessories	Sync Cord, Power Cord, Protective Cover for Flash Tube, Manual, Carton Packaging	Sync Cord, Power Cord, Protective Cover for Flash Tube, Manual, Carton Packaging
Construction	PP Plastic Molded Shell with Modular Circuitry Integrated into Rigid Frame Design; Ceramic E27 Model Lamp Base with Aluminum Shield. Matte Black Finish.	PP Plastic Molded Shell with Modular Circuitry Integrated into Rigid Frame Design; Ceramic E27 Model Lamp Base with Aluminum Shield. Matte Black Finish.
Warranty	6 Months Service Warranty	6 Months Service Warranty



CONTROL PANEL

1. Sync Socket 1/4"
2. Power Control Knob for Model Lamp and Flash
3. Flash Test Button
4. Model Lamp: I - Full power
5. Model Lamp: II - Variable Power
6. Main Power Switch
7. Umbrella Hole
8. Cooling Fan/Heat Exhaust Vents
9. Photo Cell
10. Flash Charge Indicator
11. Reflector (Optional Accessory, Elinchrom Mount)
12. Fuse (with Spare)
13. Power Socket



Kremlin 150
150Watt-seconds
GN32 @ ISO 100
Color: Red

Vs.



Eiffel 200
200Watt-seconds
GN42 @ ISO 100
Color: Black

PHOTOZUELA Shibuya 250 Code: ATD-250GS

GN52

Elinchrom Mount / Reflector Sold Separately



Flash Unit Only w/o Reflector
SHIBUYA 250
ATD-250GS
P6415
ea.



* All Models Include Protective Cover for Flash Tube, Sync and Power Cord

PHOTOZUELA Vegas 300 Code: RMF-300GT

GN54

Elinchrom Mount / Reflector Sold Separately



Flash Unit Only w/o Reflector
VEGAS 300
RMF-300GT
P8250
ea.

MODEL OPTIONS	SHIBUYA 250 Code ATD-250GS	VEGAS 300 Code RMF-300GT
Recycle Time	1-2s	1-2s
Output Power Control Range	Precise Control by Samsung Processor 1/8-1/1 Step-less Adjustment	Precise Control by NEC Processor 1/16-1/1 Step-less Adjustment
Modeling Lamp	100W Included (Do Not Use A Lamp More than 100W)	100W Included (Do Not Use A Lamp More than 100W)
Color Temperature	5600K	5600K
Flash Duration	1/600-1/1000s	1/600-1/1000s
Flash Triggering Method	Photocell / Test Button / Wireless Trigger	Photocell / Test Button / Wireless Trigger
Triggering Voltage	5V	5V
Sync Distance	≥ 10m	≥ 10m
Working Voltage / Wattage	180-250V 50-60Hz / 250Ws	180-250V 50-60Hz / 300Ws
Safety Features	Cooling Fan, Over Heat / Over Work and Over Voltage Protection Circuit	Cooling Fan, Over Heat / Anti-red Eye / Over Work and Over Voltage Protection Circuit / Auto Discharge
Standard Accessories	Sync Cord, Power Cord, Protective Cover for Flash Tube, Manual, Carton Packaging	Sync Cord, Power Cord, Protective Cover for Flash Tube, Manual, Carton Packaging
Construction	PP Plastic Molded Shell with Modular Circuitry Integrated into Rigid Frame Design; Ceramic E27 Model Lamp Base with Aluminum Shield. Matte Black Finish.	PP Plastic Molded Shell with Modular Circuitry Integrated into Rigid Frame Design; Ceramic E27 Model Lamp Base with Aluminum Shield. Matte Black Finish.
Warranty	6 Months Service Warranty	6 Months Service Warranty

-
- 1 Control Panel
 - 1. High -sensitivity Photo Cell
 - 2. Handle
 - 3. Overheat Protection Indicator
 - 4. Power Control Knob for Model Lamp and Flash
 - 5. Flash Test Button
 - 6. Sync Socket 1/4"
 - 7. Power Socket
 - 8. Fuse (with Spare)
 - 9. Cooling Fan with Grill (Intake)
 - 10. Reflector (Optional Accessory, Elinchrom Mount)
 - 11. Cooling Fan/Heat Exhaust Vents
 - 12. Modeling Lamp Mode Selector (Full or Variable Power)
 - 13. Buzzer (On / Off)
 - 14. Modeling Lamp Power Switch
 - 15. Main Power Switch



100W
Modeling Lamp
MDL-100H
P480
ea.

-
- 1 Control Panel w/ Digital Display
 - 1. High -sensitivity Photo Cell
 - 2. Reflector (Optional Accessory, Elinchrom Mount)
 - 3. Cooling Fan/Heat Exhaust Vents
 - 4. Modeling Lamp Mode Selector (Full or Variable Power)
 - 5. Flash Test Button
 - 6. Buzzer (On / Off)
 - 7. Main Power Switch
 - 8. Handle
 - 9. Anti-Red Eye / Photocell Switch
 - 10. Power Control Knob for Model Lamp and Flash
 - 11. Sync Socket 1/4"
 - 12. Power Socket
 - 13. Fuse (with Spare)
 - 14. Cooling Fan with Grill (Intake)
 - 15. Over Voltage and Over Heat Indicator

Spares (Legacy Products)

Basic Kit Spare Flash Tube Code 45Ws
Code: FT-45L

FT-45L P150



Basic Kit Plus Spare Flash Tube 72Ws
Code: FT-72L

FT-72L P200



Duo Kit Pro Spare Flash Tube 120Ws
Code: FT-120L

FT-120L P380



Xingular 150 Spare Flash Tube 150Ws
Code: FT-150L

FT-150L P400



Trio Kit Pro Spare Flash Tube 160Ws
Code: FT-160L

FT-160L P430



Trio Kit Pro Plus Spare Flash Tube 300Ws
Code: FT-300L

FT-300L P840



Spare Model Light for Xingular 150, Duo Kit Pro
Trio Kit Pro, and Trio Kit Pro Plus - 75Watts
Code: MDL-75HL

MDL-75HL P100



Supports



8' Height, Standard

- ▶ Code: SS-46S
- Material: Plastic/Aluminum
- Folded height: 845mm
- Unfolded height: 2400mm
- Max. Tube Diameter: 29mm
- Net weight: 1.5kg

SS-46S
P935
ea.

8' Height, Air Cushion Bolted Joints

- ▶ Code: SS-47A
- Material: ALL Aluminum
- Folded height: 740mm
- Unfolded height: 2400mm
- Max Tube Diameter: 29.5mm
- Net weight: 1.5kg


SS-47A
P1550
ea.



7.2' Height, Air Cushion Riveted

- ▶ SS-VH15A, Air Cushion
- Material: ALL Aluminum
- Folded height: 690mm
- Unfolded height: 2200mm
- Max. Tube Diameter: 29mm
- Segments: 4
- Net weight: 1.5kg

SS-VH15A
P1430
ea.

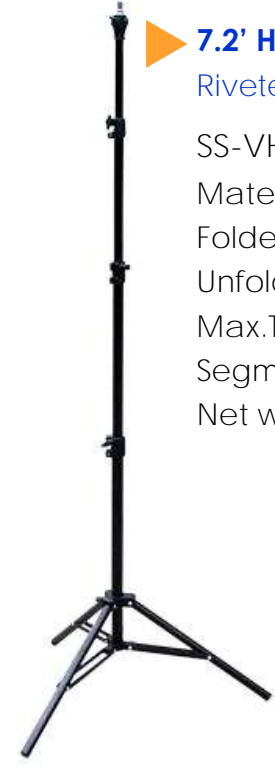

Flexible 1/4" and 3/4" Spigot
can be Placed Vertically or Horizontally. Spigot Included.

Reflector Holder w/ Light Stand

- ▶ Code: RH-618
- Reflector Holder
- Tube: 22mm -19mm -16mm
- Length: 60 -180cm
- Light Stand (Spring Cushion)
- Height: 6.56'



Circular Reflector
Not Included

Reflector Holder Kit
RH-618
P1850
ea.

7.6' Height, with Boom Weight Bag: Boom
Can Increase Stand Height Two-fold when positioned 90 degrees.



SS-B29
P3585
ea.

- ▶ Code SS-B29
- Material: Aluminum
- Folded height: 1200mm
- Unfolded height: 2320mm
- Max. Tube Diameter: 33mm
- Segments: 3
- Net weight: 3kg

6.2' Height, Very Light Weight

- ▶ Code: SS-32S
- Max. Height: 1900mm
- Folded Height: 660mm
- Max. Tube: 22mm
- Min. Tube Diameter: 16mm
- Segments: 3
- Net Weight: est. < 700g

SS-32S
P660
ea.



To complete your strobist setup, don't forget to add:
Reemix Wireless Trigger, ThinkLite TT560, UM-33RS or UM-33T
Umbrellas, SH-12E Holder.

Light Modifiers

▶ **PHOTOZUELA** Light Modifiers

Open Umbrellas, Umbrella Boxes, softboxes., Snoots, Barn Doors, Color Gels, Reflectors, Filters



60x60cm
Square Softbox Standard
Code: SB-66SS ◀

SB-66SS
P1320
ea.



60x90cm
Rectangular Softbox Standard
Code: SB-69RS ◀

SB-69RS
P1430
ea.



36" Dual Purpose Umbrella
Translucent / Reflective Function
Code: UM-36DP ◀

UM-36DD
P825
ea.



40" Umbrella Box Reflective
Code: UB - 40RC ◀

UB-40RC
P1040
ea.



40" Umbrella Box Translucent
Code: UB-40TR ◀

UB-40T
SS-46S
P1040
ea.



33" Translucent Umbrella
Code: UM-33T ◀

UM-33T
P380
ea.

To complete your strobist setup, don't forget to add:
Reemix Wireless Trigger,
Light Stand SS-32S,
ThinkLite TT560, SH-12E
Holder.



33" Silver Reflective Umbrella
Code: UM-33RS ◀

UM-33RS
P395
ea.



Don't forget to include a Reflector to prevent stray light if you plan to use an Open Umbrella with your studio flash. Please browse through the next pages.

Light Modifiers



Light Modifiers

Open Umbrellas, Umbrella Boxes, Softboxes,, Snoots, Barn Doors, Color Gels, Reflectors, Filters

▶ PHOTOZUELA Disc Reflectors

Circular reflectors give you maximum surface area. Artificial lighting aside, the sun is still our original light source. It's free, reliable, and for our purposes, essentially unending. It's up to photographers to apply it as creatively as they wish. How expressive you wish to make it come to life is up to you. It can be softened, reflected, or both, among other formative approaches. Tame natural light. Get natural lighting effects without letting nature take control of your creativity.



Silver and Gold Only with Pouch

Circular 2-in-1

▶ Ø **60cm, 23.6"**

Code: CRF-2SG

Circular
2-in-1
CRF-2SG
P 340
ea.

TRANSLUCENT Gives a soft and diffused light.



SILVER Highly reflective with high light output and gives a crisp light.



BLACK Reduces reflections and stray light. Also increases contrast when shooting under very soft light conditions.



GOLD Highly reflective with high light output and gives a soft warm light.



WHITE Gives a soft even light output.



Silver, Gold, Translucent, White, Black with Pouch

Circular 5-in-1

▶ Ø **60cm, 23.6"**

Code: CRF-5M

Circular
5-in-1
CRF-5M
P 630
ea.

Circular 5-in-1

▶ Ø 80cm

Code: CRF-80, **31.5"**

Circular
5-in-1
CRF-80
P 775
ea.

Continued on Next Page...

▶ PHOTOZUELA Light Modifiers

Open Umbrellas, Umbrella Boxes, Softboxes,, Snoots, Barn Doors, Color Gels, Reflectors, Filters




Silver, Gold, Translucent, White, Black with Pouch

Circular 5-in-1
Ø110cm, 43.3"

▶ Code: CRF-110

Circular
CRF-110
P990
ea.



Oval Silver, Gold, Translucent, White, Black with Pouch

Oval 5-in-1
80x120cm, 31.5" x 47.2"

▶ Code: RFD-812

Oval 5-in-1
RFD-812
P1650
ea.

Oval 5-in-1
100x150cm, 39.4" x 59.1"

▶ Code: RFD-1015

Oval 5-in-1
RFD-1015
P1980
ea.



Barn Door with Color Gels - Attaches to Standard Reflector

Code: BD-22M

Barn Door Set
D-22M with
Color Gels
P990
ea.



ELINCHROM Mount Beauty Dish

White Reflector
without Honeycomb

Ø 40.5cm, 15.9"

Code: EB-14M

Elinchrom
Beauty Dish
EB-14M
P1540
ea.



Honey Comb for
Beauty Dish EB-14M

Code: EB-14H

Honeycomb
for Beauty Dish
EB-14HC
P1320
ea.



ELINCHROM Mount
Snoot with
Detachable Honey
Comb Filter
Code: ES-2M

Elinchrom
Snoot
ES-2M
P665
ea.



ELINCHROM Mount
Standard Reflector with
Umbrella Hole

Ø 19cm, 7.5"

Code: ER-8M

Elinchrom
Reflector
ER-8M
P610
ea.

Continuous Lights

Bianco Luce 330 Code: BL-330CF

Bianco Luce 600D Code: BL-S600LD

Bianco Luce 1200D Code: BL-S1200LD

Quarzo Luce Code: QL-1000

Testa Rossa Code: BFL-800

Testa Gialla Code: BHL-2000

Spares

Spare Lamp for Bianco Luce 330 Code: CFL-55CS

Spare Lamp for Quarzo Luce Code: QB-1K

Spare Lamp for Testa Rossa Code: HTR-25LM

Spare Lamp for Testa Gialla Code: HTR-425LM

Other Spares

Spare Lamp for CFL-255K and Bianco Luce 330 Code: CFL-85CS

Spare Lamp for DVO-500K Code: QB-500

Spare Lamp for DVS-800K Code: HTR-18LM

Continuous lights are the first thing that come to mind whenever a video or product shoot is in play. Continuous lights provides the necessary supplemental light source to help ensure the most accurate results. Fluorescent and halogen lighting makes studio photography and cinematography simple and easy because it is a WYSIWIG (what you see is what you get) light source. You will find here halogen and fluorescent studio lighting that will perform according to your production needs and soon studio LED lighting and more variations of the Bianco Luce 330 - BL-330CF.

▶ PHOTOZUELA Bianco Luce 330 Code: BL-330CF

Features:

- Sturdy and Professional Aluminum Box Frame, Matte Finish with Front Aluminum Shield/Reflector
 - Easy to Assemble/Disassemble 60x60 Softbox
 - Ceramic E27 Lamp Sockets
 - 2 Switches to Control Power Output to 3 Bulbs Per Switch
 - Each 55W CFL Lamp is Equivalent to 250W of Filament Bulb, Flicker-free
 - Up to 21000 Lumens Combined 6 Lamps, Up to 8,000 Hours Lamp Life
 - CRI (Color Rendition Index) of 84
 - 5500K Color Temperature, Daylight Balanced
- 6 Months Service Warranty



Bianco Luce
330 BL-330CF
with 6pcs 55W CFL
Bulbs CFL-55CS
P6688
ea.



• Light Stand NOT INCLUDED

* Protected by a 6 Month Service Warranty (Please refer to our TERMS)
* CFL Bulbs DO NOT carry any warranty. Please trust that we test them before shipping.
* Available only as single order without light stand.

PHOTOZUELA Quarzo Luce Code:QL-1000

Each of the housing units are equipped with a strong air exhaust blower with heat dissipation spacer offering uncompromised lighting for TV and DV filming. It is also perfect for wedding, artistic ambient lighting in photography.

Because of the included diffusion umbrella, it may also be used for green screen Chroma key applications both in video and stills. Quartz-halogen lights are an alternative to flash heads for studio photography.

One of the most common problems in flash photography is finding out after you look at pictures taken that the flash units created unwanted shadows. This doesn't happen with quartz-halogen lights. These lights are on while you are composing a picture, so you see the exact effect the lighting has on your subject. This is a big advantage for a lot of photographers.

Features:

- Step less Light Intensity Adjustment from up to 1000 Watts*, 26000 lm
- Model Light Function
- No Optical Parallax
- Color Temperature: 3300 K
- Cooling Method: Cooling Fan, Thermal Isolation Base, Radiator
- Operating Voltage: AC 220V

500 Watts
Quartz Lamp
QB-500
P600
ea.


1000 Watts
PHILIPS
Quartz Lamp
QB-1K
P1990
ea.

SINGLE
QUARZO LUCE
QL-1000
PHILIPS 1000Watts
Quartz Light w/ Heavy
Duty Light stand and 36"
Detachable Umbrella
P6520
ea.

* Protected by a 6 Month Service Warranty (Please refer to our TERMS)
* Bulbs DO NOT carry any warranty. Please trust that we test them before shipping.
* Available as a single order with stand included and umbrella. Packaged in Carton
* Carry bag sold separately.



Each QL-1000 Includes A
**9' Light Stand and A 36" Dual
Duty Umbrella Code: UM-36DP
with Standard Bowens Reflector**

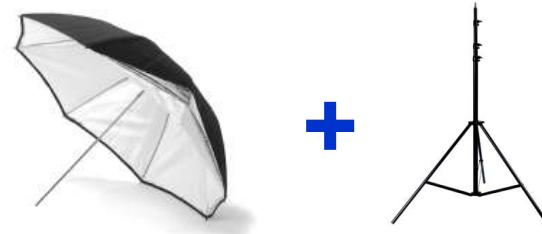

Flexible 1/4" and
3/4" Light Stand
Spigot can be
Placed Vertically or
Horizontally. Spigot
Included.

What's Included / Specifications:

- 1pcs Quartz Light Control Unit Bowens S-Type
- 1pcs 1000 Watts PHILIPS Quartz Halogen Lamp HTQ-260LM
- 1pcs Bowens S-Type Mount Reflector
- 1pcs Fused British Plug with 5m Power Cord, Socket Adaptor Included
- 1pc Light Stands Code: SS-T280

Segments: 4
Max. Height: 2800mm, 9 feet
w/ 1/4 and 3/8 Spigot, Vertical and
Horizontal Placement

Operation Manual
6 Months Service Warranty



• Adaptor Included

WARNING! These lights operate at very high voltage and temperatures. Always plan ahead when positioning them - use weights on your light stands. Arrange your electrical wires so as not to cause tripping and harm. Do not open the device yourself. It must be serviced by a licensed electrician. NEVER install bulbs higher than 1000 Watts!

PHOTOZUELA Testa Rossa Code: BFL-800, BFL-800K (Kit)

Available in BFL-800K (Kit) and BFL-800 (Single). The Testa Rossa BFL-800 is also widely known as The Redhead, with a combined 2400 Watts of power (Kit) and a color temperature 3200K, this product is ideal for lighting on stage, conference room, large studio, in the field, SLR and DSLR photography or videography. Each housing has an 800W halogen tube which can illuminate a large area indoors and outdoors. You can control the focus of the beam using the large dial on its back end for precise focus. Also Available in single purchase with stand. These lights can be used as a key flood light for large areas and are also useful as fill and backlights.



• Light Stand INCLUDED

SINGLE
Testa Rossa
BFL-800 SINGLE
w/ Light Stand SS-T280
P5718
ea.

Flexible 1/4" and
3/4" Spigot can be
Placed Vertically or
Horizontally. Spigot
Included.

800 Watts
Halogen Tube
HTR-25LM
P590
ea.

Included in the Testa Rossa **BFL-800K Kit**:

3 Head Units Code: BFL-800

Power: AC 220V, 800W *

Adjustable Focus Knob: Rear

Barn Door / Scrim: Included

3 Halogen Tubes Code: HTR-25LM

Luminous Flux: 25000 lm

3 Light Stands Code: SS-T280

Segments: 4

Max. Height: 2800mm, 9 feet
w/ 1/4 and 3/8 Spigot, Vertical and
Horizontal Placement

1 Four-Leaf Barn Door Assembly

1 Scrim

1 Black, Rolling Nylon Case

Fused British Power Plug

1 Included Grounded Socket Adapter

Includes In-line Master Switch

User Manual

Packed in Carton

6 Months Service Warranty

Limited Stock
PROMO KIT
BFL-800K Kit w/ Rolling
Semi-Hard Case
Exclusive Only for This Kit
P19000
ea. kit

* Protected by a 6 Month Service Warranty on Focus Assembly Only (Please refer to our TERMS)

* Lamps DO NOT carry any warranty. Please trust that we test them before shipping.

* Available as a kit or single order with stand included Packaged in Carton

* Carry Bag NOT Sold Separately



• Adaptor Included



WARNING! These lights operate at very high voltage and temperatures. Always plan ahead when positioning them - use weights on your light stands. Arrange your electrical wires so as not to cause tripping and harm. Do not open the device yourself. It must be serviced by a licensed electrician.

PHOTOZUELA Testa Gialla Code: BHL-2000

Only available as single, non-kit version with light stand, the BHL-2000 is widely known as The Yellow Head or Blonde. with a very powerful, 2000 Watts, large diameter reflector which greatly increases your lighting real estate and the same color temperature as the BFL-800 Testa Rossa of 3200K, this is ideal for lighting on stage, a larger studio, in the field. Each housing has a 2000W halogen tube which can illuminate an even larger area indoors and outdoors. You can control the focus of the beam using the large blue Bakelite dial under the back end for precise focus.

Included with the Testa Gialla BHL-2000:

- 1 Head Unit Code: BHL-2000
 - Power: AC 220V, 2000W *
 - Adjustable Focus Knob: Rear Bottom
 - Barn Door: Included
- 1 Halogen Tube Code: HTG-425LM
 - Luminous Flux: 42500 lm
- 1 Light Stand Code: SS-T280
 - Segments: 4
 - Max. Height: 2800mm, 9 feet
 - w/ 1/4 and 3/8 Spigot, Vertical and Horizontal Placement
- 1 Four-Leaf Barn Door
- 1 Scrim
- 1 Rolling Semi-Hard Nylon Case
- Fused British Power Plug w/ Adaptor
- Includes In-line Master Switch
- User Manual
- Packaged in Carton
- 6 Months Service Warranty

Testa Gialla
BFL-2000 SINGLE
w/ Light Stand S
P9540
ea.

Flexible 1/4" and 3/4" Spigot can be Placed Vertically or Horizontally. Spigot Included.

• Light Stand INCLUDED

* Protected by a 6 Month Service Warranty on Focus Assembly Only (Please refer to our TERMS)
 * Lamps DO NOT carry any warranty. Please trust that we test them before shipping.
 * Available as a kit or single order with stand included Packaged in Carton
 * Carry Bag NOT Sold Separately




WARNING! These lights operate at very high voltage and temperatures. Always plan ahead when positioning them - use weights on your light stands. Arrange your electrical wires so as not to cause tripping and harm. Do not open the device yourself. It must be serviced by a licensed electrician.



Options/Compatibility Guide

for Studio Flash and Bianco Luce 330

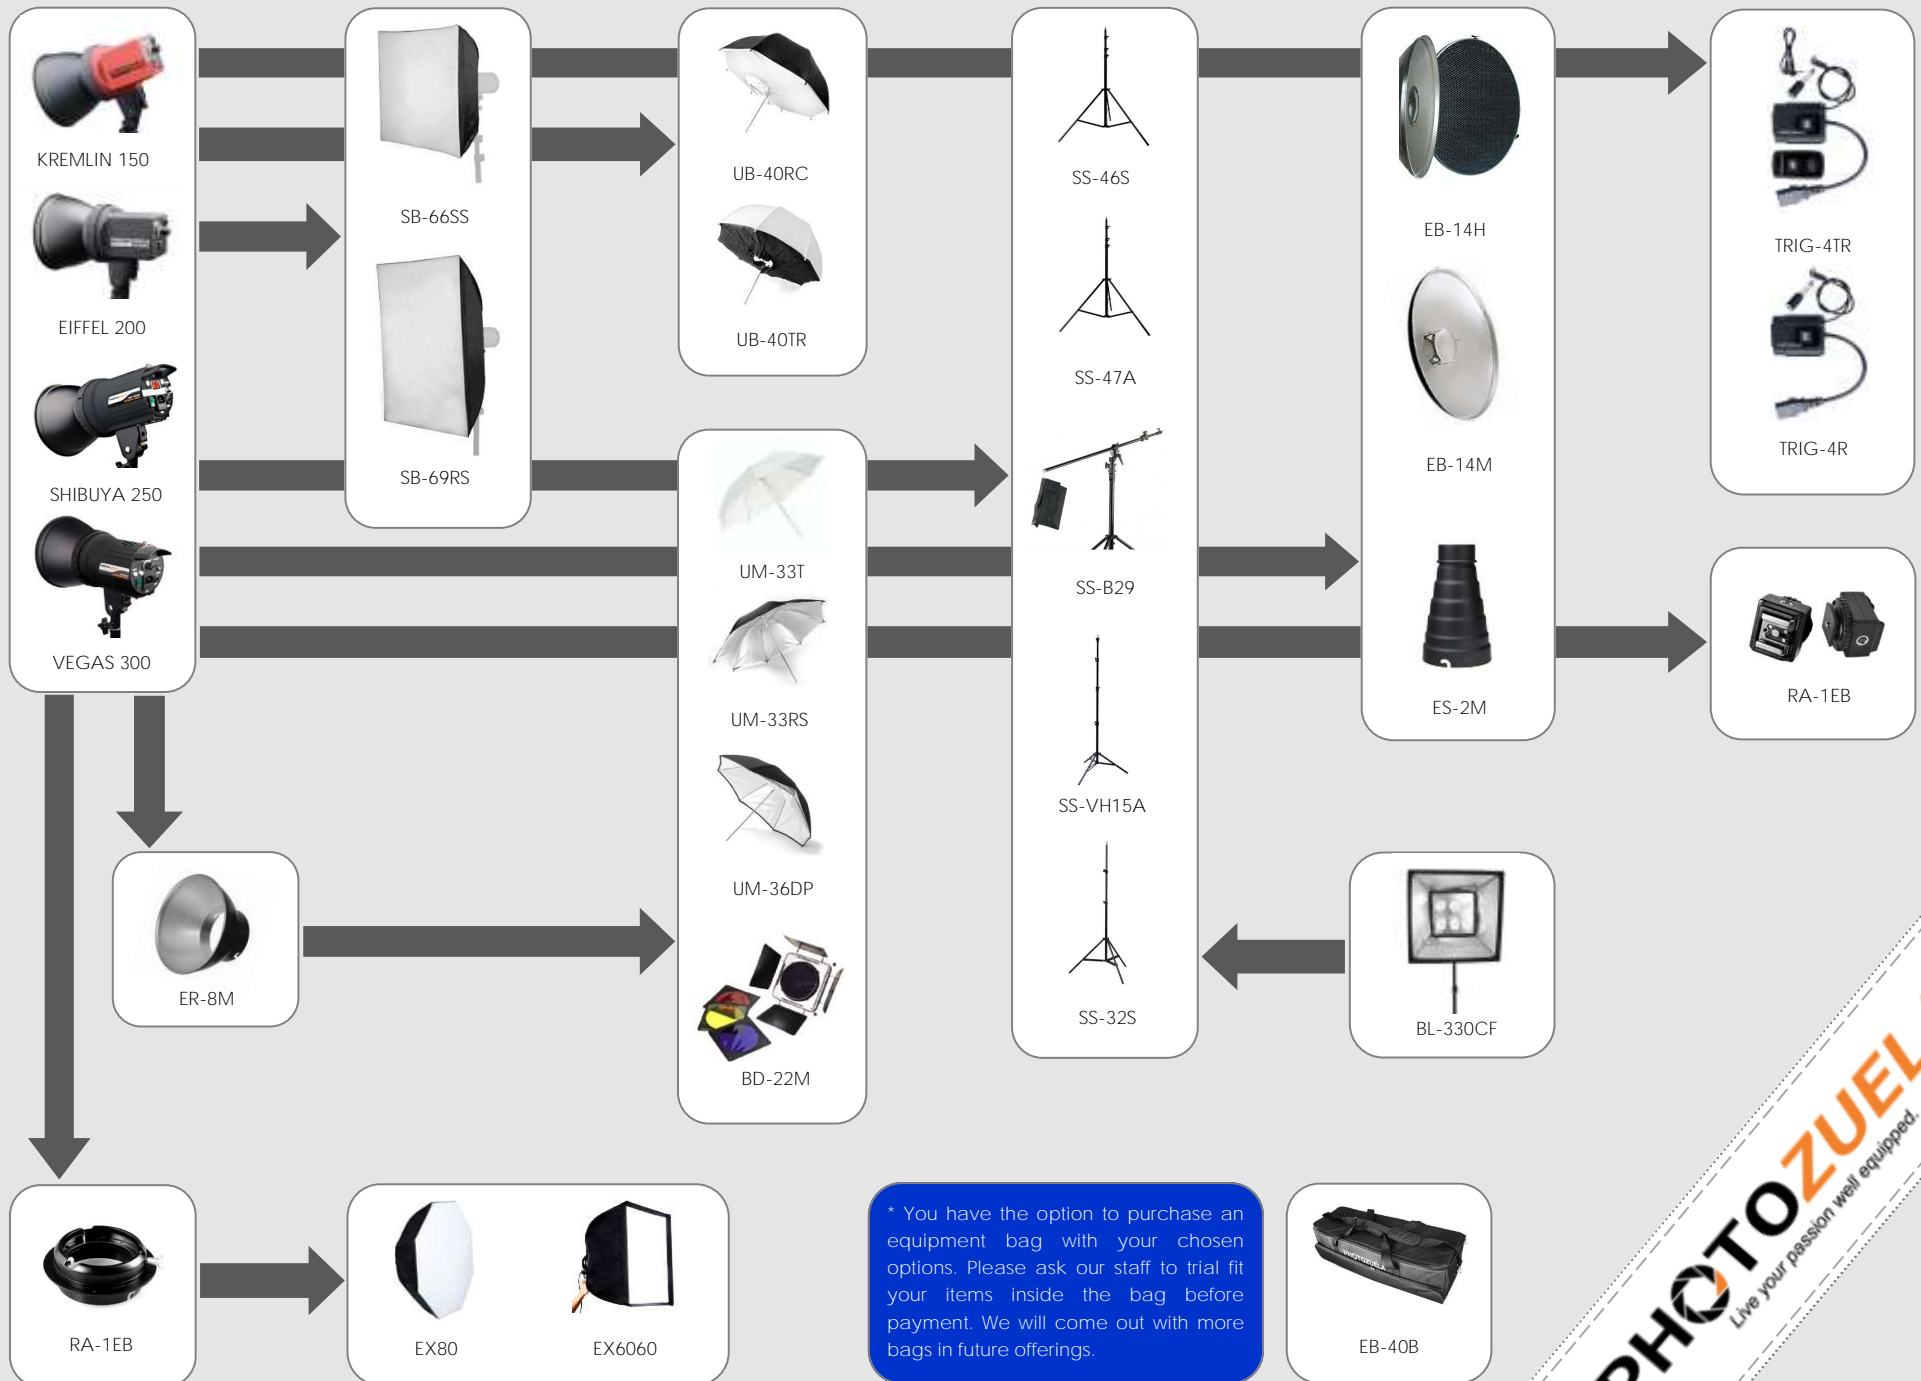

* You have the option to purchase an equipment bag with your chosen options. Please ask our staff to trial fit your items inside the bag before payment. We will come out with more bags in future offerings.

PHOTOZUELA
Live your passion well equipped.

Studio Accessories

Backdrop Stand and Crossbar Kit Code: BST-300

Non-woven Backdrops 3m x 6m

Black Code NW-36BK

Grey Code: NW-36GY

White Code: NW-36WT

Green Code: NW-

Photo / Still Life Shooting Tables

Small model: PT-512 50x120cm Code: PT-512

Large model: PT-1020 100x200cm Code: PT-1020

Godox Speedlight Holder Code: SH-12E

Studio Flash Wireless Triggers

4-Channel Trigger/Receiver DC Canon/Nikon

Code: FTU-4B

4-Channel Trigger/Receiver DC for Sony

Code: FTS-4B

4-Channel AC/DC Set Code: TRIG-4TR

4-Channel AC Extra Receiver Code: TRIG-4R

Elinchrom to Bowens Adaptor Code: RA-1EB

Hot Shoe Adaptor for Sync Cords Code: HS-A2

Equipment Bag Code: EB-40B

▶ PHOTOZUELA

Backdrop Stand and
Crossbar Kit Code: BST-300

Our backdrop frame have been improved from our previous model. From the telescopic "Twist-Lock" per segment crossbar to the heavy duty light stands to support more weight for whatever you might want to hang as your background. We now have a bigger and better carry case to support all the aluminum.

SPECIFICATIONS:

Retractable Background Stand

Max. Height: 260cm

Folded Height: 97cm

Bar Segments: 3

Bar Length: 300cm

One Segment length: 100cm

Bar Material: Aluminum

• Twist-Lock Mechanism Built into The Crossbar



PHOTOZUELA Non-woven Backdrops

Large, canvas backdrops available in black, grey, white, and green. There is one size available of 3 meters horizontal and 6 meters vertical (Approx. 10x20feet). Can be soaked in warm water with mild detergent or hosed down for cleaning (do not machine wash).

SPECIFICATIONS:

Non-woven, Cotton and Polyester, 3m x 6m (Approx. 10ft x 20ft)

		Black Code: NW-36BK	
		Grey Code: NW-36GY	
		White Code: NW-36WT	
		Green Code: NW-36GR	

PHOTOZUELA

Metal Backdrop Clamps with Rubber Teeth

Spring lever, sturdy, metal clamps for backdrops and anything else you could imagine its use. Each comes with rubber sleeved teeth.



Metal Backdrop
Clamp MC-25
P 165
ea.

PHOTOZUELA

Elinchrom to Bowens Mount

Adaptor Code: RA-1EB

If you have existing Bowens S-Type Mount light modifiers, you may utilize this to fit them with our Elinchrom mount devices.



Elinchrom
to
Bowens Adaptor
RA-1EB
P 1430
ea.

Hot Shoe
PC Sync Adaptor
HS-A2
P 440
ea.



PHOTOZUELA

Hot Shoe PC Sync Adaptor

Code: HS-A2 w/ TTL Pass Through Mounts to your hot shoe and connects to your studio flash via sync cable for stationary situations such as photo booth applications.

Equipment Bag
EB-40B
LWD 70x30x30
P 3300
ea.

PHOTOZUELA

Equipment Bag Code: EB-40B

Equipment Bag Constructed of sturdy nylon and padding with side pockets as well as light stand compartments. Size:

L 70cm x W 30cm x D 30cm



▶ PHOTOZUELA

Photo / Still Life Shooting Tables

Do you sell products online? Ever wanted to get those nice background diffused product photos and reflective surface shots? Here's a mainstay if you're in the e-commerce trading business.

Shooting Tables are designed for small and middle product setups, allowing the non-reflective translucent Plexiglas to be lit from above, below, behind, or around the subject for dramatic or high-key lighting with precise control.

Our Still Life Photo Tables Come in two Sizes:
 Small model: PT-512 50x120cm (Table Area)
 Large model: PT-1020 100x200cm (Table Area)

What's Included / Specifications:

- Composed of Lightweight Aluminum Frame
- 180° and 90° Recline
- Non-reflective opaque Plexiglas surface Base (Reversible for Reflective)
- 8 Rubberized clamps
- 2 C-Clamps (with spigot and thread)
- 1 Carrying case
- Assembly Instructions



PT-512
50x120cm
P3850
ea.

PT-1020
100x120cm
P6740
ea.

▶ Godox Speedlight Holder - Place any device like speed lights, Microphones,

Portable Recording devices, transmit and receive devices; and many more using hot shoe or threads atop and on the end of light stands and booms. A very compact holder with 1/4" and 3/8" mounting thread.

Holder For Most Speed lights and other devices
SH-12E
P475
ea.



To complete your strobist setup, don't forget to add: ThinkLite TT560, Light Stand SS-32S, UM-33RS or UM-33T Umbrellas, Reemix 3-in-1 Trigger.



▶ PHOTOZUELA

Studio Flash Wireless Triggers

4-CHANNEL TRIGGER/RECEIVER DC

Specifications: **ALL Battery Operated**
 Power: 2xAAA Receiver, 1x12V 23A Transmitter
 Channel: 4, 433Mhz
 Sync Cord: Ø6.35/Ø3.5
 Outdoor operation distance: ≥20-30M
 Indoor operation distance: ≥20M
 Sync speed: 1/200s
 User Manual
 Receiver Batteries Not Included
 3 Months Service Warranty

For Canon and Nikon FTU-4B
P835
ea.



For **Nikon, Canon, most brands** 4-Channel FTU-4B

For Sony FTS-4B
P835
ea.



For **Sony** 4-Channel model: FTS-4B

4-CHANNEL TRIGGER/RECEIVER AC

Specifications:
 POWER: Receiver 220VAC, Transmitter 1x12V 23A
 Channel: 4, 433Mhz
 Sync Cord: Ø6.35/Ø3.5
 Outdoor operation distance: ≥20-30M
 Indoor operation distance: ≥20M
 Syncspeed: 1/200s
 User Manual
 3 Months Service Warranty

For Canon and Nikon Trigger and Receiver TRIG-4TR
P1040
ea.



AC Receiver DC Receiver

For Canon and Nikon Receiver Only TRIG-4R
P595
ea.



Adaptors, Short Sync Cable Included for all Models

* Ask about our overstock flash triggers at low prices

On-The-Go

Godox Monix EX Series Portable Outdoor Flash

Godox EX-400 **Pre-order Only**

Godox EXR-400

Godox Monix LUX Series Portable Outdoor Flash

Godox LUX-400

Godox EX / LUX Series Accessories

Softbox 60x60cm Code: EX6060

Softbox Octabox 80cm Code: EX-80

Extras

Spare Battery for EX and LUX Series Code: E3000

Replacement Ring Flash Tube Code: FT-14

Replacement Modeling Lamp Code: ML-03

Godox Monix EX and LUX Series Portable Outdoor Flash



Designed for professional outdoor shooting, it features fast recycle time, less than 1.8s at full power. A clear digital LED screen shows 9 steps precise output controlled by CPU. The change in aperture is less than 0.1 when your light meter is set at 1/60s and 1/500s. More than 180 times full power flashes. Battery recharging is safe and stable which can be done both ways, car cigarette lighter and outlet charger.

Compared to traditional outdoor portable flash, its reflector can be dismantled from the flash head enabling you to use accessories like softbox*, barn door**, and snoot** which offers versatility just like shooting inside the studio. It is equipped with an umbrella holder built into the handle. Moreover, the handle is also capable of mounting onto studio light stands, a boom, or tripods with its thread on its bottom - equipped with a two-finger release knob*** for easy attachment and removal.

The EX and LUX Series is equipped with a set of wireless receiver and transmitter modules for your convenience. Additionally, a diffuser soft cap is also included so you can have control with the quality of light.

The flash has a hard, protective plastic cover**** to safeguard the flash tube and modeling bulb. A shoulder strap and soft carry bag is also included for ease in mobility. All EX and LUX Series come with a sleek, professional, padded hard aluminum case to give you that added peace of mind and cool factor.

Continued next page...

* We offer a 60x60cm Softbox and 80cm octa box.

** Barn door and snoot are pending accessories we will carry in future offerings. However, you may purchase in other stores. Look for attachments that are 'Bowens' mount compatible.

*** EX and LUX Series only.

**** Hard protective plastic cover only available for EX and EXR models

We offer EX and LUX Series of portable outdoor flash in 3 variants:

The Standard ► **Godox** Monix EX400 **GN52**

Contains the most basic elements for you to perform top notch on location shoots. *(flash mountable onto light stands with standard spigot)*

SPECIFICATIONS:

Max power Output: 400Ws

Guide Number: 52 (ISO 100)

Power variation: 9 steps

Modeling Lamp: 12V 20W

Recycle Time (Full Light): 1.8s

Illumination Angle: 65°

Rated voltage of the Charger: AC 100V-240V 50/60HZ

Battery: Rechargeable 3000mAh Ni-MH

Battery Charge Mode: AC Outlet /Automobile 12VDC

Battery Loading & Unloading: Built-in (replaceable)

Monix
EX400
P17299
ea.



What's Included?

1 Flash head with handle (mountable to hot shoe, tripod or light stand)

1 Power pack

1 Battery pack

1 AC Charger

1 Wireless remote trigger RT-02

1 Padded, Aluminum case (Dark Gray)

1 Translucent Diffuser Cap

1 Sync cord

1 1.5-meter power cord

1 Vehicle cigarette lighter cord

1 Power pack bag

User Manual

3 Months Service Warranty

Spare Battery
Pack E3000
P3500
ea.



The Ring Flash Godox Monix EXR400 GN68

Aside from having a ring flash, it provides advanced features such as higher guide number than the EX400 and a camera stand. The large diameter hole allows you to mount almost all types of cameras and lens size.

If you need a flash that hardly produces shadows, this is your best choice. Another plus is that The Monix EXR400 creates fantastic lighting effects most especially for wedding ceremonies (creates a glamorous catch light), and large scale venues. There are no interference by nearby colors and creates perfect lighting under a gold and yellow background.

(flash mountable onto lightstands with standard spigot)

SPECIFICATIONS:

Max power Output: 400Ws

Guide Number: 68 (ISO 100)

Power variation: 9 steps

Modeling Lamp: 12V 20W

Recycle Time (Full Light): 2.5s*

Illumination Angle: 65°

Rated voltage of the Charger: AC 100V-240V 50/60HZ

Battery: Rechargeable 3000mAh Ni-MH

Battery Charge Mode: AC Outlet / Automobile 12VDC

Battery Loading & Unloading: Built-in
(replaceable)

Monix
EXR400
P25500
ea.

Spare Battery
Pack E3000
P3500
ea.



What's Included?

- 1 Ring Flash head with handle (tripod or light stand)
- 1 Power pack
- 1 Battery pack
- 1 AC Charger
- 1 Wireless remote trigger RT-02
- 1 Aluminum case (Dark Gray)
- 1 Translucent Diffuser Cap (for ring)
- 1 Sync cord
- 1 1.5-meter power cord
- 1 Vehicle cigarette lighter cord
- 1 Camera Stand / Mounting Bracket
- 1 Power pack bag
- User Manual
- 3 Months Service Warranty



* Extended recycle time due to large ring flash diameter.

▶ The Best of Both Worlds **Godox** Monix LUX400

GN52

GN68

This set combines both features of The EX400 and The EXR400. What's left is up to your imagination!

(flash mountable onto lightstands with standard spigot)

Monix
LUX400
P 31540
ea.

Specifications:

Max power Output: 400Ws

Guide Number: 52 standard / 68 Ring Flash (ISO 100)

Power variation: 9 steps

Modeling Lamp: 12V 20Ws

Recycle Time (Full Light): 1.8s Standard / 2.5s Ring Flash

Illumination Angle: 65°

Rated voltage of the Charger: AC 100V-240V 50/60HZ

Battery: Rechargeable 3000mAh Ni-MH

Battery Charge Mode: AC Outlet / Automobile 12VDC

Battery Loading & Unloading: Built-in (replaceable)

What's Included?

- 1 Flash head with handle (mountable to hot shoe, tripod or light stand)
- 1 Ring Flash Head with Handle
- 1 Power pack
- 1 Battery pack
- 1 AC Charger
- 1 Wireless remote trigger RT-02
- 1 Padded, Aluminum case (Dark Gray)
- 1 Translucent Diffuser Cap
- 1 Sync cord
- 1 1.5-meter power cord
- 1 Vehicle cigarette lighter cord
- 1 Camera Stand / Mounting Bracket
- 1 Power pack bag
- User Manual
- 3 Months Service Warranty



Spare Battery
Pack E3000
P 3500
ea.



Godox EX / LUX Series Accessories and Spares

To enhance your shooting experience and convenience, we offer the following light control accessories and spares for your portable flash. Your EX and LUX Series flash head accepts 'Bowens' mount compatible attachments, so you don't have to worry about availability.



Model EX80 Octa Box
Ø 80cm

Accessory
EX80 Octa Box
P2150
ea.



Model EX6060 Softbox
60x60cm

Accessory
EX6060
Softbox
P1850
ea.



Spare EX Modeling Lamp
12V 25W

Generic
Modeling Lamp
EX125V
P250
ea.



Spare EX Flash Tube
Model FT12
400Ws

Generic
EX Flash
Tube FT12
P1750
ea.



Spare EXR Flash Tube
Model FT14
400Ws

Generic
EXR Flash
Tube FT14
P2850
ea.

Godox EX / EXR / LUX Series Photos and Diagrams



Power Pack Top Panel



Quality Aluminum Case



Equipped with Umbrella Holder



EX Series



EXR Series



AC Charger



Sync Cable



Flash Tube Protector



Translucent Cap



Car Cigarette Plug



EX Series Flash (Cover off)



EX Series Flash (Back View)



Reflector

Portable Power

Godox Propac PB820 Power Source

For Nikon Flashgun

For Canon Speedlight

Godox Leadpower LP-750 Portable Power Inverter

Pre-order Only

Godox Leadpower LP-750 Spare Battery LP-9000

Pre-order Only

▶ Godox Propac PB820 Power Source For Speedlight

Need that extra power and fast recycle time for your off-camera flash—events photography? The Professional Propac PB820 is your answer! Get up to *Up to 250-320 full-power flashes with Canon and Nikon flashes! This is the perfect tool to have in your camera bag for an all day photo-shoot such as weddings and company parties, graduations, community events and others. You can even charge it in your car en route to the event. There must be batteries inside your flash even if they are drained out for the PB820 to work, since it uses those batteries as a bridge to supply power to your speed light.

Propac PB820
P5280
ea.

More Details:

Remaining Power Indicator: 4-LED power display tells you exactly how much power remains. Low Power Indicator: Green LED light flickers when power gets low and a charging indicator gives the charge status. Safe and Reliable Protection: Protected against overheating, high voltage, low voltage and overuse. The Propac PB820 employs advanced circuitry to protect both user and your device. Compact and Slim Design: With a slim, comfortable and portable case (belt clips and strap loops included). It is easy to transport and fits right in you camera bag.

Specifications:

Battery: Ni-MH 9.6V, 2000mAh

Charging Time: Approx. 2 Hours

Cycling Time: within 1s

Dimensions: 6.1x4x1.7"

What's Included?

1 Propac PB820 with Belt Clip

1 AC Charger

1 Car Charger

1 Flash Power Connector (Choose from Canon or Nikon)

1 Shoulder Strap

User Manual, 3 Months Service Warranty

Compatibility: Canon 580EXII, 580EX, 550EX, 430EZ, 540EZ

Nikon SB800, SB900, SB28 Euro, SB28DX, SB80DX



* 250-320 full-power flashes tested with high-end Canon 580EXII and Nikon SB-900.

▶ Godox Leadpower LP-750 Portable Inverter

Are you ready to take your existing monolight setup outdoors? Bring the power of the electrical grid on location with the Leadpower LP-750! The Godox Leadpower LP-750 is a battery pack with a pure sine wave inverter, designed for use with studio lights. It can power laptops, digital cameras and wide for many outdoor activities. Leadpower LP-750 makes AC power possible wherever your carry of other electronic equipment as well. The LP-750 is an indispensable back-up power supply creativity takes you.

Features:

Novel Structure and Portable Size:

It consists of a built-in battery of 2.2kg supporting fast replacement and a body of 3.4kg, easy to carry.

Powerful as a Mini Generator:

The battery supports strobes of up to 3000Ws (recycle time of 2s) which can meet the outdoor shooting requirement for large-power strobe light. The special high-quality 9000mAH NIMH battery pack sustains strobe lights of 600Ws to flash 380 times in full power.

Safe and Reliable, Multiple Protection:

The Leadpower is protected against overload, short circuit, high-voltage input, overheating, and inverse connection of anode and cathode to avoid electrical hazard.

Easy to operate, professional:

Install the battery into the battery box, turn on the power switch, and then insert the power cord of your equipment into the socket on battery box

Easy to charge:

It supports AC charging, car cigarette socket charging, or 10 to 15V DC external charging by a car battery or storage battery via a battery connector



Leadpower
LP-750
P31000
ea.

Extra Battery
LP-9000
P7300
ea.

Specifications:

- Continuous Output: 750W*
- Peak Power: 1400W
- Output Voltage/Frequency: 230V/50Hz
- Output Waveform: Pure Sine Wave
- High Dynamic Distortion: 3%
- Current Consumption: Normal Mode: 0.25A/Flash Mode: 1A
- Conversion Efficiency: 91%
- Low-Voltage Alarm: Yes
- Low-Voltage Shutdown: Yes
- Storage Temperature Range: -30°C – 70°C
- Operating Temperature Range: 0 – 40°C
- Battery Type / Capacity: NiMH/9000mAh
- Normal Capacity of Battery: 9000mAh
- Charging Period: About 6 Hours (Standard 1.7A Charger)
- Power Outlets: Three (3) Universal Type CE 230V
- Fuse: 6x30A Changeable (3x30A for External Connection; 3x30A for Actual Device)
- Weight: Approx. 8.2kg with Accessories and Packaging

What's Included:

- 1 LEADPOWER LP-750 Portable Inverter
- 1 9000mAh Ni-MH Rechargeable Battery LP-9000
- 1 AC Charger
- 1 Car Charger
- 1 1.5m Power Cable
- 1 Water Proof Carrying Bag
- 4 Screws for Cathode and Anode Terminals
- User Manual
- 6 Months Service Warranty

Camera Accessories

Godox Reemix 3-in-1 Remote

For Nikon
For Canon

Godox Lens Caps

Ø 58mm
Ø 67mm
Ø 72mm
Ø 77mm

Godox Lens Hood

HB-39 for Nikon
HB-35 for Nikon
HB-32 for Nikon
ES-71/II for Canon
EW-83E for Canon
EW-73B for Canon
EW-60C for Canon
EW-78D for Canon

Godox Flash Diffusers

DF-900
DF-680
DF-430
DF-580

Godox ThinkLite Speedlight model: TT560

Godox Ring48 LED Macro Light

▶ Godox Reemix 3-in-1 Remote Control RMI - The Reemix Remote is more than just another flash trigger. It has three functions: TRIGGER STUDIO STROBE. Connect Reemix with your studio flash to trigger synchronously. It has multiple channels that enable you to trigger more than one strobe at a time. CONTROL FLASH SPEEDLIGHT. You can wirelessly control your off-camera flash gun. RELEASE CAMERA SHUTTER. You can set your camera in correspondence mode. It is possible to release your camera shutter in auto-focus, single and continuous shot, bulb and delay from a distance.

Available for most models of **Canon** and **Nikon** only. Additional receivers are available for purchase.

Specifications:

Transmit Frequency: 433MHz
Workable Range: 100m for Camera,
30m for Flash
Channels: 16
Transmitter Battery: 12V 1xA23
Receiver Battery: 1.5V 2xAAA
Sync Speed: Up to 1/250s

What's Included?

1 Transmitter
1 Receiver
1 Sync Cable (Choose from above: **C1, C3, N1, N2, N3** left to right)
1 12V A23 Battery
User Manual
3 Months Service Warranty



To complete your strobist setup, don't forget to add: ThinkLite TT560, Light Stand SS-32S, UM-33RS or UM-33T Umbrellas, SH-12E Holder.

Reemix Remote
Set RMI
P1450
ea. set

Additional
Receiver RMI-R
P920
ea.



Compatible with:

C1: Pentax K100D, K110D, K10D, *ist Ds2, *ist D, *ist Ds, *ist, *istDL, *ist DL2. **Samsung** GX-1L, GX-1S, GX-10. **Canon** EOS 30, 33, 50E, 300, 300V, 3000, 50, 300D, 350D, 400D, 450D, 500D, 550D, 600D, 1000D, 1100D. **C3:** Canon EOS 1Ds Mark II, 1Ds Mark III, 1Ds, 1D Mark IV, 1D Mark II, 1D Mark II N, 1D Mark III, 5D Mark II, 1D, 5D, 7D, 50D, 60D, 40D, 30D, 20D, 10D, D60, D30, D2000, 1v HS, 1v, 3. **N1:** Nikon D2H, D2Hs, D1x, D1h, D1, D2x, D2Xs, D200, D300, D3, D3X, D3S, D2HS, D300S, D700, F5, F6, F100, F90, F90x, D100 (MB-D100 needed), **Kodak** DCS-14n, **Fujifilm** Finepix S3pro, S5pro. **N2:** Nikon D70S, D80. **N3:** D90, D3000, D3100, D5000, D5100, D7000.

Verify your SLR Connector

▶ Godox Lens Caps - Indispensable for protecting the front element and or glass, screw-in filter of your lens from smudges, dust, and everyday transport.

No front label. Canon lens cap style. Works on all other major brands.

Available Sizes/Code:
LC-58, Ø 58mm
LC-67, Ø 67mm
LC-72, Ø 72mm
LC-77, Ø 77mm



ALL
Lens Caps
P90
ea.

▶ Godox Lens Hoods - A lens hood lets you take better pictures. It extends beyond the edge of your lens, shading it and reducing light interference that causes glare. It also serves as protection for your valuable lens and glass filter, since it extends beyond the lens surface, shielding it from debris, moisture, bumps, and even fingerprint smudges.

Available for the following lens:

LH-HB39 for Nikon
AF-S DX 16-85mm



ALL
Lens Hoods
P230
ea.

LH-HB35 for Nikon
AF-S DX 18-200mm f/3.5-5.6G ED IF VR



LH-HB32 for Nikon
AF-S DX 18-70mm f/3.5-4.5G ED IF
AF-S DX 18-105mm f/3.5-5.6 VR ED
AF-S DX 18-135mm f/3.5-5.6G ED IF



LH-ES71II for Canon
EF 50mm f/1.4 USM



LH-EW83E for Canon
EF 16-35mm f/2.8L II USM
EF 20-35 f/3.5-4.5 USM
EF 17-40mm f/4L USM
EF 17-35mm f/2.8L USM
EF-S 10-22mm f/3.5-4.5 USM



LH-EW60C for Canon
EF-S 18-55mm f/3.5-5.6 I, II IS
EF 28-80mm f/3.5-5.6 II, II USM, III, IV, V
EF 28-90mm f/4.0-5.6



LH-EW78D for Canon
EF-S 18-200mm f/3.5-5.6 IS
EF 28-200mm f/3.5-5.6



LH-EW73B for Canon
EF-S 17-85mm f/4.5-5.6 IS USM
EF-S 18-135mm f/3.5-5.6 IS



▶ Godox Flash Diffusers - Flash diffusers for off-camera flash. Get rid of the harsh contrast and shadows created by bare flash. Soften, and evenly distribute the light across the entire frame* and create a flattering look for your subjects. Perfect for portrait shots, macros and more. Just slides into your flash with ease and fits anywhere in your camera bag.

* Available for the following hot shoe flash and other third party

ALL
Flash Diffusers
P200
ea.



DF-900

For Nikon SB-600 / SB-800, Nissin Di466, Olympus FL-36, DMW-FL360E, Sunpak PZ42X, Yongnuo YN-460, YN-460II, YN-465, YN-467



DF-680

For Nikon SB-900



DF-430

For Canon 430EX / 430EXII



DF-580

For Canon 580EX / 580EXII, Godox TT560, Nissin Di622, 360TXP, 360TW, PZ400-C-N

* Requires bouncing of light indoors to achieve. Flash units shown for illustration only.

▶ Godox Macro LED Ring Light Ring48

Powered by 48 pieces of white (color balanced) LED lights, it is effective for macro photography (close-up shooting) and portraiture. It emits a constant stream of light providing permanent lighting for your subject and enabling easy exposure handling. The ring light can be switched for 1/2 right, left, top or down creating different lighting effects. It includes 6 lens thread adapter rings of different diameter for mounting on most lens brands. Additionally, it is possible to create a ring around the eye area of your subject for a more glamorous look. *The batteries are stored inside the hot shoe mounted device to avoid any weight stress to the front lens barrel assembly. It can be powered through batteries or with the included AC/DC adapter.*



This space is reserved for the new Montana C600 Speedlight with power and sync ports. Arriving this December 2001 to mid January 2012. Pre-order yours now! Call 4080580 for more details.



Ring48
P2490
ea.

- Specifications:
- Effective Distance: 3cm-100cm
 - Service Time: 1.5 Hours Using 2AA Ni-MH, 5W
 - LED Index: (at full power) GN15
 - Color Temperature: 5500±6000K
 - Power Rate: Semi-Power / Full Power
 - Power Source: Battery or A/C
 - Coiled Cord Length: 100cm
 - Ring Adapter Sizes: 49, 52, 55, 58, 62, 67mm
 - Adapter: 100-240Vac
 - Shipping Weight: 185g
 - Batteries Not Included



- What's Included?**
- 1 Ring LED Head
 - 1 A/C Adapter
 - 6 Adapter Rings
 - 1 Hot Shoe Power Controller / Battery Pack
 - User Manual
 - 3 Months Service Warranty

LIMITED STOCKS AVAILABLE

How to Order

At this moment we mainly handle online sales. Visits are by appointment. This means that our staff will be more than happy to answer your questions and send you pictures and information about the products with as many details and explanations as you may need.

How to buy: You can browse the website, choose to "buy now" the products of your interest and these will be added to your "cart". When you are done you can roll over the top right "items" button and then click on "go to checkout". We offer the option to do manual payment or online payment and also the choice between pick up at our warehouse or delivery door-to-door through the couriers you see on this page. You can also call, SMS, or email us and our friendly sales staff will follow up your query. Visits are by appointment only.

Catalog prices are already the lowest possible price. No further discounts are available.

CASH – Clients can pay cash upon pick-up. Those who want to pre-order need to pay 30% cash or bank deposit in advance.

BANK DEPOSIT – You may deposit in our BPI, HSBC or BDO account. If a check payment is made, checks must be cleared first before items are delivered or retrieved.

** Current Account in HSBC to the name of Analema Corporation, ACC # 026-080663-040*

** Current Account in BPI to the name of Analema Corporation ACC # 1921-1158-45*

** Saving Account in BDO bank to the name of Analema Corporation, ACC # 506-800-2007*

CREDIT CARD – You may pay with your credit card via our website (Safe SSL Payment) or when you pick up your items without extra charge. All major credit cards are accepted.

PAYPAL™ – You may use your credit card and pay via paypal.com. This is one of the safest ways of paying in the internet. However, you will need to add 5% to the total amount you want to purchase for the PayPal fees. If you do not have a PayPal account, you must first register to their site. Afterwards, please pay the exact amount to our account: analemacorp@gmail.com. It will take 3-4 working days for PayPal payments to be cleared and before you may pick up or have your item shipped.

GLOBE® **GCASH™** - You can make G-CASH payments through mobile number 0927-8484378



About Photozuela Products



All of our products are brand new and do not contain hidden defects and extra charges except that which are required by law such as VAT. (Additionally, charges may be added on top of the retail price when the client opts for private courier delivery and such.)

All of our items are fully protected against manufacturer defects at the moment of purchase. We assure our clients that all our products have been tested and quality checked at the factory and upon receipt of the items in our warehouse.

Small imperfections such as tiny and almost unnoticeable scratches/irregularities in some of the parts are sometimes unavoidable during the manufacturing and shipment and may not be subject for refunds and or replacement as long as the product is in perfect working order. Hence, we invite every client to check for themselves (or call our staff to check for online orders) any irregularities in cosmetic appearance and function before checking out for your peace of mind.

Consumables such as flash tubes and light bulbs (including CFL bulbs) are tested for it's correct function before shipping and are never replaced.

Warranty

If an item is found factory defective, an outright replacement is granted within the first 3 days after purchase. After this, product servicing shall take place. We employ in-house quality tests before release, but we absolutely encourage our clients to test in-house and perform item counting on their purchase. (If client, for example, performs tests for items such as light stands, it must not be loaded by force; weight should be applied only for what the light stand or support is designed to bear. Client is liable for damages incurred should this be the case.)

In an event that a product of ours has been returned within the warranty or replacement period for any reason, an investigation of product fault shall take place. This is to protect and improve our future product design and specs. We only replace and or repair our products and never process a full refund as we act in full transparency with our clients that we do not carry items with hidden defects.

For customers purchasing in other regions via courier: we guarantee special care and full transparency that they will receive our products in full working order and fully quality checked before we release them for delivery to third party logistics companies. The client will be responsible for the insurance and normal risks involved during transport. Rest assured, we do stress detailed instructions regarding handling and packaging of our items with our partner courier. Should the client prefer to return a defective item after troubleshooting calls for it, they shall shoulder all expenses to return the item back to our warehouse for servicing. This is regardless if the product is within the warranty period or if it had lapsed.

Electronic items (excluding CFL bulbs) - service warranty covers free repair if it is confirmed by our technicians to be a factory defect. Warranty will be completely void if the user himself opens the units or allows a third party technician to do so. Clients may prefer do so only after service warranty have lapsed or the product EOL had been announced.

Not Included in warranty: Specific mechanical, textile, accessories, non-electronic and certain electrical items. Also, Peripheral items normally do not carry any warranty – (ex. diffuser cloth, bags, light stand, circular reflector, anything with no electronic or electrical component). Service warranty shall be specified in the product's page, in the receipt, our catalog, or as noted by our point of sales.

There is NO coverage for force majeure, abuse or misuse of the items. Examples of abuse and or misuse include, but are not limited to: liquid spillage, immersion, fall, unauthorized disassembly, scratches caused by wear and use, using a product not intended for commercial use, using the wrong replacement parts and such. All malfunctions resulting from misuse, misconfiguration, exposure to dust, humidity, dirt, sand, water, dropping or shock of any kind will not be covered by this warranty.

Items unclaimed after sixty (60) days will be forfeited.

** Product Design, specifications and prices may change without prior notice.*


YOU MAY SEND US AN EMAIL AT SUPPORT@PHOTOZUELA.COM FOR MORE INFORMATION

Click anywhere on this page to open our Google Maps™ location.



PHOTOZUELA™

Lot 10 Block 6 Phase 5 AFPOVAI F. Ver St. corner M. Cabal St. Fort Bonifacio Taguig City, Manila, Philippines 1630
 GPS 14°31'44.54"N, 121° 2'39.35"E
 TEL +632 408 0580
 Globe +63 927 8779654
 Smart +63 999 3951639
 WWW.PHOTOZUELA.COM
 sales@photozuela.com
 support@photozuela.com
 Mon to Fri 9am-6pm | Sat 9am - 12pm

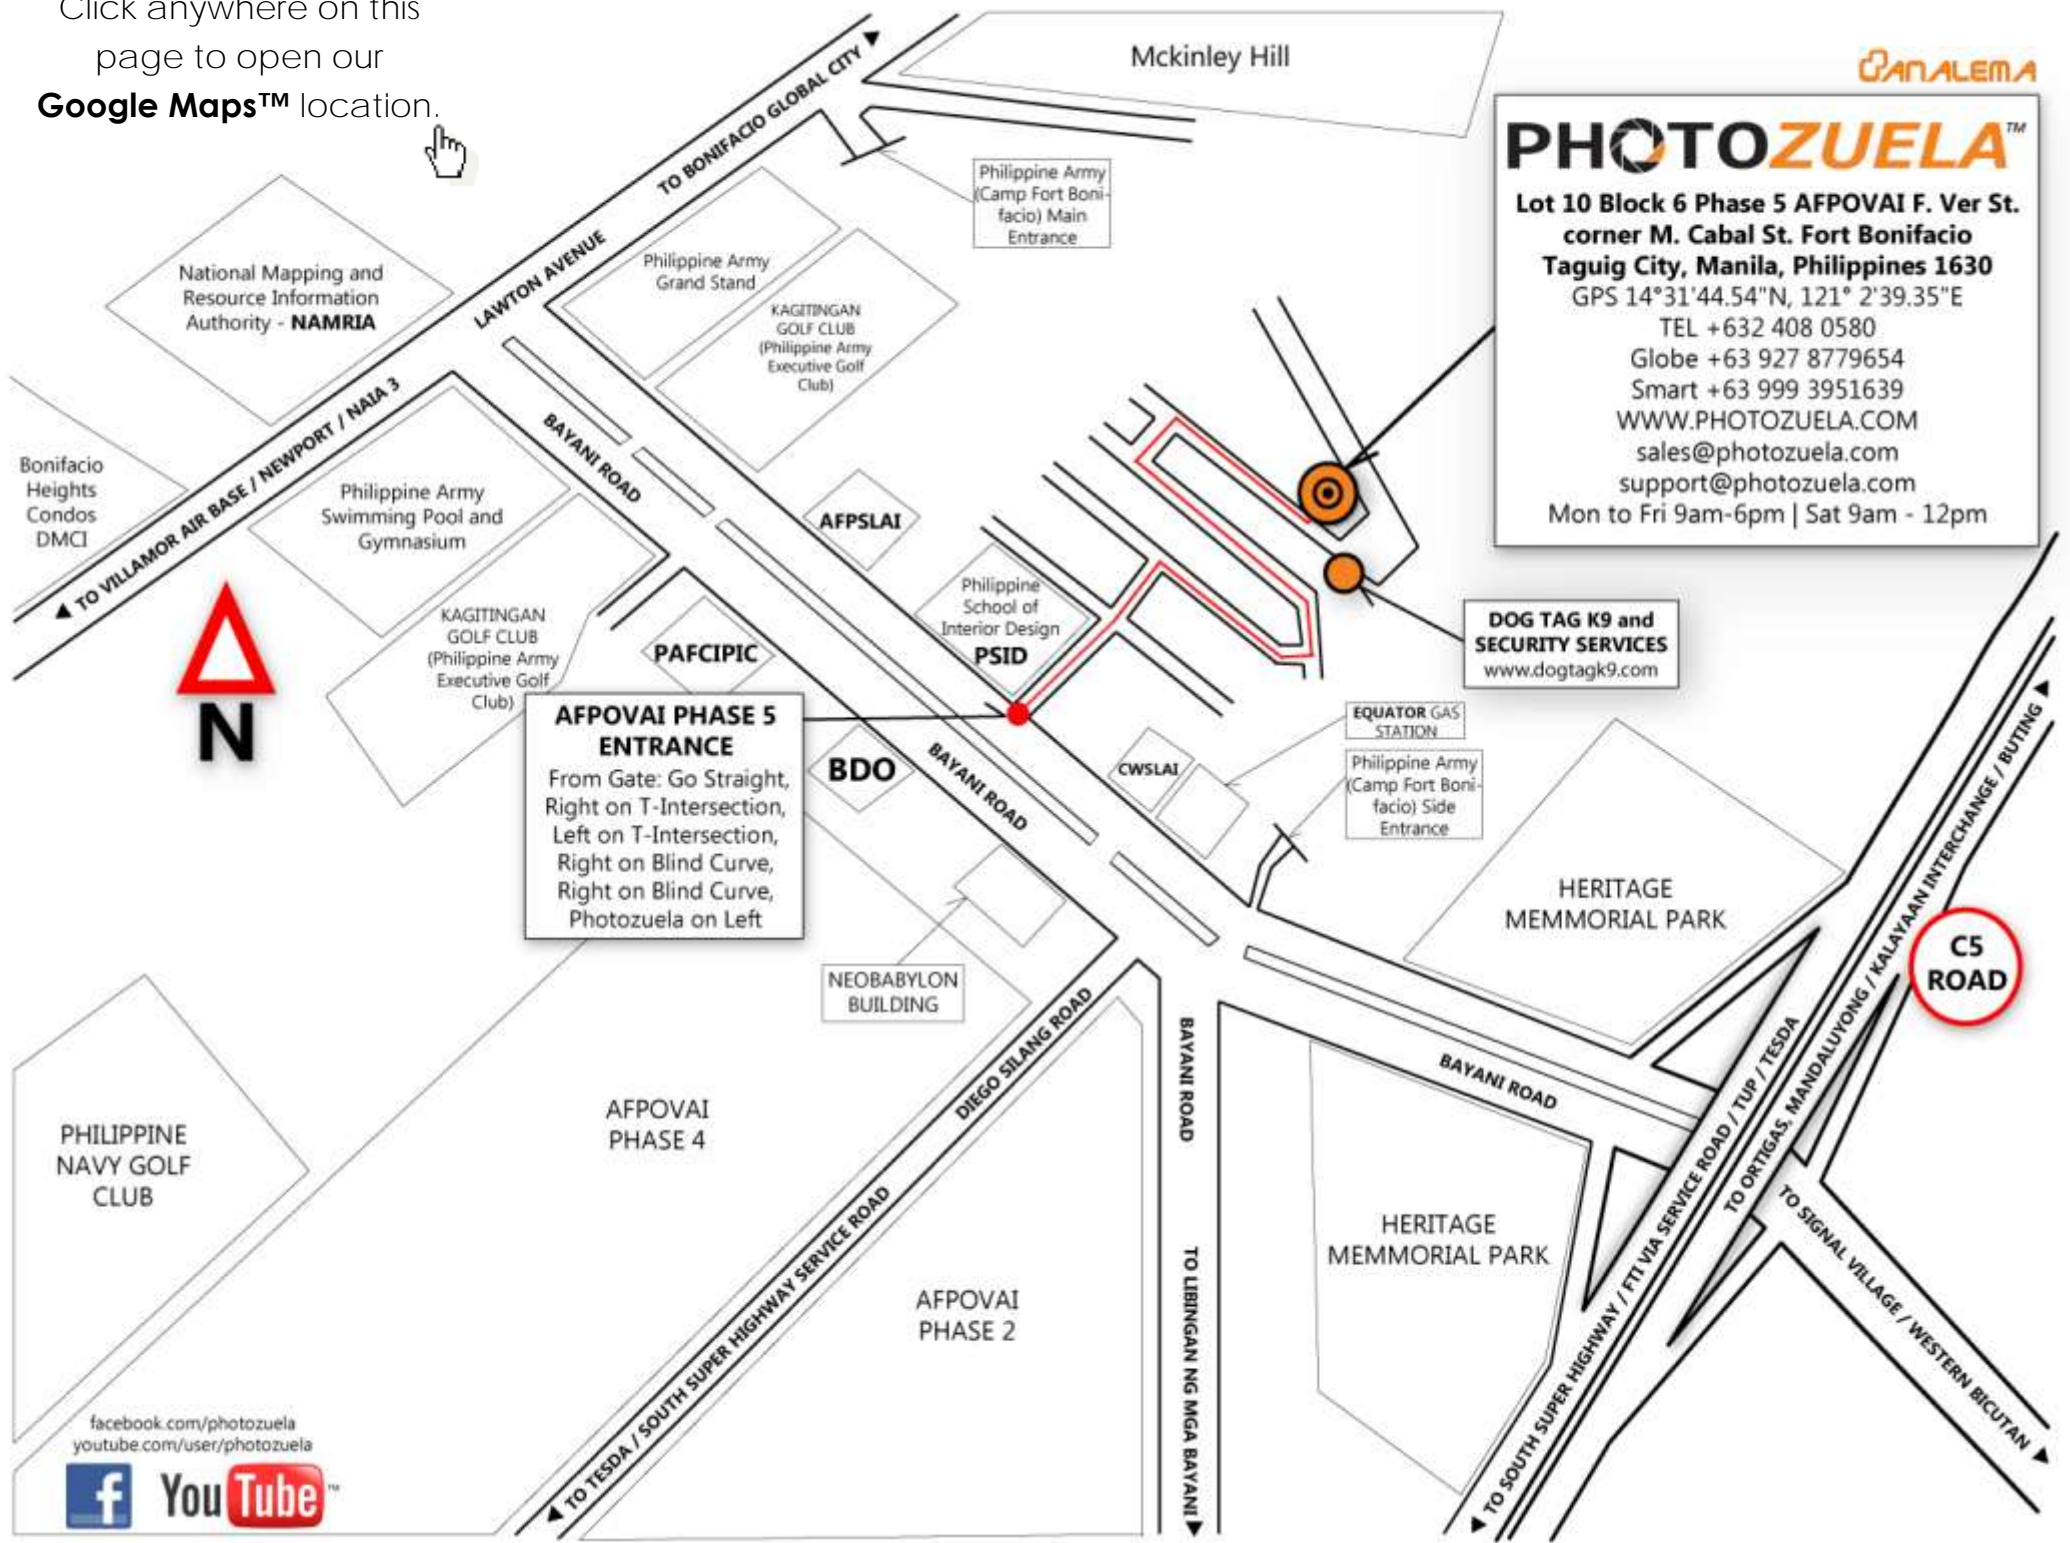

AFPOVAI PHASE 5 ENTRANCE
 From Gate: Go Straight, Right on T-Intersection, Left on T-Intersection, Right on Blind Curve, Right on Blind Curve, Photozuela on Left

DOG TAG K9 and SECURITY SERVICES
 www.dogtagk9.com


C5 ROAD



facebook.com/photozuela
 youtube.com/user/photozuela



PHOTOZUELA[®]
Live your passion well equipped.

powered by 

WWW.PHOTOZUELA.COM "Photozuela," its colors, design and logo are registered trademarks