#### LIMITED ONE YEAR WARRANTY

Chaney Instrument Company warrants that all products it manufactures to be of good material and workmanship and to be free of defects if properly installed and operated for a period of one year from date of purchase. REMEDY FOR BREACH OF THIS WARRANTY IS EXPRESSLY LIMITED TO REPAIR OR REPLACEMENT OF DEFECTIVE ITEMS. Any product which, under normal use and service, is proven to breach the warranty contained herein within ONE YEAR from date of sale will, upon examination by Chaney, and at its sole option, be repaired or replaced by Chaney. In all cases, transportation costs and charges for returned goods shall be paid for by the purchaser. Chaney hereby disclaims all responsibility for such transportation costs and charges. This warranty will not be breached, and Chaney will give no credit for products it manufactures which shall have received normal wear and tear, been damaged, tampered, abused, improperly installed, damaged in shipping, or repaired or altered by others than authorized representatives of Chaney.

THE ABOVE-DESCRIBED WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, AND ALL OTHER WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTY OF MERCHANTABILITY AND THE IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE. CHANEY EXPRESSLY DISCLAIMS ALL LIABILITY FOR SPECIAL, CONSEQUENTIAL OR INCIDENTAL DAMAGES, WHETHER ARISING IN TORT OR BY CONTRACT FROM ANY BREACH OF THIS WARRANTY. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. CHANEY FURTHER DISCLAIMS ALL LIABILITY FROM PERSONAL INJURY RELATING TO ITS PRODUCTS TO THE EXTENT PERMITTED BY LAW. BY ACCEPTANCE OF ANY OF CHANEY'S EQUIPMENT OR PRODUCTS, THE PURCHASER ASSUMES ALL LIABILITY FOR THE CONSEQUENCES ARISING FROM THEIR USE OR MISUSE. NO PERSON, FIRM OR CORPORATION IS AUTHORIZED TO ASSUME FOR CHANEY ANY OTHER LIABILITY IN CONNECTION WITH THE SALE OF ITS PRODUCTS. FURTHERMORE, NO PERSON, FIRM OR CORPORATION IS AUTHORIZED TO MODIFY OR WAIVE THE TERMS OF THIS PARAGRAPH, AND THE PRECEDING PARAGRAPH, UNLESS DONE IN WRITING AND SIGNED BY A DULY AUTHORIZED AGENT OF CHANEY. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.

For in-warranty repair, please contact: Customer Care Department Chaney Instrument Company 965 Wells Street Lake Geneva, WI 53147



Please DO NOT return product to the retail store. For technical assistance and product return information, please call Customer Care: 877-221-1252 Mon. - Fri. 7:00 A.M. to 7:00 P.M. (CST)

## www.acurite.com

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

1- This device may NOT cause harmful interference, and

2- This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, There is no quarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
  Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.


NOTE: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user authority to operate the equipment.

> Patent numbers: 5,978,738; 6,076,044; 6,597,990 ACURITE® is a registered trademark of the Chaney Instrument Co. Lake Geneva, WI



Thank You for purchasing this ACURITE® product. This Thermometer features indoor temperature and a wired temperature probe sensor that can be routed outside to provide outdoor temperature readings. This thermometer also includes a MAX/MIN memory function and a light for easy low light viewing. Please read this manual to fully enjoy the benefits and features of this product. Please keep this manual for future reference.


NOTE: A protective film is applied to the LCD at the factory that must be removed prior to using this product. Locate the clear tab and simply peel to remove.

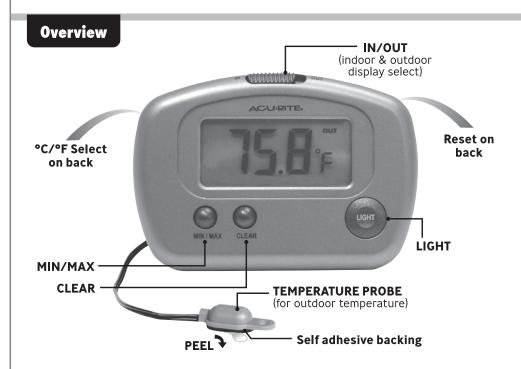

## **PLACEMENT**

# **Install Batteries**

Slide the battery compartment cover open and install 1 fresh "AAA" battery as shown here. Make certain the "+" and "-" polarity markings on the battery match the markings within the battery compartment. Replace the battery with a fresh one when the display starts to fade or when the unit stops functioning.

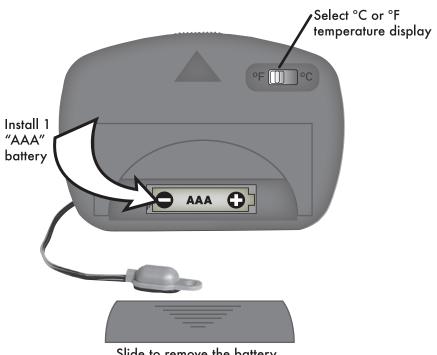

Slide to remove the battery compartment cover

## **PRODUCT REGISTRATION** SUPPORT To receive product updates and information, Go to www.AcuRite.com ▶ Register a Product

PLEASE DISPOSE OF OLD OR DEFECTIVE BATTERIES IN AN ENVIRONMENTALLY SAFE WAY AND IN ACCORDANCE WITH YOUR LOCAL LAWS AND REGULATIONS.

BATTERY SAFETY: Clean the battery contacts and also those of the device prior to battery installation. Remove batteries from equipment which is not to be used for an extended period of time. Follow the polarity (+/-) diagram in the battery compartment. Promptly remove dead batteries from the device. Dispose of used batteries properly. Only batteries of the same or equivalent type as recommended are to be used. DO NOT incinerate used batteries. DO NOT dispose of batteries in fire, as batteries may explode or leak. DO NOT mix old and new batteries or types of batteries (alkaline/standard). DO NOT use rechargeable batteries. DO NOT recharge non-rechargeable batteries. DO NOT short-circuit the supply

Now that setup is complete, you must choose a location to place the thermometer.

When considering placement options, be sure to choose an area free of water, dust and direct heat that may effect the accuracy of the temperature readings on the thermometer.

To observe outdoor temperatures, the wired temperature probe must be placed outside. The probe sensor then can be securely mounted to a surface utilizing the adhesive pad or the integrated screw/nail hole. Take care not to damage the sensor during mounting.

A common routing option would be to open a window, and route the wire through that opening. Then gently close the window frame on the sensor wire, making sure there are no sharp or binding surfaces that may sever or cut the wire.

NOTE: The wired temperature is not intended for permanent submersion installation in liquids, but may be used short term to check shallow water temperatures.

#### USE

You may switch between viewing the current indoor OR outdoor temperature by sliding the "IN/OUT" slide select switch.

You may view the MAX/MIN recorded values for temperatures and humidity by pressing the "MAX/MIN" button for temperature, or the "MAX/MIN" button for humidity. The MAX and MIN indicators will appear on the display. To clear the currently viewed MAX/MIN values, press the "CLEAR" button.

### **SPECIFICATIONS**

Batteries: I x "AAA" (not included)

#### Measurement Ranges

Outdoor Temperature: -58°F to 140°F

-50°C to 70°C

Indoor Temperature: -32°F to 122°F

The thermometer will display "LO" or "HI" when temperature or humidity readings reach a level out of the range stated above.

Limited One Year Warranty

**Customer Care:** 877-221-1252

www.AcuRite.com

Patent numbers: 5,978,738; 6,076,044; 6,597,990; ACURITE® is a registered trademark of the Chaney Instrument Co. Lake Geneva, WI 53147