With Serial, Bluetooth, Wireless and USB connectivity options, the RJ series use thermal printing technology so you don't have to worry about ink or toner. And with IP54 certification, the toughest tests against dust and water, you are assured of its continued reliability whatever the conditions. BPL (ZPL emulation) also allows existing applications for label/receipt printers to work with the RJ device without extra development costs.

FIELD SERVICE

Engineers out on the road can use RJ to print service reports for customers they are visiting, increasing customer confidence and minimising future queries.

LOGISTICS/DELIVERIES

Busy delivery drivers can print out updated delivery notes and order sheets with RJ, helping to keep them on the move and in the right place at the right time.

FIELD SALES

RJ can print out quotations, contracts, financial plans and invoices, increasing the opportunity for your sales people to close the deal while a customer's interest is still high.

PUBLIC SAFETY/EMERGENCY SERVICES

RJ can increase the accuracy of recording important information out in the field, avoiding unnecessary, time-consuming paperwork back in the office.

RJ Series Specification

Printing	RJ-4030	RJ-4040	
Print resolution	203	dpi	
Print technology	Direct thermal		
Printing speed	Maximum 5ips (inches per second) or 127mm/second (under Brother standard environment *1)		
Paper feed method	Roll feed		
Printable Width	Maximum 104m	m (4.09 inches)	
Print Length	Maximum 3m (118.11 inches)	
Roll Width - Max/Min	118mm (4.64")	/ 51mm (2.0")	
Maximum Roll Diameter	58mm	(2.28")	
General			
Dimensions (W x H x D)	6.38" x 6.93" x 3.03" (162	2mm x 176mm x 77mm)	
Weight	610g/1.35lb excludin	ng battery and paper	
Battery	Rechargeable, Li-ion 14.4V		
No. of pages per battery charge	Rechargeable Li-ion Battery: approximately 2000 labels - continuously printing. (under Brother standard environment *1)		
Interface			
USB	Standard	Standard	
Serial	Standard	Standard	
Bluetooth (Ver. 2.0 + EDR)	Standard	N/A	
WiFi (802.11 b/g/n)	N/A	Standard	
Software Support			
OS Driver Support	Windows XP, Windows Vista, Windows 7	Windows XP, Windows Vista, Windows 7, Windows Server 2003, Windows Server 2008/2008 R	
SDKs	Windows CE 5.0 & later, Windows Mobile 5 & later Android 2.2 & later		
Supported Command	P-touch Template 2.0, Raster, ESC/P		
Emulations	ZPL II® Compatible		
Barcode support	Yes		
Memory			
RAM	32MB		
Flash	16MB		
Environmental			
Temperature	0C to +40C (During Operation) -20C to +60C (During Storage)		
Relative Humidity	20%-80% (No Condensation)		
Sealing Certification	IP54		
Drop Protection	1.8m (6ft)		
Package contents			
Items included	RJ Printer (RJ4030 or RJ4040), Belt (printer driver and user manual) includ		

^{*1} Figures quoted depend on operating environment. "Brother standard environment" is based on connectivity via USB with fully charged new battery at 23 degrees C. (7% coverage 4X6 inches.)

FOLD MARKS \rightarrow



CUSTOMISE RJ FOR YOUR REQUIREMENTS

RJ is supplied with Machine, Belt Clip, CD ROM and user guide. As each printing application is different, you simply choose the accessories you need, keeping set up costs to a minimum.

Step 1 'Choose your printer'

icp i checoc you plane.		
RJ Model Comparison	RJ4030	RJ4040
203dpi print resolution	\(\)	
IP54 Certification	\(\)	✓
6ft drop protection	\(\)	✓
USB & serial interface	\	\
Bluetooth connectivity	/	
WiFi Connectivity		√
5 ips print speed		<u> </u>

Step 2 'Choose your Accessories'

Power Options

	te de go	\$143			W.
Li-ion Rechargeable Battery	AC Adaptor (EU)	AC Adaptor (UK)	12V Car Adaptor (Cigarette Socket)	12V Car Adaptor (Permanently Wired)	4 Bay Battery Charger
PA-BT-4000LI	PA-AD-600EU	PA-AD-600UK	PA-CD-600CG 12V	PA-CD-600WR 12V	PA-4BC-4000

Additional Ontions

	ptions		
PA-MCR-4000	PA-CM-4000	PA-WC-4000	PA-SS-4000
Magnetic Card Reader	Car Mounting Kit	Weather Case	Shoulder Strap

Paper

RD-M01E5	RD-M03E1
4" Wide Paper Rolls	4" Wide Label Rolls
•	

For more information or to buy now, please contact one of the following distributers





Brother UK Ltd, Audenshaw, Manchester M34 5JD Tel:+44(0)8444 999 444 Fax:+44(0)161 931 2218 Web: www.brother.co.uk

All specifications correct at time of printing. Brother is a registered trademark of Brother Industries Ltd. Brand product names are registered trademarks or trademarks of their respective companies.

Material code ZLFTRJ40304040U1

FAST, COMPACT AND VERY RUGGED



THE TOUGH PRINTING SOLUTION TO SUPPORT MOBILE WORKERS


IN THE FIELD

I SERIES MOBILE PRINT


RUGGED MOBILE PRINTING, WHATEVER THE CONDITIONS

Come rain or shine, our RJ series are designed and manufactured to the high standards you'd expect from Brother and with IP54 certification and drop testing to 6', you have complete peace of mind that they won't let you down, even in the harshest outdoor conditions.

THE TOUGH PRINTING SOLUTION TO SUPPORT MOBILE WORKERS

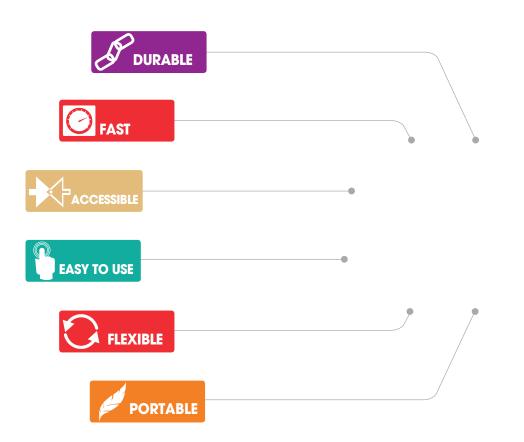



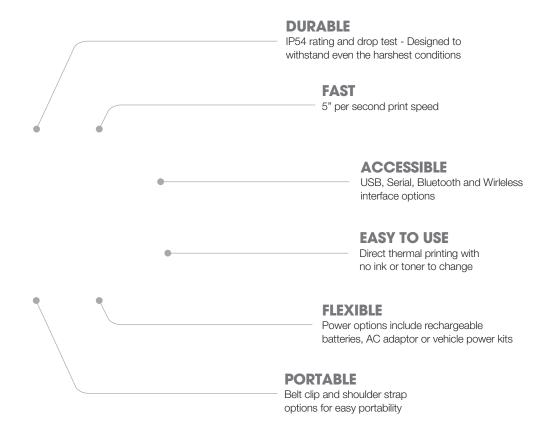

SOFTWARE SUPPORT AND INTEGRATION

Brother can provide the necessary tools required for software developers to integrate the print function into their mobile application. Printer drivers are available for Windows OS and Software development kits can be provided to support Windows Mobile and Android applications.

For further information go to http://www.brother.com/product/dev

ON THE GO PRINTING

Thermal printing is ideal for on the go use because it is less susceptible to fluctuating seasonal temperatures and humidity extremes than other mobile technologies.

FURTHER FEATURES INCLUDE:

- BPL ZPL emulation for easy integration with existing systems.
- Fully featured design software to upload templates to the device.
- Supports a wide range of industry standard barcode symbols both linear and 2D.
- Industry standard 203 dpi print resolution.

VERTICAL MARKETS/APPLICATIONS





- 1. Field Service
- 2. Public Safety/Emergency Services
- 3. Logistics/Deliveries

stry standard barcode symbols – both linear and 2D.

FOID MARKS→