



Co-Axial Plug Connector Kit

Model Number: CCK3-RO


User Manual

Please read this manual thoroughly before using your Ross Co-Axial Plug Connector Kit and then retain for future reference

Contents:

2 x Coax Plugs

1 x Coax Coupler

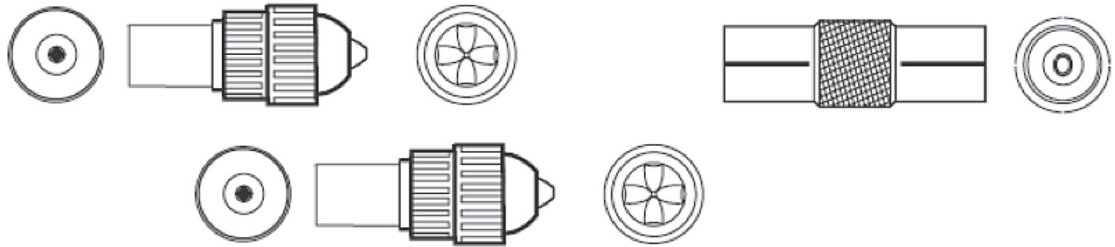


Assembly Instructions for TV/FM Plugs on Coax Cable:


1. Cut Coaxial cable to desired length (always use the shortest lengths possible for the best signal transfer)
2. Unscrew coax plug and open cable grip "jaws"
3. Slide cap and cable grip over Coax cable
4. Strip away 10cm of outer insulation
5. Peel back the braid and/or foil in order to uncover the inner insulation
6. Strip away 5mm of inner insulation to uncover the copper wire
7. Position the inner connector over the centre copper wire, and secure it by tightening the connector screw
8. Position the outer plug connector over the inner plug connector and push the braid and/or foil back over the cable grip
9. Screw the plug cap back on the outer connector
10. Now repeat at the other end

The couple included allows you to join coaxial cables together or change the sex of the cable if required.


Coaxial plug wiring instructions:




1
Unscrew coax plug housing and slide cap over cable.




2
Strip 20mm of cable outer sheath. Gather copper braid, wrap around outer sheath, slide clamp over braid



3
Strip 15mm of inner insulation to leave 5mm exposed



4
Undo screw on clamp, slide clamp over inner wire and tighten screw. Re-assemble plug



5
Tighten it until secure

