

Swift Hitch™

User's Manual

Portable Wireless Camera System

With Infrared Night Vision

Model: SH01



Please read this manual carefully und thoroughly before any attempt to operate this product and retain it for your future reference.

TABLE OF CONTENTS

INTRODUCTION	3-4
Notice	3
Warranty	3
Restrictions	4
Maintenance	4
PRODUCT	5-6
Package Contents	5
Feature Locations	6
FIRST TIME USAGE	7-10
Charging the Camera and Receiver	7-8
Using the Camera	8-9
Night Vision	9
SPECIFICATIONS	10
TROUBLESHOOTING	11
IMPRINT	11

EU Environmental Protection

Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.





INTRODUCTION

Thank you for purchasing this wireless camera kit. This product works at ISM-2.4GHz frequency band which could be legally used worldwide without permission. We feel confident that you will be pleased with the quality and features of this product. The camera features an image sensor and a transmitting module to capture the image and transmit them wirelessly.

The receiver features a receiving module to receive and display the camera image on a color (LCD) - liquid crystal display.

Notice

Notice: This product may cause interference with other wireless equipment that operates at 2.4 GHz ISM band. Please turn off one of the equipments to eliminate the interference.

Product Assurance: This camera will emit electromagnetic wave, just like other wireless products. But its transmitting power is less than other wireless products such as mobile phones. The 2.4 GHz wireless camera meets wireless frequency security standards and recommended indexes while working. These standards and indexes are certificated by academic organization and represent the cogitative research of the scientific workers who continuously explore and annotate the involved fields. So we believe that our products are safe for customers.

Warranty

This product has a **one year limited warranty** with an affective date that begins the date of purchase. Refer to the troubleshooting guide at the end of this manual for help. Contact the phone number provided in that section for any additional support. Please retain proof of purchase receipt for verification. Any attempted disassembly of the product will void the warranty. **Do not return defective product to the retailer.**



Restrictions

1. DO NOT use this product to violate one's privacy. Monitoring one's activities without consent is illegal and this product is not designed and manufactured for such purpose;
2. DO NOT put this product near any medical equipment. Radio waves might potentially cause breakdown of electrical medical equipment. So this product should be placed at least 1 foot away from any heart pacemaker. Radio waves might potentially influence heart pacemaker and lead to respiratory disturbance.
3. DO NOT use this product for any illegal activities. We shall not be responsible for any consequences of illegal acts committed by the user.

Maintenance


1. Do not shake or strike the product
2. Keep it dry and dustless and avoid exposing it to direct sunlight
3. Avoid putting the product in places where the constantly changed temperature or humidity occurs.
4. Keep product away from heat sources such as electric heater
5. Do not use the camera near caustic chemicals
6. Do not use this camera near water, for example, near a bath tub, wash bowl, kitchen sink or laundry tub, in a wet basement or near a swimming pool and the like
7. Do not use the camera in the places which are enclosed by metal. The surrounding metal like lifter, cabin, may shield the electromagnetic wave, and result in failure of signal reception
8. Please obey the local government's environment protection policy
9. Please turn off the power when left unused
10. Do not disassemble or repair the camera or receiver; doing so might cause damages to the product, and also VOID THE WARRANTY.

PRODUCT

Package Contents


This package comes with the following items. Please check whether they are all included in the packaging box, if one or some is missing, contact the retailer for replacement.

- 1) 2,4 GHz wireless camera
(1x)
- 2) Weatherproof cover for
camera (1x)
- 3) 2,4 GHz wireless receiver
(1x)
- 4) Lithium Battery for
receiver (1x)
- 5) „Y“ shaped charging cable
for camera & receiver (1x)
- 6) User's manual
- 7) Charging cable „open end“
- 8) 2x2 cm velcro for receiver

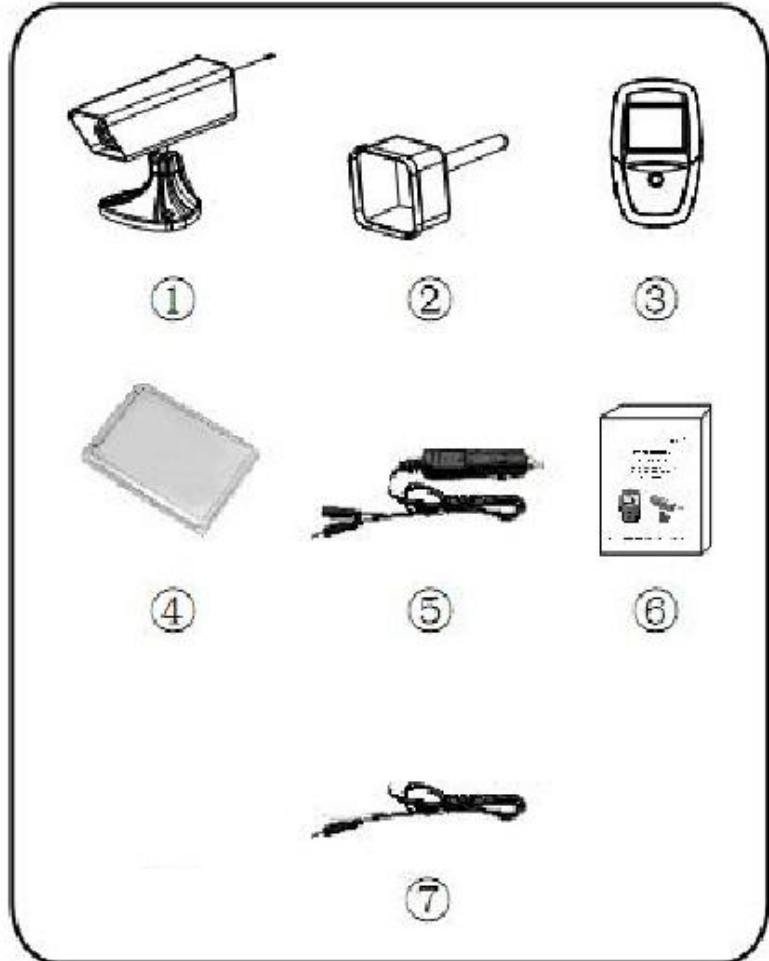


Feature Locations

1. Camera

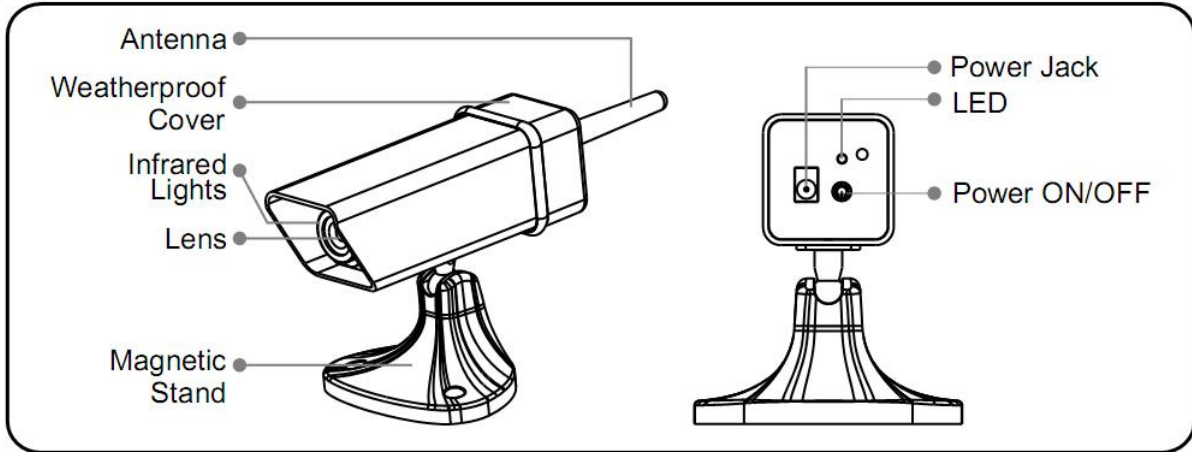


2. Receiver

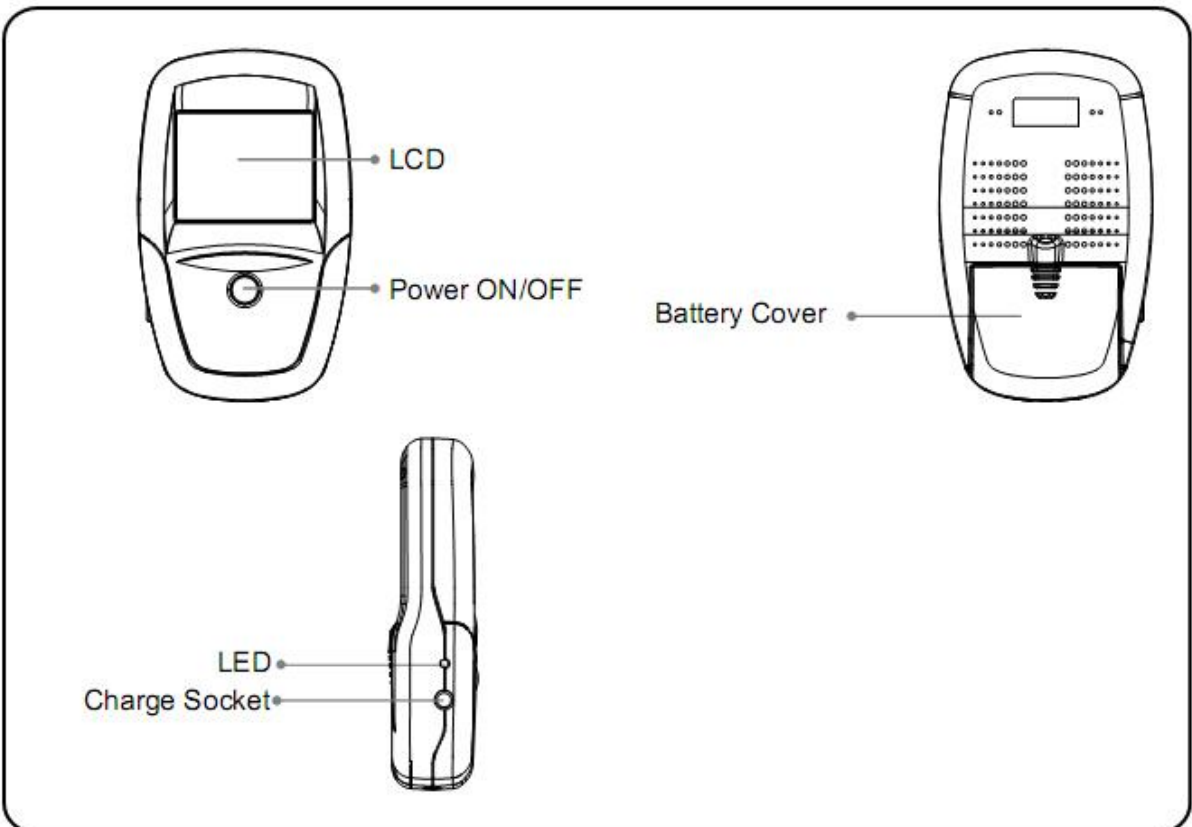


FIRST TIME USAGE

Charging the Camera and Receiver

1. Load a Li-battery to the battery compartment with its polarities matched.




2. Connect the camera/receiver with auto cigarette lighter by the "Y" shaped charging cable. Your camera and receiver are being charged. A full charge will take about 2.5 hours for camera and for receiver respectively.

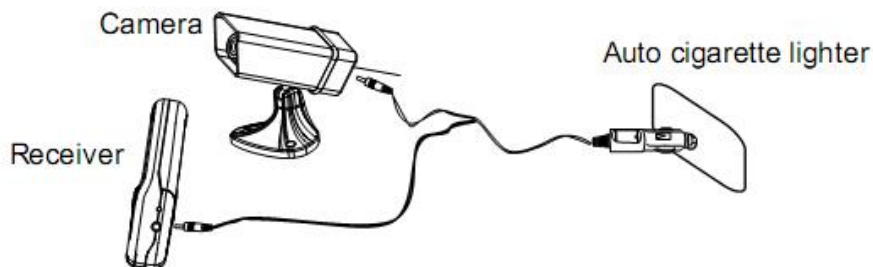


Note: For camera, you need to remove the cover before charging.

3. Die Kamera kann während des Ladevorgangs betrieben werden. Drücken Sie den An/Aus Knopf um die Kamera an- (bzw. aus)zuschalten. Dann können sie die Kamera benutzen.

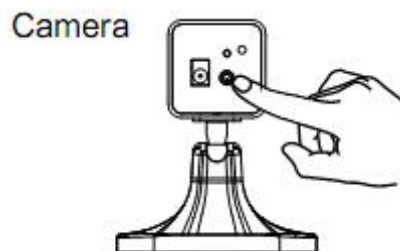

4. The receiver can also work during charging. Press and hold the Power ON/OFF button for about three seconds to turn on/off the receiver. When the receiver is powered on, LCD displays reverse the image by default.

Pressing POWER ON/OFF button momentarily can switch between reverse and non reverse image..

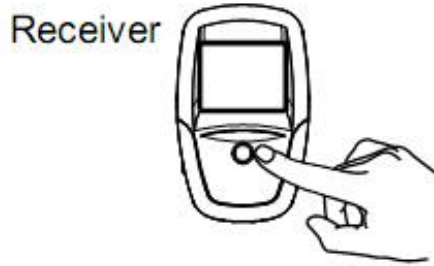

Notes for camera:

- If the battery is exhausted, please recharge it with the charging cable.
- Always keep weatherproof cover fitted regardless of conditions.

CAMERA LED INDICATOR	STATUS
Red on	Charging when Power off
Off	Power off (disconnect with cigarette lighter)/Finish charging
Green on	Power on
Yellow on	Charging when Power on

Notes for receiver:


- A full charge will take about 2.5 hours, which can power the receiver for about 4 hours continuously.
- You are recommended to have the battery fully charged before its first installation to optimize its life.
- Do not burn or disassemble the Li-battery. ⚠
- Do not short-circuit the battery as it may cause fire or electric shock. ⚠

RECEIVER LED INDICATOR	STATUS
Red on	Charging when Power off
Off	Power off (disconnect with cigarette lighter)/Finish Charging
Green on	Power on, working at reverse image
Yellow on	Charging when Power on, working at reverse image
Green flash	Power on working at non reverse image
Yellow flash	Charging and working at non reverse image


Using the Camera

1. Before using make sure the camera is fully charged. Press the camera Power ON/OFF button to power on your camera.


Camera



2. Mount the Magnetic Camera on your tailgate, and then adjust it to a suitable angle



3. Watching the back view of the car via the LCD display. Hitch your ride.



Note: einem The Velcro supplied for those customers who desire to attach the display to vehicle dashboard

Night Vision

The built-in Infra-red lights in camera provide night vision for low light conditions. The Infra-red lights will be automatically activated at night. The picture will turn to Black & White (monochrome) in Night Vision status.

**Built-in IR lights for about
15ft Night Vision Range**



Specifications





	ITEMS	VALUE
Camera	Imaging Sensor	1/3" CMOS
	CMOS	628 x 582 (PAL); 510 x 492 (NTSC)
	View Angle	55°
	Minimum Illumination	5 Lux/F1.2 & 0Lux (IR ON)
	Transmission Frequency	ISM 2.400 GHz – 2.483 GHz
	Transmission Power	10mW/CE
	Modulation Type	FM
	Bandwidth	18MHz
	Power Supply	+12V DC
	Battery Type	Rechargeable Lithium-ion Battery- 3.7 VDC
	Consumption Current	180 mA & 230 mA (IR ON)
	Charging Current	330 mA
	Charge Time	Up to 2 hours
	Working Time	Up to 4 hours
	Unobstructed Effective Range	100m (300 ft)
	Night Vision Range	5m (15 ft)
	Dimensions (WxDxH)(mm)	28 x 90 x 28
	Weight	156 g, (5,7 oz)
Receiver	LCD	2,5" TFT
	LCD Resolution	960 x 240
	Intermediate Frequency	ISM 2.400 GHz – 2.483 GHz
	Demodulation Type	480 MHz
	Demodulation	FM
	Receiving Sensitivity	-80dBm
	Power Supply	+12V DC
	Consumption Current	240 mA
	Charge Time	ca 2 Stunden
	Working Time	ca 4 Stunden
	Dimensions	80 x 38 x 130
	Weight	156 g, (5,5 oz)
	Operating Temperature	-10° C – 50° C / +14° F – +122° F
Storage Temperature	-30° C – +65° C / -22° F – + 149° F	
Operating Humidity	- 85% RH	

Actual transmission range may vary according to weather, location, interference or building construction

All the specifications are subject to minor change without prior notice

TROUBLESHOOTING

When you experience the operation problems, please check and try the following yourself before claimin that it is the defective product or consulting the experienced technician.

Abnormal Phenomena	Possible Reasons/Solutions
 No image	Check whether the camera/receiver is connected to power supply and powered on.
 Snowflakes on image	Check the distance & blocks.
 Ghost image	<ol style="list-style-type: none"> 1. Interfered with other devices; 2. Check the distance & blocks.
 Normal image	Interfered with other devices nearby; Remove or turn off such devices.

Copyright & Imprint

This Manual is the Property of Satconsystem. Excerpts, copies and/or changes require written authorization from Satconsystem.

Satconsystem
 Briegelstraße 14
 97486 Königsberg in Bayern
 Germany
 Tel: +49 9525 9818116
 Fax: +49 9525 9818117

info@satconsystem.de

www.satconsystem.de