

# **NVR User Manual**

For H.264 16-channel network video recorder  
All rights reserved

## CAUTION

- Please read this user manual carefully to ensure that you can use the device correctly and safely.
- We do not warrant all the content is correct. The contents of this manual are subject to change without notice.
- This device should be operated only from the type of power source indicated on the marking label. The voltage of the power must be verified before using the same. Kindly remove the cables from the power source if the device is not to be used for a long period of time.
- Do not install this device near any heat sources such as radiators, heat registers, stoves or other devices that produce heat.
- Do not install this device near water. Clean only with a dry cloth.
- Do not block any ventilation openings and ensure proper ventilation around the machine.
- Do not power off the NVR when the device is functioning. The correct operation to shut down the NVR is to first stop recording and then use “shut-down” button from the menu, and finally switch off the main power.
- This machine is for indoor use only. Do not expose the machine in rain or moist environment. In case any solid or liquid get inside the machine’s case, please turn off the device immediately and get it checked by a qualified technician.
- Do not try to repair the device by yourself without technical aid or approval.
- When this product is in use, the relevant contents of Microsoft, Apple and Google will be involved in. The pictures and screenshots in this manual are only used to explain the usage of our product. The ownerships of trademarks, logos and other intellectual properties related to Microsoft, Apple and Google shall belong to the above-mentioned companies.
- This manual is suitable for 16-channel network video recorders. All examples and pictures used in the manual are from 16-channel NVR.

## Table of Contents

<b>1 Introduction.....</b>	<b>1</b>
1.1 NVR Introduction .....	1
1.2 Main Features .....	1
<b>2 Hardware Installation .....</b>	<b>4</b>
2.1 Install Hard Drive &DVD Writer .....	4
2.1.1 Install Hard Drive .....	4
2.1.2 Install DVD Writer .....	5
2.2 Front Panel Descriptions .....	7
2.3 Rear Panel Instructions .....	8
2.4 Remote Controller.....	9
2.5 Control with Mouse.....	12
2.5.1 Connect Mouse.....	12
2.5.2 Use Mouse .....	12
<b>3 Basic Function Instruction.....</b>	<b>14</b>
3.1 Startup and Shutdown.....	14
3.1.1 Startup.....	14
3.1.2 Shutdown.....	14
3.2 Login.....	15
3.3 Live preview.....	15
3.3.1 Live playback.....	16
<b>4 Add IP Cameras .....</b>	<b>18</b>
<b>5 Main menu setup guide.....</b>	<b>20</b>
5.1 Basic configuration .....	21
5.1.1 System.....	21
5.1.2 Date & Time.....	22
5.1.3 DST.....	22

---

5.2 Live Configuration.....	23
5.2.1 Live .....	23
5.2.2 Main Monitor .....	24
5.2.3 Mask .....	24
5.3 Record Configuration.....	25
5.3.1 Enable.....	25
5.3.2 Record Bitrate .....	25
5.3.3 Time .....	26
5.3.4 Stamp .....	27
5.3.5 Recycle Record .....	27
5.4 Schedule Configuration.....	28
5.4.1 Schedule .....	28
5.4.2 Motion.....	29
5.4.3 Sensor.....	29
5.5 Alarm Configuration.....	29
5.5.1 Sensor Alarm .....	30
5.5.2 Motion Alarm .....	31
5.5.3 Other alarm.....	33
5.5.4 Alarm out.....	33
5.6 Network Configuration.....	34
5.6.1 Network .....	34
5.6.2 Email.....	35
5.6.3 Other Settings .....	35
5.7 User Management Configuration .....	37
5.8 Advanced .....	39
5.8.1 Reset.....	39
5.8.2 Import/Export .....	39

---

5.8.3 Block/Allow list .....	39
<b>6 Search, Playback &amp; Backup .....</b>	<b>40</b>
6.1 Time Search .....	40
6.2 Event Search .....	41
6.3 File Management .....	42
6.4 Backup .....	43
<b>7 Manage NVR .....</b>	<b>44</b>
7.1 Check System Information .....	44
7.1.1 System Information .....	44
7.1.2 Event Information .....	44
7.1.3 Log Information .....	44
7.1.4 Network Information .....	44
7.1.5 Online Information .....	44
7.2 Manual Alarm .....	45
7.3 Disk Management .....	45
7.4 Upgrade .....	45
7.5 Logoff .....	46
<b>8 Remote Surveillance .....</b>	<b>47</b>
8.1 IE Remote Surveillance .....	47
8.1.1 On LAN .....	47
8.1.2 On WAN .....	47
8.2 Remote Surveillance through Apple PC .....	49
8.2.1 On LAN .....	50
8.2.2 On WAN .....	52
8.3 Remote Preview .....	53
8.4 Remote Playback & Backup .....	55
8.4.1 Remote Playback .....	55

8.4.2 Remote Backup .....	60
8.5 Remote System Configuration .....	61
8.6 Tools.....	62
8.7 Remote Information .....	63
<b>9 Mobile Surveillance .....</b>	<b>64</b>
9.1 By phones with Iphone OS .....	64
9.2 By phones with Android OS .....	71
<b>Appendix A FAQ.....</b>	<b>77</b>
<b>Appendix B Calculate Recording Capacity.....</b>	<b>83</b>
<b>Appendix C Compatible Devices .....</b>	<b>84</b>
<b>Appendix D Specifications .....</b>	<b>86</b>

# 1 Introduction

## 1.1 NVR Introduction

This model NVR (Network Video Recorder) is designed specially for CCTV system. It adopts high performance video processing chips and embedded Linux system. Meanwhile, it utilizes many most advanced technologies, such as standard H.264 with low bit rate, Dual stream, SATA interface, VGA output mouse supported, IE browser supported with full remote control, mobile view(by phones), etc., which ensure its powerful functions and high stability. Due to these distinctive characteristics, it is widely used in banks, telecommunication, transportation, factories, warehouse, and irrigation and so on.

## 1.2 Main Features

### **COMPRESSION FORMAT**

- Standard H.264 compression with low bit rate and better image quality.

### **LIVE SURVEILLANCE**

- Support HDMI/CVBS/VGA output.
- Support channel security by hiding live display.
- Display the local record state and basic information.
- Support USB to make full control.

### **RECORD MEDIA**

- Support eight SATA HDDs to record for a longer time without any limitation.

### **BACKUP**

- Support USB 2.0 devices to backup.
- Support built-in SATA DVD writer to backup.
- Support saving recorded files with AVI standard format to a remote computer through internet.

**RECORD & PLAYBACK**

- Record modes: Manual, Schedule, Motion detection and Sensor alarm recording.
- Support recycle after HDD full.
- Resolution, frame rate and picture quality are adjustable.
- Three record search mode: time search, event search and image search.
- Support 16 screen playback simultaneously.
- Support deleting and locking the recorded files one by one.
- Support remote playback in Network Client through LAN or internet.

**ALARM**

- 4 channel alarm output and 16 channel alarm input available.
- Support schedule for motion detection and sensor alarm
- Support pre-recording and post recording.
- Support linked channels recording once motion or alarm triggered on certain channel.

**SECURITY**

- Customize user right: log search, system setup, two way audio, file management, disk management, remote login, live view, manual record, playback.
- Support 1 administrator and 63 users.
- Support event log recording and checking, events unlimited

**NETWORK**

- Support TCP/IP, DHCP, PPPoE, DDNS protocol.
- Support IE browser to do remote view
- Support setup client connection amount .
- Support dual stream. Network stream is adjustable independently to fit the network bandwidth and environment.
- Support picture snap and color adjustment in remote live.
- Support remote time and event search, and channel playback with picture snap.



- Support remote full menu setup, changing all the NVR parameters remotely.
- Support mobile surveillance by smart phones , symbian, WinCE, Iphone or Gphone, 3G network available.
- Support CMS to manage multi devices on internet.

## 2 Hardware Installation

**Notice:** Check the unit and the accessories after getting the NVR.  
Please don't power up the unit till the physical installation is complete.

### 2.1 Install Hard Drive & DVD Writer

#### 2.1.1 Install Hard Drive


**Note:** 1. This series supports eight SATA HDDs. Please select the hard drive as per the manufacturer's recommendation. Refer to 'Appendix C Compatible Devices'.

2. Please calculate HDD capacity according to the record setting. Please refer to 'Appendix B Calculate Recording Capacity'.

Step 1: Unscrew and open the case and then unscrew the screws in the both sides to take out of the upper iron bar as shown below:



Step 2: Put the HDD under the lower iron bar and let the screw holes of the HDD aim at the iron bars'. Then screw firmly and connect the power and data cables. The pictures are shown as follows:



Step 3: Install other three HDD according to above-mentioned method. Then cover the upper iron bar and screw it firmly. Put the HDD under it and screw firmly as shown below:



Step 4: Install other three HDD under the upper iron bar as shown below:



Step 5: Cover the back cover of the device and screw firmly.

### 2.1.2 Install DVD Writer

**Note:** If the you install a DVD, you can only install 4 HDD disks. Because too much room has been taken up.

Step 1: Unscrew and open the case and then unscrew the screws in the both sides to take out of the upper iron bar as shown below:



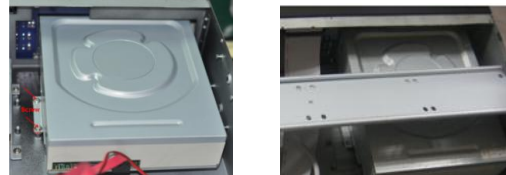
Step 2: Unscrew the four screws in the back of the front panel as shown below and then take out of the brace with a triangular mark.



Step 3: Install the DVD holder attached with the device. Please let the screw holes of the DVD aim at the holder's. Try to place the holder farther away from the front and then screw firmly. Then, put the DVD with the holder into the case and let the screw holes of the case aim at the holder's. Next, screw them firmly.








Step 4: Connect the power and data cables and install the upper iron bar. Then, screw firmly with screws in the both sides.



## 2.2 Front Panel Descriptions

**Notice:** The front panel descriptions are only for reference; please make the object as the standard.

Item	Type	Name	Description
1	Channel indicator	Channel indicator	When the IP Camera is offline, the light turns blue.
2	Work state indicator	Power	Power Indicator, when connected, the light is blue.
		HDD	The light turns blue when reading/writing HDD.
		Net	The light turns blue when it is able to access the network.
		Backup	The light turns blue when backing up files and data.
		Play	The light turns blue when playing video.
		REC	The light turns blue when recording
3	Compound button	AUDIO /+	1. Set Audio    2. Increase the value in setup.
		P.T.Z / -	1. Enter PTZ Mode.    2. Decrease the value in setup.
		MENU	Enter into Menu.
		INFO	Check the parameters set for recording.
		BACKUP	Enter into Backup mode.
		SEARCH	Enter into search mode
			Record Manually.
			Play/pause
			Stop/exit
			Rewind Key
			Fast Forward
4	Digital button	1-9 (Digital button)	Input number 1-9 or choosing channel.
		0/10+ (Digital button)	Input number 0, 10 and the above number together for channels 10 to 16

5	Input button	Direction key	Change direction to select items
		Multi-screen	Change screen display mode
		Enter key	Confirm selection
6	IR receiver	IR	For remote controller
7	USB	USB port	To connect external USB devices like USB flash drive, USB HDD for backup or updating firmware;

## 2.3 Rear Panel Instructions

The rear Panel interface for 16-ch is as shown in Fig 2-1:

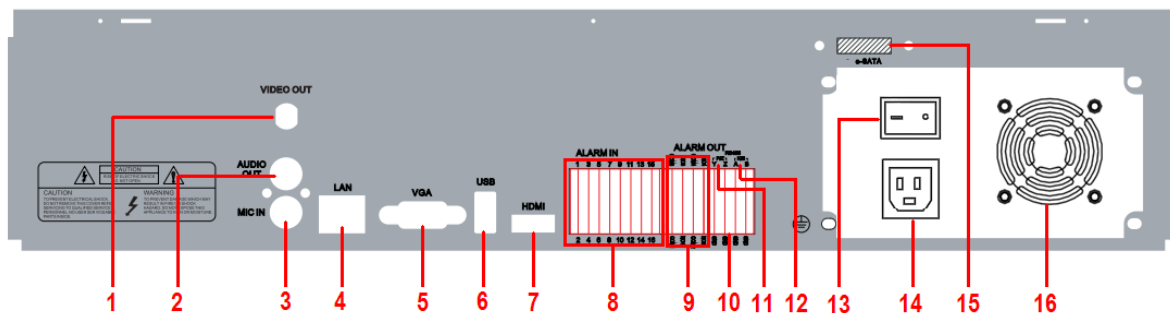


Fig 2-1 Rear Panel for 16-ch

Item	Name	Description
1	Video out	Video output. Connect to monitor.
2	Audio out	Audio output, connect to the sound box
3	MIC IN	Connect to microphone

Item	Name	Description
4	LAN	Network port
5	VGA port	VGA output, connect to monitor
6	USB port	To connect external USB devices like USB flash drive, USB HDD for backup or updating firmware.
7	HDMI port	Connect to high-definition display device
8	Alarm in	Alarm Inputs for connecting sensors
9	Alarm Out	Relay Output. Connect to external alarm.
10	GND	Grounding
11	P/Z	Connect to speed dome (unavailable)
12	K/B	Connect to Keyboard, K is TX+, B is TX-
13	Power Switch	Turn on/off the power supply.
14	Power Input	AC 110V-220V
15	E-SATA	Connect to E-SATA x 1
16	Fan	For cooling the device

## 2.4 Remote Controller

It uses two AAA size batteries.

- Open the battery cover of the Remote Controller.
- Place batteries. Please take care of the polarity (+ and -).
- Replace the battery cover.

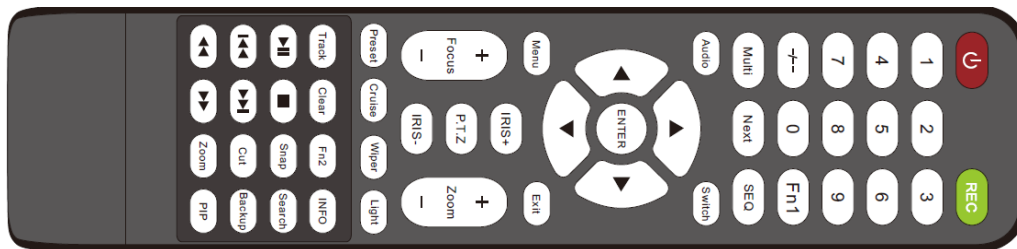



Fig 2-2 Remote Controller

Button	Function
Power Button	Switch off—to stop DVR. Use it before turning off the power
Record Button	To record manually
-/-- /0-9 Digital Button	Input number or choose camera
Fn1 Button	Unavailable temporarily
Multi Button	To choose multi screen display mode
Next Button	To switch the live image
SEQ	To enter into auto dwell mode
Audio	To enable audio output in live mode
Switch	To switch the output between BNC and VGA
Direction button	To move cursor in setup or pan/title PTZ
Enter Button	To confirm the choice or setup
Menu Button	To enter into menu
Exit Button	To exit the current interface
Focus/IRIS/Zoom/PTZ	To control PTZ camera. Move camera/zoom/IRIS/Focus
Preset Button	Unavailable
Cruise Button	Unavailable
Track Button	Unavailable
Wiper Button	Unavailable
Light Button	Unavailable



Clear Button	To return to the previous interface
Fn2 Button	Unavailable temporarily
Info Button	Get information about DVR like firmware version, HDD information
	To control playback. Play/Pause/Stop/Previous Section/Next Section/Rewind/Fast Forward
Snap Button	To take snapshots manually
Search Button	To enter into search mode
Cut Button	To set the start/end time for backup in playback mode
Backup Button	To enter into backup mode
Zoom Button	To zoom in the images
PIP Button	To enter into picture in picture setting mode

**Note:** Key points to check in case the remote doesn't work.

1. Check batteries polarity.
2. Check the remaining charge in the batteries.
3. Check IR controller sensor for any masking.
4. Check the ID of the remote with respect to the NVR.

If it still doesn't work, please try using a good known remote, or contact your dealer.

The interface of remote controller is shown in Fig2-2 Remote Controller.

### Operation processes with remote controller to control multi-NVR

The default device ID of the NVR is 0. It's not necessary to reset the device ID when a remote is to be used to control a single NVR. However when controlling multiple NVRs with multiple remote controllers, you would need to configure the device ID, please refer to below steps:

- Activate remote controller to control the NVR: Turn the IR sensor of the remote controller towards the IR receiver on the front panel, press the number key 8 twice on the remote, then input device ID of the NVR to be controlled (Range from: 0-65535; the default device ID is 0) press ENTER to confirm.

- You can check the device ID of a NVR from System Setup→Basic→Device ID. You can also set multiple NVRs with the same device ID however this can cause interference if the NVRs are kept close to each other.

## 2.5 Control with Mouse

### 2.5.1 Connect Mouse

It supports USB mouse through the ports on the rear panel.

**Notice:** If mouse is not detected or doesn't work, check below steps:

1. Make sure the mouse is plugged in the USB mouse port not the USB port on the front panel.
2. Try with a good know mouse.

### 2.5.2 Use Mouse

#### During live:

Double-click on any camera window for the full screen mode. Double-click again to return to the previous screen mode.

Right click to reveal the control menu on the screen. Right click to hide the control menu.

#### In Configuration:

Click to enter a particular option. Right click to cancel the option or to return to the previous menu.

In order to input a value in a particular screen, move cursor to the input box and click. An input window will appear as Fig 2-3.

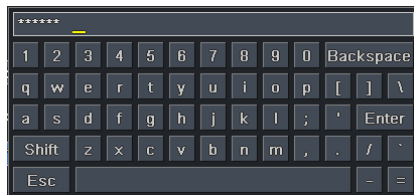


Fig 2-3 Digital Numbers and Letters Input Window

It supports digits, alphabets and symbols as inputs. Click Shift button to input Capital letters and symbols; click Shift button again to return.

You can change some values using the mouse wheel, such as time. Move cursor onto the value and roll the wheel when the value blinks.

It supports mouse drag. For e.g. setting up motion detection area, click customized, hold down the left button and drag to set motion detection area.

Setting up Schedule: hold left button and drag to set schedule time.

**In Playback:**

Click to choose the options. Right click to return to live mode.

**In Backup:**

Click to choose the options. Right click to return to previous picture.

**In PTZ Control:**

Click left button to choose the buttons to control the PTZ. Click right button to return to live.

**Note:** Mouse is the default tool for all operations unless an exception, as indicated.

## 3 Basic Function Instruction

### 3.1 Startup and Shutdown

Please make sure all the connections are done properly before you power on the unit. Proper startup and shutdown are crucial to expanding the life of your NVR.

#### 3.1.1 Startup

Step1: Connect with the source power.

Step2: The device will boot and the power LED would turn blue.

Step3 A WIZZARD window will pop up and show some information about time zone , time setup , network configuration, record configuration and disk management. You can setup here and refer to the concrete setup steps from the corresponding chapters. If you don't want to setup Wizard, please click Exit button to exit.

**Note:** The default output is HDMI output. This NVR can only display options on either VGA /HDMI monitor or CVBS monitor at a given point of time, if there is live image display without menu options then please check if there is display on other device/monitor, or long press Exit key to wait for login dialog box to appear. Long press Exit key can switch the output between CVBS and VGA/HDMI.

#### 3.1.2 Shutdown


You can shut down the device by using IR remote controller and mouse.

##### **By IR remote controller:**

Step1: Press Power button. This will take you to see a shutdown window. The unit will shut down after a while by click OK button.

Step2: Disconnect the power.

##### **By mouse:**

- Step1: Enter into  Menu and select "Shut Down" icon to display a shutdown window.
- Step2: Click OK. Then the unit will power off after a while.
- Step3: Disconnect the power.

## 3.2 Login

You can login or log off the NVR system. Once logged off you cannot do any other operation except changing the multi-screen display.

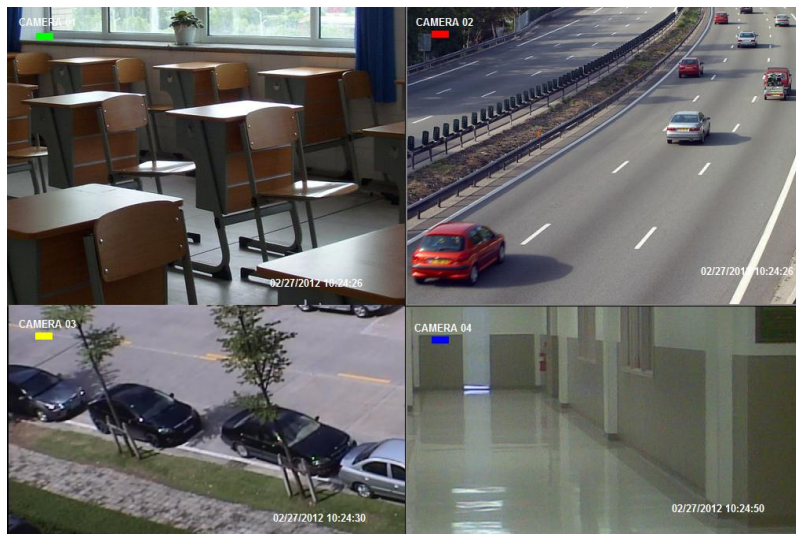


**Fig 3-1 Login**

**Notice:** The default user name and password is "admin" and 123456".


For complete operational steps for changing password, adding or deleting user please refer to section 4.7 User management Configuration.


## 3.3 Live preview

**Fig 3-2 Live Preview Interface**

Symbol	Meaning
Green	Manual record
Yellow	Motion detection record
Red	Sensor Alarm record
Blue	Schedule record

### 3.3.1 Live playback

Click Playback  button to playback the record. Refer to Fig 3-3. You can do complete operation by clicking the buttons on screen.

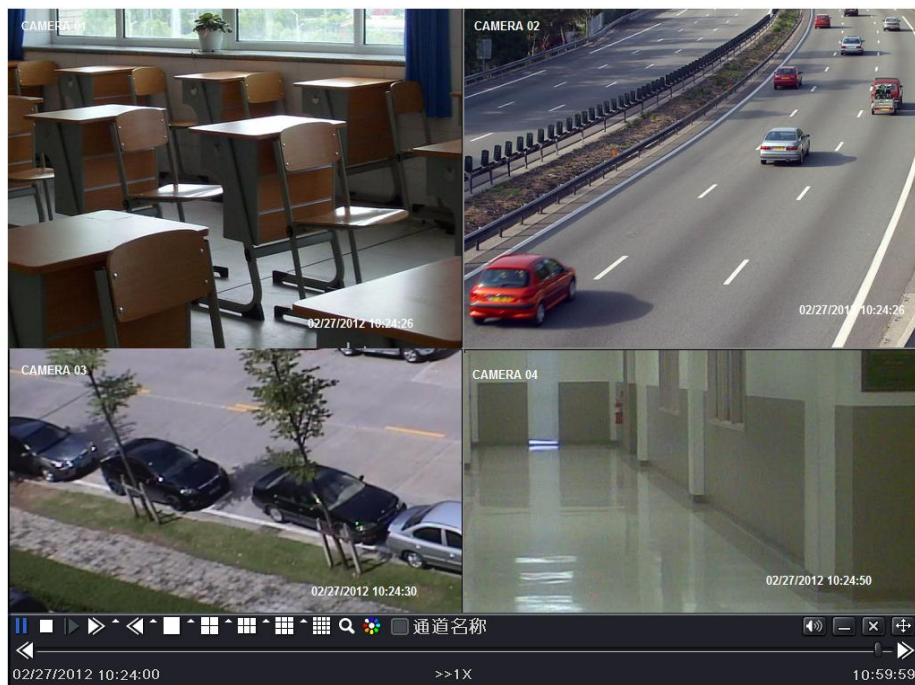

**Fig 3-3 Live Playback**

## 4 Add IP Cameras


This chapter mainly introduce how to connect multiple IP cameras through NVR. Once you finish adding IP cameras, you can see the live images through the monitor of NVR.

To add IP cameras:

Step 1: Please Enter into Menu→IP Camera tab. Refer to Fig 4-1. Click "Search" button to search the devices in the same network.



**Fig 4-1 Device Management**

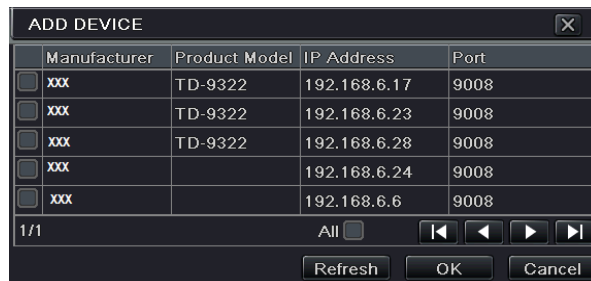

**Fig 4-2 Search Devices**

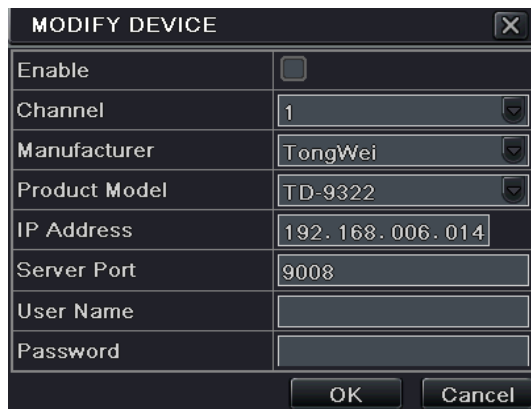
Step 2: Enter into the search tab. Click "Refresh" to refresh the searched devices and then check the device you want to add or check "All" to add all devices.

Step 3: Click "OK" button to save these devices.

Step 4: Click "Setup" button to enable this device. Refer to Fig 4-3. Check the "enable" checkbox, select channel and input the username and password of this device. Then click "OK" to save settings.

Of course, you can add devices manually. The steps are as follows: Click "Add" button in the device management tab. This will bring up a window similar to Fig 4-3. You need to check "Enable" box, select channel, manufacturer and product model and input server port, username and password of this device. All of these information you can check in the relevant user manual.





MODIFY DEVICE	
Enable	<input type="checkbox"/>
Channel	1
Manufacturer	TongWei
Product Model	TD-9322
IP Address	192.168.006.014
Server Port	9008
User Name	
Password	
OK Cancel	

Fig 4-3 Add Device

**Note:** The IP address of the IP cameras and NVR must be in the same network segment. For example: If the IP address of NVR is 192.168.006.067, the IP address of IP camera must be 192.168.006.XXX. If the NVR is connected through PPPoE, the IP camera can be connect through PPPoE. If the LAN IP address is used in the IP camera, you shall forward the IP address and port of the device in the router, otherwise, the NVR cannot connect this IP camera.

## 5 Main menu setup guide

Click right mouse or press Exit button on the front panel to display the control bar on the bottom of the screen. Refer to Fig 5-1:

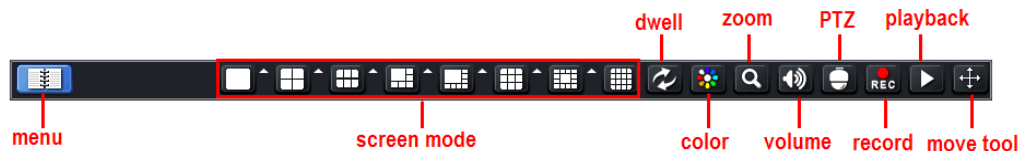



Fig 5-1 Main Menu Toolbar

Click the  icon beside the screen mode to display a channel select dialog. 6/8/13 screen mode can realize single channel big screen. Images can drag to any place to display in the live interface.

**Dwell:** Dwell means to display live images from different cameras in a sequence. The images may be displayed as a single channel or in a grid fashion from different cameras. Dwell mode is enabled only when the chosen display mode is not able to display all the available cameras.

**Color:** If this button is enabled, you can adjust the color of live images.


**Zoom:** Single channel large screen electronic amplification.


**Volume:** Enable sound.

**PTZ:** Click the PTZ button to control rotation position, speed and auto scan of the PTZ connected to the IP camera.

**Record:** Click this button to start/stop recording.

**Playback:** Click this button to playback the recorded files.

You can click  button and drag it anywhere with the left mouse to move the main menu bar anywhere.

Click Menu  button to pop up a window as Fig 5-2; you can also press MENU button on the front panel or operate with remote controller to display the main menu. Clicking Setup icon will pop-up the configuration menu:

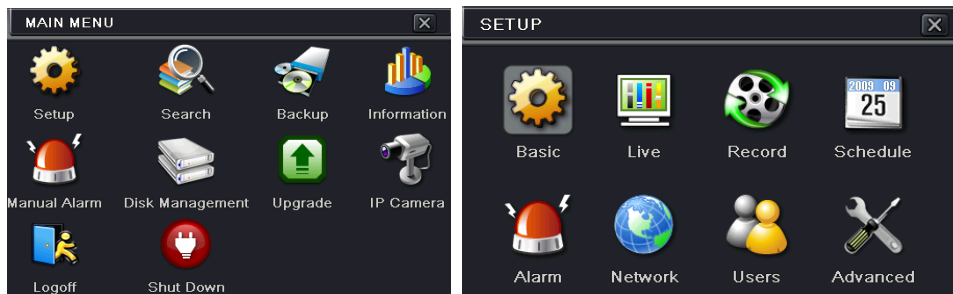


Fig 5-2 System Setup

## 5.1 Basic configuration

Basic configuration includes three sub menus: system, date & time and DST.

### 5.1.1 System

Step1: Enter into Menu→Setup→Basic→System. Refer to Fig 5-3:

Step2: In this interface you can setup the device name, device ID, video format, max network user, VGA resolution and language. The definitions for every parameters display as below:

**Device Name:** The name of the device as it may display on the client end or on CMS, this would help the user to recognize the device remotely.

**Device ID:** This ID is used to map the NVR with IR remote controller and speed dome cameras.

**Video Format:** Two modes: PAL and NTSC. User can select the video format according to the cameras being used.

**Password Check:** If enabled the user would need to input the user name and the password for performing corresponding operations.



Fig 5-3 Basic Configuration-Basic

**Show System Time:** If selected, displays the current time during live monitoring.

**Max Online Users:** To set the maximum number of concurrent user logins in the NVR.

**Show wizard:** If selected, the GUI would launch the startup wizard on every boot, allowing the to do basic setup.

**Video Output:** Resolution of live display interface, ranges from: VGA800\*600, VGA1280\*1024 and HDMI.

**Note :** Switching between HDMI and VGA will change the menu output mode. Please connect to relevant monitor.

**Language:** To setup the menu language.

**Note:** After changing the language and video output, the device needs to login again.

**Logout After (Minutes):** You can setup the screen interval time (30s, 60s, 180s, 300s). If there is no any operation within the setting period, the device will auto logout and return to the login interface.

**No Image When Logout:** If selected, there will be no image showing when logout.

## 5.1.2 Date & Time

Step1: Enter into Menu→Setup→Basic→Date & Time tab. Refer to Fig 5-4:

Step2: Set the date format, time format, time zone in this interface; checkmark “sync time with NTP server” to refresh NTP server date.

You can adjust system date manually

Step3: Click “Default” button to restore default setting; click “Apply” button to save the setting; click “Exit” button to exit the current interface.

## 5.1.3 DST

Step1: Enter into Menu→Setup→Basic→DST interface. Refer to Fig 5-5:

Step2: In this interface, enable daylight saving time, time offset, mode, start & end month/week/date, etc.

Step3: Click “Default” button to restore default setting; click “Apply” button to save the setting; click “Exit” button to exit the current interface.

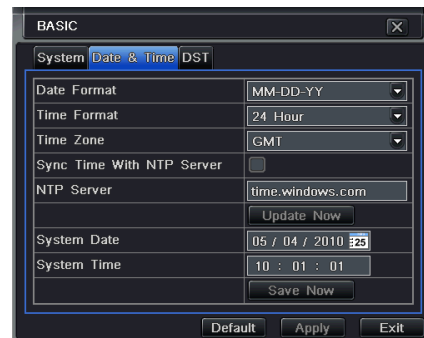


Fig 5-4 Basic Configuration-Date & Time

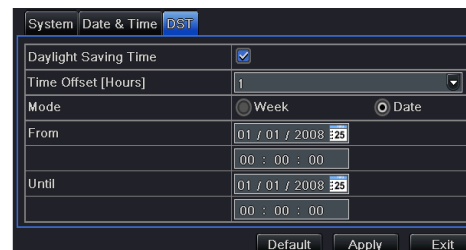


Fig 5-5 Basic Configuration-DST

## 5.2 Live Configuration

Live configuration includes three submenus: live, main monitor and mask.

### 5.2.1 Live

In this interface, you can setup camera name, adjust colors including brightness, hue, saturation and contrast.

Step1: Enter into Menu→Setup→Live interface. Refer to Fig 5-6:

Note: A soft keyboard will pop up by clicking the camera name. You can self-define the camera name.

Step2: For a particular camera/channel setting, please click "setting" button to see a window as Fig 5-7:

Step3: In this interface, you can adjust brightness, hue, saturation and contrast in live; click "Default" button to restore default setting, click "OK" button to save the setting.

Step4: Select "All" to setup all channels with the same parameters.

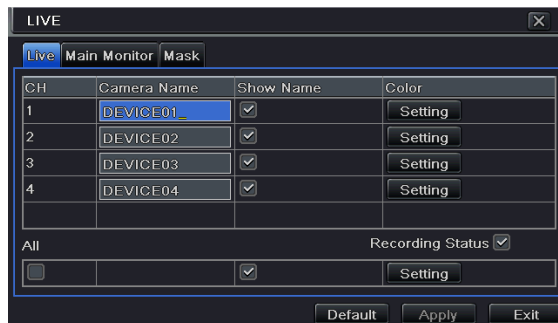


Fig 5-6 Live Configuration→Live




Fig 5-7 Live-Color Adjustment

### 5.2.2 Main Monitor

Step1: Enter into Menu→Setup→Live→Main Monitor tab. Refer to Fig 5-8:

Step2: Select split mode: 1×1, 2×2, 2×3, 3×3, 4×4 and channel. Click

◀ button to setup the previous channel group. Click ▶ button to set the latter channel group.

Step3: Set the dwell time.

Step5: Click "Default" to restore default setting; click "Apply" to save the setting; click "Exit" to exit the current tab.



Fig 5-8 Live Configuration – Main Monitor

### 5.2.3 Mask

You can setup private mask area on the live image picture. For a given channel a maximum of three areas can be masked.

**Setup mask area:** Click Setting button, enter into live image to press left mouse and drag mouse to set mask area. Please refer to the below picture. Right click to exit. Click Apply button to save the setting.

**Delete mask area:** Select a certain mask area and double click to delete that mask area. Then click Apply button to save the setting.



Fig 5-9 Live Configuration-Mask



Setup Mask Area



Live Image Mask Area

## 5.3 Record Configuration

Record configuration includes five sub menus: enable, record bit rate, time, stamp and recycle record.

### 5.3.1 Enable

Step1: Enter into Menu→Setup→Record→Enable tab. Refer to Fig 5-10:



Parameter	Meaning
Record	To enable/disable recording for the channel
Audio	To enable/disable audio recording for the channel

**Fig 5-10 Record Configuration-Enable**

Step2: Checkmark record and audio.

Step3: Select All to setup the same settings for all channels.

### 5.3.2 Record Bitrate

Step1: Enter into Menu→Setup→Record→Record Bitrate interface. Refer to Fig 5-11:

Step2: Setup rate, resolution, quality, encode and max bit stream

Step3: Select "All" to set the same settings for all channels.

Step4: Click "Default" button to restore default setting; click "Apply" button to save the setting; click "Exit" button to exit the current interface.

**Note:** If the rate value set is beyond the available resources of the device, the value will be adjusted automatically.



Fig 5-11 Record Configuration-Record Bit rate

Parameter	Meaning
Rate	Range from: 1-30 ( NTSC ) 1-25(PAL)
Resolution	Supports 1080P, 720P, VGA
Quality	Unavailable
Encode	CBR
Max bit stream	Ranges from 256 ~12288 kbps

### 5.3.3 Time

Step1: Enter into Menu→Setup→Record→Time interface. Refer to Fig 5-12:

**Pre-alarm record time:** The record time prior to actual triggering of an alarm i.e. record time before motion detection or a sensor alarm was triggered.

**Post-alarm record:** Set the post recording time after the alarm is finished, five options: 10s, 15s, 20s, 30s, 60s, 120s, 180s and 300s.

**Expire time:** The time till which the records would be retained. If the set date is overdue, the recorded files will be deleted automatically.

Step2: Select "All" to setup all channels with the same parameters.

Step3: Click "Apply" to save the setting; click "Exit" to exit the current interface.



Fig 5-12 Record Configuration-Time



### 5.3.4 Stamp

**Stamp** :This provides an option to enable or disable the Camera Name and the Time stamp on the video. You can also choose a position for the stamp on the screen.

Step1: Enter into Menu→Setup→Record→Stamp interface. Refer to Fig 5-13:

Step2: Checkmark camera name and time stamp; click Setting button. You can use cursor to drag the camera name and time stamp at random positions.

Step3: Select "All" to setup all channels with the same parameters.



Fig 5-13 Record Configuration-Stamp



### 5.3.5 Recycle Record

This option is used to recycle the HDD space once it is full. If enabled, the system will automatically delete the old records (FIFO, recycling space) and recycle the space if it is completely utilized. The setting steps are as follows:

Step1: Enter into Menu→Setup→Record→Recycle Record tab.

Step2: Checkmark the 'recycle record' box to activate the auto recycling.

Step3: Click "Apply" button to save the setting; click "Exit" button to exit the current interface.

**Note:** If the option is disabled or not selected, the NVR would stop recording once the HDD is full.

## 5.4 Schedule Configuration



Schedule configuration includes three sub menus: schedule, motion and alarm.

### 5.4.1 Schedule

This tab allows defining schedule for normal recording for seven days of a week, 24 hours of a day. Every row denotes an hourly timeline for a day. Click the grid to do relevant setup. A highlighted area denotes selected timeline.

Step1: Enter into Menu→Setup→Schedule tab. Refer to Fig 5-14.

Step2: Select channel and double-click to pop up a window as Fig 5-15. Now you can edit week schedule:

Click “” button to add a certain day schedule; click “” button to delete the selected schedule;

Copy: Copy the specified schedule to other dates.

If you want to copy the schedule settings of a channel to other or all channels, you just need to select channel and click “Copy” button.

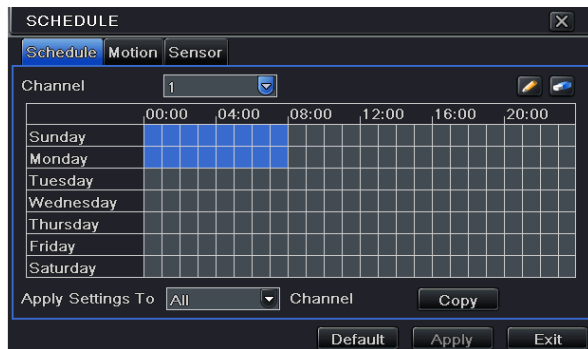


Fig 5-14 Schedule Configuration-Schedule

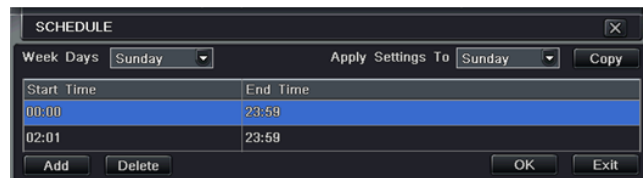


Fig 5-15 Week Schedule

### 5.4.2 Motion

This tab allows to setup schedule for motion based recording.

Step1: Enter into Menu→Setup→Schedule→Motion tab. Refer to Fig 5-16:

Step2: The setup steps for schedule for motion based recording are similar to normal schedule setup. You can refer to 5.4.1 Schedule for details.

**Note:** The default schedule of motion based recording is 24x7, that is, the color of schedule settings interface is dark blue. This enables motion based recording for 24x7. If you want to activate motion based recording, you must enable motion alarm and setup schedule for motion alarm (Refer to Chapter 5.5.2 Motion Alarm for more details).

### 5.4.3 Sensor

This tab allows to setup schedule for sensor based recording.

Step1: Enter into Menu→Setup→Schedule→Sensor tab. Refer to Fig 5-17:

Step2: The setup steps for schedule for sensor based recording are similar to normal schedule setup (Refer to 5.4.1 Schedule for details).

**Note:** The default schedule of sensor based recording is 24x7, that is, the color of schedule settings interface is dark blue. This enables sensor based recording for 24x7. If you want to activate sensor based recording, you must enable sensor alarm and setup schedule for sensor alarm (Refer to Chapter 5.5.1 for more details).

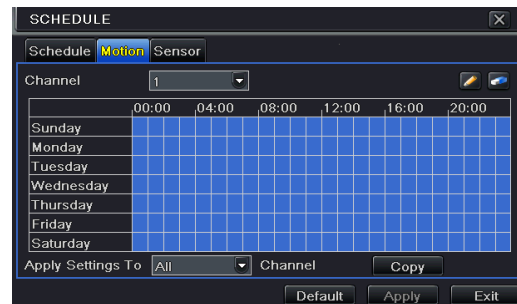


Fig 5-16 Schedule Configuration-Motion

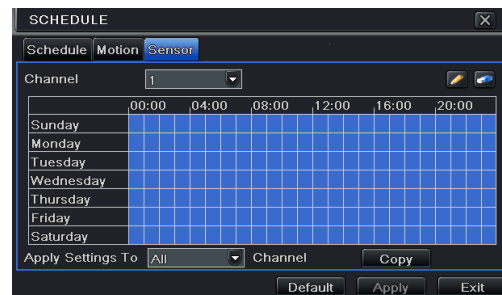


Fig 5-17 Schedule Configuration-Sensor

## 5.5 Alarm Configuration

Alarm configuration includes four sub menus: sensor, motion, other alarm and alarm out.

### 5.5.1 Sensor Alarm

Sensor includes three sub menus: basic, alarm handling and schedule.

Operate the following steps to configure sensor alarm:

Step1: Enter into Menu→Setup→Alarm→Sensor→Basic interface. Refer to Fig 5-18:

Step2: Enable channels by checking the checkboxes beside the desired channels .

Step 3: Set the alarm type according to triggered alarm type. Two option: NO and NC.

Step4: Click "Apply" button to save settings.

Step5: Enter into Alarm Handling tab. Refer to Fig 5-19.

Select hold time and then click Setting button. A dialog box will pop-up as Fig 5-20:

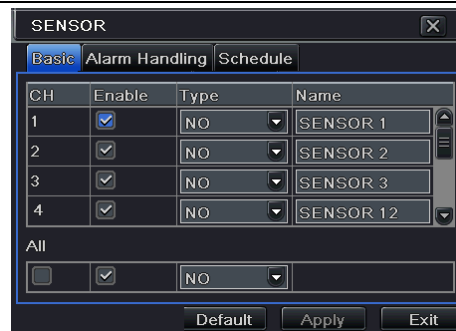


Fig 5-18 Alarm Configuration-Sensor-Basic



Fig 5-19 Alarm Configuration-Sensor-Alarm Handling



Fig 5-20 Alarm Handling-Trigger

Step 6: Enter into alarm tab to select the options to handle alarm.

**Buzzer:** If selected, the local buzzer would be activated on an alarm.

**Full screen alarm:** If selected, there will pop up the chosen channel on the monitor on an alarm trigger.


**To alarm out:** If selected, this would trigger the external relay output on detecting a sensor based alarm.

**Email:** If you select this option, the NVR will send an email alert to the preconfigured email address in case of a sensor based alarm from the particular input.

Step 7: Enter into To Record tab. Select recording channels. It would be recorded in case of an alarm. Click OK button to save the setting.

Step 8: Enter into Schedule tab. Refer to Fig 5-21. The setup steps for schedule for sensor based alarm are similar to normal schedule setup. You can refer to Chapter 5.4.1 Schedule for more details. This step is very important for sensor based alarm. Although you have enabled the sensor based alarm for all channels and setup the trigger, you will not see the result of sensor based alarm if no schedule is added.

If you have set the schedule for sensor based recording in the same timeline, recordings can also be triggered.

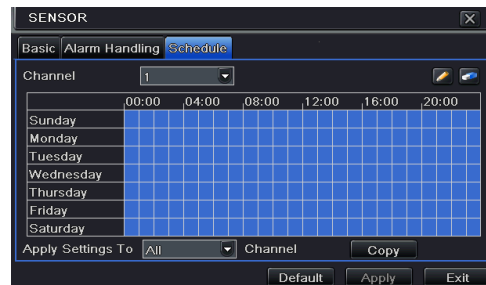

**Fig 5-21 Sensor-Schedule**

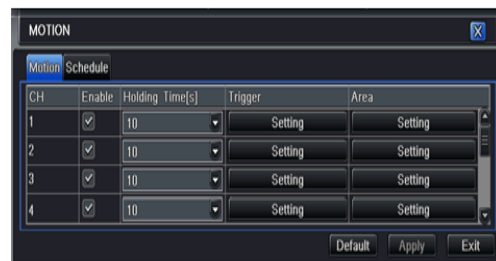
## 5.5.2 Motion Alarm

Motion includes two sub menus: motion and schedule.

The steps to set up motion alarm are as follows:

Step1: Enter into Menu→Setup→Alarm→Motion tab. Refer to Fig 5-22:






Step2: Enable motion alarm, set alarm hold time which refers to the time till which the system will wait for further detection of motion. Eg. If the holding time is set to 10 seconds, once the system detects a motion, it will go into alarm but would not detect any other motion alarm (specific to channel) until 30 seconds. If there is other motion detected during this period, it is considered it as continuous movement, otherwise it will be considered as a single motion.



**Fig 5-22 Alarm Configuration-Motion**

Step3: The setup steps of motion trigger are similar to 'Alarm Handling'. You can refer to Chapter 5.5.1 Sensor → Alarm Handling for more details.

Step4: Click "Setting" button under the Area to display the following picture as shown in Fig 5-23:

Step5: In the Area tab, you can drag slide bar to set the sensitivity value (1-8). The default value is 6. The higher the value is the more sensitive it is to motion. Since the sensitivity is influenced by color and time (day or night), you can adjust its value according to the practical conditions. Click  icon to set the whole area as detection area. Click  icon to clear the set detection area. Click  icon to test the sensitivity as per the local conditions. Once motion is sensed, it displays a figure icon. Click  icon to save the setting. Click  icon to exit the current interface.

**Note:** Prior to setting motion detection field it is recommended that you click  icon to clear the existing field and set afresh.

Step6: Select "All" to setup all channels with the same parameters.

Step7: Click "Apply" button to save the setting; click "Exit" button to exit the current interface.

Step 8: Enter into Schedule tab. Refer to Fig 5-24: The setup steps for schedule for motion based alarm are similar to normal schedule setup; you can refer to 5.4.1 Schedule for details.

This step is very important for motion alarm. Although you have enabled the motion based alarm for all channels and setup the trigger, you will not see the result of motion based alarm if no schedule is added.

If you have set the schedule for motion based recording in the same timeline, recordings can also be triggered.



Fig 5-23 Motion-Area

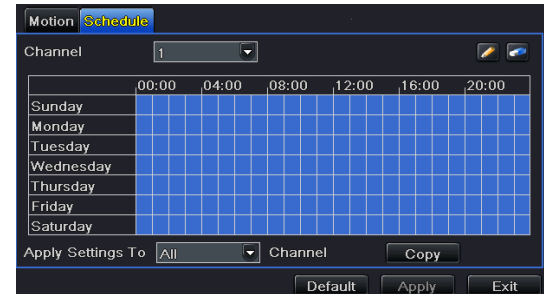


Fig 5-24 Alarm Configuration-Schedule

### 5.5.3 Other alarm

This tab gives a choice to configure alarm for Disk Full, IP Conflict, the Disconnect event or Disk Attenuation.

Step1: Enter into Menu→Setup→Alarm→other alarm interface. Refer to Fig 5-25:

Step 2: Use the dropdown menu and select the event or the alarm.

Step 3: Check the required trigger options.

If the selected event is "Disk Full", then use the drop down box for "Disk Shortage Alarm" to choose a threshold value for remaining HDD space. If the threshold value is reached, the system will trigger the Disk Full Alarm.

Click "Apply" to save settings; Click "Exit" to exit the current interface.

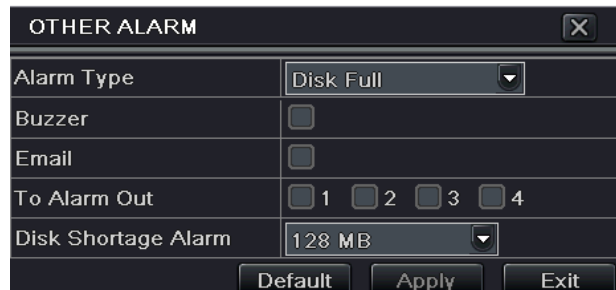


Fig5-25 Other Alarm

### 5.5.4 Alarm out

Alarm out includes three sub menus: alarm out, schedule and buzzer. To setup alarm out:

Step 1: Enter into Menu→Setup→Alarm out tab. Refer to Fig 5-26. Input relay name and hold time.

Step 2: Select the Schedule tab. This will bring up the schedule setup interface. The setup steps for schedule for alarm out are similar to normal schedule setup; you can refer to 5.4.1 Schedule for details.

This step is very important for alarm out. Even if you have enabled alarm out in the motion based alarm or sensor based alarm, you will not see the result of alarm out if no schedule is added here.

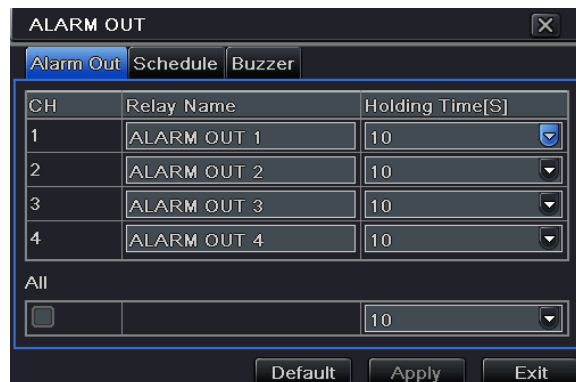


Fig 5-26 Alarm Out

### Buzzer

It is an inbuilt alarm output device. To setup Buzzer:

Step1: Enter into Menu→Setup→Alarm out →Buzzer tab;

Step2: Checkmark Buzzer and set buzzer alarm hold time. This would trigger the buzzer when the system is in alarm.

## 5.6 Network Configuration

Network configuration includes three submenus: network, Email and other settings. Network settings must be configured if NVR is used for monitoring over network.

### 5.6.1 Network

Step 1: Enter into Menu→Setup→Network→network tab. Refer to Fig5-27:


Step 2: HTTP port: the default value is 80. If the value changed, you need to modify the IP address in the IE address .i.e. if HTTP port is set to 82 and IP address is, 192.168.0.25, then you shall input IP address as http://192.168.0.25:82 in IE browser.

Server port: Communication port.

Step 3: Connect internet. If you have a DHCP server running and would like your NVR to automatically obtain an IP address and other network settings from that server, check the checkbox beside "Obtain an IP address automatically". Then the device will distribute IP address, subnet mask, and gateway IP and DNS server. If you want to configure your own settings, please input the IP address, Subnet mask, Gateway DNS server manually. You can also check the PPOE checkbox to enable this feature and then enter username and password. Once the setup is completed, your NVR will automatically dial up into your network.

Step 4: No matter what kinds of way to connect internet, you should test the effectiveness of the network by clicking "Test" button after you setup the network.

Step 5: If the network is well connected, please click "Apply" button to save settings.

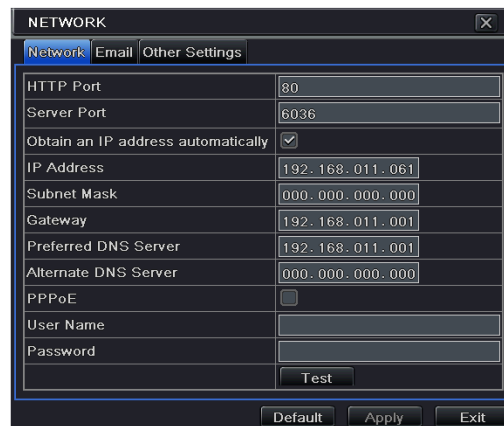

**Fig 5-27 Network Configuration-Network**



### 5.6.2 Email

Step 1: Enter into Menu→Setup→Network→Email tab. Refer to Fig 5-28:

**SMTP Server/Port:** The name and port number of SMTP server. Check the SSL checkbox if the server requires a secure connection (SSL); user can setup mail servers (such as Gmail) as required.

**Send address/password:** Sender's email address/password

**Receive address:** Receiver's email address. Here user can add at least three mail addresses. Click TEST button to test the validity of the mailbox.

**Attaching image:** After selecting it, the system will attach images when sending the emails.

### 5.6.3 Other Settings

If your NVR is setup to use PPPoE as its default network connection, you may setup DDNS to be used in connection. The setting steps are as follows:

Step 1: Select Other Settings tab. Enable DDNS server.

Step2: Select DDNS server.

Step 3: Input user name, password and host domain name registered in the DNS website (See the following example).

Step 4: Click TEST to test the effectiveness of the relevant information.

Step 5: Click "Apply" button to save the settings.

**Note:** The domain name server that selected by user is a banding domain name of NVR. User should logon the website which provided by the server supplier to register a user name and password firstly, and then apply for a domain name on line.

Once applied, user can access the server from the IE client by using that domain name.

Network <b>Email</b> Other Settings	
SMTP Server	xxxxx
Port	25
SSL Check	<input checked="" type="checkbox"/>
Send Address	xxx@gmail.com
Password	****
Receive Address1	xxxx@gmail.com
Receive Address2	
Receive Address3	
Test	
Default Apply Exit	

Fig 5-28 Network Configuration-Email

Network Email <b>Other Settings</b>	
DDNS	<input checked="" type="checkbox"/>
DDNS Server	www.dvrdydns.com
User Name	
Password	
Host Domain	
DDNS Update [Hours]	3
Test	
Default Apply Exit	


Fig 5-29 Other Settings

- How to apply for a domain name?

Here we take [www.dyndns.com](http://www.dyndns.com) for example.

Step 1: Input [www.dyndns.com](http://www.dyndns.com) in the IE address bar. Click "Free Trial of DynDNS Pro"→"Start the trial" to register.

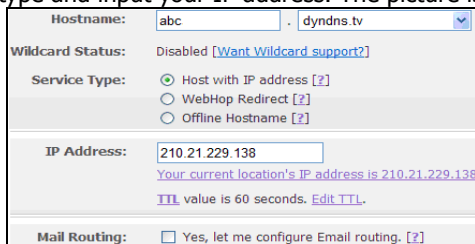Step 2: Input hostname, select service type and input your IP address. The picture is shown as follows:




The screenshot shows a web form for DynDNS registration. It includes fields for Hostname (abc), Wildcard Status (Disabled), Service Type (Host with IP address selected), IP Address (210.21.229.138), and Mail Routing (Yes, let me configure Email routing selected). There are also links for Wildcard support, help, and editing the TTL.


Hostname:	abc	dyndns.tv
Wildcard Status:	Disabled <a href="#">[Want Wildcard support?]</a>	
Service Type:	<input checked="" type="radio"/> Host with IP address <a href="#">[?]</a> <input type="radio"/> WebHop Redirect <a href="#">[?]</a> <input type="radio"/> Offline Hostname <a href="#">[?]</a>	
IP Address:	210.21.229.138 <small>Your current location's IP address is 210.21.229.138 TTL value is 60 seconds. <a href="#">Edit TTL</a>.</small>	
Mail Routing:	<input checked="" type="checkbox"/> Yes, let me configure Email routing. <a href="#">[?]</a>	

Step 3: Click "Add to cart". Then Dynamic DNS Hosts dialog box will be displayed.

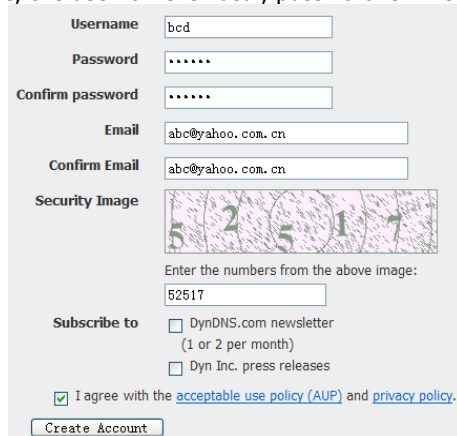Step 4: Create user account. For example, the username is "bcd", password is "123456".



The screenshot shows a web form for creating a user account. It includes fields for Username (bcd), Password (\*\*\*\*\*), Confirm password (\*\*\*\*\*), Email (abc@yahoo.com.cn), Confirm Email (abc@yahoo.com.cn), Security Image (52517), and a checkbox for agreeing to the acceptable use policy (AUP) and privacy policy. There is also a checkbox for subscribing to the DynDNS.com newsletter and Dyn Inc. press releases.

Username	bcd
Password	*****
Confirm password	*****
Email	abc@yahoo.com.cn
Confirm Email	abc@yahoo.com.cn
Security Image	
	Enter the numbers from the above image: 52517
Subscribe to	<input type="checkbox"/> DynDNS.com newsletter (1 or 2 per month) <input type="checkbox"/> Dyn Inc. press releases
	<input checked="" type="checkbox"/> I agree with the <a href="#">acceptable use policy (AUP)</a> and <a href="#">privacy policy</a> .
<a href="#">Create Account</a>	

Click "Create Account" button to create user account. After that, you shall provide your card number, card expiration and security code as well as billing address. Finally click "sign up for trial" button.

Now, according to the domain name registration of "DDNS", the domain name for NVR is "abc.dyndns.tv", username is "bcd" and password is "123456"

Connect NVR via network:

Step 1: Enter into Main menu→Network→other settings, checkmark DDNS, select "DynDNS" at the DDNS Sever pull down list box and input user name and password.

Step 2: Login IE browser and input registered domain name "http://www.abc.dyndns.tv" to connect NVR.

#### Definitions and descriptions of network configuration:

DDNS server	
DDNS server	Website provided by dynamic domain name supplier. The optional: www.meibu.com , www.dyndns.com, <a href="http://www.no-ip.com">www.no-ip.com</a> and mintdns type.
User name	User name for log in the website of domain name supplier
Password	Password for log in the website of domain name supplier
Host domain	The domain name user registered at the supplier's website.
Update interval	The interval time of upgrading NVR IP address

## 5.7 User Management Configuration

This tab allows you to add normal or advanced users. To add user and setup user authority:


Step 1: Enter into Menu→Setup→User management configuration. Refer to Fig 5-30:

Step 2: Click Add button to display a dialog box as Fig 5-31


Step 3: In General tab, input username, password and select user type. You can also check 'Binding PC MAC Address' and input this address.

Step 4: Click 'OK' button to save settings.

**Note:** When the default value of binding PC MAC address is 0, the user is not bound with the specified computer. If the bind option is used, the user would be able to log into the NVR only through the specific computer (carrying the MAC address).

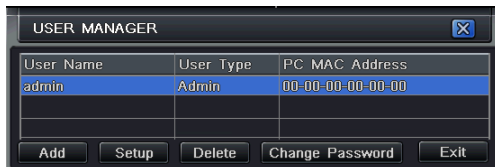


**Fig 5-30 User Management Configuration**

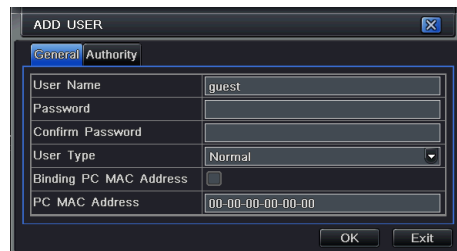

**Fig 5-31 Add-General**

Step 5: Select Authority tab and then assign the operation rights for particular user. Refer to Fig 5-32.

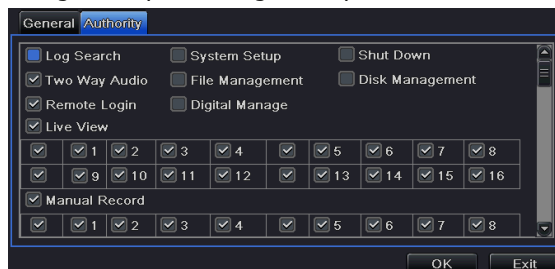

**Fig 5-32 Add User-Authority**

If you want to delete the user, please select the user you want to delete in the user list box and then click "Delete" button.

If you want to modify the user, please select the user you want to modify in the user list box and then click "Setup" button to modify its general information and authority.

If you want to change password of a user, please select the user in the user list box and then click "Change Password" button.

## 5.8 Advanced

Advanced configuration includes three submenus: Reset, Import/Export and Block/Allow list.


### 5.8.1 Reset

This would reset the system to factory defaults and reboot the NVR.

### 5.8.2 Import/Export

User can export the data files into mobile storage devices as backup and can also import specified data files from mobile storage device to NVR.

### 5.8.3 Block/Allow list

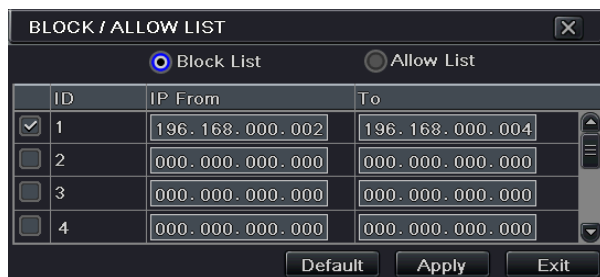

**Fig 5-33 Block/Allow List**


Here authorized user can prohibit computer users within a certain IP address range from accessing NVR or allow computer users within a certain IP address range to access NVR. For example, if an admin don't want computer users within IP address range from 196.168.000.002 to 196.168.000.004 to access the NVR, he can checkmark 'Block list' option, and then input such IP address range. If it is required that computer users within a certain IP address range access NVR, they can checkmark "Allow list option", and then do the required configuration.

## 6 Search, Playback & Backup

Search configuration includes three submenus: time search, event search and file management.

### 6.1 Time Search


Step1: Enter into Menu→Search →Time search tab. Refer to Fig 6-1:

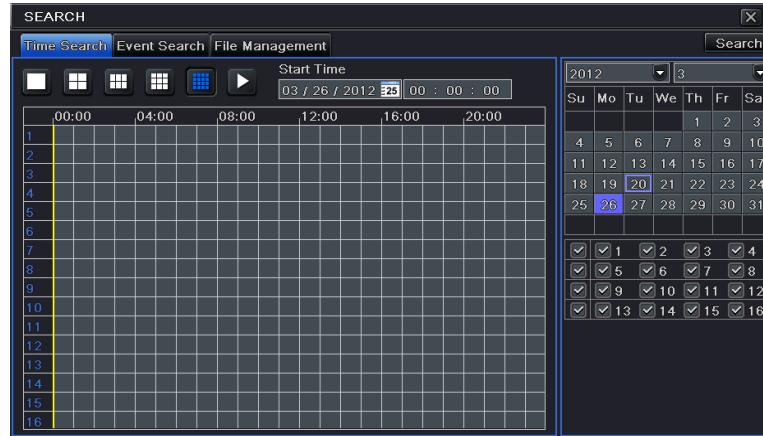


**Fig 6-1 Search Configuration-Time Search**

Step2: Select date and channels on the right hand side and press “Search” button. A date with highlighted borderline indicates presence of data.

Step3: Set the start time by clicking a particular grid or by entering the specific value in the start time field.

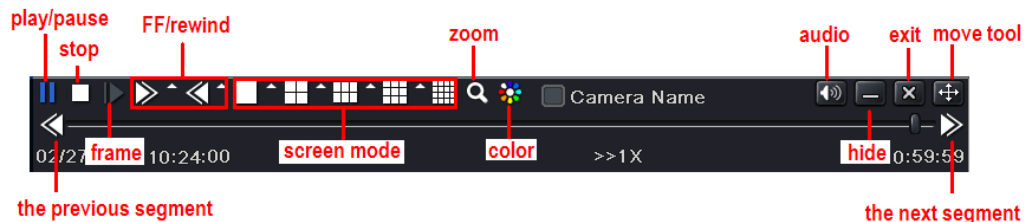Step4: Select the channel display mode and click  button to play record. Use the playback toolbar to control the playback.



### Playback Buttons

**Note:** When the monitor resolution is set to VGA800\*600, part of the time search interface will be hidden. Click the "Expand to" button to expand the whole interface.

## 6.2 Event Search

Step1: Enter into Menu→Search→Event Search tab. Refer to Fig 6-2:

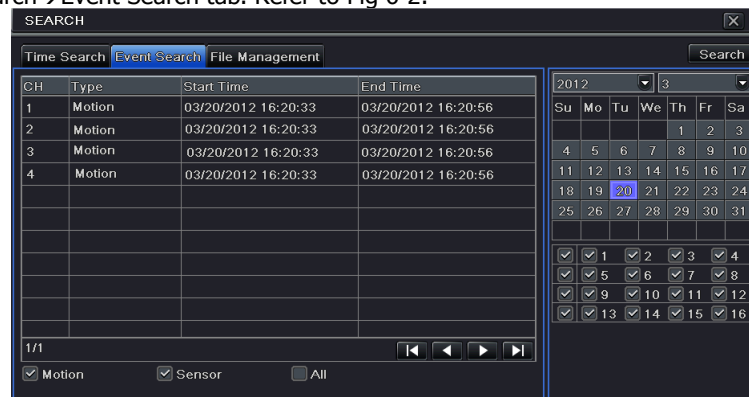


Fig 6-2 Search Configuration-Event Search

Step 3: Then checkmark Motion, Sensor or All accordingly. You can search for motion based recording and sensor based recording.

Step 5: Double click the event item to play the record.

Step1: Enter into Menu→Search→File Management tab. Refer to Fig 6-3:



Step 3: Press "Search" button to display the searched files in the file list box.

**Unlock:** Select a locked file and click Lock button to unlock this file.

42



Step 4: Use "All" button to lock/unlock or delete all files in the file management column.

Step 5: Double click an unlocked item to playback.

## 6.4 Backup

This unit supports backup by built-in SATA DVD Writer or USB flash drive. User also can make backup by IE browser via internet. Refer to 7.3.2 Remote backup.

Step1: Enter into main menu → Backup interface. Refer to Fig 6-4:

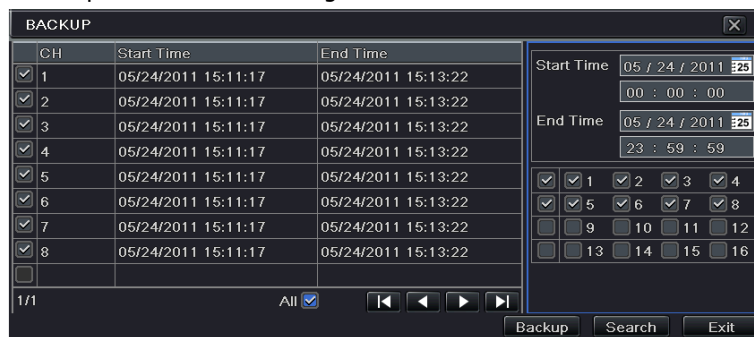


Fig 6-4 Backup Configuration

Step2: Set the start & end time, select channels and click Search button to display the searched data in the data backup list box

Step3: Select a required file or checkmark "All" to select all data files. Click Backup button to display Backup information window.

Step4: In the backup information interface, user can check the relevant options for backing up files. These options include storage Media, backup player and save file type. Then click Start button to start backup.

**Note :** If the backup files are saved in DVR format, please check backup player. Only this player can play these files in DVR format. If the backup files are saved in AVI format, you can play these files with common media player.

## 7 Manage NVR

### 7.1 Check System Information

Check system information includes five submenus: system, event, log, network and online user.

#### 7.1.1 System Information

In this interface, user can check the hardware version, MCU version, kernel version, device ID, etc.

#### 7.1.2 Event Information

In this tab, you can search for events like motion, sensor and video loss. The utility provides an interface to have a date based and a channel based search. This report can further be saved on a USB flash drive as an html file using the export button.

#### 7.1.3 Log Information

In this tab, you can search for relevant logs as per the set date and event which includes operation, setup, playback, backup, search, check information and error. This report can further be saved on a USB flash drive as an html file using the export button.

#### 7.1.4 Network Information

In this interface, you can check relevant parameters of network.

#### 7.1.5 Online Information

In this tab, you can check the details of the connected online users.

**Refresh:** refresh the current interface.

**Disconnect:** Disconnect the online users to access NVR. If this function is used by the admin, the particular PC will not be able to access the device for five minutes.

## 7.2 Manual Alarm

In this interface, user can trigger a manual alarm.

## 7.3 Disk Management

### 1. Format the disk

Step1: Enter into disk management tab.

**Note:** please format the hard disk before recording. If not formatted, it will show the status of the disk-free space, and total space at the bottom of screen.

Step2: Click Refresh button to refresh the disk information in the list box;

Step3: Select a hard disk and click Format button to start format.

**Note:** All recorded files in the hard disk will be lost once it is formatted.

### 2. Advanced

User may check model, S/N, firmware, health status of the disk in this interface. User also can monitor the temperature, internal circuit, dielectric material of the disk, analysis the potential problems of the disk and warn so as to protect its data.

## 7.4 Upgrade

The NVR can be upgraded by using USB flash drive. Get the upgrading software from your vendor when there is a new software version.

### Upgrade Steps:

Step 1: Copy the upgrade software which gets from vendor into the USB storage device


Step 2: Connect the USB flash drive to the USB port.

Step 3: Enter Menu→Upgrade tab. Then the upgrade software name would be displayed in the upgrade list box.

Step 4: Select that software and then click upgrade button. It will upgrade automatically.

**Note:** Please wait for a while when the system reboots. Never cut off power during upgrading. The original configuration will be reserved after upgrade.

## 7.5 Logoff

Enter into Menu → Logoff tab. A log off dialogue box will popup. The device will log off by clicking “OK” button. If you want to log in again, click  icon to enter into user name and password to re-login.

## 8 Remote Surveillance

### 8.1 IE Remote Surveillance

In order to view the NVR from a network it must be connected to a LAN/WAN or internet. The network setup should be done accordingly. Please refer to 5.6 Network Setup. This NVR supports IE browser, on Windows XP and Vista platform.

#### 8.1.1 On LAN

Step 1: Enter into the NVR's Main Menu→Setup→Network tab to input IP address, Subnet Mask, etc .If using DHCP, please enable DHCP in both the NVR and the router.

Step 2: Enter Record Setup to set network video parameters like resolution, frame rate etc.

Step 3: Open IE on a computer on the same network. Input the IP address of the NVR in IE address bar and press enter.

Step 4: IE will download ActiveX component automatically. Enter the username and password in the subsequent window

**Notice:** If HTTP port is not 80, other number instead, need add the port number after IP address. For example, set HTTP port as 82, need input IP address like 192.168.0.25:82.

User name and password here are the same with that used on the NVR. The default is admin and 123456.

#### 8.1.2 On WAN

There are two ways for the NVR to connect to internet.

##### 1. Connect the NVR to internet through router or virtual server

Step 1: Enter into the NVR's Main Menu→Setup→Network interface to input IP address, Subnet Mask, etc. If using DHCP, please enable DHCP in both the NVR and router.

Step 2: Forward IP address and port number in Virtual Server setup of the router or virtual server. Configure the firewall to allow accessing the NVR.

**Note:** Port forwarding settings may be different in different routers and server. Please refer to the router's manual for details.

Step 3: Open IE browser, input IP address, or dynamic domain name and enter. If HTTP port is not 80, add the port number after IP address or domain name.

Step 4: IE will download ActiveX automatically. Then a window pops up and asks for user name and password. Input name and password correctly, and enter to view.

**Note: If you cannot download and install ActiveX, please refer to FAQ Q8.**



**Fig 8-1 View with IE Browser**

## **2. Connect the NVR to internet through PPPoE directly.**

Step 1: Enter into the NVR's Main Menu→Setup→Network interface to enable PPPoE and then input user name and password received from your ISP. Next, click 'Apply'. The NVR will connect to the server and would give a confirmation message.

Step 2: When accessing the remote interface of NVR, user can input WAN IP to access directly (user can enter into Main menu→Information→Network interface to check IP address).

Step 3: If users want to utilize dynamic domain name, please apply for a domain name in a DNS server supported by the NVR or router. Then add to the NVR or router.

Step 4: The following setting steps are as the same as Step 3 and Step 4 in Point 1.

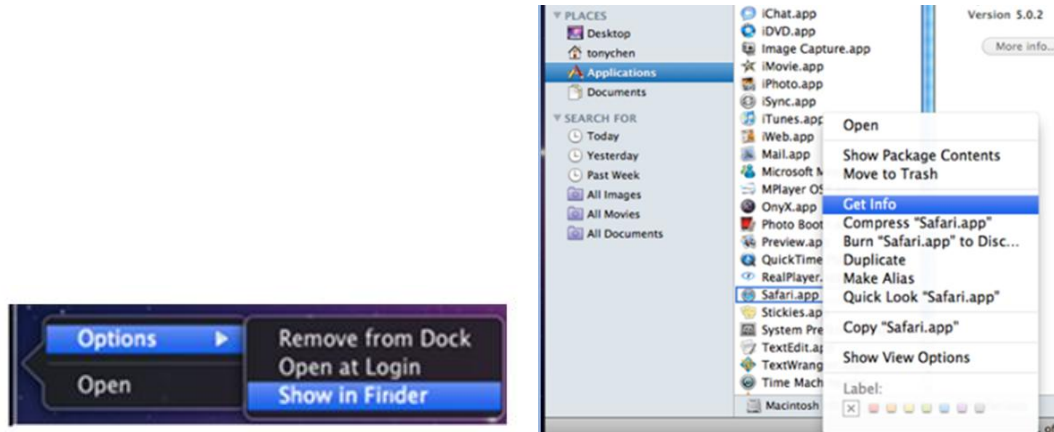
## 8.2 Remote Surveillance through Apple PC

**Note:** Because the current plug-in version of client end just only supports 32-bit mode, so the safari browser shall start 32-bit mode. If the browser is the earlier MACOS version, the default setting is 32-bit mode and the setting can be skipped.


The Setting steps are as follows:

First: Right click safari icon and select "Show in Finder".

Second: Select Applications→Right click "Safari. App"→Select "Get Info".



Third: Select "open in 32- bit mode".

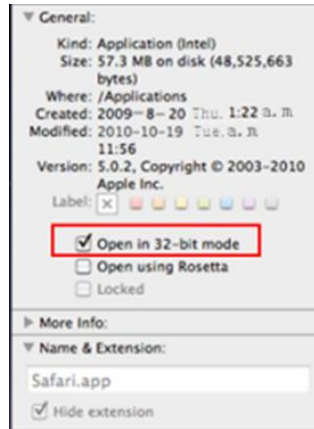

### 8.2.1 On LAN

Step 1: After starting Apple computer, click Apple icon. The following window will pop up. Please select "System Preferences"→"Internet & Wireless"→click "Network".



Step 2: Enter into Network interface and then click "Ethernet Connected" to check the internet connection of Apple PC.



Status: **Connected**  
Ethernet is currently active and has the IP address XXX.XXX.XXX.XXX

Configure IPv4: **Manually**

IP Address: XXX.XXX.XXX.XXX

Subnet Mask: XXX.XXX.XXX.XXX

Router: XXX.XXX.XXX.XXX

DNS Server: XXX.XXX.XXX.XXX

Search Domains:


Advanced... ?

her changes. Assist me... Revert Apply

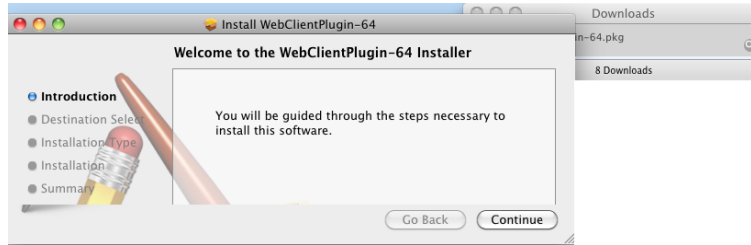
Step 3: After acquiring the IP address, Subnet Mask and so on, please enter into the NVR's Main Menu→Setup→Network interface to manually input IP address, Subnet Mask and Gateway according to the configuration of PC. The network segment should be the same as the PC. If using DHCP, please enable DHCP in the NVR and router.

Step 4: After finishing the above information, users can enter LAN IP and http port in the Safari browser. For example: input <http://192.168.1.100:81> (here 192.168.1.100 is LAN IP of NVR, 81 is the http port of NVR). Click "⌘" button, the browser will download Active X control as shown below:



Step 5: Click  icon and then select the Active X control, the welcome interface will be shown. Click "Continue"→"Install"

button , the following window will pop up :



Input the name and password of Apple PC and then click “OK” to install this Active X control.

Step 6: After finishing installing the Active X control, please quit from the Safari browser. Right click Safari icon on the desktop and then select “Quit” button to quit the browser. Then restart Safari browser. Input the IP address and http port to enter into the login interface of NVR.

## 8.2.2 On WAN

There are also two ways for NVR to connect to Internet.

### 1. Connect the NVR to internet through router or virtual server

Step 1: The network setups are the same as step one to step four of point 1 on WAN of IE remote surveillance.

Step 2: Enter WAN IP and http port in the Safari browser to install the Active control. Then a window pops up and asks for user name and password. Input name and password correctly, and enter to view.

### 2. Connect the NVR to internet directly.

Step 1: The network setups are the same as step one of point 2 on WAN of IE remote surveillance.

Step 2: Enter WAN IP and http port or domain name in the Safari browser to install the Active control. Then a window pops up and asks for user name and password. Input name and password correctly, and enter to view.

## 8.3 Remote Preview

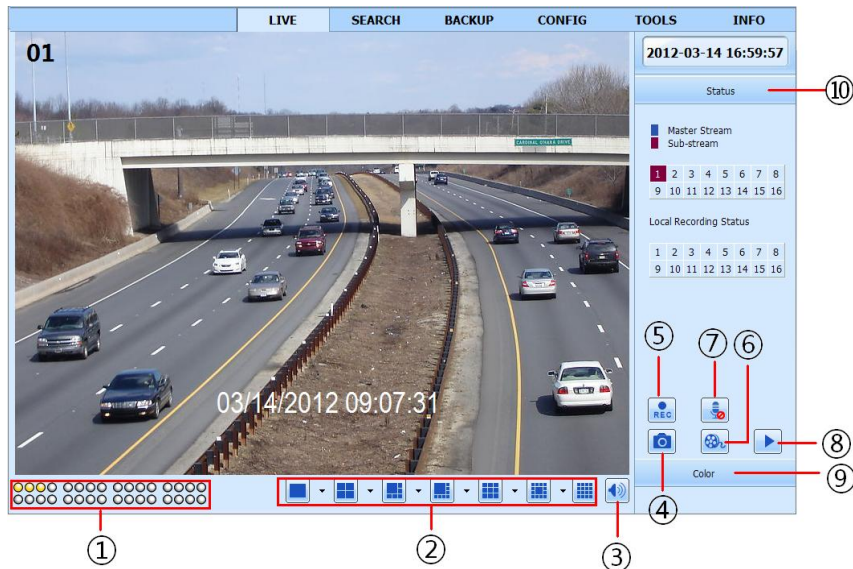



Fig 8-2 Remote Live Preview

### Symbol and function Definitions:

①	Channel indicator	②	Screen display mode	③	Volume
④	Snap	⑤	Start manual record	⑥	Start IE record
⑦	Start Talk	⑧	Playback	⑨	Color
⑩	Master/sub stream status				


**Note:** Click  button to record manual and the record file will be saved in user's PC.

**Screen display mode:**

Click the  icon beside the screen display mode, to display a channel select dialog as below:











Take 8-channel view for example: user can checkmark 8 channels from 1-ch to 16-ch at random to display the live pictures. A maximum of 16 channels can be selected. Then click OK button to confirm the setting.

**Fig 8-3 Channel Selection****Snap pictures**

The system will automatically capture pictures and save those pictures in the computer by clicking “Snap”  icon, User should set up the path for those picture in the Configuration→Local configuration.

**Color adjustment:**

Drag the slide bar to adjust Brightness, Contrast, Hue, and Saturation. Click Default to reset them to original value.

Buttons	Description
 	Drag the scroll bar to adjust the brightness of channel
 	Drag the scroll bar to adjust the contrast of channel
 	Drag the scroll bar to adjust the saturation of channel
 	Drag the scroll bar to adjust the hue of channel
	Click this button to recover the default value of brightness, contrast, saturation and hue.
	Save the adjustment

Click the right mouse on the live interface to display a pull-down menu as below.



**Fig 8-4 Right Key Sub Menu**

**Stream:** The NVR supports master stream and sub stream. Master stream has higher frame rate, max 25 fps (PAL)/30 fps (NTSC ) for every channel, but it needs higher network bandwidth; second stream has low frame rate, max 6FPS (PAL)/7FPS(NTSC) for every channel, but it requires low network bandwidth as compared to the master stream. Therefore, users can select the stream according to their bandwidth.

**All to sub stream:** Set all channel to master stream or sub stream.


**Enable audio:** Enable or disenable audio.

**Full screen:** The live preview picture will display in full screen and the tool bar will be hidden; double click left or click right mouse to return.


**Zoom in:** Single channel large screen electronic amplification. Click the channel which needs to be zoomed. Right click to select zoom in button to zoom in the image. Double click or right click to exit.

## 8.4 Remote Playback & Backup

### 8.4.1 Remote Playback

Click  button to enter into record playback interface. Refer to Fig 8-5:

Select the record date and channels and double-click the file name in the record file list box. Then user can play that file and preview the picture.

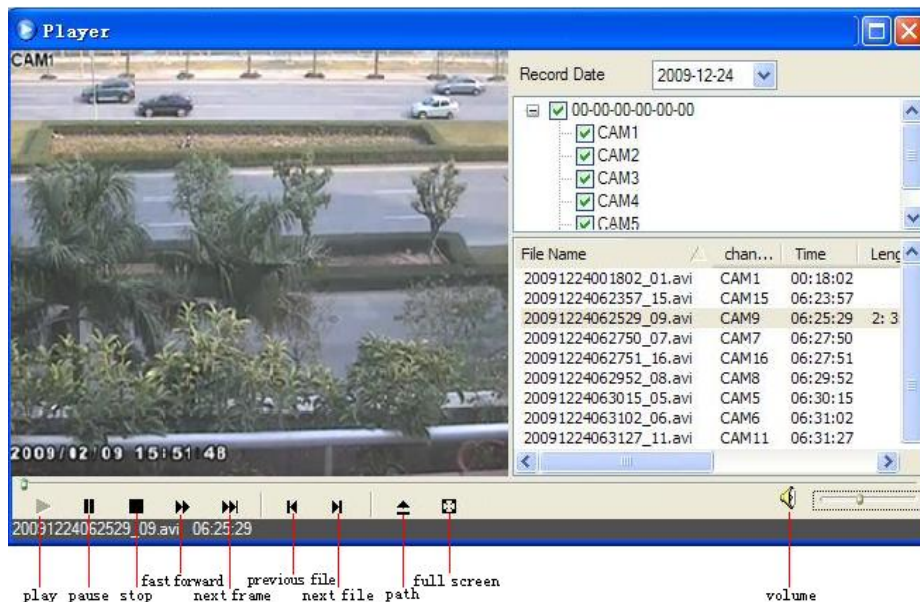

**Fig 8-5 Play Record File Interface**

This NVR supports remote time search, event search and file management.

### By Time Search:

**Step1:** Enter into Search→Time search. Refer to Fig 8-6:

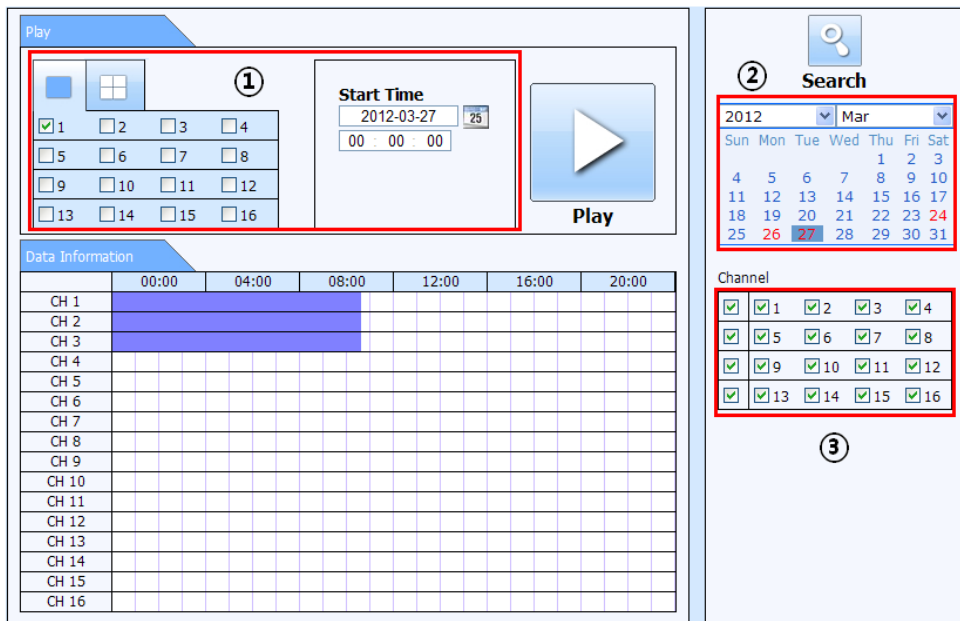


Fig 8-6 Time Search Interface

**Step2:** The highlight date in the area② indicates recorded data. Select the date in the area ② and record channels in area③.

**Step3:** Click "Search" button. The record data will be displayed in the data information list box.

**Step 4:** Set the Start time and display mode in the area① as required.

**Step 5:** Click "play" button to playback.

**Step 6:** Click the relevant buttons in the interface for operation, like FF, pause, change channel mode, research, etc. Please refer to Fig 8-7:

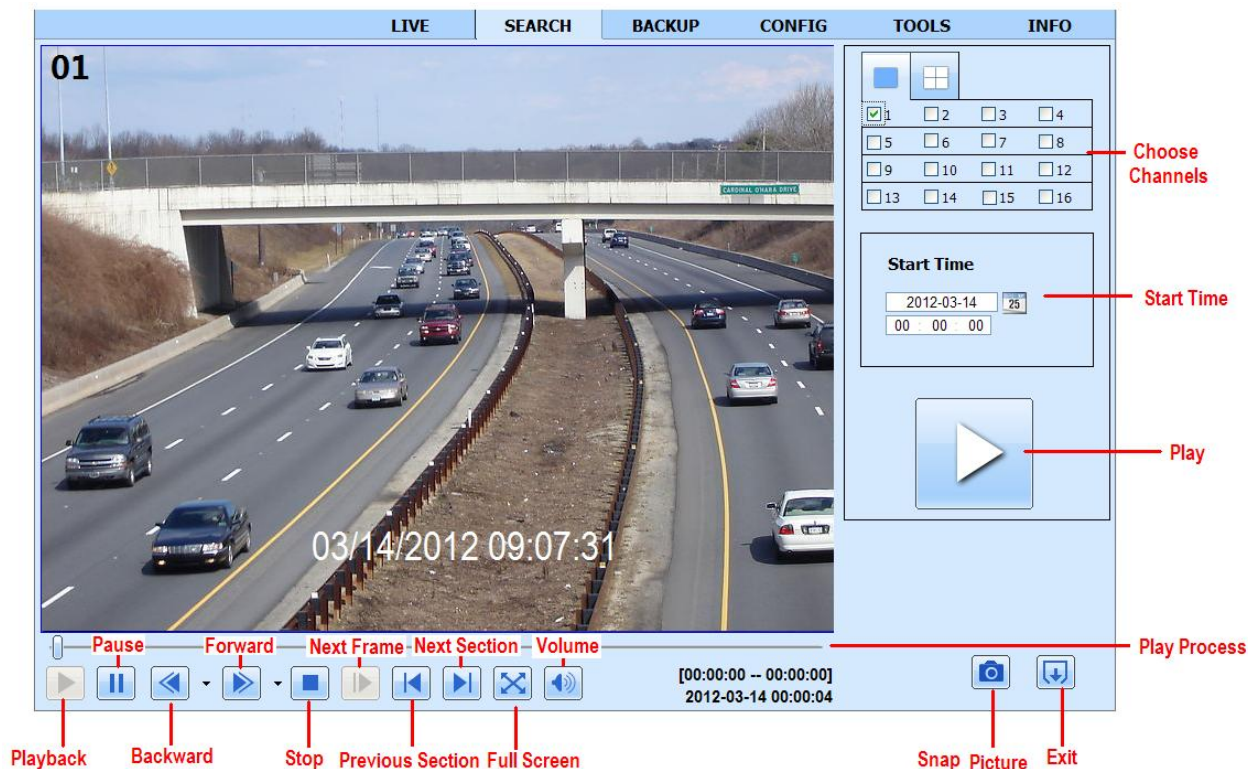


Fig 8-7 Time Search Playback

**By Event Search:**



**Step 1:** Enter into Search→Event Search. Refer to Fig 8-8:

The screenshot displays the 'Event Search' interface. On the left is a table titled 'Event list' with columns: Channel, Start Time, End Time, and Type. It contains 20 rows of event data from March 27, 2012. On the right is a search panel with a 'Search' button, a date selector (2012 Mar), a calendar view with the 27th highlighted, a 'Channel' selection grid with 16 channels checked, and a filter section with 'Motion' and 'Sensor' checked, and 'All' unchecked.

Channel	Start Time	End Time	Type
3	2012-03-27 10:43:05	2012-03-27 10:52:45	Motion
3	2012-03-27 10:32:04	2012-03-27 10:43:05	Motion
3	2012-03-27 10:21:03	2012-03-27 10:32:04	Motion
3	2012-03-27 10:10:03	2012-03-27 10:21:03	Motion
3	2012-03-27 09:59:02	2012-03-27 10:10:03	Motion
3	2012-03-27 09:48:01	2012-03-27 09:59:02	Motion
3	2012-03-27 09:37:00	2012-03-27 09:48:01	Motion
3	2012-03-27 09:25:59	2012-03-27 09:37:00	Motion
3	2012-03-27 09:14:59	2012-03-27 09:25:59	Motion
3	2012-03-27 09:03:58	2012-03-27 09:14:59	Motion
3	2012-03-27 08:52:57	2012-03-27 09:03:58	Motion
3	2012-03-27 08:41:56	2012-03-27 08:52:57	Motion
3	2012-03-27 08:30:55	2012-03-27 08:41:56	Motion
3	2012-03-27 08:19:55	2012-03-27 08:30:55	Motion
3	2012-03-27 08:08:54	2012-03-27 08:19:54	Motion
3	2012-03-27 07:57:53	2012-03-27 08:08:54	Motion
3	2012-03-27 07:46:52	2012-03-27 07:57:53	Motion
3	2012-03-27 07:35:50	2012-03-27 07:46:50	Motion

**Fig 8-8 Event Search Interface**

**Step 2:** Click the highlight date and select record channels.

**Step 3:** Checkmark the event type: motion and sensor.

**Step 4:** The events will be display in the event list box by clicking Search button.

**Step 5:** Double-click certain item to playback.

## File Management

**Step 1:** Enter into Search→File management. Refer to Fig 8-9:

**Step 2:** Select highlighted date and channels.

**Step 3:** Click "Search" button to search the recorded files.

File list

Check	Channel	Start time	End time	Status
<input type="checkbox"/>	1	2010-01-09 00:01:07	2010-01-09 00:02:16	motion
<input type="checkbox"/>	1	2010-01-09 00:03:28	2010-01-09 01:24:11	manual
<input type="checkbox"/>	1	2010-01-09 00:08:36	2010-01-09 00:09:31	motion
<input type="checkbox"/>	1	2010-01-09 00:10:10	2010-01-09 00:10:58	motion
<input type="checkbox"/>	1	2010-01-09 00:11:30	2010-01-09 00:12:15	motion
<input type="checkbox"/>	1	2010-01-09 00:14:48	2010-01-09 00:15:43	motion
<input checked="" type="checkbox"/>	1	2010-01-09 00:15:45	2010-01-09 00:17:09	motion
<input type="checkbox"/>	1	2010-01-09 01:24:11	2010-01-09 02:46:11	manual
<input type="checkbox"/>	1	2010-01-09 02:46:11	2010-01-09 03:19:45	manual
<input type="checkbox"/>	1	2010-01-09 17:39:52	2010-01-09 17:57:12	manual
<input type="checkbox"/>	2	2010-01-09 00:01:07	2010-01-09 00:01:53	motion
<input type="checkbox"/>	2	2010-01-09 00:02:18	2010-01-09 00:03:01	motion
<input type="checkbox"/>	2	2010-01-09 00:03:01	2010-01-09 00:04:12	motion
<input type="checkbox"/>	2	2010-01-09 00:03:32	2010-01-09 00:54:27	manual
<input type="checkbox"/>	2	2010-01-09 00:14:22	2010-01-09 00:15:03	motion
<input type="checkbox"/>	2	2010-01-09 00:21:54	2010-01-09 00:22:35	motion
<input type="checkbox"/>	2	2010-01-09 00:23:51	2010-01-09 00:24:33	motion
<input type="checkbox"/>	2	2010-01-09 00:25:12	2010-01-09 00:25:54	motion
<input type="checkbox"/>	2	2010-01-09 00:26:57	2010-01-09 00:28:43	motion
<input type="checkbox"/>	2	2010-01-09 00:31:48	2010-01-09 00:32:30	motion

AllNoneInverse

0/0

◀◀▶▶

LockUnlockDelete

Search

2010 Jan

Sun	Mon	Tue	Wed	Thu	Fri	Sat
					1	2
3	4	5	6	7	8	9
10	11	12	13	14	15	16
17	18	19	20	21	22	23
24	25	26	27	28	29	30
31						

☒ 1

☒ 2

☒ 3

☒ 4

☒ 5

☒ 6

☒ 7

☒ 8

☒ 9

☒ 10

☒ 11

☒ 12

☒ 13

☒ 14

☒ 15

☒ 16

Fig 8-9 File Management Interface

Lock: Select certain file item in the file list box and then click "Lock" button to lock this file that ca not be deleted or overlaid.

Unlock: Select a locked file and then click "unlock" button to unlock this file.


Delete: Select an unlock file and then click "delete" button to delete this file from file list.

### 8.4.2 Remote Backup

Click Backup button to enter into backup interface. Refer to Fig 8-10:

60

LIVE		SEARCH		BACKUP		CONFIG		TOOLS		INFO	
Data List											
Check	CH	Start Time	End Time	Status							
<input checked="" type="checkbox"/>	1	2011-04-27 23:50:35	2011-04-28 00:12:48								
<input checked="" type="checkbox"/>	1	2011-04-28 00:12:48	2011-04-28 00:34:58								
<input checked="" type="checkbox"/>	1	2011-04-28 00:34:58	2011-04-28 00:57:07								
<input type="checkbox"/>	1	2011-04-28 00:57:07	2011-04-28 01:19:16								
<input type="checkbox"/>	1	2011-04-28 01:19:16	2011-04-28 01:41:34								
<input type="checkbox"/>	1	2011-04-28 01:41:34	2011-04-28 02:03:47								
<input type="checkbox"/>	1	2011-04-28 02:03:47	2011-04-28 02:25:52								
<input type="checkbox"/>	1	2011-04-28 02:25:52	2011-04-28 02:48:02								
<input type="checkbox"/>	1	2011-04-28 02:48:02	2011-04-28 03:10:11								
<input type="checkbox"/>	1	2011-04-28 03:10:11	2011-04-28 03:32:20								
<input type="checkbox"/>	1	2011-04-28 03:32:20	2011-04-28 03:54:25								
<input type="checkbox"/>	1	2011-04-28 03:54:25	2011-04-28 04:16:35								
<input type="checkbox"/>	1	2011-04-28 04:16:35	2011-04-28 04:38:44								
<input type="checkbox"/>	1	2011-04-28 04:38:44	2011-04-28 05:00:53								
All		Inverse		1/16		<input type="button" value="Previous"/> <input type="button" value="First"/> <input type="button" value="Next"/> <input type="button" value="Last"/>					
File Path		<input type="text"/>		<input type="button" value="Browse"/>		<input type="button" value="Backup"/>					



**Search**

**Start Time**

2011-04-28
25

00 : 00 : 00

**End Time**

2011-04-28
25

23 : 59 : 59

**Channel**

<input checked="" type="checkbox"/>	1	<input checked="" type="checkbox"/>	2	<input checked="" type="checkbox"/>	3	<input checked="" type="checkbox"/>	4
<input checked="" type="checkbox"/>	5	<input checked="" type="checkbox"/>	6	<input checked="" type="checkbox"/>	7	<input checked="" type="checkbox"/>	8
<input checked="" type="checkbox"/>	9	<input checked="" type="checkbox"/>	10	<input checked="" type="checkbox"/>	11	<input checked="" type="checkbox"/>	12
<input checked="" type="checkbox"/>	13	<input checked="" type="checkbox"/>	14	<input checked="" type="checkbox"/>	15	<input checked="" type="checkbox"/>	16


Fig 8-10 Remote Backup Interface

Step1: Select channels, set the start and end time and then click "search" button to display the file information in the file list box

Step2: Select backup files and click "browse" button to set the path. Then click "backup" button to start backup. The backup files will be saved on user's PC.

## 8.5 Remote System Configuration

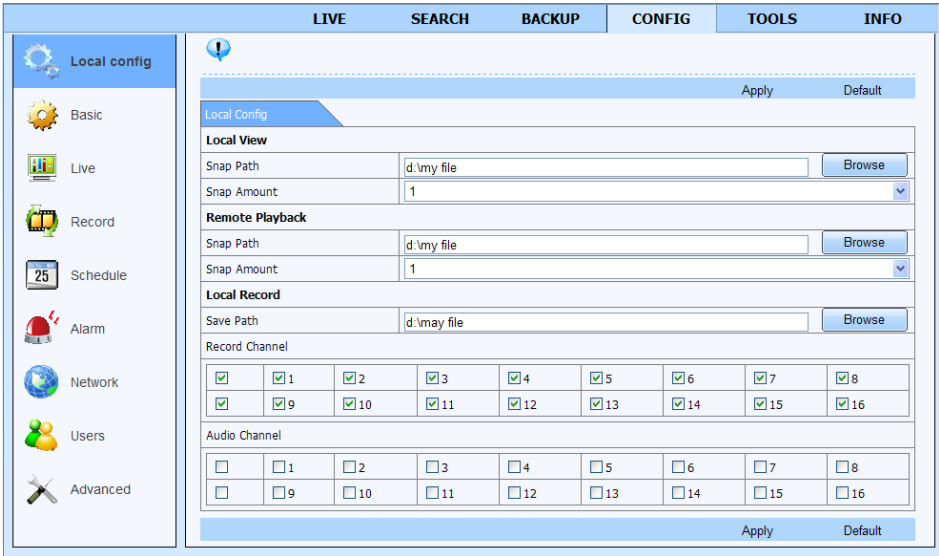You can do remote setup of the device which includes functions like basic configuration, live configuration, record configuration, schedule configuration, alarm configuration, network configuration, PTZ configuration and user configuration. You should select an option from the menu list on the left and then setup the relative parameters. Only one user can do configuration setup at a given point of time. Click Config tab to enter into the below interface as Fig 8-11:



### Fig 8-11 Remote System Configuration

The sub menu list and the options in every menu are similar to that of the NVR. Please refer to Chapter 5 Main Menu Setup Guide for more details.

## 8.6 Tools

Click on tool's tab to access the disk management tool. You can view the status of the HDD, change/view the read/write properties and can also format the HDD remotely.

## 8.7 Remote Information

The Info tab provides a web based interface to access the general information pertaining to the NVR's settings. It includes five submenus: System, Event, Log, Network and Online users. The sub menu list and the options in every menu are similar to that of the NVR. Please refer to Chapter 7 for more details.

Type	User Name	Time	IP Address
File Management	admin	2012-03-27 10:54:34	192.168.0.1
Event Search	admin	2012-03-27 10:52:45	192.168.0.1
Event Search	admin	2012-03-27 10:52:45	192.168.0.1
Stop	admin	2012-03-27 10:52:38	192.168.0.1
Play	admin	2012-03-27 10:39:05	192.168.0.1
Time Search	admin	2012-03-27 10:34:44	192.168.0.1
Logon	admin	2012-03-27 10:21:47	192.168.0.1
Logoff	admin	2012-03-27 09:52:37	192.168.0.1
Logon	admin	2012-03-27 09:51:55	192.168.0.1
Check Network Status	admin	2012-03-27 09:49:38	127.0.0.1
IPCamera Connected	system	2012-03-27 00:12:12	192.168.20.205
IPCamera Connected	system	2012-03-27 00:12:11	192.168.20.201
IPCamera DisConnected	system	2012-03-27 00:12:11	192.168.20.201
IPCamera Connected	system	2012-03-27 00:12:11	192.168.20.215
IPCamera DisConnected	system	2012-03-27 00:12:11	192.168.20.215

Fig 8-12 Remote Information Search

**Note:** There may be slight differences with respect to functions of remote surveillance between through IE and through Apple PC. Here we only take IE remote access for example.

## 9 Mobile Surveillance



This NVR supports mobile surveillance by phones with android, Iphone OS. If you want to make mobile surveillance, please enable network service on the NVR first and refer to Chapter 5.6 Network configuration. The below is the use instructions on mobile client end for two OS.

### 9.1 By phones with Iphone OS


#### 1. Install through Iphone

Step 1. Open App Store function of Iphone.


Step 2. Enable "search"  function to search "Superlive".



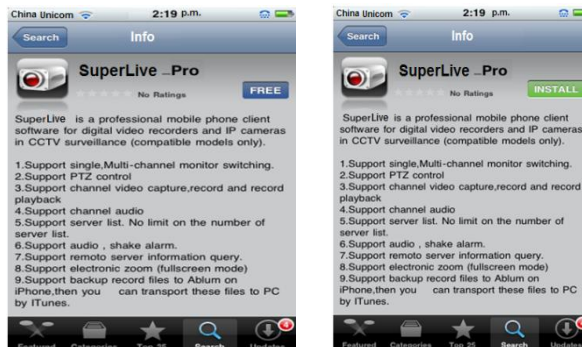Step 3: Click Superlive-pro, enter into "introduce" interface and then click "FREE", it will change into "INSTALL"



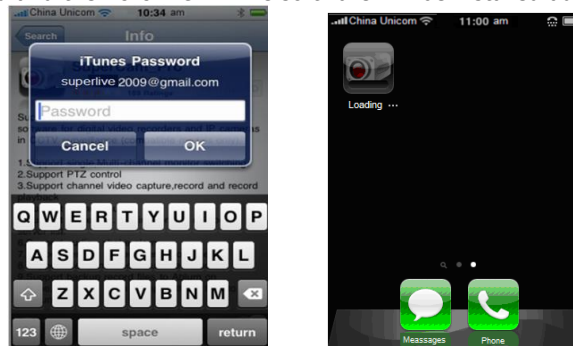**Step 4:** Input iTunes Store password and then click "OK". The software will be installed automatically.



**Note:** If it is the first time for user to operate, please enter user ID; if there is no Store account, user needs to apply for one.

## 2. Install through PC.



Step 1: Install iTunes store in PC and then login



Step 2: Connect iPhone and PC



Step 3: Enable "search" function to search "Superlive-Pro"



Step 4: Click "free application" button






Step 5: Input apple ID and password, then click "acquire"

Step 6: Checkmark "synchronously apply program" and "Superlive-pro", and then click "apply" button

## Operation Instruction for Superlive-Pro

### 1. Login interface



Enter server's IP address (or domain name), user name and password  
Click "Remember server" to save the setting; click ▼ button can quick input saved server address, user name and password.

## 2. Main Interface





	Image view		Four channel
	Playback		Snap
	Setting		Record
	Information view		Audio
	Server list		Talk
	Logoff		Color
	Single channel		

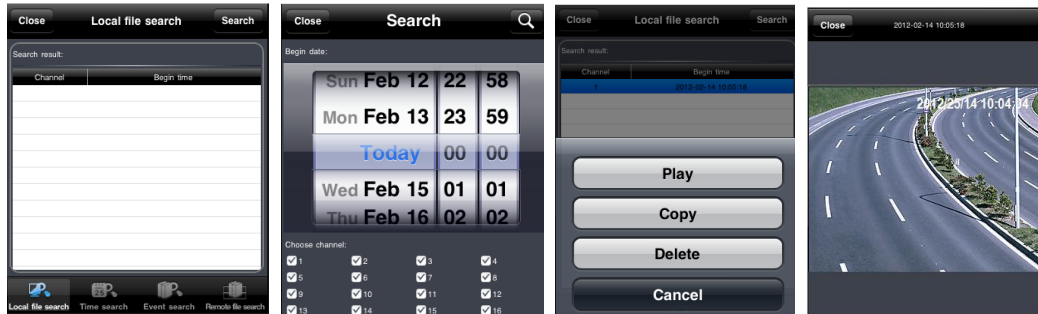
## 3. Image View

After the image is snapped, you can click icon to enter into the image view interface. Select the image and click it to amplify this image. Then you can copy or delete the image. Click 'close' button to return to the previous interface.




#### 4. Playback





Click  icon to enter into the playback interface. Then click 'Search' button, select the time and channel to playback and click  button. Now you can see the local file list. Select a file and click play button to playback. You can also copy or delete the file. Finally, click 'Close' button to return to the previous interface.




You can also search file to playback through time search, event search and remote file search. Please click the related button.


#### 5. Server list



Click  button to enter into server list interface. You can click  icon to add a server list. After you add the list, you can click  icon to edit the server information and click  icon to delete this server information.


## 6. Configuration interface



Click  icon to enter into Settings interface. You can set many properties, such as local, basic, live, record, schedule, alarm, network, etc. Please see chapter 5 in respect of setting steps for more details.

## 7. Information View Interface




Click  icon to enter into information view interface. You can check the information of system, network and online users. In the system interface, you can see the information of device name, device ID, hardware version, MCU version and so on. In the network interface, you can see the information of http port, server port, IP address, gateway, network status, etc. In the online users interface, you can see the information of the current online users.

## 9.2 By phones with Android OS


### Software Installation




Step 1: Run Google Market program



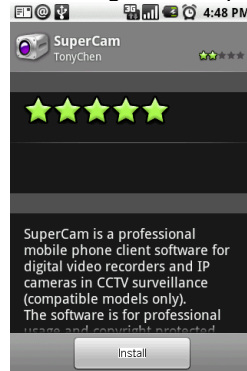
Step 2: Search "Supercam"



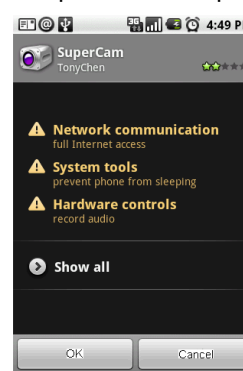Step 3: Press "Install" button




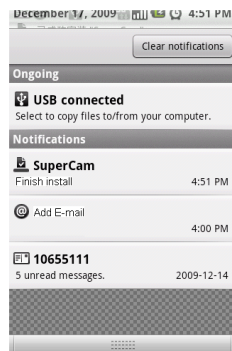Step 4: Click "OK" button



Step 5: User can view the download and install process in notifications; Once finishing downloading, the software will install automatically.


## Login



Enter into server's IP address (or domain name), user's ID and password.

Click "Remember server" to save the setting; click ▼ button can quick input saved server address, user name and password.

## Main menu

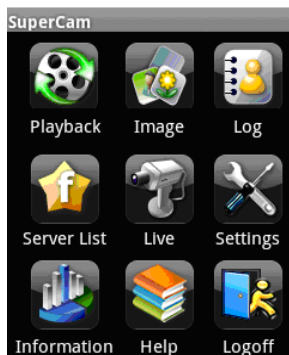

<b>【Playback】</b>	playback record file	<b>【Image】</b>	image view
<b>【Log】</b>	log record	<b>【Server List】</b>	device list
<b>【Live】</b>	live view	<b>【Settings】</b>	software setting
<b>Information】</b>	device information view	<b>【Help】</b>	software help center
<b>【Logoff】</b>	logoff and return to login interface		

## Live view




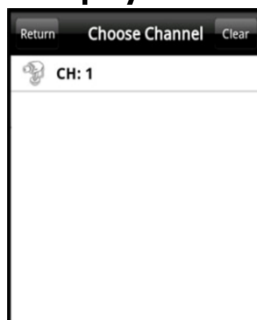
## Image view

	Stop playing		Single channel display
	Screen mode		Four channels display
	Snap		Record
	Talk		Hide
	Live audio		



	The first picture
	The previous picture
	Next picture
	The last picture
	Zoom in
	Zoom out
	Delete

## Record playback



	Play/Pause
	Stop
	Fast forward
	Slow play

Click Playback icon in the Main Menu interface to enter into the playback interface. First, choose channel. Second, select the record file and click it to playback. Finally, click 'Return' button to return to the previous interface.




## Server list



	Add a server list
	Modify a server list
	Delete a server list
Return	Return to the previous interface

## Config interface



<b>Alarm setting</b>	If Audio alarm is enabled, when Video Loss/Sensor/Motion happen , sound alarm will be triggered; If shake Alarm is enabled, when Video Loss/Sensor/Motion happen , shake alarm will be triggered.
<b>Storage setting</b>	User can setup the relevant parameters of mobile video. This function can be valid only insert SD card.
<b>Display setting</b>	User can setup display order or display mode.

## Information view



## Appendix A FAQ

### **Q1. Why the NVR doesn't turn on even after connecting to the power?**

- a. The power adapter could have gone bad. Please change a new power adapter
- b. The power from the adapter may be not enough for operating the NVR. Please use the power adaptor supplied along with the NVR.
- c. It could be a hardware problem.

### **Q2. There is no menu displayed and only has live image display.**

- a. Check whether the monitor is connected to the main video out . The monitor might be connected to VGA /HDMI port whereas the NVR may be set for output through BNC or vice versa. Long press Exit key to toggle the output modes.

### **Q3. The NVR LED turns on, however there is no output.**

- a. The power from the adapter may be not enough for operating the NVR. Please use the power adaptor supplied along with the NVR.
- b. It could be a wiring issue. Please check the connection for the same.
- c. Check the monitor settings.

### **Q4. Why are no images displayed on few or all the channels of the NVR?**

- a. It could be a wiring issue. Please check the cable and the ports of the cameras.
- b. The problem can also be related to cameras. Please check the same.
- c. Please make sure that you have added and enabled the cameras.

### **Q5. Cannot find HDD**

- a. The power from the adapter may be not enough for operating the NVR. Please use the power adaptor supplied along with the NVR.
- b. It could be a wiring issue. Please check the power and data cables of the HDD.

c. The HDD could have gone bad. Change a new one.

**Q6. Cannot record**

- a. Make sure the HDD was formatted prior to use.
- b. Maybe the user hasn't enabled the record function or has done incorrect setup. Please refer to Chapter 6.
- c. Maybe HDD is full and thus the NVR is not able to record. Check HDD information from Disk management and if required, please enable the recycle function.
- d. Check the attributes of the HDD. It might be set to read only mode.
- e. The HDD could have gone bad. Please change another one.

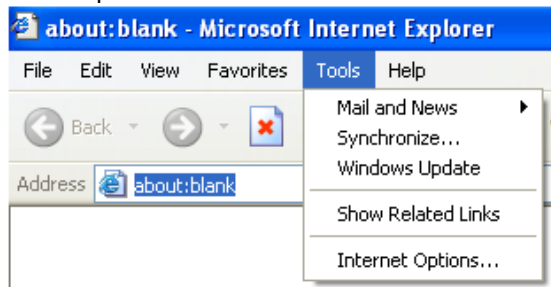
**Q7. Mouse does not work.**

- a. The mouse should be connected to the USB port at the rear side.
- b. After connecting the mouse, allow the NVR to detect the mouse for seconds. If not detected, try restarting the NVR.
- c. The mouse may be incompatible or faulty. Please change a mouse.

**Q8. Cannot download ActiveX control.**

- a. IE browser blocks ActiveX. Please do setup as per the steps mentioned below.

① Open IE browser. Click Tools-----Internet Options....



- ② select Security-----Custom Level....Refer to Fig 8-1
  - ③ Enable all the sub options under "ActiveX controls and plug-ins". Refer to Fig 8-2
  - ④ Then click ok to finish setup.
- b. Other plug-ins or anti-virus may block ActiveX. Please disable or do the required settings.

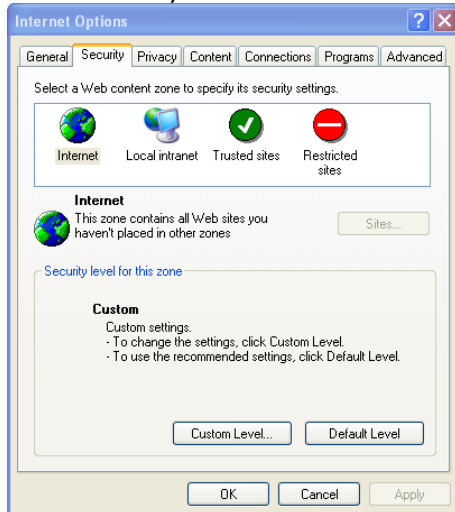


Fig 8-1

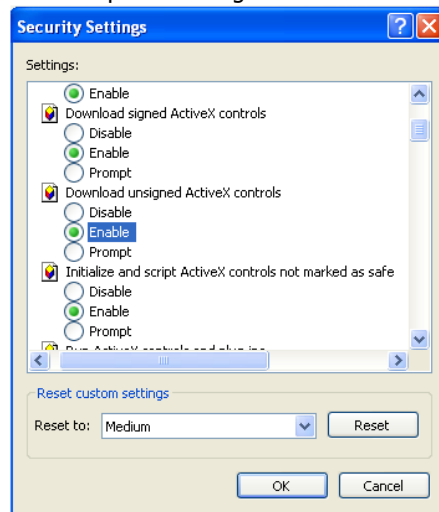


Fig 8-2

### Q9: NVR displays "please wait..."all the time

- a.HDD power cable and data cable may not be well connected. Please check the connections for HDD.
- b. It is also possible that the NVR was forced to stop because HDD has a bad sector and it may have caused the system to halt. Check with a good known HDD or try formatting the existing HDD.

**Q10: How to input password and numbers in the interface?**

Click the password or the input box a small keyboard will pop up. Please select characters to be input (the initial password is 123456), or you can use the digital keys on the front panel, or the digital keys on the remote controller.

**Q11: A hard disk is being identified as a new device however it was being used with another NVR of same model. Should it be formatted prior use?**

It is possible to migrate an HDD from one NVR to another provided that the NVRs are of the same model and that the HDD being migrated would be used as the sole disk in the new NVR. However in cases where the new NVR already contains a HDD, the migrated disk being installed would have to be formatted. In general migrating disks from one NVR to another is not recommended.

**Q12: What is the minimum configuration required for remote monitoring?**

PC Module	Parameters
CPU	Intel Celeron 2.4G
Motherboard	Intel 845
HDD	80G
RAM	512M
VGA	NVIDIA GeForce MX440/FX5200 ATIRADEON 7500/X300
OS	Windows 2000(SP4 above) /Windows XP(SP2 above) /VISTA
DirectX	9.0

**Q13: What is the PC configuration for 16-ch real time viewing of mainstream?**

PC Module	Parameters
CPU	Intel Core(TM)2 Duo CPU E4600
Motherboard	G31/P31 chip
HDD	80G
RAM	1GB
VGA	GMA3100/NVIDIA GeForce 8400/ ATI RADEON HD3450
OS	Windows 2000(SP4 above) /Windows XP(SP2 above) VISTA
DirectX	9.0

**Q14: How to handle the situation that the codec Control is blocked when downloading in the VISTA or Win7 system?**

This problem can be fixed in two ways:

- Enter Control Panel→User Account and Family Safety → User Account Control (refer to Fig 14-1); click Turn User Account on or off. Cancel Use User Account Control (UAC) to help protect your computer.
- Right click IE browser (refer to Fig 14-2), select Run as administrator to run browser.



Fig 14-1





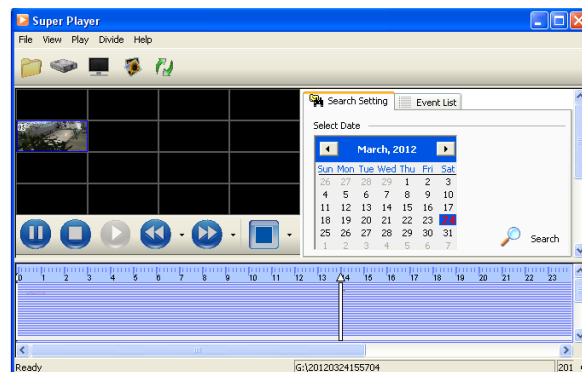


Fig 14-2

### Q15. How to play the backup file?

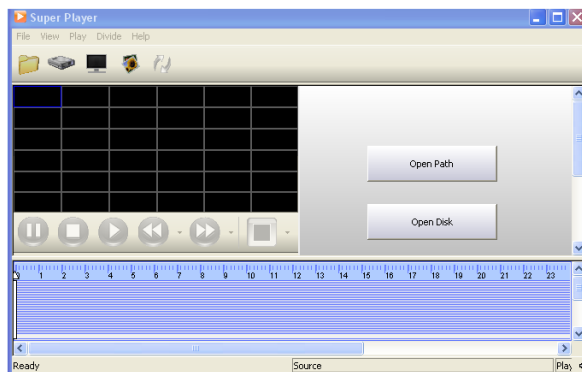- a. Insert your USB device where the backup files are saved in the USB port of PC. If your files are saved in DVR format, you must have already downloaded the backup player box before doing backup. Then double click to open your USB disk to find

your backup files and backup player. Double click  icon to install backup player. After you install it, open this player and click "Open Path" button to open your backup file. Next, click  play button to play the backup file. Double click the image and then right click to enable audio. If you save your backup files in AVI format, you can directly open your file by using the media player which supports this format.





## Appendix B Calculate Recording Capacity

You can calculate the size of hard disk according to the saving time and NVR recording settings. The NVR uses fixed video bit rate. The below are the details at different settings. The used space (MB/H) = Bitrate  $\div$  8  $\times$  3600  $\div$  1024.

Resolution	Bit Rate (kbps)	Used Space(MB/h)
1080P	12M	5400
	10M	4500
	8M	3600
	7M	3150
	5M	2250
	3M	1350
720P	6M	2700
	4M	1800
	2M	900
	1M	450
	512	225

The calculation format is: **Total Recording capacity =Used space per hour (MB/h) (coverage rate of hard disk)  $\times$  recording time (hour)  $\times$ channel numbers**

For instance, one customer set resolution to 720P, frame rate to 25fps, bitrate to 2048kbps Lowest for enabling total 4 channels. He wants the unit to record continuously in a month. Below is the calculation:

**Total Recoding capacity =900 (mb/h) X 24(hours/day) X30(days) X4 (channels)= 2592000 (MB)=2531.25(GB)**

Therefore, customers just install two SATA HDDs with 1.5TB, it can almost record for one month.

## Appendix C Compatible Devices

### 1. Compatible USB drive after test.

Brand	Capacity
SSK	512MB, 1G, 2GB
Netac	4GB
Kingston	2GB
Aigo	2GB
Smatter vider	1GB
SanDisk	4GB

### 2. Compatible SATA CD/DVD writers after test

Brand	Model
TECLAST	GH22NP20/TL-22XD
BENQ	DW220S-0K4
LITEON	DH—20A6S01C
LITEON	DH-20A4P02C
SAMSUNG	TS-H653B

### 3. Compatible HDD list

Brand	Capacity
Seagate Barracuda	80G/160G/250G/320G /1.5T/2TB
Seagate SV35.3	1T
Seagate Pipeline HD.2	500G
Maxtor Diamondmax	160G
HITACHI Deskstar	80G/160G
WD WD1600JS	160G
Samsung HD161HJ	160G

## Appendix D Specifications

Compression format		H.264 Main Profile
Video output		Composite : 1.0V p-p/75Ω BNC×1, VGAX1, HDMI×1
HDMI/VGA Resolution		1920*1080/1280*1024 / 800*600
Record Resolution		1080P/720P/VGA
IP Input	1080P	4 CH @ 30 FPS or 16 CH @ 7 FPS
	720P	8 CH @ 30 FPS or 16 CH @ 15 FPS
	VGA	16 CH @ 30 FPS
MIC		RCA X1
Audio output		RCA X1
Alarm Input		NO or NC 16CH
Alarm output:		4CH
Record Mode		Manual / Sensor /Timer / Motion detection
Simplex/Duplex/Triplex		Pentaplex
Network Interface		RJ45 (LAN, INTERNET)
PTZ control		YES
Communication interface		RS485, USB2.0 x 2 (one for backup, another for USB mouse)
Disk info		SATA x 4+DVD-RW x 1 or SATA x 8; E-SATA x1
Remote controller		YES
Power Supply		AC100V/220V
Temperature		0°C-50°C
Humidity		10%-90%
Average Operating Power ( Excluding HDD )		≤60W

**450011000363 A0**