

Atmos EasySolar



User Operating Instructions for Atmos EasySolar

Atmos Heating Systems
West March
Daventry
Northants, NN11 4SA
Tel: 01327 871990
Fax: 01327 871905
e-mail: sales@atmos.co.uk
internet: www.atmos.co.uk

Issue 1.3.11

1 Introduction

Congratulations with your newly purchased Atmos EasySolar hot water system. You have chosen a durable system that will enable you to generate your own energy. This user manual will help you make the best use of your new solar hot water system. Keep it in a place where you will find it easily when you need it.

The EasySolar hot water system uses sunlight to heat the water for domestic hot water use. The system can be used both for flat roofs and pitched roofs. Heating your hot water with sunlight will reduce your energy bills. You will also reduce your CO₂ emissions and so help to save the environment.

The system consists of compact and light weight components which can be easily integrated into your home so as to take up very little space. The collector panels can be fitted between the roof tiles to make for a neat appearance. Alternatively it can be fitted above the roof tiles.



Building Regulations and the Benchmark Checklist

Atmos Heating Systems is a licensed member of the Benchmark Scheme which aims to improve the standards of installation and commissioning of domestic heating and hot water systems in the UK and to encourage regular servicing to optimise safety, efficiency and performance.

Benchmark is managed and promoted by the Heating and Hotwater Industry Council. For more information visit www.centralheating.co.uk


Please ensure that the installer has fully completed the Benchmark Checklist on the inside back pages of the installation instructions supplied with the product and that you have signed it to say that you have received a full and clear explanation of its operation. The installer is legally required to complete a commissioning checklist as a means of complying with the appropriate Building Regulations (England and Wales).

All installations must be notified to Local Area Building Control either directly or through a Competent Persons Scheme. A Building Regulations Compliance Certificate will then be issued to the customer who should, on receipt, write the Notification Number on the Benchmark Checklist.

The Benchmark Checklist may be required in the event of any warranty work and as supporting documentation relating to home improvements in the optional documents section of the Home Information Pack.



How does it work?

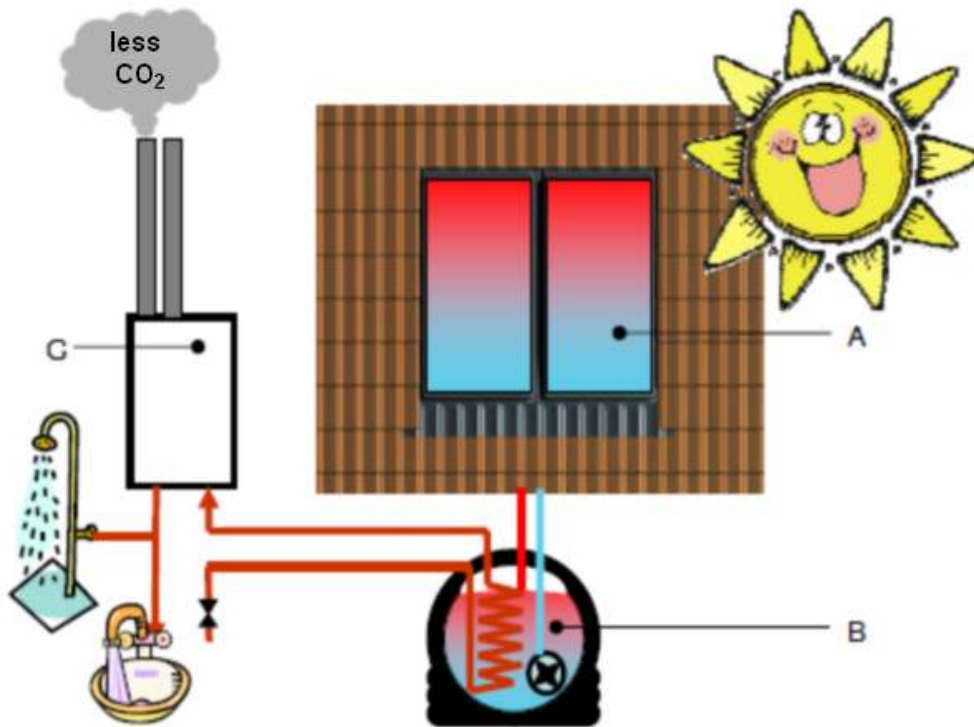

The EasySolar system consists of one or more collectors (A) and an insulated storage tank (B) which contains 100 litres of water. The collectors are fitted on the roof and the storage tank is fitted inside the house.

The sun shines

When the sun shines the collectors are heated by the sun. When the collector reaches a certain temperature a small pump that is incorporated in the storage tank starts up. This pump circulates the water in the storage tank through the collectors and the heat is stored in the storage tank.

The sun stops shining

When the sun stops shining the pump stops and the water drains out of the collectors through gravity. This prevents frost damage to the collectors in winter. When the temperature in the storage tank reaches its maximum level the pump will also stop. This prevents the tank overheating.

Hot water is used

When hot water is used, cold water flows into the internal heat exchanger of the storage tank. This heat exchanger prevents the domestic water mixing with the water that is stored in the tank but ensures that the cold water is quickly heated up. From the storage tank the preheated domestic water flows to the combi boiler or to the hot water cylinder. Because the water has been preheated less energy is needed to bring the water up to the required temperature. This saves on your energy bill. If the temperature of the water coming from the storage tank is high enough it can go direct to the hot water taps. This requires a thermostatic diverter valve.

3 Use

Once installed the system works automatically. The following points need to be considered:

- The best time to use hot water is in the afternoon or evening when the storage tank is warmest.
- Set the hot water temperature no higher than 60° on your combi boiler or hot water cylinder in order to minimise energy use.
- When the sun shines intermittently the pump will keep switching on and off. When the pump is not working the collectors may still be collecting heat which will be transferred to the storage tank once the pump starts up again.


3.1 Yearly maintenance

Maintenance of the storage tank


Because no antifreeze is used it is not necessary to replace the water in the tank. We do however advise that the connecting pipes and the wiring is checked and the storage tank topped up once a year. Do this as follows:

Unplug the 12V adaptor from the socket and wait for ten minutes. Remove the plug from the overflow outlet and insert the overflow connector. Put a tray or bucket underneath to catch any water coming out. Remove the plug from the filling point and insert the yellow hose provided for this purpose. Fill the tank with clean water.

Make sure the yellow hose is held firmly in position whilst water is flowing into the tank. Stop filling as soon as water flows from the overflow outlet. Allow the surplus water to flow out before replacing the overflow plug and the filling plug.

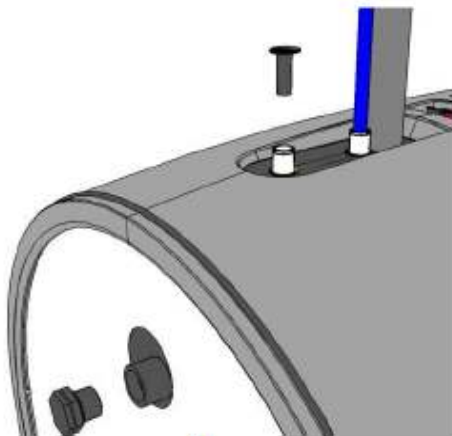

filling plug and overflow plug

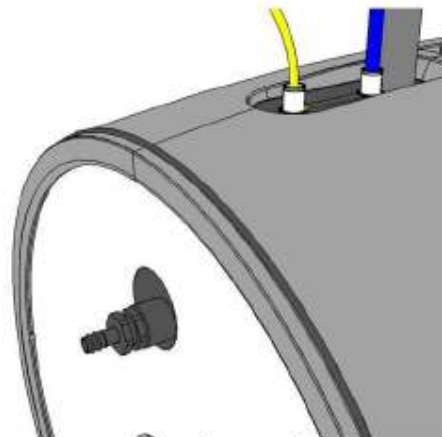

filling hose and overflow connector

Maintenance of collectors

Keep the gutters of the collectors free from leaves so that rain water can flow unhindered.

This only applies when the collectors are fitted between the roof tiles.

3.2 Faults

If the storage tank is not collecting heat even though the sun shines this indicates a fault.

To check for any malfunction follow the following procedure. This will only work when the sun is shining.

Ensure the storage tank is cold by drawing off hot water. This may take 10 minutes if the storage tank is very warm to start with.

1. Is there 240V on the socket? **Yes=>2, No=>13**
2. Is there 12V feed to the storage tank? **Yes=>3, No=>4**
3. Are the wires from the collector thermostat and the 12V feed to the tank connected correctly? **Yes=>6, No=>5**
4. The 12V adaptor is faulty. Atmos can supply a replacement.
5. Ensure the wires are connected correctly. The wires from the collector thermostat are interchangeable. Does the pump start up within 10 minutes? **Yes=>6, No=>7**
6. Does the red pipe become warm after a few minutes? **No=>8**
7. Disconnect the wires to the collector thermostat from the connector block on the tank and then connect the two terminals on this block with a short piece of wire. Does the pump start up? **Yes=>9, No=>10**
8. Unplug the 12V adaptor from the socket. Top up the tank with water. Plug the 12V adaptor back into the socket. Does warm water begin to flow into the tank after a few minutes? **Yes=>12, No=>11**
9. The collector thermostat is faulty or the wiring to the collector thermostat is interrupted.
10. There is a fault with the storage tank pump or the wiring to the pump is interrupted.
11. Are the red pipe and the blue pipe to the collectors sloping back towards the storage tank at all points? **Yes=>14, No=>15**
12. Check the system for leakage.
13. Ensure there is 240V on the socket.
14. Check the flow restrictors for blockages. There is one flow restrictor for each collector and one for the storage tank.
15. Ensure that the red pipe and the blue pipe to the collectors are sloping back towards the storage tank at all points. Flush the pump on the storage tank as described in the Installation manual.

4 Materials

The collectors and the storage tank can easily be disassembled and the components recycled.

<i>Collector</i>	
Collector tray	ABS
Insulation	Rockwool
Pipe insulation	EPDM
Absorber	Copper
Side profiles	Aluminium
Cover	Hardened glass

<i>Storage tank</i>	
Insulation	EPP
Connecting rings	Steel
Tank	PE
Heat exchanger	Copper / brass
Sheeting	Aluminium/PE/PMMA
Pump	Stainless steel /Noryl

<i>Accessories</i>	
Wakaflex	Polyisobutene / aluminium
Collector pipes	PA
Pipe connectors	Stainless steel
Flexible connector pipes	Stainless steel
Pipe insulation	EPDM

5 Warranty

1. **The Warranty card must be completed and the signed copy received by Atmos within 14 days of installation.** By signing the Warranty card the buyer agrees that the goods have been delivered in a satisfactory condition (transport damage is outside the scope of this warranty).
2. The Benchmark Checklist must be completed on commissioning the whole system, and a copy returned to Atmos with the Warranty card. Failure to complete the Benchmark checklist invalidates the warranty.
3. The warranty is two years from the date of invoice of supply of goods, and provides for the replacement of faulty parts.
4. The warranty covers any material, construction or operation faults that are found to be of original manufacturing origin.
5. Any alleged faulty part must first be returned to Atmos for inspection. Provided that it is agreed that the fault is of original manufacturing origin (see paragraph 6 below), a replacement part will be dispatched free of charge within 3 working days. If it is not a manufacturing fault, the replacement part (including carriage) will have to be paid for before dispatch.
6. Any warranty provision shall not apply if Atmos determine that the fault is due to improper application, improper use, neglect, accidental damage or injudicious treatment, non-observance of instructions contained in Atmos manuals or due to improper repair, adjustment, installation or maintenance.
7. This warranty shall not apply if the fault is caused by scale, failure or abnormality of water supply, abnormal or high voltage or impact of any external influence that adversely affects the normal operation of the product.
8. In the event of full payment for a product not being received, Atmos shall be discharged from all further contractual or warranty obligations.
9. If the original installation was carried out by an approved Atmos Installer Partner, the warranty shall be ten years from date of invoice of installation (as stated on Warranty card) for the replacement of faulty parts. Additionally the warranty will cover the associated labour cost for repair during the first two years. This installer warranty is subject to the conditions 4 to 8 above.