PERSONAL RINGER

MODEL: BHDR619A USER'S MANUAL

INTRODUCTION


Congratulations on your purchasing the BHDR619A personal ringer.

Sleek and elegant, this model is designed for ease of use. With security coding system, the interference to or from neighbouring Oregon Scientific wireless products can be avoided.

No wiring is required between the Ringer and the Bell button (BHDR229A). Effective transmission range is up to 80 feet (25 meters).

The standard package contains a Ringer and a Bell button (BHDR229A). You can acquire additional bell buttons from an authorized dealer.

FEATURES & KEY CONFIGURATION : RINGER

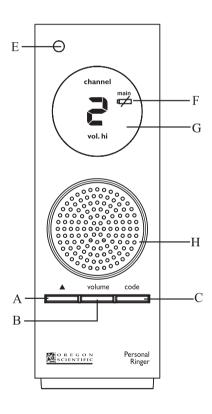

A. [🛦] BUTTON

Changes the security system code from 1 to 16

B. [VOLUME] BUTTON

Selects high or low volume for the door chime

^e c. [code] button

Press and hold to activate the security code setting mode

D. [RESET] BUTTON

Returns all settings to their original values

E. LED INDICATOR

Flashes when the door chime is sounding

F. LOW-BATTERY INDICATOR

Lights up when the batteries of the Ringer or Bell button are running low

G. LCD DISPLAY

H. SPEAKER

Emits the selected door chime

I. BATTERY COMPARTMENT

Accommodates two AA-size (UM-3) 1.5V batteries





FEATURES & KEY CONFIGURATION: BELL BUTTON

A. BELL BUTTON

Activates the door chime

B. DOOR CATCH

Press to open the battery compartment door

C. BATTERY COMPARTMENT

Accommodates three AAA-size (UM-4) 1.5V batteries


D. CHANNEL SLIDE SWITCH

Selects the channel designation for the Bell button

E. SYSTEM CODE SWITCHES

Sets the system code for the Bell button


F. BATTERY COMPARTMENT DOOR




gg

BATTERY INSTALLATION & SETTING UP: BELL BUTTON


1. Press the recessed door catch with a screwdriver to open the compartment.




2. Insert three AAA-size (UM4) 1.5V batteries.



Mount the compartment door on a wall using the two pieces of screws provided.



4. Assemble the front unit onto the compartment door.



BATTERY INSTALLATION: RINGER

- 1. Remove the screw on the bottom of the unit.
- 2. Pull out the battery door.
- 3. Insert two AA-size (UM-3) 1.5V batteries.
- 4. Close the battery door .
- 5. Replace the screws.
- 6. Hold down [RESET] with a blunt stylus.





TABLE-STANDING OR WALL-MOUNTING

Table-standing:


Your unit comes with a stand connector for connecting it to other modular units in the same series.






Connector:

Use wall-mount connector to align with other wall-mount brackets if neccessary.



Wall mount the unit onto the wall with the help of 2 pieces of screws provided.



HOW TO SELECT THE DOOR CHIME

The door chime is selected by the channel slide switch of the bell button. There are three chime patterns: Ding Dong (channel 1), Ding Ding (channel 2) and West Minister (channel 3).

To select the channel,

- 1. Open the battery compartment door of the bell button.
- 2. Slide the channel switch to the desired setting.
- 3. Replace the battery compartment door.

The channel selected will be displayed on the Ringer.



HOW TO READ THE LOW BATTERY INDICATOR

Replace the batteries when the low-battery indicator for the Ringer or bell button appears.

	Low battery indicator
	Main unit
ch.1	Channel 1 bell button
ch. 2	Channel 2 bell button
ch. 3	Channel 3 bell button

HOW TO SET THE CHIME VOLUME

Press [VOLUME] on the main unit to select between high and low volume. The volume level will be displayed.

HOW TO SET THE SYSTEM CODE

This product uses a coding system to avoid interference with neighbouring Oregon Scientific wireless products. If another Oregon Scientific wireless product in the neighbourhood is using the same codes as your own the unit might ring even though you did not press the bell button. In such a case you will need to change the security system code. The code set for the bell button and the Ringer must be identical before they can work properly together.


To set the code for the ringer,

- 1. Press and hold [CODE] for two seconds.
- 2. Use [] to enter the code. You can select from 1 to 16.
- 3. Press [CODE] to confirm and exit.

Once set, the Ringer will retain the system code even when the batteries are removed.

To set the code for the bell button,

- 1. Open the battery compartment door of the bell button.
- 2. Set the code on the system code switch as shown below. There are 16 combinations.
- 3. Replace the battery compartment door.



Note: These Oregon Scientific wireless models are compatible and will activate each other if the system codes are set to be the same. For example, if you install an additional Bell button for your back door, make sure you adjust the system code of the additional Bell button to be the same as your other Bell button and Ringer.

HOW TO USE THE PRODUCT

Once the Ringer and bell button are in place, pressing the bell button will activate the door chime in the chime pattern selected. If the button is held down the bell will ring continuously.

TRANSMISSION COLLISION

Signals from other household devices, such as home security systems and entry controls, may interfere with those of this product and cause temporarily reception failure. This is normal and does not affect the general performance of the product. The transmission and reception of signals will resume once the interference recedes.

THE RESET BUTTON

The RESET button is used to enhance synchronization of signals after battery replacement or when the unit is operating in an unfavorable way or malfunctioning. Use a blunt stylus to hold down the button. All settings will return to their original values.

PRECAUTIONS

This unit is engineered to give you years of satisfactory service if handled carefully.

- 1. Do not immerse the unit in water.
- 2. Do not clean the unit with abrasive or corrosive materials.

- B 3. Do not subject the unit to snow or excessive force, shock, dust, temperature or humidity.
 - 4. Do not tamper with the unit's internal components.
 - 5. Do not mix new and old batteries or batteries of different specifications.
 - No rechargeable batteries should be used in this product. Only use the type of battery as specified.

SPECIFICATIONS

General				
No. of system code combination		16		
No. of channel		3		
Channel 1 door chime		Ding Dong		
Channel 2 door chime		Ding Ding		
Channel 3 door chime		West Minister		
RF Transmission Range		Maximum 80 feet (25 meters)		
Transmission Frequency		433MHz		
Power				
Main Unit		2 pcs UM-3 or "AA" 1.5V battery		
Bell push		3 pcs UM-4 or "AAA" 1.5V battery		
Weight				
Main Unit		5.78 ounces(164g)		
		(including batteries)		
Bell push		2.54 ounces (72g) (including batteries)		
		(including batteries)		
Dimensions				
Main Unit (H x W x D)		6.57x2.24x1.26 inches (167x57x32mm)		
Bell push (H x H x D)		4.25x1.46x1.06 inches		
	•	(108x37x27 mm)		

NOTE ON COMPLIANCE

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC :

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is needed.
- □ Consult the dealer of an experienced radio/TV technician for help.

Company Name: Oregon Scientific, Inc.

Address: 19861 SW 95th Place, Tualatin, Oregon 97062, USA

Telephone Number: (503)-639-8883

Website address: www.oregonscientific.com.

Name and model number of the product: Personal ringer BHDR619A

CAUTION

- The content of this manual is subject to change without further notice.
- Due to printing limitation, the displays shown in this manual may differ from the actual display.
- The contents of this manual may not be reproduced without the permission of the manufacturer.

CUSTOMER ASSISTANCE

Should you require assistance regarding this product and its

operation, please contact our customer care department at

541-868-8205 or via email at helpme@oscientific.com. Our customer care department is available 24-7-365.

WARRANTY

This product is warranted to be free of manufacturing defects for a period of 3 months from date of retail purchase. Defective product should be directed to the place of retail purchase for exchange.

Should this not be possible, contact our customer care department for assistance and a return material authorization. No returns may be made without a return authorization. Please retain your retail receipt as you may be asked to provide a copy of it for proof of date purchased.

This warranty does not cover product subjected to abuse, misuse, accidental damage or tampering.

Upon return of the defective product, Oregon Scientific will at its discretion, replace the product with either a new or a tested reconditioned product. Should the product be out of warranty, the consumer may purchase directly from Oregon Scientific a replacement at reasonable cost plus shipping and handling.