

OneWireless Adapter for HART Devices Specifications

Model: OWA 100

34-XY-03-43 June 2011



Introduction

The Honeywell OneWireless™ Adapter (OWA 100) allows you to easily gain access to the information locked in your wired HART devices and bring it into any ISA100.11a compliant control system. Save time and money by avoiding the cost of installing long runs of cable to your installed HART devices by using the OneWireless Adapter. Improve the monitoring capabilities by automating the collection of information from these remote field devices by just adding the adapter to these 2- or 4-wired HART devices that can either be difficult or cost-prohibitive to reach.

The OneWireless Adapter utilizes the proven radio electronics of the XYR 6000 family of transmitters providing a proven and reliable solution for getting the data wirelessly from any HART device.

The OneWireless Adapter adds to the Honeywell OneWireless and XYR 6000 line of wireless products, allowing you to add wireless communications to almost any measurement point. Using the OWA 100 OneWireless Adapter, customers can obtain data to create information from remote and hazardous measurement locations without the need to run wires, where running wire can be cost prohibitive and/or difficult if the measurement is in a hazardous location. The adapter can be installed on an existing 2- or 4-wired HART device and operational in minutes, quickly providing information back to your control system.

The OneWireless Adapter is part of the Honeywell OneWireless system and is ISA100.11a compliant.

Each OneWireless Adapter can scavenge power from the 4-20ma loop in addition to being battery powered by a long-life "D" size lithium battery. The OWA 100 Adapter's transmission range is 1,000 ft. (305 m) line of site (LOS) under ideal conditions.

The OWA 100 will transmit the HART PV's and diagnostic data over the Honeywell OneWireless network. The four HART PVs can be viewed using a standard internet browser through the Wireless Device Manager's user interface. This interface is the same user interface used for configuring and viewing the entire OneWireless network.

The diagnostic data is passed from the HART transmitter through the OneWireless network. FDM, AMS, or some similar application running on the user's process control system is able to read the HART data from the transmitter wirelessly through the OneWireless network.



Figure 1- OneWireless Adapter (OWA 100)

These applications can also configure the HART device over the network.

The Honeywell OneWireless Network ensures reliable and fast transmission of field information into Experion® PKS or any other control system wirelessly via OPC client or Modbus-TCP

Implement the value of wireless technology today:

- Gain wireless access to HART information
- Measure remote access points simply, safe and securely
- Obtain and utilize previously inaccessible information due to high wiring cost or hazardous locations.
- Easily meet regulatory requirements
- Improve process efficiency
- Increase productivity by eliminating manual field readings of instruments

Operating Conditions

Parameter	Reference Condition		Rated Condition		Operative Limits		Transportation and Storage	
	°C	°F	°C	°F	°C	°F	°C	°F
Ambient Temperature**	25 ±1	77 ±2	-40 to 85	-40 to 185	-40 to 85	-40 to 185	-40 to 85	-40 to 185
Humidity (%RH)	10 to 55		0 to 100		0 to 100		0 to 100	
Vibration	Maximum of 4g over 15 to 200 Hz							
Shock	Maximum of 40g							
Power	<p>Battery powered 3.6V Lithium thionyl chloride (LiSOCl₂) battery non-rechargeable, size D</p> <p>Connected into a powered 4-20 mA loop power supply = 7 to 30 Vdc, 25 mA for power scavenging; maximum loop voltage drop due to adapter is 2.52 Vdc over the ambient temperature range across the loop; minimum loop load resistance is 250 Ohms.</p> <p>Battery life @ reference conditions with 30 second publish cycle time set for non-Routing is 3+ years</p>							

** The ambient limits shown are for ordinary non-hazardous locations only. Refer to the appropriate control drawing, FM/CSA, ATEX, or IECEx for the ambient limits when installed in hazardous locations.

Physical Specifications

Parameter	Description
Mounting	½" NPT or M20 316 Stainless Steel fitting that allows the adapter to be attached directly to the conduit entry of any 2 or 4-wire HART device (standard options). Mounting should result in the antenna being vertically oriented. An optional Remote Mounting Kit is available.
Housing	Molded Polycarbonate UL rating of f1 for outdoor use, UV stabilized and V-0 rating. Meets Type 4X (hosedown and corrosion resistant), IP 66 (dust-tight/hosedown).
Dimensions	See Figure 5
Net Weight	Approximately 1.0lb/(0.45Kg)

Specifications

Parameter	Description
Input	Any 2 or 4-wire HART device
Wireless Communication	<p>ISA100.11a Compliant</p> <p>2,400 to 2,4835 GHz (2.4 GHz) Industrial, Scientific and Medical (ISM) band per FCC 15.247 / IEEE 802.15.4-2006.</p> <p>Every data packet transmitted in either direction is verified (CRC check) and acknowledged by the receiving device.</p> <p>USA – FCC Certified; Canada – IC Certified; European Union – RTTE/ETSI Conformity</p>
RF Transmitter Power	<p>NA Selection – 125 mW (20.9 dBm) maximum transmit power not including antenna per FCC/IC, or 400 mW (26.0 dBm) maximum EIRP including antenna for USA and Canadian locations</p> <p>EU Selection – 10 mW (10.0 dBm) maximum EIRP including antenna per RTTE/ETSI for EU locations.</p>
Data	<p>PV Data Publish Cycle Time: Configurable from 5 seconds to 1 minute, (HART PV every 5 seconds minimum)</p> <p>Rate: 250 Kbps</p> <p>ISA100.11a Compliant output</p>
Antenna	Integral – 2.5 dBi omnidirectional monopole
Signal Range*	<p>OWA 100 Adapter to FDAP: Nominal 305 m (1,000 feet) with a clear line of sight</p> <p>Two OWA's both having TX Power set to 14 dBm with a clear line of site nominal signal range is 240 m (790ft.)</p> <p>An XYR 6000 transmitter having TX Power set to 16 dBm and an OWA with TX Power set to 14 dBm with a clear line of site nominal signal range is 170 m (560ft.)</p>

Parameter Routing vs. non-Routing"	Specification - Unit can be set as a Field Routing or non-Field Routing device; the number of routing devices is set by the system manager. Using the device as a routing device will impact battery life, the more messages routed through a device, the greater the impact on battery life.
CE Conformity	These transmitters conform with the protection requirements of European Council Directives: 2004/108/EC, the EMC Directive and 1999/5/EC, the Radio & Telecommunications Directive per EN 300 328, V1.7.1 (2004-11), EN 300 489-1, V1.6.1 (2005-09), EN 300 489-17, V1.2.1 (2002-08), EN 301 893 V1.4.1 and EN 61326-1:2005, Electrical Equipment for Measurement, Control and Laboratory Use – EMC Requirements

* Actual range can vary depending on site topography.

Hazardous Location Certifications	<p>c CSA us - Intrinsic Safety - Entity CL I, II, III, Div 1, GPs A-G; T4 Ta = 85°C; Ex ia IIB; T4; Ex tb IIIC T90°C IP66 Amb Temp: -40°C ≤ Ta ≤ +70°C; Encl: Type 4x/ IP46</p> <p>c CSA us - Non Incendive - CL I, Div 2, GPs CD; CL II, Div 2, GPs F & G; Suitable for CL III, Div 2; T4; CL I, Zone 2 AEx nA IIB, T4; Amb Temp: -40°C ≤ Ta ≤ +85°C Encl: Type 4x/ IP46</p> <p>IECEX - DEKRA- Intrinsic Safety Ex ia IIB; T4; Ex tb IIIC T90°C, IP66; Amb Temp: -40°C ≤ Ta ≤ +70°C; Encl: IP66</p> <p>IECEX -DEKRA- Non Sparking Ex nA IIB T4, Gc; Zone 22, Ex tb IIIC T90°C IP66, Dc; -40°C ≤ Ta ≤ +85°C; Encl: IP66</p>
	<p>ATEX - DEKRA- Intrinsic Safety</p> <p> II 1 G Ex ia IIB T4 ; II 1 D Ex tb IIIC T90°C, IP66 ; Amb Temp: -40°C ≤ Ta ≤ +70°C ; Encl: IP66</p> <p>ATEX - DEKRA- Non Sparking</p> <p> II 3 G Ex nA IIB T4 ; II 3 D Ex tb IIIC T90°C IP66 ; -40°C ≤ Ta ≤ +85°C ; Encl: IP66</p>

Wiring

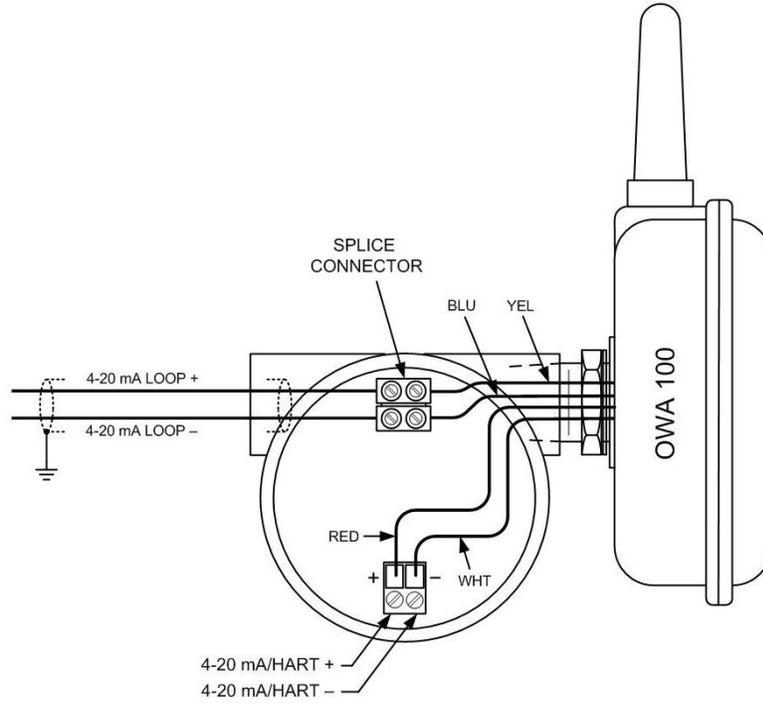


Figure 2 - OWA 100 – TWO-WIRE CONFIGURATION HART DEVICE

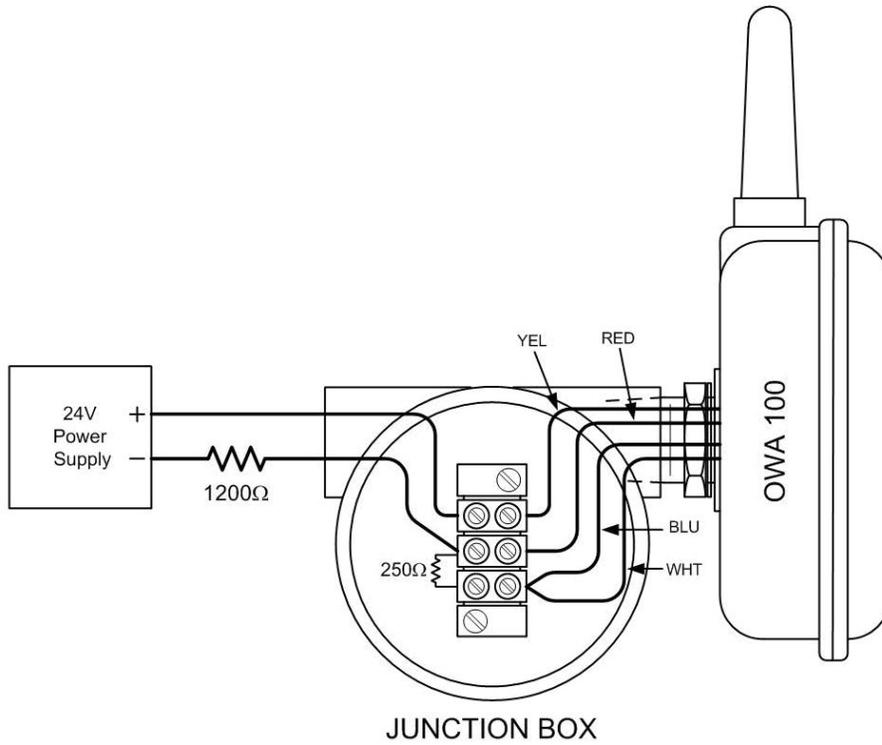


Figure 3 OWA 100 – AS A ROUTER, NO WIRED DEVICE

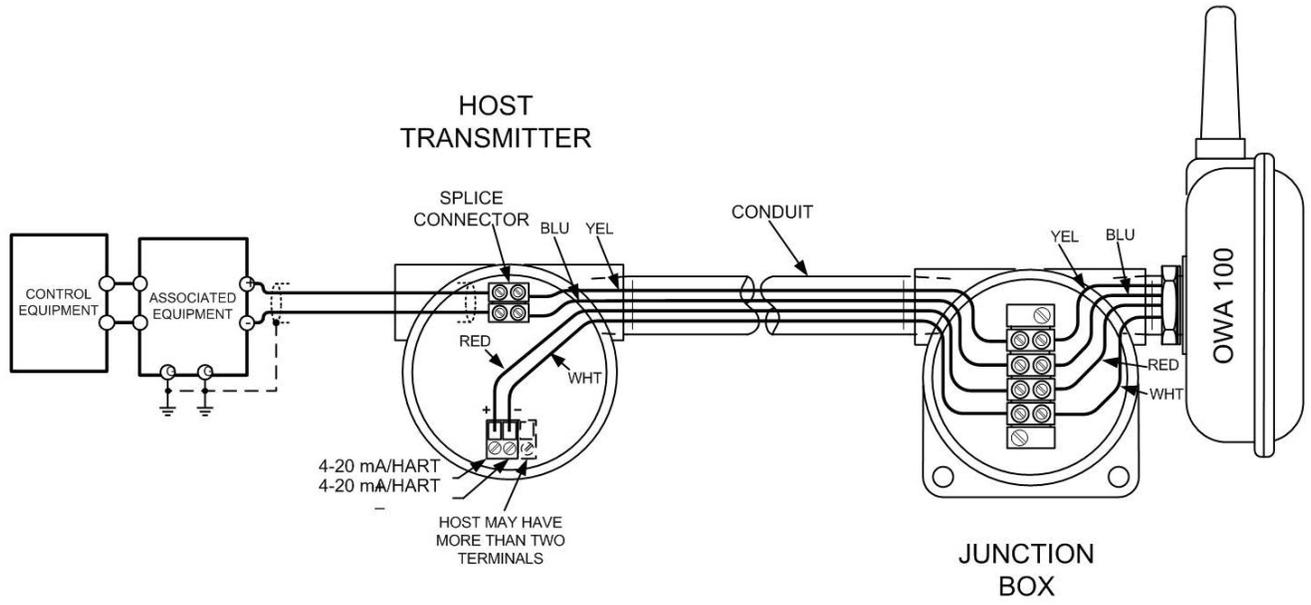


Figure 4 REMOTE INSTALLATION

Dimensions (mm/inches)

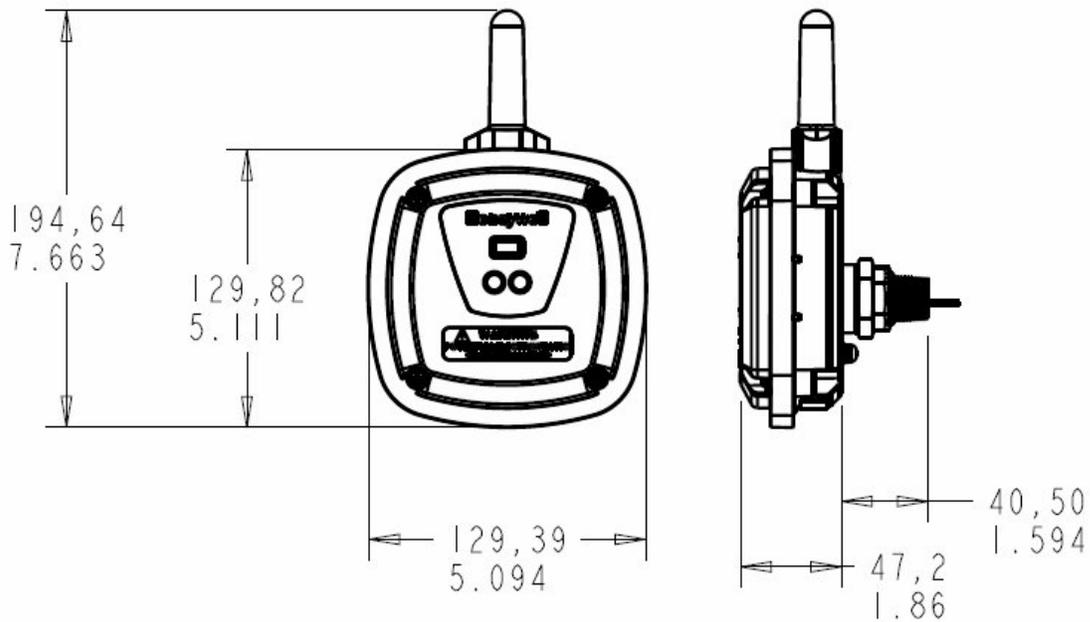


Figure 5 —Example of typical mounting position
Typical mounting dimensions for reference only

Sales and Service

For application assistance, current specifications, pricing, or name of the nearest Authorized Distributor, contact one of the offices below.

Asia Pacific Global Technical Support

Field Instruments
Phone: +65 6580 3156
Fax: +65 6445-3033

Australia

Honeywell Limited
Phone: +(61) 7-3846 1255
FAX: +(61) 7-3840 6481
Toll Free 1300-36-39-36
Toll Free Fax:
1300-36-04-70

China – PRC - Beijing

Honeywell China Inc.
Phone: +(86-10) 8458-3280
Fax: +(86-10) 8458-4650

China – PRC - Shanghai

Honeywell China Inc.
Phone: (86-21) 5257-4568
Fax: (86-21) 6237-2826

China – PRC - Chengdu

Honeywell China Inc.
Phone: +(86-28) 6613-5078
Fax: +(86-28) 8678-7061

China – PRC - Xi'an

Honeywell China Ltd - Xi'an.
Phone: +(86-29) 8833-7490
Fax: +(86-29) 8833-7489

China – PRC - Shenzhen-

Honeywell China Inc.
Phone: +(86) 755-2518-1226
Fax: +(86) 755-2518-1221

Indonesia

PT Honeywell Indonesia
Phone: +(62) 21-535-8833
FAX: +(62) 21-5367 1008

Honeywell Automation

India Ltd.
Honeywell Ltd.
Phone: +(91) 6603-9400
Fax: +(91) 6603-9600

Japan

Honeywell Inc.
Phone: +(81) 3 6730 7197
Fax: +(81) 3 6730 7228

Malaysia

Honeywell Engineering Sdn Bhd
Phone: +(603) 7958-4788
Fax: +(603) 7958-8922

New Zealand

Honeywell Limited
Phone: +(64-9) 623-5050
Fax: +(64-9) 623-5060
Toll Free (0800) 202-088

Singapore

Honeywell Pte Ltd.
Phone: +(65) 6580 3278
Fax: +(65) 6445-3033

South Korea

Honeywell Korea Co Ltd
Phone: +(822) 799 6114
Fax: +(822) 792 9015

Thailand

Honeywell Systems (Thailand) Ltd.
Phone: +(662) 693-3099
FAX: +(662) 693-3089

Taiwan R.O.C.

Honeywell Taiwan Ltd.
Phone: +(886-2) 2245-1000
FAX: +(886-2) 2245-3243

SE Asia Countries

see Honeywell Pte Ltd (Singapore)
for: Philippines, Pakistan, Cambodia, Guam, Laos, Myanmar, Vietnam, East Timor

SE Asia Countries

see Honeywell Automation India Ltd for: Bangladesh, Nepal, Sri Lanka

EUROPE

Austria
Honeywell Austria GmbH
Phone: +43 (316)400123
FAX: +43 (316)40017

Belgium

Honeywell SA/NV
Phone: +32 (0)2728 24 07
FAX: +32 (0)2728 22 45

Bulgaria

Honeywell EOOD
Phone: +(359) 2 40 20 900
FAX: +(359) 2 40 20 990

Czech Republic

Honeywell spol. s.r.o.
Phone: +420 242 442 232
FAX: +420 242 442 131

Denmark

Honeywell A/S
Phone: +(45) 39 55 55 55
FAX: +(45) 39 55 55 58

Finland

Honeywell OY
Phone: +358 (0)20752 2753
FAX: +358 (0) 20752 2751

France

Honeywell SA
Phone: +33 (0)1 60198075
FAX: +33 (0)1 60198201

Germany

Honeywell AG
Phone: +49 (69)8064-299
FAX: +49 (69)806497336

Hungary

Honeywell Kft.
Phone: +36-1-451 4300
FAX: +36-1-451 4343

Italy

Honeywell S.p.A.
Phone: +390292146307
FAX: +39 0292146377

The Netherlands

Honeywell B.V.
Phone: +31 (0) 20 5656200
FAX: +31 (0) 20 5656210

Norway

Honeywell A/S
Phone: (45) 39 55 55 55

Poland

Honeywell Sp. zo.o
Phone: +48-22-6060900
FAX: +48-22-6060901

Portugal

Honeywell Portugal Lda
Phone: +351 21 424 5000
FAX: +351 21 424 50 99

Romania

Honeywell Bucharest
Phone: +40 (0) 21 2316437
FAX: +40 (0) 21 2316439

Russian Federation (RF),

Honeywell Field Solutions
Kievskaya str., 7,
Moscow 121059, Russia
Phone +7 (495) 796 98 60
Fax +7 (495) 797 99 64

Slovak Republic

Honeywell s.r.o.
Phone: +421-2-58247 410
FAX: +421-2-58247 415

Spain

Honeywell S.A.
Phone: +34 (0)91313 61 00
FAX: +34 (0)91313 61 30

Sweden

Honeywell AB
Phone: +(46) 8 775 55 00
FAX: +(46) 8 775 56 00

Switzerland

Honeywell AG
Phone: +41 18552448
FAX: +(41) 1 855 24 45

Turkey

Honeywell Turkey A.S.
Phone: +90 216 578 71 00
FAX: +90 216 575 66 35

Ukraine

Honeywell
Tel: +380-44-201 44 74
Fax: +380-44-201-44-75

United Kingdom

Honeywell Control Systems Ltd.
Phone: +44 (0)1344 655251
FAX: +44 (0) 1344 655554

MIDDLE EAST
Abu Dhabi U A E

Middle East Headquarters
Honeywell Middle East Ltd.
Phone: +971 2 4041246
FAX: +971 2 4432536

Sultanate of Oman

Honeywell & Co Oman LLC
Phone: +968 24 701153/
Ext.33
FAX +968 24 787351

Saudia Arabia

Honeywell Turki Arabia Ltd
Jubail Office
Phone: +966-3-341-0140
Fax: +966-3-341-0216
Honeywell - ATCO
Dammam Office
Phone: 0096638304584
Fax: 0096638338059

Kuwait

Honeywell Kuwait KSC
Phone: +965 242 1327 to 30
Fax: +965 242 8315
And
Phone: +965 326
2934/1821Fax: +965 326
1714

AFRICA
Mediterranean & African

Distributors
Honeywell SpA
Phone: +39 (02) 250 10 604
FAX: +39 (02) 250 10 659

South Africa (Republic of) and sub saharan

Honeywell Southern Africa
Honeywell S.A. Pty. Ltd.
Phone: +27 11 6958000
FAX +27 118051504

NORTH AMERICA
Canada

Honeywell LTD
Phone: 1-800-737-3360
FAX: 1-800-565-4130

USA

Honeywell Process Solutions,
Phone: 1-800-423-9883
Or 1-800-343-0228
Email: ask-ssc@honeywell.com

SOUTH AMERICA
Argentina

Honeywell S.A.I.C.
Phone: +(54-11) 4383-3637
FAX: +(54-11) 4325-6470

Brazil

Honeywell do Brasil & Cia
Phone: +(55-11) 7266-1900
FAX: +(55-11) 7266-1905

Chile

Honeywell Chile, S.A.
Phone: +(56-2) 233-0688
FAX: +(56-2) 231-6679

Mexico

Honeywell S.A. de C.V.
Phone: +(52) 55 5259-1966
FAX: +(52) 55 5570-2985

Puerto Rico

Honeywell Inc.
Phone: +(809) 792-7075
FAX: +(809) 792-0053

Trinidad

Honeywell Inc.
Phone: +(868) 624-3964
FAX: +(868) 624-3969

Venezuela

Honeywell CA
Phone: +(58-2) 238-0211
FAX: +(58-2) 238-3391

Specifications are subject to change without notice.

Model Selection Guides are subject to change and are inserted into the specifications as guidance only. Prior to specifying or ordering a model check for the latest revision Model Selection Guides which are published at: <http://hpsweb.honeywell.com/Cultures/en-US/Products/Instrumentation/ProductModelSelectionGuides/default.htm>

Model Selection Guide (34-XY-16-93)



Section 13
Issue 1
Page 1 of 1


OneWireless Adapter OWA 100

Model Selection Guide

Model Selection Guide
34-XY-16-93 Issue 1

Instructions

- Select key number.
- Make one selection from each table, I and II, using the column below the proper arrow.
- A (♦) denotes unrestricted availability. A letter denotes restricted availability.



KEY NUMBER		Availability	
Description	Selection		
OneWireless Adapter	WA100		↓

Table I Options

Housing & Electronics Options			
M20 316 SS Conduit Adaptor	1	----	•
1/2" NPT 316 SS Conduit Adapter	2	----	•
Battery Option			
Battery Holder Only - No Battery Included	_ 0	----	•
Battery Power	- 1	----	•
Approvals	Location or Classification (see listing below)		
No approvals	__ 0	----	•
CSA cus, IECEX & ATEX	__ 1	----	•
Factory Mutual	__ 2	----	•
No Selection			
No Selection	___ 0	---	•
Manual Option			
User Manual (CD)	___ C	---	•
User Manual (Paper Copy)	___ P	---	•
Certificate Options			
None	_____ 0	-----	•
Certificate of Conformance (F3391)	_____ 1	-----	•
Certificate of Origin (F0195)	_____ 2	-----	•
Certificate of Origin (F0195) & Conformance (F3391)	_____ 3	-----	•

Table II - Country Code

Description			
North America, Canada		A	•
European Union		E	•

Table III - Factory Use

Description			
Factory Identification		000	•

RESTRICTIONS				
Restriction Letter	Available Only With		Not Available With	
	Table	Selection	Table	Selection

OneWireless and XYR are trademarks and Experion is a registered trademark of Honeywell International Inc.

For More Information

Learn more about how Honeywell's OWA 100 OneWireless Adapter can increase performance, reduce downtime and decrease configuration costs, visit our website www.honeywell.com/ps/wireless or contact your Honeywell account manager.

Honeywell Process Solutions

1860 West Rose Garden Lane
Phoenix, Arizona 85027
Tel: 1-800-423-9883 or 1-800-343-0228
www.honeywell.com/ps/hfs

34-XY-03-43
June 2011
© 2011 Honeywell International Inc.

Honeywell