


WHAT ARE YOU LOOKING AT...?



FlexScan®

Business Enterprise Monitor Solutions

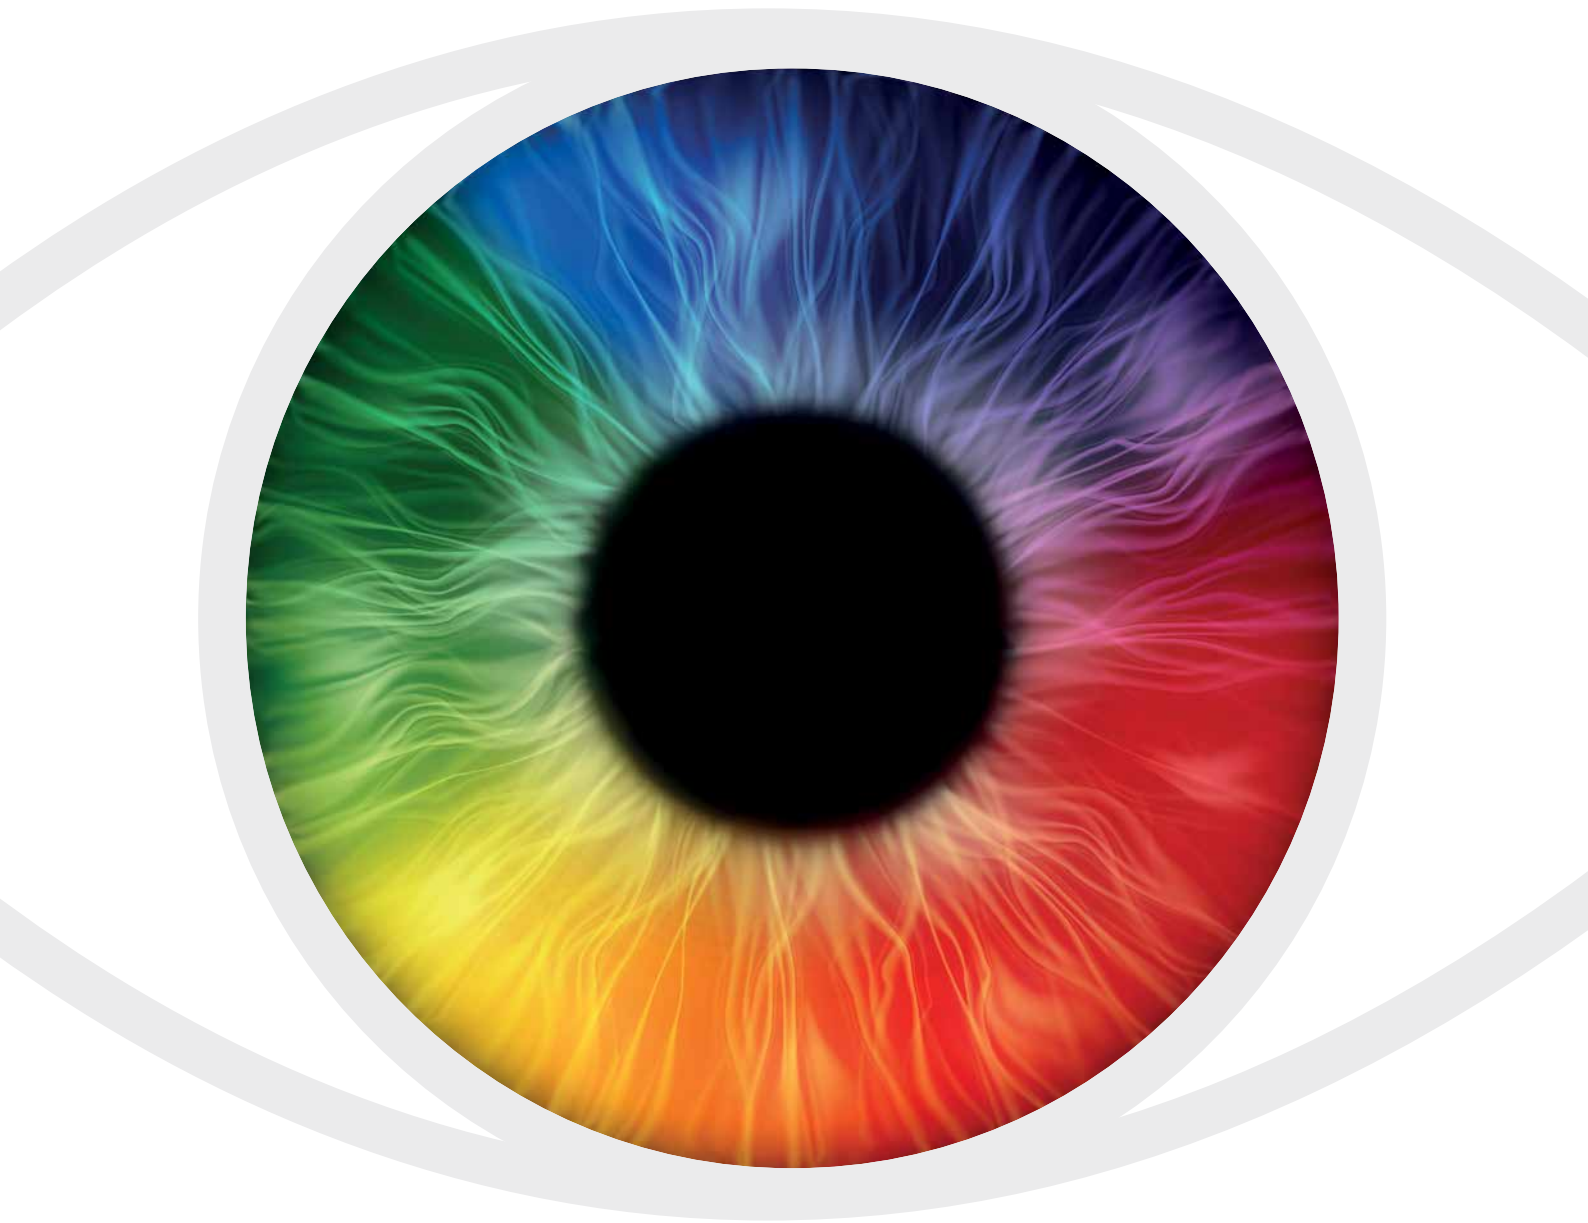








EIZO only makes monitors, and has done for nearly 50 years, so we're absolutely focused on them being the best you can buy. We put all of our considerable experience into making them a great investment for your business and in this brochure we'll explain just why you should look no further...

FlexScan®

Business Enterprise Monitor Solutions

	...47 YEARS OF INDUSTRY EXPERIENCE	4
	...QUALITY THAT'S GUARANTEED TO LAST	6
	...EXCELLENCE THAT WON'T COST THE EARTH	8
	...TECHNOLOGY THAT CARES ABOUT THE USER	10
	...30 DAYS TO SEE IT FOR YOURSELF	12
	SOFTWARE	13
	FLEXSCAN RANGE	14



...47 YEARS OF INDUSTRY EXPERIENCE

Founded in 1968, EIZO has been designing and manufacturing market leading monitors ever since.



AN INTEGRATED APPROACH

Our entire business is focused on delivering the benefits that our customers expect; improving designs, developing new features and harnessing the very latest technological advances.

The business prides itself in an integrated approach to research and development, quality control and manufacturing — and it's this philosophy that sets FlexScan apart from other business monitors.

We look closely at every aspect of design and manufacture to ensure that an EIZO monitor is better from top to bottom. We source better materials, insist on better quality and testing, deliver better green credentials and design features to make our monitors better for users.



MANUFACTURING

Our manufacturing process combines manual and automated operations to ensure high quality products are made as efficiently as possible.

To more efficiently perform mechanical tasks, automated operations take advantage of robotic and CCD (charge coupled device) camera technologies.

Manual operations are performed for assembly tasks that cannot be automated, so we verify image quality with something that no other manufacturer has; our eyes.



AWARDS




Gold Award Hardware Info Dec 2014
(FlexScan EV2450)



Silver Award Hardware Info Dec 2014
(FlexScan EV2455)

"It is rare that a monitor comes as close to perfection as these two models!"



RESEARCH AND DEVELOPMENT

EIZO's purpose built R&D centre in Japan is the culmination of years of considerable investment. Here, all the engineers who develop EIZO products are in one location, allowing for improved collaboration, greater efficiency and reduced development time.

Our highly skilled team could even be accused of being slightly obsessed with developing all of the little advancements that make a big difference to the end result.



...QUALITY THAT'S GUARANTEED TO LAST

We're so confident in the design and build quality of our FlexScan range that we'll give you a 5 year warranty, reducing your cost of ownership and putting your mind at ease.

QUALITY CONTROL

Safety and reliability are hallmarks of FlexScan monitors and we work hard to maintain our incredibly low failure rate.

COMPLIANCE

EIZO has its own anechoic chambers that we use to confirm that our products comply with international regulations covering electromagnetic interference (EMI) and susceptibility.



LIFE-LONG TESTING

And, to be absolutely sure of durability, we also conduct long-life testing where our monitors are kept powered up for tens of thousands of hours and their image quality is regularly checked.



TÜVRheinland®

The EIZO FlexScan EV series monitors have been certified by TÜV Rheinland Japan, recognising their low blue light and flicker-free quality based on new 2PFG standards established by TÜV Rheinland.



THE INDUSTRY'S ONLY 5 YEAR WARRANTY AS STANDARD

As more desktop LCD monitor brands outsource development and production to third parties, we remain convinced that the best way to deliver the quality that our customers expect is to maintain our in-house approach.

Importantly, this gives us the confidence to back them up with the industry's only 5 year manufacturer's warranty as standard.

Cost of ownership is therefore reduced over the life of the monitor when comparing EIZO to other cheaper manufacturers.



	FULL PRICE	WARRANTY	COST PER YEAR
EIZO MONITOR	£100	5 YEARS	£20
CHEAPER MONITOR	£90	3 YEARS	£30

This table is for illustrative purposes only.



...EXCELLENCE THAT WON'T COST THE EARTH

Lower your costs and save the planet with our market leading features that reduce energy consumption by up to 63%.

SAVE MONEY & THE ENVIRONMENT

EIZO's range of FlexScan EcoView monitors contribute to increased user comfort, reduced environmental burden, and lower running costs.

LED BACKLIGHTS

- Last longer and consume less power than CCFL
- Mercury-free for minimal environmental impact.

FUSION DESIGN

FLEXSCAN SERIES EV2450 AND EV2455:

- Reduced power consumption
- Improved visual ergonomics
- Extremely compact cabinet.

COMPLIANCE WITH INTERNATIONAL LABELS




AUTO ECOVIEW - 49% ENERGY SAVING

- Brightness sensor automatically lowers brightness according to ambient lighting.



ECOVIEW SENSE - 63% ENERGY SAVING

- Switches to power save mode when you are absent
- Turns power on again when you return
- Works in a multi-monitor setup so all monitors remain on when you're at your desk.



ECOVIEW OPTIMIZER 2 - UP TO 30% ENERGY SAVING

- Reduces backlight brightness
- Maintains image quality by increasing gain.

HOW GREEN IS YOUR LCD MONITOR COMPARED TO EIZO'S FLEXSCAN ECOVIEW MONITORS?



EcoView

www.eizo.co.uk/flexscan/calculator



...TECHNOLOGY THAT CARES ABOUT THE USER

Our monitors feature a huge range of practical benefits so users can say goodbye to tired eyes and say hello to greater productivity.

MULTIPLE PRESET MODES

FOR OPTIMUM VIEWING OF DIFFERENT KINDS OF CONTENT:

- Choose from paper mode, sRGB, Movie mode and Custom mode (user-defined settings)
- Switch between modes with the press of a button or automatically with the bundled ScreenManager Pro for LCD software.

WORLD'S THINNEST BEZELS

FLEXSCAN EV2455 AND EV2450 FEATURE 1MM ULTRA-SLIM BEZELS ON THE SIDES AND TOP FOR MULTI-MONITOR ENVIRONMENTS:

- Attractive design that blends in with the desktop
- Reduces eye movement in a multi-monitor setup.

CONVENIENT MULTITASKING

FLEXSCAN EV3237:

PICTURE-BY-PICTURE (PBYP):

- View data from multiple signal sources on a single screen.

PICTURE IN PICTURE (PINP):

- Display small separate screen from second signal source within the monitor
- Multitask, such as viewing a video conference while working in other applications.

ADJUSTABLE POSITIONING

AN ERGONOMIC STAND ALLOWS THE MONITOR TO BE ADJUSTED TO THE MOST COMFORTABLE POSITION:

Adjustable height: up to 140mm
Rotation: from 90° to +/- 90°
Tilt: from -5° to 40°
Swivel: up to 344°

MULTIPLE INPUTS

D-Sub mini / DisplayPort / HDMI / DVI-D / USB Upstream / USB 2.0 / USB 3.0 / Audio / Headphones

CLEAR VIEW FROM ALL ANGLES

- LED-backlit IPS / TN (in-plane switching) LCD panel
- 160° - 178° viewing angle
- Minimises colour shift and contrast changes when viewing at an angle.

FLICKER-FREE

- Flicker is imperceptible, without compromising colour stability
- In an ELIZO test, FlexScan EV2455 and EV2450 proved to reduce flicker by more than 74% compared to other manufacturers
- Minimises eye fatigue.

ADJUSTABLE BRIGHTNESS

FLEXSCAN EV2455 AND EV2450 LED BACKLIGHTS ARE ADJUSTABLE TO 1 CD/M²:

- Less than 1% of the maximum
- More comfortable in dimly lit work environments.

CONVENIENCE BUILT-IN

- Carrying handle
- Cable holder
- Speakers in the back

REDUCES EYE FATIGUE


PAPER MODE SETTING:

- Reduces the amount of blue light, a cause of eye fatigue
- Helps prevent eyestrain when reading documents.



...30 DAYS TO SEE IT FOR YOURSELF

We have total belief in EIZO products but please don't just take our word for it...



To see for yourself why Flexscan is the very best monitor you can buy for your money, just ask about our 30 Day Free Trial.



Call **01344 317495** for more information or fill in the contact form at www.eizo.co.uk/flexscan



SOFTWARE

POWER MANAGEMENT SOFTWARE

- Helps organisations take advantage of the ergonomic and energy-saving features
- Allows a network administrator to adjust brightness and power settings from a central location
- Compatible with Windows 7, Vista, and XP (and is available free of charge).

EIZO SCREENSLICER

- Allows an entire screen to be effectively used through partitioning
- Multiple windows can be easily aligned and dropped into the partitioned areas in single or multi-monitor environments
- Compatible with Windows 8.1, 8, 7 and Vista.



SCREENMANAGER PRO FOR PERSONAL SETTINGS

- Lets users adjust colour and EcoView settings with the mouse and keyboard instead of the on-screen display menu
- Offers multi-monitor matching which allows adjustments to be applied to all FlexScan monitors connected to a single PC.














EIZO MONITOR CONFIGURATOR FOR ADMINISTRATORS

- Allows system administrators to control the settings of all FlexScan EV monitors with a USB connection
- The settings of one monitor can be saved as an xml file and can apply to other monitors via USB or office network.

FlexScan® EV3237

CAD, business, gaming or video – this 31.5-inch monitor does it all. With its 4K UHD resolution and 60 Hz refresh rate, the FlexScan EV3237 provides you with an exceptional experience no matter the application.



- **CONVENIENT MULTITASKING**
- **REDUCES EYE FATIGUE**
- **FLICKER-FREE**
- **MULTIPLE INPUTS**
- **CLEAR VIEW FROM ALL ANGLES**
- **MULTIPLE PRESET MODES**
- **ADJUSTABLE POSITIONING**
- **LED BACKLIGHTS**
- **CARRYING HANDLE, CABLE HOLDER & SPEAKERS**
- **ECOVIEW SENSE**
- **AUTO ECOVIEW**
- **ECOVIEW OPTIMIZER 2**
- **COMPLIANCE WITH INTERNATIONAL LABELS**













PANEL		VIDEO SIGNALS	
• Type:	IPS	• Input Terminals:	DisplayPort 1.2 x 2 (with HDCP 1.x), DVI-D 24 pin x 1 (with HDCP 1.x), HDMI x1 (with HDCP 1.x)
	LED		• Digital (H / V): 31 - 134 kHz, 29 - 31 Hz and 59 - 61 Hz
• Size:	31.5" / 80 cm (799 mm diagonal)		
• Native Resolution:	DisplayPort: 3840 x 2160 (60 Hz, 16:9 aspect ratio)		
	DVI / HDMI: 3840 x 2160 (30 Hz, 16:9 aspect ratio)		
• Viewable Image Size (H x V):	696.9 x 392.0 mm		
• Pixel Pitch:	0.1815 x 0.1815 mm		
• Display Colours:	16.77 million		
• Viewing Angles (H / V, typical):	178°, 178°		
• Brightness (typical):	300 cd/m²		
• Contrast Ratio (typical):	1000:1		
• Response Time (typical):	5 ms (grey-to-grey)		
		USB	
		• Function:	1 port for up stream 3-port USB hub (including 1 USB battery charge port)
		• Standard:	USB 3.0, USB BC 1.2

With current LCD technology, a panel may contain a limited number of missing or flickering pixels.
If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximise the life of the monitor, we recommend the monitor be turned off periodically.

FlexScan® EV2750

Ultra-thin and fully flat. A design as elegant as it is practical. The generous 27-inch screen is flush with the 1 mm bezels for a completely flat surface from corner to corner. The refined look is complimented by picture-by-picture capability, a flexible stand, and EIZO's EcoView technologies.



- **1MM BEZEL**
- **REDUCES EYE FATIGUE**
- **FLICKER-FREE**
- **MULTIPLE INPUTS**
- **CLEAR VIEW FROM ALL ANGLES**
- **MULTIPLE PRESET MODES**
- **ADJUSTABLE POSITIONING**
- **LED BACKLIGHTS**
- **CARRYING HANDLE, CABLE HOLDER & SPEAKERS**
- **AUTO ECOVIEW**
- **ECOVIEW OPTIMIZER 2**
- **COMPLIANCE WITH INTERNATIONAL LABELS**

PANEL		VIDEO SIGNALS	
• Type:	IPS	• Input Terminals:	DisplayPort x 1, DVI-D 24 pin x 1 (with HDCP), HDMI x1 (with HDCP)
	LED		• Digital (H / V): 31 - 89 kHz, 59 - 61 Hz
• Size:	27" / 68.5 cm		
• Native Resolution:	2560 x 1440 (16:9 aspect ratio)		
• Viewable Image Size (H x V):	596.7 x 335.7 mm		
• Pixel Pitch:	0.233 x 0.233 mm		
• Display Colours:	16.77 million		
• Viewing Angles (H / V, typical):	178°, 178°		
• Brightness (typical):	300 cd/m²		
• Contrast Ratio (typical):	1000:1		
• Response Time (typical):	5 ms (grey-to-grey)		
		USB	
		• Function:	1 port for up stream 2-port USB hub
		• Standard:	USB 3.0

With current LCD technology, a panel may contain a limited number of missing or flickering pixels.
If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximise the life of the monitor, we recommend the monitor be turned off periodically.

FlexScan® EV2455

This monitor features a new “Fusion” design that combines EIZO’s own EcoView technologies, for reduced power consumption and improved visual ergonomics, inside an extremely compact cabinet.



530.8mm / 1920 pixels

347.2mm / 1200 pixels

24.1"

233mm

1MM BEZEL

REDUCES EYE FATIGUE

FLICKER-FREE

MULTIPLE INPUTS

CLEAR VIEW FROM ALL ANGLES

ADJUSTABLE BRIGHTNESS

5 Year Warranty

5 YEAR WARRANTY AS STANDARD

ECOVIEW SENSE

AUTO ECOVIEW

ECOVIEW OPTIMIZER 2

FUSION DESIGN

COMPLIANCE WITH INTERNATIONAL LABELS

MULTIPLE PRESET MODES

ADJUSTABLE POSITIONING

LED BACKLIGHTS

CARRYING HANDLE, CABLE HOLDER & SPEAKERS

PANEL		VIDEO SIGNALS	
<ul style="list-style-type: none">• Type:• Backlight:• Size:• Native Resolution:• Viewable Image Size (H x V):• Pixel Pitch:• Display Colours:• Viewing Angles (H / V, typical):• Brightness (typical):• Contrast Ratio (typical):• Response Time (typical):	IPS	<ul style="list-style-type: none">• Input Terminals:• Digital (H / V):• Analog (H / V):• Sync Formats:	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), HDMI x 1 (with HDCP), DisplayPort x 1 (with HDCP)
	LED		
	24.1" / 61 cm (611 mm diagonal)		
	1920 x 1200 (16:10 aspect ratio)		
	518.4 x 324.0 mm		
	0.270 x 0.270 mm		
	16.77 million		
	178°, 178°		
	300 cd/m²		
	1000:1		
	5 ms (grey-to-grey)		
USB			
		<ul style="list-style-type: none">• Function:• Standard:	1 port for monitor control 2-port USB hub USB 3.0

With current LCD technology, a panel may contain a limited number of missing or flickering pixels.
If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximise the life of the monitor, we recommend the monitor be turned off periodically.

FlexScan® EV2450

This monitor features a new “Fusion” design that combines EIZO’s own EcoView technologies, for reduced power consumption and improved visual ergonomics, inside an extremely compact cabinet.



537.6mm / 1920 pixels

317.6mm / 1080 pixels

23.8"

233mm

1MM BEZEL

REDUCES EYE FATIGUE

FLICKER-FREE

MULTIPLE INPUTS

CLEAR VIEW FROM ALL ANGLES

ADJUSTABLE BRIGHTNESS

5 Year Warranty

5 YEAR WARRANTY AS STANDARD

ECOVIEW SENSE

AUTO ECOVIEW

ECOVIEW OPTIMIZER 2

FUSION DESIGN

COMPLIANCE WITH INTERNATIONAL LABELS

MULTIPLE PRESET MODES













ADJUSTABLE POSITIONING

LED BACKLIGHTS

CARRYING HANDLE, CABLE HOLDER & SPEAKERS

PANEL		VIDEO SIGNALS	
<ul style="list-style-type: none">• Type:• Backlight:• Size:• Native Resolution:• Viewable Image Size (H x V):• Pixel Pitch:• Display Colours:• Viewing Angles (H / V, typical):• Brightness (typical):• Contrast Ratio (typical):• Response Time (typical):	IPS	<ul style="list-style-type: none">• Input Terminals:• Digital (H / V):• Analog (H / V):• Sync Formats:	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), HDMI x 1 (with HDCP), DisplayPort x 1 (with HDCP)
	LED		
	23.8" / 60 cm (604 mm diagonal)		
	1920 x 1080 (16:9 aspect ratio)		
	527 x 296.4 mm		
	0.2745 x 0.2745 mm		
	16.77 million		
	178°, 178°		
	250 cd/m²		
	1000:1		
	5 ms (grey-to-grey)		
USB			
		<ul style="list-style-type: none">• Function:• Standard:	1 port for monitor control 2-port USB hub USB 3.0

With current LCD technology, a panel may contain a limited number of missing or flickering pixels.
If the monitor is left on continuously over a long period of time, dark smudges or burn-in may appear. To maximise the life of the monitor, we recommend the monitor be turned off periodically.


4K UHD			ULTRA SLIM SERIES			ULTRA SLIM FULL HD			SLIM SERIES				SQUARE SERIES														
																											
FlexScan EV3237			FlexScan EV2750			FlexScan EV2455			FlexScan EV2450			FlexScan EV2736W		FlexScan EV2436W		FlexScan EV2336W		FlexScan EV2416W		FlexScan EV2316W		FlexScan EV2216W		FlexScan S2133		FlexScan S1933	
CABINET COLOUR			Grey, Black			White, Black			White, Grey, Black			Grey, Black		Grey, Black		Grey, Black		Grey, Black		Grey, Black		Grey, Black		Grey, Black		Grey, Black	
MODEL VARIATIONS			With FlexStand, Without Stand			With FlexStand, Without Stand			With FlexStand, Without Stand			With FlexStand, Without Stand		-		-		-		-		-		With Height Adjustable Stand, Without Stand		With Height Adjustable Stand, Without Stand	
PANEL	Type	IPS	IPS	IPS	IPS	IPS	IPS	IPS	IPS	TN	TN	TN	TN	TN	TN	TN	TN	IPS	IPS								
	Backlight	LED	LED	LED	LED	LED	LED	LED	LED	LED	LED	LED	LED	LED	LED	LED	LED	LED	LED								
	Size	31.5" / 80 cm (799 mm diagonal)	27" / 68.5 cm	24.1" / 61 cm (611 mm diagonal)	23.8" / 60 cm (604 mm diagonal)	27" / 68 cm (684 mm diagonal)	24.1" / 61 cm (611 mm diagonal)	23" / 58 cm (584 mm diagonal)	24.1" / 61 cm (611 mm diagonal)	23" / 58 cm (584 mm diagonal)	22" / 56cm (558 mm diagonal)	21.3" / 54 cm (540 mm diagonal)	19" / 48cm (481mm diagonal)														
	Native Resolution	DisplayPort: 3840 x 2160 (60 Hz, 16:9 aspect ratio) DVI / HDMI: 3840 x 2160 (30 Hz, 16:9 aspect ratio)	2560 x 1440 (16:9 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	1920 x 1080 (16:9 aspect ratio)	2560 x 1440 (16:9 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	1920 x 1080 (16:9 aspect ratio)	1920 x 1200 (16:10 aspect ratio)	1920 x 1080 (16:9 aspect ratio)	1680 x 1050 (16:10 aspect ratio)	1600 x 1200 (4:3 aspect ratio)	1280 x 1024 (5:4 aspect ratio)														
	Viewable Image Size (H x V)	696.9 x 392.0 mm	596.7 x 335.7 mm	518.4 x 324.0 mm	527.4 x 296.4 mm	596.7 x 335.6 mm	518.4 x 324 mm	509.1 x 286.4 mm	518.4 x 324.0 mm	509.8 x 286.7 mm	473.7 x 296.1 mm	432 x 324mm	376.3 x 301 mm														
	Pixel Pitch	0.1815 x 0.1815 mm	0.233 x 0.233 mm	0.270 x 0.270 mm	0.2745 x 0.2745 mm	0.233 x 0.233 mm	0.270 x 0.270 mm	0.2652 x 0.2652 mm	0.270 x 0.270 mm	0.2655 x 0.2655 mm	0.282 x 0.282 mm	0.270 x 0.270 mm	0.294 x 0.294 mm														
	Display Colours	16.77 million	16.77 million	16.77 million	16.77 million	16.77 million	16.77 million	16.77 million	16.77 million	16.77 million	16.77 million	16.77 million from a palette of 1.06 billion	16.77 million from a palette of 1.06 billion														
	Viewing Angles (HxV, typ.)	178°, 178°	178°, 178°	178°, 178°	178°, 178°	178°, 178°	178°, 178°	178°, 178°	170°, 160°	170°, 160°	170°, 160°	178°, 178°	178°, 178°														
	Brightness (typical)	300 cd/m2	350 cd/m2	300 cd/m2	250 cd/m2	300 cd/m2	300 cd/m2	250cd/m2	250 cd/m2	250 cd/m2	420 cd/m2	250 cd/m2															
Contrast Ratio (typical)	1000:1	1000:1	1000:1	1000:1	1000:1	1000:1	1000:1	1000:1	1000:1	1500:1	1000:1																
Response Time (typical)	5 ms (grey-to-grey)	5 ms (grey-to-grey)	5 ms (grey-to-grey)	5 ms (grey-to-grey)	6 ms (grey-to-grey)	6 ms (grey-to-grey)	6 ms (grey-to-grey)	5 ms (black-white-black)	5 ms (black-white-black)	5 ms (black-white-black)	6 ms (grey-to-grey)	14 ms (grey-to-grey)															
VIDEO SIGNALS	Input Terminals	DisplayPort 1.2 x 2 (with HDCP 1.x), DVI-D 24 pin x 1 (with HDCP 1.x), HDMI x1 (with HDCP 1.x)	DisplayPort x 1, DVI-D 24 pin x 1 (with HDCP), HDMI x1 (with HDCP)	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), HDMI x1 (with HDCP), DisplayPort x 1 (with HDCP)	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), HDMI x1 (with HDCP), DisplayPort x 1 (with HDCP)	DisplayPort x 1 DVI-D 24 pin x 1 (with HDCP)	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), DisplayPort x 1 (with HDCP)	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), DisplayPort x 1 (with HDCP)	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), DisplayPort x 1 (with HDCP)	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), DisplayPort x 1 (with HDCP)	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), DisplayPort x 1 (with HDCP)	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), DisplayPort x 1 (with HDCP)	D-Sub mini 15 pin x 1, DVI-D 24 pin x 1 (with HDCP), DisplayPort x 1 (with HDCP)														
	Digital (H, V)	31 - 134 kHz, 29 - 31 Hz and 59 - 61 Hz	31 - 89 kHz, 59 - 61 Hz	31 - 76 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz)	31 - 68 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz)	31 - 89 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz, WQHD SL: 29 - 31 Hz)	31 - 76 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz)	31 - 68 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz)	31 - 76 kHz, 59 - 61 Hz	DisplayPort: 31 - 67.5 kHz, 59 - 61 Hz DVI: 31 - 68.0 kHz, 59 - 61 Hz	31 - 76 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz)	31 - 64 kHz, 59 - 61 Hz (VGA Text: 69 - 71 Hz)															
	Analog (H, V)	-	-	31 - 81 kHz, 55 - 76 Hz	31 - 81 kHz, 55 - 76 Hz	-	31 - 81 kHz, 55 - 76 Hz	31 - 81 kHz, 55 - 76 Hz	31 - 76 kHz, 55 - 61 Hz	31 - 68 kHz, 55 - 61 Hz	24 - 80 kHz, 49 - 76 Hz	31 - 80 kHz, 50 - 75 Hz															
	Sync Formats	-	-	Separate	Separate	-	Separate	Separate	Separate	Separate	Separate, Composite	Separate, Sync on green															
USB	Function	1 port for up stream, 3-port USB hub (including 1 USB Battery charge port)	1 port for up stream, 2-port USB hub	1 port for monitor control, 2-port USB hub	1 port for monitor control, 2-port USB hub	1 port for up stream, 2-port USB hub	1 port for monitor control, 2-port USB hub	1 port for monitor control, 2-port USB hub	1 port for monitor control, 2-port USB hub	1 port for monitor control, 2-port USB hub	1 port for monitor control, 2-port USB hub	-															
	Standard	USB 3.0, USB BC 1.2	USB 3.0	USB 3.0	USB 3.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	USB 2.0	-															
AUDIO	Speakers	1.0 W + 1.0 W	1.0 W +1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W	1.0 W + 1.0 W	0.5 W + 0.5 W															
	Input Terminals	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack	3.5 mm stereo jack															
	Output Terminals	3.5 mm headphone jack	3.5 mm headphone jack	3.5 mm headphone jack	3.5 mm headphone jack	3.5 mm headphone jack	3.5 mm headphone jack	3.5 mm headphone jack	3.5 mm headphone jack	3.5 mm headphone jack	3.5 mm headphone jack	3.5 mm headphone jack															
	Sound Adjustment	Volume, Power Save, Source (DisplayPort, HDMI)	Volume, Source (DisplayPort, HDMI)	Volume, Power Save, Source (DisplayPort, HDMI)	Volume, Power Save, Source (DisplayPort, HDMI)	Volume, Power Save, Source (DisplayPort)	Volume, Power Save, Source (DisplayPort)	Volume, Power Save, Source (DisplayPort)	Volume, Power Save, Source (DisplayPort)	Volume, Power Save, Source (DisplayPort)	Volume, Power Save, Source (DisplayPort)	-	Volume														
POWER	Power Requirements	AC 100 ~ 120 V / 200 ~ 240 V, 50 / 60 Hz	AC 100 ~ 240 V, 50 / 60 Hz	AC 100 ~ 120 V / 200 ~ 240 V, 50 / 60 Hz	AC 100 ~ 120 V / 200 ~ 240 V, 50 / 60 Hz	AC 100 ~ 120 V / 200 ~ 240 V, 50 / 60 Hz	AC 100 ~ 120 V / 200 ~ 240 V, 50 / 60 Hz	AC 100 ~ 120 V / 200 ~ 240 V, 50 / 60Hz	AC 100 ~ 120 V / 200 ~ 240 V, 50 / 60 Hz	AC 100 ~ 120 V / 200 ~ 240 V, 50 / 60 Hz	AC 100 ~ 120 V / 200 ~ 240 V, 50 / 60 Hz	AC 100 ~ 120 V / 200 ~ 240 V, 50 / 60 Hz															
	Max. Power Consumption	105 W	67 W	49 W	47 W	67 W	60 W	40 W	45 W	43 W	39 W	24 W															
	Typ. Power Consumption	30 W	22 W	13 W	12 W	24 W	19 W	15 W	15 W	14 W	12 W	12 W															
	Power Save Mode	Less than 0.5 W	Less than 0.5 W	Less than 0.3 W	Less than 0.3 W	Less than 0.5 W	Less than 0.3 W	Less than 0.3 W	Less than 0.3 W	Less than 0.3 W	Less than 0.3 W	Less than 0.5 W															
	Power Management	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Off Timer	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Off Timer	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Eco Timer	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Eco Timer	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Eco Timer	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Eco Timer	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Eco Timer	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Eco Timer	Power Save (VESA DPM, and DVI DMPM), Eco Timer	Power Save (VESA DPM, and DVI DMPM), Eco Timer	Power Save (VESA DPM and DVI DMPM), Eco Timer	Power Save (VESA DPM and DVI DMPM), Eco Timer														
FEATURES & FUNCTIONS	Preset Modes	Colour mode (Paper, Movie, sRGB, User1, User2)	Colour mode (Paper, Movie, sRGB, User1, User2)	Colour mode (Paper, Movie, sRGB, User1, User2, DICOM)	Colour mode (Paper, Movie, sRGB, User1, User2, DICOM)	FineContrast (Paper, Movie, sRGB, User1, User2)	FineContrast (Paper, Movie, sRGB, User1, User2)	FineContrast (Paper, Movie, sRGB, User1, User2)	FineContrast (Paper, Movie, sRGB, User1, User2)	FineContrast (Paper, Movie, sRGB, User1, User2)	FineContrast (Paper, Movie, sRGB, User1, User2)	FineContrast (User1, User2, sRGB, Paper, Movie)	FineContrast (Text, sRGB, EyeCare, Paper, Custom)														
	Auto EcoView	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes														
	EcoView Sense	Yes	-	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	-	-														
	OSD Languages	English, French, German, Italian, Japanese, Simplified & Traditional Chinese, Spanish, Swedish	English, German, French, Italian, Japanese, Simplified & Traditional Chinese, Spanish, Swedish	English, French, German, Italian, Japanese, Simplified & Traditional Chinese, Spanish, Swedish	English, French, German, Italian, Japanese, Simplified & Traditional Chinese, Spanish, Swedish	English, French, German, Italian, Japanese, Simplified & Traditional Chinese, Spanish, Swedish	English, French, German, Italian, Japanese, Simplified & Traditional Chinese, Spanish, Swedish	English, French, German, Italian, Japanese, Simplified & Traditional Chinese, Spanish, Swedish	English, French, German, Italian, Japanese, Simplified & Traditional Chinese, Spanish, Swedish	English, French, German, Italian, Japanese, Simplified & Traditional Chinese, Spanish, Swedish	English, French, German, Italian, Japanese, Simplified & Traditional Chinese, Spanish, Swedish	English, French, German, Italian, Japanese, Simplified & Traditional Chinese, Spanish, Swedish	English, French, German, Italian, Japanese, Simplified & Traditional Chinese, Spanish, Swedish														
PHYSICAL SPECIFICATIONS	Dimensions (W x H x D)	731 x 439 - 578 x 245 mm	611.6 x 390.2 - 545.2 x 245 mm	530.8 x 368 - 488.2 x 233 mm	537.6 x 368 - 473.5 x 233 mm	640 x 404.5 - 554.5 x 245 mm	552.5 x 368 - 499 x 233 mm	540 x 368 - 478.5 x 233 mm	552.5 x 368 - 499 x 233 mm	540 x 368 - 478.5 x 233 mm	500 x 368 - 483.1 x 233 mm	465 x 453 - 535 x 208.5 mm	With height adjustable stand: 405 x 406.5 - 506.5 x 205 With tilt stand: 405 x 416 x 205 mm														
	Dimensions (Without Stand, W x H x D)	731 x 428 x 59.5 mm	611.6 x 359 x 48.5 mm	530.8 x 347.2 x 47.9 mm	537.6 x 317.6 x 47.9 mm	640 x 379 x 65 mm	552.5 x 358 x 57 mm	540 x 317.5 x 56 mm	552.5 x 358 x 57 mm	540 x 317.5 x 56 mm	500 x 326.5 x 54 mm	465 x 361 x 64 mm	405 x 334 x 61.5 mm														
	Net Weight	10.6 kg / 23.4 lbs	7.9 kg / 17.4 lbs	6.5 kg / 14.3 lbs	6.2 kg / 13.7 lbs	9.9 kg / 21.8 lbs	6.4 kg / 14.1 lbs	6.1 kg / 13.4 lbs	6.1 kg / 13.4 lbs	5.9 kg / 13.0 lbs	5.6 kg / 12.3 lbs	8.6 kg / 19.0 lbs	With height adjustable stand: 5.9 kg / 13.0 lbs With tilt stand: 4.9 kg / 10.8 lbs														
	Net Weight (Without Stand)	7.8 kg / 17.2 lbs	5.1 kg / 11.2 lbs	4.1 kg / 9.0 lbs	3.8 kg / 8.4 lbs	7.3 kg / 16.1 lbs	3.7 kg / 8.2 lbs	3.7 kg / 8.2 lbs	3.5 kg / 7.7 lbs	3.7 kg / 8.2 lbs	3.5 kg / 7.7 lbs	5.6 kg / 12.3 lbs	4.1 kg / 9.0 lbs														
	Height Adjustment Range	139 mm	155 mm	131 mm (maximum 140mm)	140 mm	150 mm	131 mm (maximum 140 mm)	140 mm	131 mm (maximum 140 mm)	140 mm	82 mm	With height adjustable stand: 100 mm															
	Tilt	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down	35° Up, 5° Down	40° Up, 0° Down	With height adjustable stand: 30° up / 0° down With tilt stand: 30° up / 5° down														
	Swivel	344°	344°	344°	344°	344°	344°	344°	344°	344°	344°	35° Right / 35° Left	With height adjustable stand: 35° right / 35° left														
	Pivot	-	90°(both clockwise and counter clockwise)	90° (both clockwise and counter clockwise)	90° (both clockwise and counter clockwise)	90°	90°	90°	90°	90°	90°	90°	With height adjustable stand: 90°														
ENVIRONMENTAL REQUIREMENTS	Hole Spacing (VESA Std.)	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm	100 x 100 mm															
	Operating Temperature	5 - 35 °C	5 - 35 °C	5 - 35 °C	5 - 35 °C	5 - 35 °C	5 - 35 °C	5 - 35 °C	5 - 35 °C	5 - 35 °C	5 - 35 °C	5 - 35 °C															
	Operating Humidity	20 - 80 %	20 - 80 %	20 - 80 %	20 - 80 %	20 - 80 %	20 - 80 %	20 - 80 %	20 - 80 %	20 - 80 %	20 - 80 %	20 - 80 %															
SUPPLIED ACCESSORIES		AC power cord, signal cables (DisplayPort - DisplayPort), USB cable, EIZO LCD Utility Disk (PDF user's manual), setup guide	AC power cord, signal cables (DisplayPort - DisplayPort), USB cable, EIZO LCD Utility Disk (PDF user's manual), setup guide	AC power cord, signal cables (DisplayPort - DisplayPort), USB cable, EIZO LCD Utility Disk (PDF user's manual), setup guide	AC power cord, signal cables (DisplayPort - DisplayPort), USB cable, EIZO LCD Utility Disk (PDF user's manual), setup guide	AC power cord, signal cables (DVI-D - DVI-D (dual link supported)), DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/C], EIZO ScreenSlicer software), setup guide	AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/C], EIZO ScreenSlicer software), setup guide	AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/C], EIZO ScreenSlicer software), setup guide	AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/C], EIZO ScreenSlicer software), setup guide	AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/C], EIZO ScreenSlicer software), setup guide	AC power cord, signal cables (DVI-D - DVI-D, DisplayPort - DisplayPort), EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/C], EIZO ScreenSlicer software), setup guide	AC power cord, signal cables (D-Sub - D-Sub, DVI-D - DVI-D audio cable, setup guide, CD-ROM (PDF user's manual, ScreenManager Pro for LCD [DDC/C], ScreenSlicer software)															
CERTIFICATIONS & STANDARDS (PLEASE CONTACT EIZO FOR THE LATEST INFORMATION.)		TCO Displays 6.0, EPEAT Gold (US), TUV/Ergonomics (including ISO9241-307), TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, GOST-R	TCO Displays 6.0, EPEAT Gold (US), TUV/Ergonomics (including ISO9241-307), TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, EAC	TCO Displays 6.0, EPEAT Gold (US), TUV/Ergonomics (including ISO9241-307), TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, GOST-R	TCO Displays 6.0, EPEAT Gold (US), TUV/Ergonomics (including ISO9241-307), TUV/GS, RCM, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, GOST-R	TCD Displays 6.0, EPEAT Gold (US), TUV/Ergonomics (including ISO9241-307), TUV/GS, c-Tick, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, GOST-R	TCD Displays 6.0, EPEAT Gold (US), TUV/Ergonomics (including ISO9241-307), TUV/GS, c-Tick, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, GOST-R	TCD Displays 6.0, EPEAT Gold (US), TUV/Ergonomics (including ISO9241-307), TUV/GS, c-Tick, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, GOST-R	TCD Displays 6.0, EPEAT Gold (US), TUV/Ergonomics (including ISO9241-307), TUV/GS, c-Tick, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, GOST-R	TCD Displays 6.0, EPEAT Gold (US), TUV/Ergonomics (including ISO9241-307), TUV/GS, c-Tick, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, GOST-R	TCD Displays 6.0, EPEAT Gold (US), TUV/Ergonomics (including ISO9241-307), TUV/GS, c-Tick, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, GOST-R	TCD Displays 6.0, EPEAT Gold (US), TUV/Ergonomics (including ISO9241-307), TUV/GS, c-Tick, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, GOST-R	TCD Displays 6.0, EPEAT Gold (US), TUV/Ergonomics (including ISO9241-307), TUV/GS, c-Tick, CE, CB, cTUVus, FCC-B, Canadian ICES-003-B, TUV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, China RoHS, CCC, GOST-R														

THE EIZO PRODUCT FAMILY

The FlexScan series serves as the core for all of EIZO's product groups. For each of our other ranges we have researched and developed additional features and benefits to suit a specific industry:



FORIS
Superb for Gaming



DuraVision
Built for Industry
and Security /
Surveillance



ColorEdge
Ideal for Graphics
and Photography



CuratOR
Designed for
Operating Rooms



RadiForce
Perfect for
Medical Imaging



Raptor
Great for Air
Traffic Control

For more information on any of these ranges visit: www.eizo.co.uk

FlexScan

Business Enterprise Monitor Solutions

Tel: +44 (0) 1344 317 480
Stylus House, London Road, Bracknell, Berkshire RG12 2UT, UK

www.eizo.co.uk/flexscan

EIZO EcoView NET is a trademark, and ScreenManager Pro, FlexScan, and EIZO are registered trademarks of EIZO Corporation.

Specifications are subject to change without notice.

Copyright © 2015 EIZO Corporation. All rights reserved.

Version 2_2015

