

SESCOM[®]

SES-NORMALIZE-IT

Volume Leveler

Operation Manual

SRS 
TruVolume



- TruVolume, SRS and the (O) symbol are trademarks of SRS Labs, Inc.
- TruVolume technology is incorporated under license from SRS Labs, Inc.

Introduction

The SESCOM Volume Leveler incorporating SRS TruVolume™ technology regulates TV channel volume to your preferred listening level and prevents annoying fluctuations that occur when channel surfing as well as taming those obnoxious commercials. It also lets you hear everything you've been missing by giving you a crystal clear audio experience!

Features


1. Easy to operate.
2. Simple installation process (Stereo analog in/out, Power).
3. Supports Line Level inputs up to 2Vrms and Line Level outputs up to 1Vrms, via stereo RCA jacks.
4. Regulates TV/Satellite/Radio broadcast volume levels, so you don't have to constantly adjust them when changing channels.
5. Connects between your TV/Stereo/Soundbar/HTiB/AVR and cable box, to your DVD/Blue Ray player, DVR/PVR/TiVo® or Satellite Receiver.
6. Powered via external universal AC/DC adapter (input: 100V~240V AC, 50~60Hz; output: +5V DC, US-type plug).
7. Boosts low and high-frequency content (20-bands/ch), using an advanced psychoacoustic modeling engine making the entire listening experience come alive, regardless of the audio level!

Package Contents


- SRS TruVolume™ Volume Leveler
- 5V DC power adaptor
- User Manual

Operation Controls and Functions

Front Panel




Rear Panel

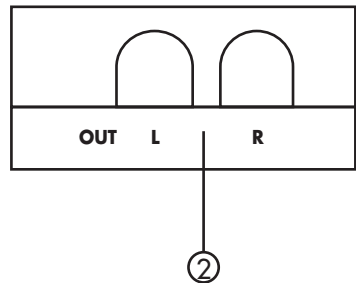


- ① L/R input: Connect the L/R stereo analog audio input port to the L/R source device, such as a Set Top Box.
- ② L/R output: Connect the L/R stereo analog audio output to the audio input of the display or audio device.

Side Panel



- ① Switch SRS TruVolume on/off.
- ② Power: Plug 5V DC power supply into the unit and connect the adaptor to an AC outlet.

Connection and Installation

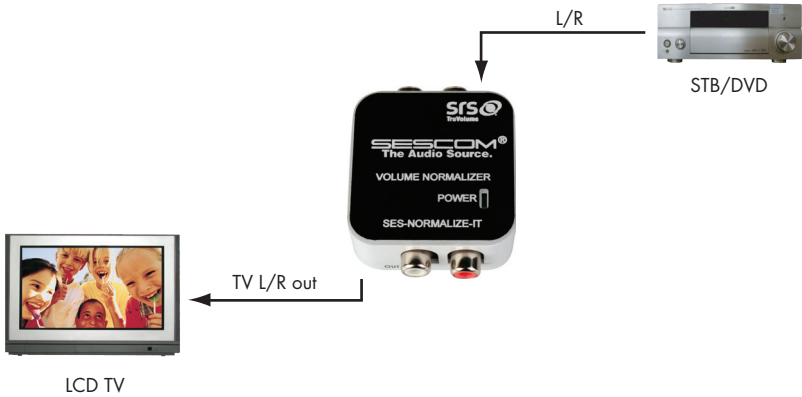

Specifications

Input Ports	L/R
Output Ports	L/R
Power Supply	5V/1A DC (US/EU standards, CE/FCC/UL certified)
Dimensions (mm)	42(W) x 40.5(D) x 22(H)
Weight (g)	25
Chassis Material	Plastic
Silkscreen Color Operating Temperature	White Letters on Black 0°C ~ 40°C



SAFETY PRECAUTIONS



1. To prevent fire or shock hazard, do not expose this equipment to an environment of high humidity and/or dust. Do not use in an unprotected outdoor installation or any area classified as overly damp or wet.
2. The temperature for installation should be kept between 0°C ~ 60°C. Avoid direct sunlight exposure or extreme changes of temperature over a short period of time.
3. Do not disassemble the unit or put it on an unstable base
4. Do not drop it and avoid heavy impact.
5. Ventilation: Any openings in the enclosure are provided for ventilation and to ensure reliable operation of the unit and to protect it from overheating. These openings, if any, must not be blocked or covered. This unit should not be placed in a built-in installation unless proper ventilation is provided.
6. Cleaning: Unplug the unit from the mains outlet before cleaning. Do not use liquid cleaners or aerosol cleaners, only use a damp cloth.
7. Do not overload outlets and extension cords as this may result in a risk of fire or electric shock.
8. Enclosure Entry of any kind is dangerous. Never push objects of any kind, including liquids, into this unit through openings as they may touch dangerous voltage points or short-out parts that could result in a fire or electric shock.
9. Service: Do not attempt to open or service this unit yourself as opening or removing covers may expose you to dangerous voltage of other hazards.
10. There are no user-serviceable parts inside the unit. If the unit requires service please contact your authorized dealer, or an authorized repair service company.