# Kramer Electronics, Ltd.



# **USER MANUAL**

**Model:** 

FC-46

HDMI Audio De-Embedder

### Contents

# **Contents**

1	Introduction	1
2	Getting Started	1
2.1	Quick Start	2
3	Overview	3
3.1	About HDCP	3
3.2	Defining EDID	3
3.3	About HDMI	4
3.4	Recommendations for Best Performance	5
4	Your FC-46 HDMI Audio De-Embedder	6
5	Connecting the FC-46 HDMI Audio De-Embedder	7
6	<b>Technical Specifications</b>	8
Figu	res	
_	1: FC-46 HDMI Audio De-Embedder 2: Connecting the FC-46 HDMI Audio De-Embedder	6
Table	es	
Table 1: FC-46 HDMI Audio De-Embedder Features Table 2: Technical Specifications of the FC-46 HDMI Audio De-Embedder		



### 1 Introduction

Welcome to Kramer Electronics (since 1981): a world of unique, creative and affordable solutions to the infinite range of problems that confront the video, audio and presentation professional on a daily basis. In recent years, we have redesigned and upgraded most of our line, making the best even better! Our 500-plus different models now appear in 8 Groups<sup>1</sup>, which are clearly defined by function. Congratulations on purchasing your Kramer TOOLS **FC-46** *HDMI*<sup>2</sup> to Audio De-Embedder, which incorporates HDMI<sup>TM</sup> technology, and is ideal for:

- Home theater, presentation and multimedia applications
- Rental and staging

The package includes the following items:

- FC-46
- Power adapter (12V DC Input)
- This user manual<sup>3</sup>

# 2 Getting Started

We recommend that you:

- Unpack the equipment carefully and save the original box and packaging materials for possible future shipment
- Review the contents of this user manual
- Use Kramer high performance high resolution cables<sup>4</sup>

<sup>4</sup> The complete list of Kramer cables is on our Web site at http://www.kramerelectronics.com




1

<sup>1</sup> GROUP 1: Distribution Amplifiers; GROUP 2: Video and Audio Switchers, Matrix Switchers and Controllers; GROUP 3: Video, Audio, VGA/XGA Processors; GROUP 4: Interfaces and Sync Processors; GROUP 5: Twisted Pair Interfaces; GROUP 6: Accessories and Rack Adapters; GROUP 7: Scan Converters and Scalers; and GROUP 8: Cables and Connectors 2 High-Definition Multimedia Interface

<sup>3</sup> Download up-to-date Kramer user manuals from the Internet at this URL: http://www.kramerelectronics.com

### 2.1 Quick Start

This quick start chart summarizes the basic setup and operation steps.

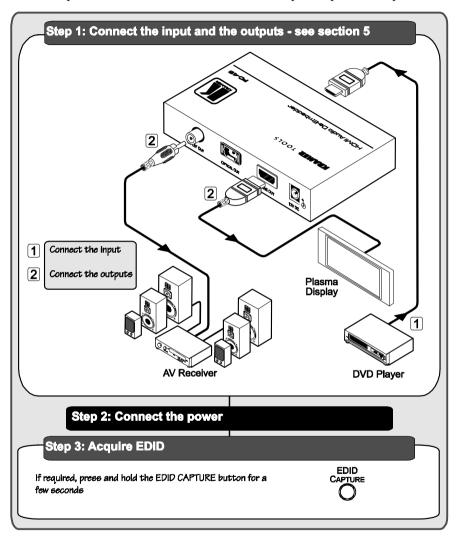

### 3 Overview

The high quality **FC-46** *HDMI Audio De-Embedder* accepts an HDMI input signal, de-embeds the audio signal and transfers it separately to a digital audio S/PDIF output and/or an optical TosLink® audio output, while the HDMI output remains the same.

### In particular, the **FC-46**:

- Lets you connect your HDMI source to an HDMI display and enjoy high quality digital audio at the same time (for example, when using a high quality AV receiver)
- Features input format auto detection: digital RGB or YPbPr
- Supports an operation frequency of up to 1.65Gbps (including 1080p)
- Is 12VDC fed
- Is HDCP compliant
- · Is Plug and Play

### 3.1 About HDCP

The High-Bandwidth Digital Content Protection (HDCP) standard (developed by Intel), protects digital video and audio signals transmitted over DVI or HDMI connections between two HDCP-enabled devices to eliminate the reproduction of copyrighted material. To protect copyright holders (such as movie studios) from having their programs copied and shared, the HDCP standard provides for the secure and encrypted transmission of digital signals.

# 3.2 Defining EDID

The Extended Display Identification Data (EDID<sup>1</sup>) is a data-structure, provided by a display, to describe its capabilities to an HDMI source. The EDID enables the **FC-46** to "know" what kind of display is connected to the output. The EDID includes the manufacturer's name, the product type, the timing data supported by the display, the display size, luminance data and (for digital displays only) the pixel mapping data.

<sup>1</sup> Defined by a standard published by the Video Electronics Standards Association (VESA)



3

### 3.3 About HDMI

High-Definition Multimedia Interface (HDMI) is an uncompressed all-digital audio/video interface, widely supported in the entertainment and home cinema industry. It delivers the highest high-definition image and sound quality. Note that Kramer Electronics Limited is an HDMI Adopter and an HDCP Licensee In particular, HDMI:

- Provides a simple<sup>5</sup> interface between any audio/video source, such as a set-top box, DVD player, or A/V receiver and video monitor, such as a digital flat LCD / plasma television (DTV), over a single<sup>6</sup> cable
- Supports standard, enhanced, high-definition video, and multi-channel digital audio<sup>7</sup> on a single cable
- Transmits all ATSC HDTV standards and supports 8-channel digital audio, with bandwidth to spare to accommodate future enhancements and requirements
- Benefits consumers by providing superior, uncompressed High Definition digital video via a single cable<sup>8</sup>, and user-friendly connector
- Is backward-compatible with DVI (Digital Visual Interface)
- Supports two-way communication between the video source (such as a DVD player) and the digital television, enabling new functionality such as automatic configuration and one-button play

HDMI has the capacity to support existing high-definition video formats (720p, 1080i, and 1080p/60), as well as standard definition formats such as NTSC or PAL.

<sup>1</sup> Ensuring an all-digital rendering of video without the losses associated with analog interfaces and their unnecessary digitalto-analog conversions

<sup>2</sup> See http://www.hdmi.org/about/adopters\_founders.asp

<sup>3</sup> See http://www.digital-cp.com/list/

<sup>4</sup> HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI licensing LLC

<sup>5</sup> With video and multi-channel audio combined into a single cable, the cost, complexity, and confusion of multiple cables currently used in A/V systems is reduced

<sup>6</sup> HDMI technology has been designed to use standard copper cable construction at up to 15m

<sup>7</sup> HDMI supports multiple audio formats, from standard stereo to multi-channel surround-sound. HDMI has the capacity to support Dolby 5.1 audio and high-resolution audio formats

<sup>8</sup> HDMI provides the quality and functionality of a digital interface while also supporting uncompressed video formats in a simple, cost-effective manner

### 3.4 Recommendations for Best Performance

Achieving the best performance means:

- Connecting only good quality connection cables, thus avoiding interference, deterioration in signal quality due to poor matching, and elevated noise levels (often associated with low quality cables)
- Avoiding interference from neighboring electrical appliances that may adversely influence signal quality and positioning your FC-46 in a location free from moisture and away from excessive sunlight and dust



Caution – No operator-serviceable parts inside unit.

Warning – Use only the Kramer Electronics input power wall adapter that is provided with this unit<sup>1</sup>.

Warning – Disconnect power and unplug unit from wall before installing or removing device or servicing unit.

<sup>1</sup> For example: model number AD2512C, part number 2535-000251



5

### 4 Your FC-46 HDMI Audio De-Embedder

Figure 1 and Table 1 define the **FC-46** *HDMI Audio De-Embedder*:

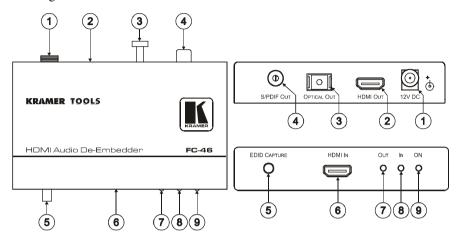


Figure 1: FC-46 HDMI Audio De-Embedder

Table 1: FC-46 HDMI Audio De-Embedder Features

#	Feature	Function
1	12V DC	+12V DC connector for powering the unit
2	HDMI OUT Connector	Connects to the HDMI acceptor
3	OPTICAL OUT TosLink® Connector	Connect to the digital audio acceptor
4	S/PDIF OUT RCA Connector	Connects to the digital audio acceptor
5	EDID CAPTURE Button	Press and hold <sup>1</sup> to acquire EDID
6	HDMI IN Connector	Connects to the HDMI source
7	OUT LED	Illuminates to indicate that a display is connected
8	IN LED	Illuminates to indicate a signal at the input
9	ON LED	Illuminates when receiving power

<sup>1</sup> For about 5 seconds

# 5 Connecting the FC-46 HDMI Audio De-Embedder

To connect the **FC-46**, as the example in Figure 2 illustrates, do the following<sup>1</sup>:

- 1. Connect the HDMI OUT connector to the HDMI acceptor (for example, a plasma display).
- 2. Connect the S/PDIF RCA OUT connector<sup>2</sup> to the digital audio acceptor (for example, a surround system).
- Connect the HDMI source (for example, a DVD player) to the HDMI IN connector.
- 4. Connect the 12V DC power adapter to the power socket and connect the adapter to the mains electricity (not illustrated in Figure 2).

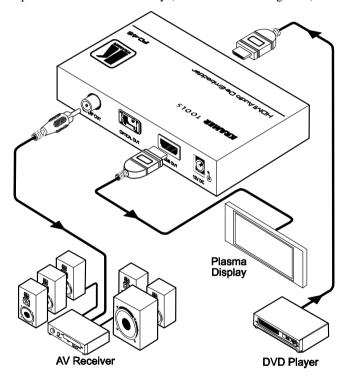


Figure 2: Connecting the FC-46 HDMI Audio De-Embedder

<sup>2</sup> Alternatively, you can connect the optical output or connect both audio outputs



-

<sup>1</sup> Switch OFF the power on each device before connecting it to your FC-46. After connecting your FC-46, switch on its power and then switch on the power on each device

# 6 Technical Specifications<sup>1</sup>

Table 2 defines the technical specifications:

Table 2: Technical Specifications of the FC-46 HDMI Audio De-Embedder

INPUT:	HDMI Connector
OUTPUTS:	1 HDMI Connector
	1 TosLink® optical connector
	1 S/PDIF (digital audio) on an RCA connector
OPERATION FREQUENCY:	Supports up to 1.65Gbps (1080p @60Hz)
COMPLIANCE WITH HDMI STANDARD:	Supports HDMI 1.1, HDCP 1.0
CONTROLS:	EDID button
INDICATOR LED:	ON, IN, OUT
POWER SOURCE:	12 VDC 180mA
DIMENSIONS:	12cm x 7.2cm x 2.4cm (4.73" x 2.83" 0.95", W, D, H)
WEIGHT:	0.3 kg. (0.67 lbs.) approx.
ACCESSORIES:	Power supply, bracket installation kit
OPTIONS:	Kramer cables

<sup>1</sup> Specifications are subject to change without notice

#### LIMITED WARRANTY

Kramer Electronics (hereafter Kramer) warrants this product free from defects in material and workmanship under the following terms.

#### HOW LONG IS THE WARRANTY

Labor and parts are warranted for seven years from the date of the first customer purchase.

#### WHO IS PROTECTED?

Only the first purchase customer may enforce this warranty.

#### WHAT IS COVERED AND WHAT IS NOT COVERED

Except as below, this warranty covers all defects in material or workmanship in this product. The following are not covered by the warranty:

- 1. Any product which is not distributed by Kramer, or which is not purchased from an authorized Kramer dealer. If you are uncertain as to whether a dealer is authorized, please contact Kramer at one of the agents listed in the Web site www.kramerelectronics.com.
- 2. Any product, on which the serial number has been defaced, modified or removed.
- Damage, deterioration or malfunction resulting from:
  - i) Accident, misuse, abuse, neglect, fire, water, lightning or other acts of nature
  - ii) Product modification, or failure to follow instructions supplied with the product
  - iii) Repair or attempted repair by anyone not authorized by Kramer
  - iv) Any shipment of the product (claims must be presented to the carrier)
  - v) Removal or installation of the product
  - vi) Any other cause, which does not relate to a product defect
  - vii) Cartons, equipment enclosures, cables or accessories used in conjunction with the product

#### WHAT WE WILL PAY FOR AND WHAT WE WILL NOT PAY FOR

We will pay labor and material expenses for covered items. We will not pay for the following:

- 1. Removal or installations charges.
- 2. Costs of initial technical adjustments (set-up), including adjustment of user controls or programming. These costs are the responsibility of the Kramer dealer from whom the product was purchased.
- 3. Shipping charges.

#### HOW YOU CAN GET WARRANTY SERVICE

- 1. To obtain service on you product, you must take or ship it prepaid to any authorized Kramer service center.
- 2. Whenever warranty service is required, the original dated invoice (or a copy) must be presented as proof of warranty coverage, and should be included in any shipment of the product. Please also include in any mailing a contact name, company, address, and a description of the problem(s).
- 3. For the name of the nearest Kramer authorized service center, consult your authorized dealer.

#### LIMITATION OF IMPLIED WARRANTIES

All implied warranties, including warranties of merchantability and fitness for a particular purpose, are limited in duration to the length of this warranty.

#### **EXCLUSION OF DAMAGES**

The liability of Kramer for any effective products is limited to the repair or replacement of the product at our option. Kramer shall

- 1. Damage to other property caused by defects in this product, damages based upon inconvenience, loss of use of the product, loss of time, commercial loss; or:
- 2. Any other damages, whether incidental, consequential or otherwise. Some countries may not allow limitations on how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations and exclusions may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights, which vary from place to place.

NOTE: All products returned to Kramer for service must have prior approval. This may be obtained from your dealer.

This equipment has been tested to determine compliance with the requirements of:

EN-50081: "Electromagnetic compatibility (EMC);

generic emission standard.

Part 1: Residential, commercial and light industry"

"Electromagnetic compatibility (EMC) generic immunity standard. EN-50082:

Part 1: Residential, commercial and light industry environment".

CFR-47 FCC Rules and Regulations:

Part 15: "Radio frequency devices

Subpart B Unintentional radiators"

#### CAUTION!

- Servicing the machines can only be done by an authorized Kramer technician. Any user who makes changes or modifications to the unit without the expressed approval of the manufacturer will void user authority to operate the
- Use the supplied DC power supply to feed power to the machine.
- Please use recommended interconnection cables to connect the machine to other components.





For the latest information on our products and a list of Kramer distributors, visit our Web site: www.kramerelectronics.com, where updates to this user manual may be found.

We welcome your questions, comments and feedback.



### **Safety Warning:**

Disconnect the unit from the power supply before opening/servicing.





# Kramer Electronics, Ltd.

Web site: www.kramerelectronics.com E-mail: info@kramerel.com P/N: 2900-000285 REV 1