

1

2

3

4


5

6

Δ,ÇÓ	ÄĒ	ČĆ	μμ	
△	XXXXXXXXXXXXXXXXXX	XXXXXXXXXX	XXXXXX	


Side:A

PRODUCTION

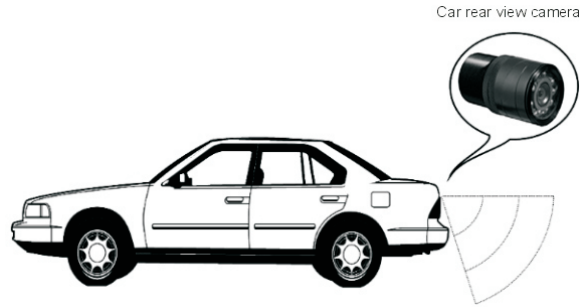

Car rear view camera

IR distance:8~10m

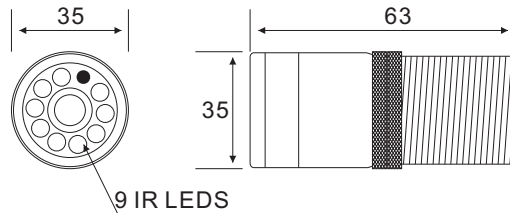

JMK®

CAR REAR VIEW CAMERA

User's Manual



URZ0108
MODEL NO:JK-115



Before you use this product, please read the introduction

REMARK: Design and specifications are subject to change without notice.

Ä ž μ × †				Í , †	ŃÉł	μšÉ
				†Á±Äł		
Éłł	ÁŌ»	É šł		†ł±šł	CUM-JMK-JK115PD	
, šł				čĂłł	JMK ÓĪ JK-115PDĚÄĒ	
ŃĪł				č Öł	157gĪ°Ō	Ń':1/2
Í × ł				† ł	190(L)X130(H)mm	°':1.0

1

2

3

4

5

6

A

B

C

D

A

B

C

D

1

2

3

4

5

6

Δ, ÇÓ	Ä È	Ç Ç	μ μ		
Δ	XXXXXXXXXXXXXXXXXX	XXXXXXXXXX	XXXXXXXXXX	XXXXXXXXXX	XXXXXXXXXX

Side:B

PRODUCT DESCRIPTION

- Users should not disassemble the camera from the front direction.
- Always handle the camera with care, Please do not apply a shock or vibration as much as possible and do not take cautions to cause damage or make a scratch on the camera due to careless storage.
- Please do not install the camera with the rainy place or highly humid areas, And do not operate the camera in the wet place.
- Do not clean the camera body with strong abrasives or soaps. When the camera becomes dirty clean it with dry rags. Especially make sure to use the dedicated rags for lens to clean the dome cover.
- Please select the camera in the cool area that is not exposed to the direct sunlight. If you do it can cause bad effects on the product.
- The camera design matches well with the product quality. It looks so elegant as much as the camera quality stands for. The unique face aims to best fit to the environment decorative to any place, It lasts its beautiful shape

COLOR CCD CAMERA

Pick-up Device	1/3" SHARP CCD	
TV System	NTSC(EIA)	PAL(CCIR)
Scanning Area	4.9mm(H)X3.7mm(V)	
Picture Element	512(H) *492(V)250K	512(H) *582(V)290K
Horizontal Resolution	420TV Lines	
Scan frequency	15.734KHz(H)/59.94Hz(V)	15.625KHz(H)/50Hz(V)
Electronic Shutter	1/60~1/100000(sec)	1/50~1/100000(sec)
Gamma Characteristic	0.45	
S/N Ratio	More than 48dB	
Minimum Illumination	0Lux	
Sensitivity	+18DB--AGL ON-OFF	
Video Output	1.0Vp-p,75Ω, Unbalanced	
Sync. System	Internal	
Scanning System	2:1 Interlace	
White Balance	Auto	
Operation Temperature	-10°~+50°	
Storage Temperature	-20°~+60°	
Power source	DC12V(±10%)	

Ä ž μ × †				Í , †	ÑÉ†	μšÉ
†Á±Ä†				†L±š†	CUM-JMK-JK115PD	
É ††	ÁÖ»	É š†		ČĂ††	JMK Ó† JK-115PD ĚÄÈ	
š†				Ö†	157g†Ö	Ñ':2/2
Ñ ††				† ††	190(L)X130(H)mm	°':1.0

1

2

3

4

5

6

A

B

C

D

A

B

C

D