



QUICKIN



QUICKIN

Generation and manipulation of grid-related parameters such as bathymetry, initial conditions and roughness

User Manual

Hydro-Morphodynamics & Water Quality

Version: 4.00.34158

28 May 2014

QUICKIN, User Manual

Published and printed by:

Deltares telephone: +31 88 335 82 73
Boussinesqweg 1 fax: +31 88 335 85 82
2629 HV Delft e-mail: info@deltares.nl
P.O. Box 177 www: http://www.deltares.nl

2600 MH Delft The Netherlands

For sales contact:

e-mail: sales@deltaressystems.nl e-mail: support@deltaressystems.nl www: http://www.deltaressystems.nl www: http://www.deltaressystems.nl

For support contact:

Copyright © 2014 Deltares

All rights reserved. No part of this document may be reproduced in any form by print, photo print, photo copy, microfilm or any other means, without written permission from the publisher: Deltares.

Contents

1			s manual	1
	1.1	Introdu		1
	1.2		and specifications of the program	1
	1.3		Il version and revisions	2
	1.4		raphical conventions	2
	1.5	Change	es with respect to previous versions	 3
2			to QUICKIN	5
	2.1		ıction	5
	2.2	Prograi	m considerations	 5
3	Gett	ing start		7
	3.1	Overvie	ew of Delft3D	 7
	3.2	Starting	g Delft3D	 7
	3.3	_	g into QUICKIN	8
	3.4	•	ing some menu options	10
	3.5	Exiting	QUICKIN	 13
4	Gen	eral ope	eration	15
	4.1	Genera	al program operation instruction	 15
	4.2	Key str	roke functions	 15
5	Men	u option	ns	19
	5.1	File me	enu	 19
		5.1.1	New project	 19
		5.1.2	Open project	 20
		5.1.3	Save project	 20
		5.1.4	Save project as	 20
		5.1.5	Attribute files	 20
		5.1.6	Import	 22
		5.1.7	Export	 23
		5.1.8	Delft3D-FLOW attributes	 25
		5.1.9	Open Colour map	 27
		5.1.10	Open Settings	 27
		5.1.11	Save Settings	 27
		5.1.12	Exit	 27
	5.2	Edit me	enu	 28
		5.2.1	Land boundary	 28
		5.2.2	Polygon	 30
		5.2.3	Depth	32
		5.2.4	Depth linear	32
		5.2.5	Depth isoline	32
		5.2.6	Depth line sweep	32
		5.2.7	Samples	33
		5.2.8	Check dike heights	33
		5.2.9	Edit Second Depth Animate Incremental	33
		5.2.10	Dry points	33
		5.2.11	Thin dam points	34
		5.2.12	Observation points	34
			Dredge and dump areas	34

5.3	Operat	ions menu
	5.3.1	New Domain
	5.3.2	Select domain
	5.3.3	Delete domain
	5.3.4	Change centre of projection
	5.3.5	Delete
	5.3.6	Create Rectangular Grid
	5.3.7	Data in cell centre
	5.3.8	Grid cell averaging
	5.3.9	Triangular interpolation
	5.3.10	Internal diffusion
	5.3.11	Smoothing
	5.3.12	Courant numbers
	5.3.13	Actual and maximum data dimensions
	5.3.14	Check interpolation
	5.3.15	Volumes and areas
	5.3.16	Combine depth and uniform value
	5.3.17	Combine depth and second depth
	5.3.18	Combine samples and uniform value
	5.3.19	Copy depth to samples
	5.3.20	Change samples to difference with depth
	5.3.21	Copy polyline to samples
	5.3.22	Copy polyline to samples channel
	5.3.23	Swap depth and second depth
	5.3.24	Undo depth
	5.3.25	Undo samples
5.4	View m	·
5.4	5.4.1	
	5.4.1	· ·
	5.4.3	Boundary
	5.4.4	· · ·
		3D View
	5.4.5	Land boundary
	5.4.6 5.4.7	Polygons
		Grid
	5.4.8	Depth
	5.4.9	Second depth
	5.4.10	Samples
	5.4.11	Samples as triangles
	5.4.12	Dry points
	5.4.13	Thin dams
	5.4.14	Observation points
	5.4.15	Discharges
	5.4.16	Dredge and dump areas
5.5		inate System menu
5.6	_	s menu
	5.6.1	General
	5.6.2	Polyline to samples
	5.6.3	Change colour map
	5.6.4	Legend
	5.6.5	Colours

iv Deltares

		5.6.6	Sizes				 		 		 				57
		5.6.7	Averaging	options			 		 		 				58
		5.6.8	TEKAL blo	ck indica	ators		 		 		 				58
		5.6.9	Order cach	nes			 		 		 				58
	5.7	Help m	enu				 		 		 				59
		5.7.1	User manu	u <mark>al</mark>			 		 		 				59
		5.7.2	About				 		 		 				59
6	Tutor	iol													63
0	6.1		ation												63
	0.1	6.1.1													63
			Open grid												
		6.1.2	Open sam	•											63
		6.1.3	Zoom in a												64
		6.1.4	High and le												64
		6.1.5	Points outs												66
	6.2	Save de	•												68
	6.3	•	and dump												68
	6.4		g animatior												71
	6.5	QUICK	IN in the Ar	cMap en	vironn	nent	 	٠	 ٠.	٠		 •	 ٠		72
Re	eferen	ces													75
A	Files	of QUIC	NZINI												77
A															
	A.1		project file												77 79
	A.2		oundary file												_
	A.3		file												80
	A.4		n file												81
	A.5	_	onal curvilir	_											82
	A.6		etry file												83
	A.7		d depth file												84
	A.8		oundary file												86
	A.9		nts file												87
	A.10		ms file												88
	A.11		ation points												89
			tion file												90
			ındary file												91
			scheme file												91
	A.15	Settings	s file				 		 		 				92

vi

9

List of Figures

3.1	Title window of Delft3D	7
3.2	Main window Delft3D-MENU	8
3.3	Selection window for Grid and Bathymetry	8
3.4	Select working directory window	9
3.5	Select working directory window to set the working directory to <quickin marad<="" td=""><td>caibo></td></quickin>	caibo>
3.6	A part of the current working directory is shown in the title bar due to its length	9
3.7	Main window of the QUICKIN	10
3.8	Operational information displayed in the statusbar	10
3.9	Menu item $\mathit{File} \to \mathit{Attribute} \; \mathit{Files} \to \mathit{Open} \; \mathit{Land} \; \mathit{Boundary} \; \ldots \; \ldots \; \ldots$	10
3.10	File open window Open Land Boundary	11
3.11	Land boundary, grid and samples for the Maracaibo model	11
3.12	Polygon to enclose the area for triangular interpolation	12
3.13	Depth contours in the lake region after triangulation and averaging	13
3.14	Window Save Depth to save depth files	14
4.1	Location of anchor + and distance between anchor and cursor at the right	15
5.1	QUICKIN menu options	19
5.2	Options on the <i>File</i> menu	19
5.3	Options on the <i>File</i> Hend	20
5.4	·	22
5.5	File > Import options	24
5.6	File Export sub-menu options	
	Open and save Delft3D-FLOW attribute files	25
5.7	Options on the Edit menu	28
5.8	Options on the <i>Edit</i> → <i>Land Boundary</i> menu	29
5.9	Options on the <i>Edit</i> → <i>Area of Interest</i> menu	30
5.10	Options on the <i>Edit</i> → <i>Dredge and Dump Areas</i> sub-menu	35
5.11	Options on the Dredge and Dump Properties window for a dredge area	36
5.12		36
5.13		37
	Options on the <i>Operations</i> → <i>Delete</i> menu	39
	Create Rectangular Grid form	40
	Options on the Combine Depth and Uniform Value sub-menu	43
	Options on the Combine Depth and Second Depth sub-menu	44
	Options on the Combine Samples and Uniform Value sub-menu	46
5.19	Copy Polyline to Samples parameters	47
5.20	Parameters form for Polyline to Samples Channel	48
5.21	Options on the <i>View</i> menu	49
5.22	Options on the $\textit{View} \rightarrow \textit{Spherical Co-ordinates}$ sub-menu	49
5.23	Options on the Slope Parameters window	53
5.24	Options on <i>Co-ordinate System</i> menu	54
5.25	Options on Settings menu	54
5.26	Options on Settings window	55
5.27	Options on Parameters Polyline to Sample window	56
5.28	Opions on Colour Map for Parameter window	56
5.29	Opions on $Settings o Colours$ menu	57
5.30	Opions on $Settings o Colours$ menu	60
5.31	Opions on $Settings o Sizes$ menu	61
5.32	Options on Averaging Options menu	61

QUICKIN, User Manual

5.33	Options on TEKAL Block Indicator window	61
5.34	Options on Order Caches window	62
5.35	Opions on <i>Help</i> menu	62
6.1	Land boundary and grid for Lake Maracaibo	63
6.2	Samples covering the Lake Maracaibo model area	64
6.3	Default relative search cell for grid cell averaging	65
6.4	Grid cell averaging result within a pre-defined polygon	65
6.5	Interpolation results after applying grid cell averaging and triangulation	66
6.6	Display of Points Yet to be Found	67
6.7	Continuous shade display, all grid points inside the polygon have a depth value	67
6.8	Save Depth window to save the depth files	68
6.9	Location of dredge and dump areas	69
6.10	Edit Dredge and Dump, with polygon names	69
6.11	Dredge and Dump areas with their links	70
6.12	Change the dredge and dump area properties	70
6.13	Jooin parameter <i>Flooding</i> to colour map <i>jet</i>	71
6.14	Example of a flooding image	71
6.15	ARC-GIS data frame properties form	72
6.16	Options on the <i>Operations</i> menu	74
A.1	Example 1, lower left corner is located at $(100,0)$	85
A.2	Example 2, lower left corner is located at $(75, -25)$	86
A.3	Dry points in model area	88
A.4	Example of thin dams in a model area	89

viii Deltares

1 Guide to this manual

1.1 Introduction

This User Manual concerns the data interpolation module, QUICKIN, of the Delft3D software suite. To make this manual more accessible we will briefly describe the contents of each chapter and appendix.

If this is your first time to start working with QUICKIN module we suggest you to read and practice the getting started of Chapter 3 and the tutorial of Chapter 6. These chapters explain the user interface options and guide you through the definition of your first data interpolation to a curvilinear grid.

Chapter 2: Introduction to QUICKIN, provides specifications of QUICKIN and the areas of applications.

Chapter 3: Getting started, explains the use of the overall menu program, which gives access to all Delft3D modules and to the pre- and post-processing tools. Last but not least you will get a first introduction into the QUICKIN Graphical User Interface, used to define data on of grids vertices or grid cells which can be used in a hydrodynamic, wave or water quality simulation.

Chapter 4: General operation, provides practical information on the general operation of the QUICKIN module.

Chapter 5: Menu options, provides a description of all menu and toolbar options.

Chapter 6: Tutorial, emphasis at giving you some first hands-on experience in using the QUICKIN module to define the input of a simple problem.

References, provides a list of publications and related material on the QUICKIN module.

Appendix A: Files of QUICKIN, gives a description of the files that can be used in QUICKIN as input or output. Generally, these files are generated by QUICKIN or other modules of the Delft3D suite and you need not to be concerned about their internal details. However, in certain cases it can be useful to know these details, for instance to generate them by means of other utility programs.

1.2 Name and specifications of the program

Title QUICKIN

Description QUICKIN is a program for the generation, interpolation or manipulation

of space varying quantities such as bathymetries, initial conditions or parameter fields on Cartesian or spherical (curvilinear) grids e.g. created with RGFGRID (RGFGRID (2013)). Bathymetries can be generated for both the hydrodynamic simulation programs Delft3D-FLOW (Delft3D-FLOW (2013)) and Delft1D2D (Delft1D2D (2002)), QUICKIN can display animations of flooding files generated with Delft1D2D.

Special facilities various interpolation methods

user selectable 'area of influence' by polygon various viewing options various depth manipulation options various sample manipulation options functionality: dredge and dump areas new functionality: multiple grids and depths

1.3 Manual version and revisions

A manual applies to a certain release of the related numerical program. This manual applies to QUICKIN, version 4.17.00.

1.4 Typographical conventions

Throughout this manual, the following conventions help you to distinguish between different elements of text to help you learn about QUICKIN.

Example	Description
Waves Boundaries	Title of a window or sub-window. Sub-windows are displayed in the Module window and cannot be moved. Windows can be moved independently from the Module window, such as the Visualisation Area window.
Save	Item from a menu, title of a push button or the name of a user interface input field. Upon selecting this item (click or in some cases double click with the left mouse button on it) a related action will be executed; in most cases it will result in displaying some other (sub-)window. In case of an input field you are supposed to enter input data of the required format and in the required domain.
<\tutorial\wave\swan-curvi> <siu.mdw></siu.mdw>	Directory names, filenames, and path names are expressed between angle brackets, <>. For the Linux and UNIX environment a forward slash (/) is used instead of the backward slash (\) for PCs.
"27 08 1999"	Data to be typed by you into the input fields are displayed between double quotes. Selections of menu items, option boxes etc. are described as such: for instance 'select <i>Save</i> and go to the next window'.
delft3d-menu	Commands to be typed by you are given in the font Courier New, 10 points.
	User actions are indicated with this arrow.

Example	Description
[m/s] [-]	Units are given between square brackets when used next to the formulae. Leaving them out might result in misinterpretation.

1.5 Changes with respect to previous versions

Version	Description
4.00.00	Complete new version of QUICKIN

2 Introduction to QUICKIN

2.1 Introduction

The main purpose of the QUICKIN program is to create, manipulate and visualise model bathymetries for the Delft3D modules FLOW and WAVE (2 and 3 dimensional flow and transport and 2D short wave propagation) and for the programs Delft1D2D (flood and overland flow); Delft1D2D (2002), SWAN; SWAN (2000). Initial condition fields or parameter fields can also be specified.

Bathymetries for Delft3D-WAVE and SWAN can be defined on a Cartesian or spherical (curvilinear) grid, a bathymetry for Delft1D2D is defined on a rectangular grid.

The grids can be created using the RGFGRID program.

2.2 Program considerations

One of the problems of depth interpolation is that the samples (raw data) may originate from various sources, each of different date, quality and resolution. If these samples are all copied into one large file, the 'high' quality data would be contaminated with 'low' quality data, leading to non optimal interpolation results.

In order to cope with this problem of 'data contamination', the program allows for subsequent opening and interpolation of files. Thus, starting with the best data available, the optimal bathymetry is obtained, because points that have already been interpolated with 'good' quality data, are not overwritten in subsequent steps by interpolation with 'low' quality data.

Since the Delft3D-FLOW and SWAN programs use equations that in fact are averaged over the grid dimensions, the best results are obtained if the model bathymetry approximates the real bathymetry in an averaged sense rather than in a local sense. Therefore, if the sample resolution is higher than the grid resolution, we advise to assign depth values by means of an averaging method. Instead, if there are less sample points than grid points, the depth at grid points has to be interpolated (e. g. with a triangulation interpolation method).

Since the preferred interpolation method may vary over the model area, the QUICKIN program allows you to interactively select the active interpolation area, by means of a polygon, and the desired interpolation method. Also, the classic problem of triangular interpolation over areas that should not be covered by the data, but that may be inside the triangles spanned by the triangle network, can effectively be avoided by means of a polygon. Typically, this kind of situation occurs when a tidal flat is surrounded by channels which have been measured by boat, whereas the flat itself has not been surveyed.

Furthermore, a bathymetry can be created or modified without samples data, by changing grid depth values interactively of by specifying sample data using a polygon. Typically, this is of interest when future planned channels have to be built into an existing model bathymetry. A powerful so-called 'depth diffusion' mechanism is provided, that propagates user-supplied depth information at selected grid points or lines into the model, keeping a smooth transition between the original and the constructed bathymetry. Furthermore, if desired, the bathymetry can be smoothed by the depth smoothing option.

Deltares

5

3D viewing is implemented to provide a clear view of bathymetries.

3 Getting started

3.1 Overview of Delft3D

The Delft3D program suite is composed of a set of modules (components) each of which covers a certain range of aspects of a research or engineering problem. Each module can be executed independently or in combination with one or more other modules.

Delft3D is provided with a menu shell through which you can access the various modules. In this chapter we will guide you through some of the input screens to get the look-and-feel of the program. In the Tutorial, Chapter 6, you will learn to define a simple scenario.

3.2 Starting Delft3D

To start Delft3D:

- ♦ On an MS Windows platform: select *Delft3D* in the *Programs* menu.
- ♦ On Linux machines: type delft3d-menu on the command line.

Next the title window of Delft3D is displayed, Figure 3.1.



Figure 3.1: Title window of Delft3D

After a short while the main window of the Delft3D-MENU appears, Figure 3.2.

Several menu options are shown. For now, only concentrate on exiting Delft3D-MENU, hence:

♦ Click on the Exit push button.

The window will be closed and you are back in the Windows Desktop screen for PCs or on the command line for Linux workstations.

Remark:

In this and the following chapters several windows are shown to illustrate the presentation of Delft3D-MENU and QUICKIN. These windows are grabbed from the PC-platform. For Linux workstation the content of the windows is the same, but the colours may be different.



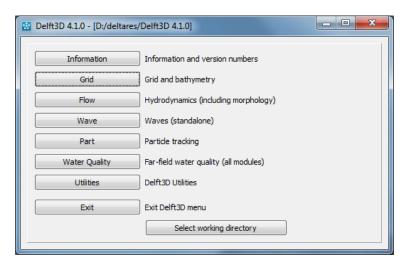


Figure 3.2: Main window Delft3D-MENU

3.3 Getting into QUICKIN

To continue start the menu program again, as indicated in section 3.2.

Click the Grid button, see Figure 3.2

Next the selection window for **Grid and bathymetry** is displayed for preparing a curvilinear grid, interpolate data on that grid and aggregate the hydrodynamic cells, see Figure 3.3.

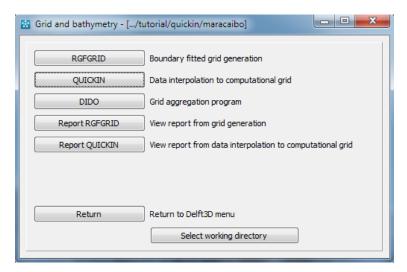


Figure 3.3: Selection window for Grid and Bathymetry

Note that in the title bar the current directory is displayed, in our case <D:/delft3d>.

Before continuing with any of the selections of this **Grid and bathymetry** window, you select the directory in which you are going to prepare scenarios and execute computations:

♦ Click the *Select working directory* button.

Next the **Select working directory** window is displayed, see Figure 3.4 (your current directory may differ, depending on the location of your Delft3D installation).

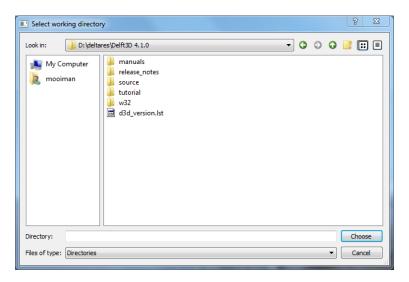


Figure 3.4: Select working directory window

- ♦ Browse to and open the <tutorial> sub-directory of your Delft3D Home-directory.
- ♦ Open the <quickin> directory.
- ♦ Enter the <maracaibo> sub-directory and close the Select working directory window by clicking button OK, see Figure 3.5.

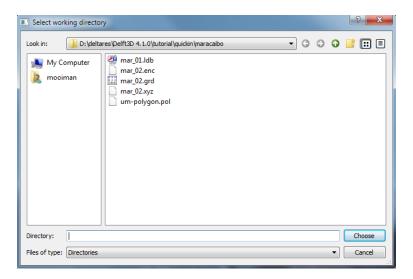


Figure 3.5: Select working directory window to set the working directory to <quickin/maracaibo>

Next the **Grid and bathymetry** window is re-displayed, but now the changed current working directory is displayed in the title bar, see Figure 3.6.



Figure 3.6: A part of the current working directory is shown in the title bar due to its length

Remark:

In case you want to start a new project for which no directory exists yet, you can select in the Select working directory window to create a new folder.

♦ Click on *QUICKIN* in the **Grid and bathymetry** window, see Figure 3.3.



QUICKIN is loaded and the primary input screen is opened, Figure 3.7.

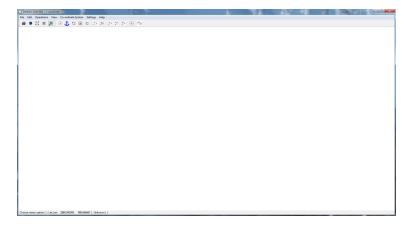


Figure 3.7: Main window of the QUICKIN

In the lower-left corner of the status bar QUICKIN gives additional operational information, see Figure 3.8, such as:

- ♦ User selections.
- Operational instructions (for instance Toggle anchor mode).
- $\diamond x$ and y co-ordinates of the current cursor position.
- ♦ Co-ordinate system: Cartesian or Spherical.
- ♦ Distance (in metre) to a user-defined anchor point (only displayed when the anchor is activated).

```
Edit Area of Influence | Move anchor | X,Y: 222698.744, 603481.092 | Cartesian | Dist 12413.160 [m] |
```

Figure 3.8: Operational information displayed in the statusbar

3.4 Exploring some menu options

To open a land boundary:

♦ Upon selecting File → Attribute Files → Open Land Boundary, you can open a collection of land boundaries, see Figure 3.9. Land boundaries (or land-water marking) are in files with default mask <*.ldb>.



Figure 3.9: Menu item File \rightarrow Attribute Files \rightarrow Open Land Boundary

Next the Open Land Boundary window is displayed, see Figure 3.10.

In the current directory one land boundary file is present.

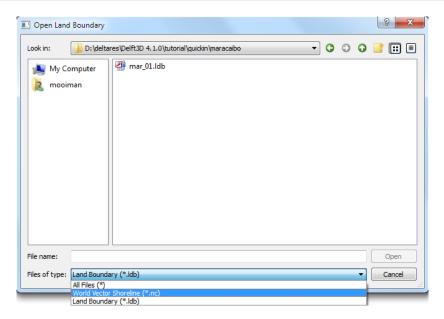


Figure 3.10: File open window Open Land Boundary

♦ Select <mar_01.ldb> and click *Open* to open the land boundary file.

Similar open the grid <mar_02.grd> (on the $File \rightarrow Import \rightarrow Grid (RGFGRID)$) and the samples in <mar_02.xyz> (on the $File \rightarrow Attribute \ Files \rightarrow Open \ Samples$). After opening these data files the screen looks like as in Figure 3.11.

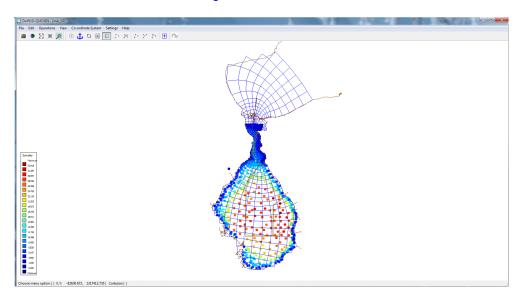


Figure 3.11: Land boundary, grid and samples for the Maracaibo model

Since the resolution of samples in the lake is low compared to the grid points, we will use a triangular interpolation to interpolate towards the grid points. First define a polygon

- ♦ On the Edit menu click Polygon menuarrow New.
- ♦ Click with the left mouse to obtain a polygon similar as in Figure 3.12.

To activate the interpolation operation:

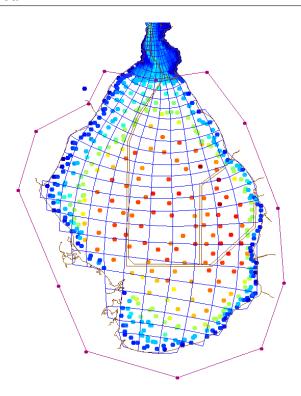


Figure 3.12: Polygon to enclose the area for triangular interpolation

♦ On the *Operations* menu, click *Triangular Interpolation*.

Since the samples often do not cover the shore region on land, the grid points at the landwater interface cannot get a depth value from the triangular interpolation.

♦ On the *Operations* menu, click *Grid Cell Averaging*, to obtain Figure 3.13.

We will now finish generating the depth for the Maracaibo model. Refer to Chapter 6, Tutorial, to finalise the depth.

To save the unfinished depth:

♦ On the File menu, point to Export and click Depth

The Save As window opens, see Figure 3.14.

You will be back in the main window of QUICKIN.

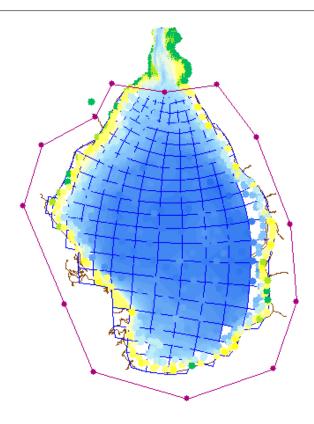


Figure 3.13: Depth contours in the lake region after triangulation and averaging

3.5 Exiting QUICKIN

To exit the QUICKIN

♦ Click Exit on the File menu.

You will be back in the Grid and bathymetry window, see Figure 3.3

- ♦ Click Return to return to the main window of Delft3D-MENU, see Figure 3.2
- ♦ Click Exit.

The window is closed and the control is returned to the desk top or the command line.

In this Getting Started session you have learned to access the QUICKIN and to open and inspect a bathymetry samples file.

We encourage new users next to run the tutorial described in Chapter 6.

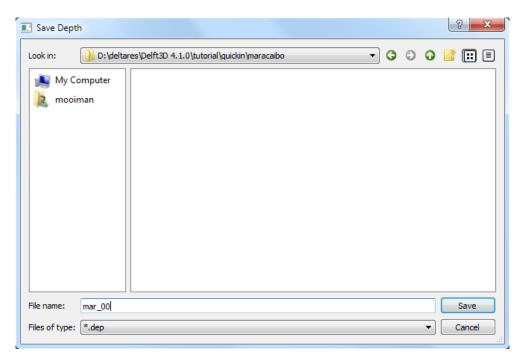


Figure 3.14: Window Save Depth to save depth files

4 General operation

4.1 General program operation instruction

The main menu bar is positioned at the top of the screen.

Help

Upon selecting $Help \rightarrow User Manual$, the QUICKIN User Manual in PDF-format will be opened. Use the bookmarks in the contents to locate the subject you are interested in.

Print screen

Press Ctrl-P or click on the toolbar to obtain the print window for a hardcopy of the current screen.

File menu

The file-menu is the standard **Open** and **Save As** window. The file mask depends on the type of data that you want to open or save. You can change the directory by navigating through the folders.

It is possible to specify whether to Stay on the Start-up Directory or not, in the **Settings General** form.

General cursor and keyboard functions

The left mouse activates or confirms desired actions. The Esc key cancels the last edit action. The right mouse may also confirm actions, or may put the program back into its original mode. In many situations, the Ins and Enter keys on the right-hand bottom of a keyboard function in the same way as the left and right mouse, respectively.

4.2 Key stroke functions

A = Anchor, or on toolbar 🕹

When clicking on the toolbar and next pressing the A key on the keyboard, a so-called anchor will appear, which acts as zero-distance point. The distance (in metre) of the present cursor position to this point is displayed in the status bar at the right of the co-ordinate system indicator, see Figure 4.1. Moving the cursor around and pressing A again will relocate the anchor. Clicking again will de-activate the anchor.




Figure 4.1: Location of anchor + and distance between anchor and cursor at the right

C = Change

In $Edit \rightarrow Samples$, pressing C allows you to change the value of individual samples.

D = Delete

In the $Edit \rightarrow Polygon$, Depth, Samples options, pressing D allows you to delete individual points (polygon, depth or sample).

E = Erase polygon

In $Edit \rightarrow Polygon$, keeping E pressed allows you to delete the indicated polygon.

I = Insert

In $Edit \rightarrow Polygon$, pressing I when the cursor is not on a polygon point allows you to start a new polygon. When the cursor is on a polygon point, pressing I allows you to insert polygon points between two points of the indicated polygon.

In $Edit \rightarrow Samples$, pressing I allows you to create samples.

Ctrl-P = Print screen

Pressing Ctrl-P will open the print window. The current screen will be printed to your printer or to a file.

R = Replace

In $Edit \rightarrow Polygon$ or $Edit \rightarrow Observation Area$, pressing R allows you to replace (move) individual points.

Mouse wheel

Use the mouse wheel to zoom in and zoom out. Other ways are:

Click on the toolbar to zoom in.

Click on the toolbar to zoom out.

To define a zoom box, click P on the toolbar and drag a box.

Ctrl + = Zoom in

Keep the Ctrl-key pressed and use the + key to zoom in more.

Ctrl -= Zoom out

Keep the Ctrl-key pressed and use the - key to zoom in more.

Ctrl move cursor = move focus of screen

Keep the Ctrl-key pressed and move the cursor around. The current screen will move accordingly.

Ctrl arrow keys = move focus of screen left, right, up or down

Keep the Ctrl-key pressed and use the arrow keys to move the focus of the screen accordingly.

Esc = Undo

In various edit modes the latest action will be undone pressing Esc.

Tab = depth cursor

16

In menu $Edit \to Depth$ and menu item Depth Linear, pressing the Tab key while the cursor is on a grid point, will display the depth value in the lower status bar. In normal view (not in $3D\ View$), you can press the Tab key to go into 'depth cursor mode'. This allows you to 'walk' over the depth points using the arrow keys. When in 'depth cursor mode' you can increase or decrease the depth values by using the + and - keys, respectively.

5 Menu options

The menu bar contains the following items, see Figure 5.1, each item is discussed in a separate sections




Figure 5.1: QUICKIN menu options

5.1 File menu

When opening a land boundary or polygon before opening the grid file be sure you choose the same co-ordinate system as the grid file you want to load, see section 5.5.

♦ When opening files, QUICKIN will not check the co-ordinate system in the file against the current co-ordinate system in QUICKIN, except when opening a grid.

On the *File* menu, see Figure 5.2, options are available to import land boundaries, samples, depth files and grid files. The results at each stage of the bathymetry definition process can be saved. The option to quit QUICKIN is located here also.




Figure 5.2: Options on the File menu

The start-up directory to open and save files can be configured in the **General Parameters** form on the menu $Settings \rightarrow General$. As default the file menu starts at the last directory selected.

For the formats of the files you are referred to Appendix A.

5.1.1 New project

Upon selecting $File \rightarrow New \ Project$, all objects (land boundaries, polygons, grids, depths, samples etc.) will be deleted; i.e. you start from scratch.

5.1.2 Open project

Upon selecting $File \rightarrow Open \ Project$, the **Open Project** window appears in which you can browse to an existing project (<*.d3d> file).

Pemark:

♦ A project saved by RGFGRID or D-Waq DIDO can be read by QUICKIN.

5.1.3 Save project

Upon selecting $File \to Save\ Project$, the current project (filenames for grid and depth) will be saved under the same name. If the project name is not known yet, the **Save Project** window appears.

Pemark:

When you started with an existing project, or when you saved the project before, saving the project will not save changes you have made to the depth(s). Either use Save Project As or save individual depths.

5.1.4 Save project as

Upon selecting $\mathit{File} \to \mathit{Save Project As}$, the current project can be saved under a different name

5.1.5 Attribute files

On the $File \rightarrow Attribute\ Files$ sub-menu, see Figure 5.3, options are available to open and save objects that are indirectly related to the grids.

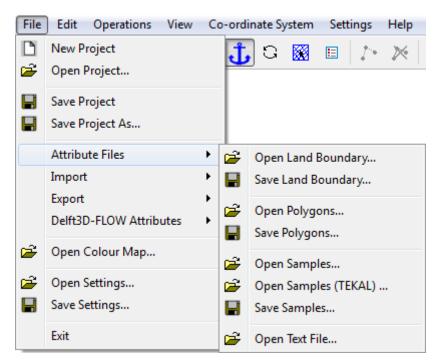


Figure 5.3: Options on the File→ Attribute Files menu

Open land boundary

Upon selecting $File \rightarrow Attribute \ Files \rightarrow Open \ Land \ Boundary$, you can open a collection of land boundaries. Land boundaries (or land-water marking) are in files with default mask <*.ldb>.

Remark:

♦ If you open another land boundary file, it will be visualised together with the existing land boundary.

Save land boundary

Save the land-boundary, e.g. after it has been edited. Land boundary files have as default mask <*.ldb>.

Open polygon

Upon selecting $File \to Attribute\ Files \to Polygons$, you can open a collection of polygons from a file with mask (<*.pol>). Polygons are per definition closed. If the polygon is not closed in the file it will still be shown as closed.

Remark:

♦ If you open another polygons file, they will be visualised together with existing polygons.

Save polygon

When saving polygons, each polygon will be saved as a closed polyline. A polygon file has as default mask <*.pol>.

Open samples

The samples in a file with mask <*.xyz>, may be a set of disordered x, y, z values given in a sequential list of free-formatted x, y, z values.

Remark:

If you open another samples file, the samples will be visualised together with existing samples.

Open TEKAL samples

In this file both the depth values and the grid information are contained. In order to use this option you must have saved the bathymetry in TEKAL format (on the *File* menu, point to *Export* and click *Grid* and *Depth* (*TEKAL*).

Deltares 21





(!)

Save samples

The program offers the facility to insert additional samples, delete or replace samples. The modified data set of samples can then be saved as a sequential list of free-formatted x, y, z values.

Open text file

Texts can be displayed in the graphics area if their position (x, y), the text and colour are defined. See an example in section A.12.

5.1.6 Import

On the *Import* sub-menu, see Figure 5.4, options are available to import objects that are directly related to the grids.

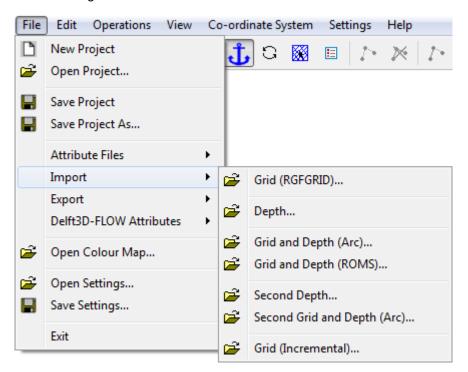


Figure 5.4: File → Import options

Grid (RGFGRID)

Upon selecting $File \rightarrow Import \rightarrow Grid$ (RGFGRID), you can open a collection of grids. The grid file has a default mask <*.grd>.

Remarks:

- ♦ The co-ordinate system in QUICKIN is set accordingly to the system specified in the arid file.
- If the co-ordinate system is spherical then the co-ordinates are shown in stereographic projection.
- ♦ If no co-ordinate system is specified, Cartesian is presumed.

Depth

Interpolated depth values in a file with mask <*.dep> can be opened in the Delft3D-FLOW depth-file format.

Grid and Depth (Arc)

This option is relevant to users of Delft1D2D. Upon selecting $File \rightarrow Import \rightarrow Grid$ and Depth (ARC), you can open a single grid. This GIS file contains both a rectangular grid and bathymetry definition in one file. The file has mask <*.a*>. If the extension chosen is <amu>, QUICKIN assumes that a Delft1D2D map-file of u-velocity components has to be opened and the v-velocity components in file <*.amv> are automatically opened as well. The resulting velocity vector field will be displayed and can be shown on a map of the Delft1D2D bathymetry. A description of this file format is given in section A.7.

Grid and Depth (ROMS)

Upon selecting $File \rightarrow Import \rightarrow Grid$ and Depth (ROMS), you can open a grid in the NetCDF format as used for the Regional Ocean Modelling Sytem (ROMS).

Second depth

A second file of interpolated depth values can be opened in a file with mask <*.dep>. This second depth field can be subtracted from or added to the present depth values (e. g. adding a non-uniform mean sea level correction to the present depth values), see menu *Operations* \rightarrow *Combine Depth and Second Depth*.

Second Grid and Depth (Arc)

After you have opened a bathymetry in a file with mask <*.adp>, you can open water levels in a file with mask <*.amz>, to be displayed together with the bathymetry.

Grid (incremental)

After you have opened a ARC-grid (*Grid and Depth (ARC)*) file with mask <*.aht>, you can open a incremental result file <*.inc> from Delft1D2D. This file can be used for animation in QUICKIN.

5.1.7 Export

On the $File \rightarrow Export$ sub-menu, see Figure 5.5, options are available to export objects that are directly related to the grids.

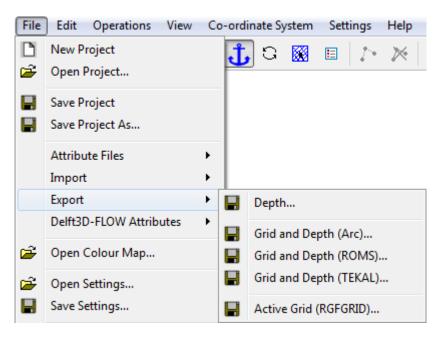


Figure 5.5: File → Export sub-menu options

Depth

Interpolated depth values can be saved in the Delft3D-FLOW depth-file format. The default mask is <*.dep>. If you need to specify a different extension (initial or rougness data) enter the required filename and extension, and add as last character a dot (ex. <waterlevel.ini.> the file on disk will be named <waterlevel.ini>). Another possibility is to rename the filename after it is saved.

Grid and depth (Arc)

Save the bathymetry and rectangular grid definition.

Grid and depth (ROMS)

Save the grid and depth values in a NetCDF file which can be used with ROMS (Regional Ocean Model.System).

Grid and depth (TEKAL)

This file can be used in the Deltares | Delft Hydraulics standard plotting packages as Delft3D-QUICKPLOT and GPP, QUICKPLOT (2013) and GPP (2013).

Active grid (RGFGRID)

After you have interpolated depth values on the grid, some parts of the grid may not be covered with data, e.g. if these parts fall on land. In that case this option gives an easy way to 'cut' away those parts of the grid that are not interpolated. A new grid is written to a file with mask <*.grd>, that only contains active grid cells, plus a so-called 'computational grid enclosure' file with mask <*.enc>, see the Delft3D-FLOW User Manual Delft3D-FLOW (2013), that indicates the border of the computational domain in Delft3D-FLOW computations.

5.1.8 Delft3D-FLOW attributes

Dry points, thin dams and observation points for the hydrodynamic module Delft3D-FLOW can be defined in two ways: either using the **Visualisation Area** window of the FLOW Graphical User Interface, or, using QUICKIN. The (sediment) dredge and dump areas and their characteristics can only be defined in QUICKIN, see Figure 5.6.

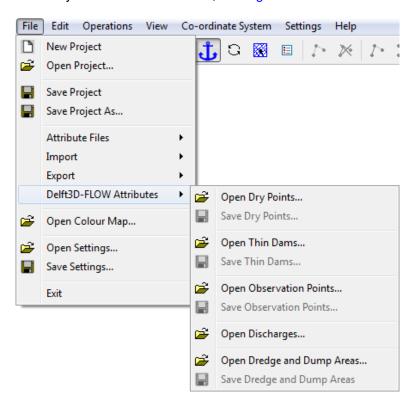


Figure 5.6: Open and save Delft3D-FLOW attribute files

Open dry points

Open a file with Delft3D-FLOW dry points. This file has mask <*.dry>. See section 5.2.10 for details how to define these points.

When opening a file with dry points and dry points are already defined, then the latter will be removed.

Save dry points

Save the dry points to a file with mask <*.dry>. A description of this file format is given in section A.9.

Open thin dams

Open a file with Delft3D-FLOW thin dams. This file has mask <*.thd>. See section 5.2.11 for details how to define these points.

When opening a file with thin dams and thin dams are already present, then the latter will be removed.

Save thin dams

Save the thin dams to a file with mask <*.thd>. A description of this file format is given in section A.10.

Open observation points

Open a file with Delft3D-FLOW observation points. This file has mask <*.obs>. See section 5.2.12 for details how to define these points.

When opening a file with observation points and observation points are already defined, then the latter will be removed.

Save observation points

Save the observation points to a file with mask <*.obs>. A description of this file format is given in section A.11.

Open discharges

Open a file with Delft3D-FLOW discharges. This file has mask <*.src>. It is not possible to define discharge location, type and time-series, in that case you have to use FLOW-GUI.

When opening a file with discharges and discharges are already present, then the latter will be removed.

Open dredge and dump areas

Open the file that contains the dredge and dump areas (defined in a separate polygon file), the depths to be dredged and the links between dredge and dump areas. The file has mask <*.dad>.

Save dredge and dump areas

Save the dredge and dump areas (defined in a separate polygon file), the depths to be dredged and the links between dredge and dump areas. The file has mask <*.dad>. When asked to save the polygon file, click *Yes* when not yet saved.

5.1.9 Open Colour map

You can choose from a number of pre-defined colour schemes (in file with masks <*.clr> or <*.clrmap>). These colour schemes have the same format as used for Delft3D-QUICKPLOT, see section A.14 for the file format.

Restriction:



\bigcirc

Remark:

If the file <quickin.clrmap> exists on the start-up directory then this file will be read, if the file does not exist on the start-up directory it will try to read the file on the installation directory <\$D3D_HOME/\$ARCH/plugins/default>.



5.1.10 Open Settings

If you have saved your QUICKIN settings in a previous session, you can open these settings again, see section A.15 for the file format.

Remark:



If the file <quickin.clrmap> exists on the start-up directory then this file will be read, if the file does not exist on the start-up directory it will try to read the file on the installation directory <\$D3D_HOME/\$ARCH/plugins/default>.

5.1.11 Save Settings

If you have made changes in one of the forms on the *Settings* menu, you can save these settings to be used later on again.

5.1.12 Exit

Exit from the QUICKIN program

5.2 Edit menu

Several edit modes are presented on the *Edit* menu, see Figure 5.7. An edit mode is an operation mode which needs at least a mouse click, i.e. a set of operation instructions which is valid for a certain data set, and which may go with some specific display method. The following objects may be modified:

- ♦ Land boundary
- ♦ Polygon
- ♦ Depth
- ♦ Samples
- Delft3D-FLOW attributes (dry points, thin dams, observation points or dredge and dump areas)




Figure 5.7: Options on the Edit menu

Esc = Undo

In most edit modes, Esc will undo the latest action.

5.2.1 Land boundary

The land boundary is used to visualise the land-water interface. To edit (define or modify) a land boundary, possible edit actions see Figure 5.8.

Edit

Upon selecting $Edit \to Land\ Boundary \to Edit$, you can start editting a polyline that defines an Land Boundary. When there is no polyline the edit mode is set to New, otherwise you have to select first a polyline (from the menu $Edit \to Land\ Boundary \to Select$ or press the key s). After you have selected the polyline you can use key-strokes, icons in the toolbar or menu items to switch the edit mode.

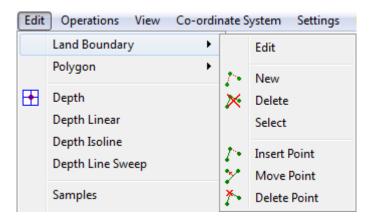


Figure 5.8: Options on the Edit ightarrow Land Boundary menu

New

Upon selecting $Edit \to Land$ Boundary $\to New$, you can start to define a new polyline, click on $\stackrel{\triangleright}{l}$, or use the key-stroke n to start a new polyline.

Delete

Upon selecting $Edit \to Land\ Boundary \to Delete$, click on \nearrow , or use the key-stroke e, to delete (erase) the selected polyline.

Select

Upon selecting $Edit \rightarrow Land \ Boundary \rightarrow Select$, or use the key-stroke s, you can select a polyline by clicking on one of its edges or vertices. After that the polyline will be highlighted

Insert point

Upon selecting $Edit \to Land\ Boundary \to Insert\ Point$, click on \ref{linear} , or use the key-stroke i, you can insert a point into the selected polyline. The point will be inserted at the nearest linear piece of the polyline.

Move point

Upon selecting $Edit \rightarrow Land\ Boundary \rightarrow Move\ Point$, click on \ref{loop} , or use the key-stroke r, you can move (replace) a point on the selected polyline.

Delete point

Upon selecting $Edit \rightarrow Land Boundary \rightarrow Delete Point$, click on $\ ^{\ }$, or use the key-stroke d, you can delete a point on the selected polyline by indicating it.

5.2.2 Polygon

The Area of Interest polygon is used to limit the area of influence of operations and or edit actions. All grid points and samples that are inside the polygon are active in the subsequent interpolation or manipulation steps. The polygon is self closing. see Figure 5.9.

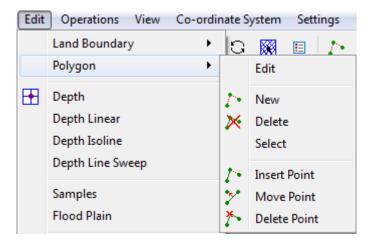


Figure 5.9: Options on the Edit \rightarrow Area of Interest menu

Edit

Upon selecting $Edit \to Area$ of $Interest \to Edit$, you can start editting a polygon that defines an Area of Interest. When there is no polygon the edit mode is set to New, otherwise you have to select first a polygon (from the menu $Edit \to Area$ of $Interset \to Select$ or press the key s). After you have selected the polygon you can use key-strokes, icons in the toolbar or menu items to switch the edit mode.

New

Upon selecting $Edit \to Area$ of Interest $\to New$, you can start to define a new polygon, click on \nearrow , or use the key-stroke n to start a new polygon.

Delete

Upon selecting Edit o Area of Interest o Delete, click on \nearrow , or use the key-stroke e, to delete (erase) the selected polygon.

Select

Upon selecting $Edit \rightarrow Area$ of $Interest \rightarrow Select$, or use the key-stroke s, you can select a polygon by clicking on one of its edges or vertices. AFter that the polygon will be highlighted

Insert point

Upon selecting $Edit \to Area$ of $Interest \to Insert$ Point, click on I^{-} , or use the key-stroke i, you can insert a point into the selected polygon. The point will be inserted at the nearest linear piece of the polygon.

Move point

Upon selecting $Edit \rightarrow Area$ of $Interest \rightarrow Move$ Point, click on \nearrow , or use the key-stroke r, you can move (replace) a point on the selected polygon.

Delete point

Upon selecting $Edit \rightarrow Area$ of $Interest \rightarrow Delete$ Point, click on $\ref{eq:condition}$, or use the key-stroke d, you can delete a point on the selected polygon by indicating it.

To define dredge and dump areas go to the *Edit* menu, point to *Dredge and Dump Areas* and click *New Area*.

The polygon will remain valid after each operation, but it can be deleted, via menu $Edit \rightarrow Polygon \rightarrow Delete$. The polygon can be used as a so-called 'fault line' in the interpolation process.

Upon selecting $Edit \rightarrow Polygon$, you can start to define a new polygon, or click on $\ ^{\bullet \bullet}$ to start a new polygon.

Valid action keys are

In $Edit \rightarrow Polygon$ mode the following keys can be used:

I = Insert

Pressing I allows you to insert individual polygon points. The message at the left of the statusbar now reads 'Insert a point', click the left mouse to insert individual points.

R = Replace

Pressing R allows you to replace (move) individual polygon points. The message at the left of the statusbar now reads 'Get a point'. If you have got it by clicking the left mouse, the message will read 'Put a point', and you can do so by clicking the left mouse at the new desired position.

D = Delete

Pressing D allows you to delete individual polygon points.

X = Break open polygon

Keep *X* pressed and move with the cursor over a polygon point to split the polygon. Effectively, the pointed co-ordinates are replaced by default 'missing' values.

E = Erase polygon

Entire polygon sections are deleted. Press key *E* and then click with the left mouse button on a point of the polygon which need to be deleted. Finish the operation by pressing the right mouse button.

5.2.3 Depth

By clicking on a grid point, a window opens in which the depth value is displayed. You can change the value manually. The depth value -999.000 indicates the grid point has no depth value (missing value).

To delete individual depth points, first press D and click on the grid point. Press C or I to go back in the edit mode.

Tab = depth cursor

In menu $Edit \rightarrow Depth$ and menu item Depth Linear pressing the Tab key while the cursor is on a grid point, will display the depth value in the lower status bar. In normal view (not in 3D View), you can press the Tab key to go into 'depth cursor mode'. This allows you to 'walk' over the depth points using the arrow keys. When in 'depth cursor mode' you can increase or decrease the depth values by using the + and - keys, respectively.

Press the D key to delete the current depth value. Press Esc to undo the latest changes. Press Tab again to go into normal cursor mode. The depth value and the (M, N) indices of the current depth point are given in the status bar at the bottom of the screen.

5.2.4 Depth linear

Manually interpolate a line of grid depth values, by clicking two points in the grid that have valid depth values. The points in between the two grid points will be linearly interpolated in between the values of the end points. This edit option, in combination with $Operations \rightarrow Internal Diffusion$, provides a very powerful way to build new bathymetries or modify existing ones.

See this combination like the construction of a ship. First, a ships framework is built, (lines of grid depth values) then, its plates are welded to the frame (*Internal Diffusion*).

Reject a result by pressing Esc. If the desired end points do not yet have valid depth values, first assign depth values by putting the cursor on top of these points and pressing Tab. The + or - keys will increase or decrease the depth value.

5.2.5 Depth isoline

The operation described above can also be performed in iso-line mode. The value of the iso-line is taken as the value of the FIRST point that has been indicated.

5.2.6 Depth line sweep

Indicate two points on the same grid line. The grid points on the indicated grid line will be copied onto the grid lines parallel to the indicated line. Use the polygon to limit the effective area.

5.2.7 Samples

Samples can be inserted (with a specified depth value), replaced or deleted in the same way as the points of a polygon. The value of the marked sample is displayed in the status bar at the bottom of the screen together with the x and y co-ordinates and the distance from the anchor. The value of the marked sample can then be modified by pressing the + (higher) or - (lower) key (or press D for delete or press Esc for restore). In edit mode after pressing the C-key), sample values can be modified. In edit Insert after pressing the I-key), new sample values can be inserted.

5.2.8 Check dike heights

It allows you to quickly check whether the dykes in a Delft1D2D schematisation start overtopping at the proper water level. (Typically useful in a polder area divided in different compartments). First open a Delft1D2D bathymetry <*.adp>. Next choose this option and click some depth point from which you want to 'release' water at the level (positive up) that you specify by typing a value. Next, water is 'released' from that point and the surrounding bathymetry is 'filled' until the water is stopped either by dykes or high grounds. Increase the 'release level' until dykes start flooding. The wetted area is displayed by means of the 'second depths', see $View \rightarrow Second Depth$.

5.2.9 Edit Second Depth Animate Incremental

The option allows for animation of the flooding process computed by Delft1D2D. First, open a Delft1D2D bathymetry <*.adp> and then choose this option. Open the relevant incremental file <*.inc> and press the space bar to start the animation. The animation can be stopped (and restarted) by pressing the space bar again, and be propagated over 1 hour intervals by pressing the +-key. The wetted area is displayed by means of the 'second depths', see $\it View \rightarrow \it Second Depth$.

5.2.10 Dry points

Dry points are grid cells centred around a water level point that are permanently dry during a computation, irrespective of the local water depth and without changing the water depth as seen from the wet points. In QUICKIN dry points are specified as single points. In the Delft3D-FLOW GUI they can also be defined as a line of points.

Click inside a grid cell to define it as dry point. Click on an existing dry point to delete this point.

Remark:

1

 Dry points for the hydrodynamic module Delft3D-FLOW can be defined in two ways: either using the Visualisation Area window of the Delft3D-FLOW Graphical User Interface, or using QUICKIN.

5.2.11 Thin dam points

Thin dams are infinitely thin objects defined at the velocity points which prohibit flow exchange between the two adjacent computational cells without reducing the total wet surface and the volume of the model. The purpose of a thin dam is to represent small obstacles (e. g. breakwaters, dams) in the model which have sub-grid dimensions, but large enough to influence the local flow pattern. Thin dams are specified at the edges of a grid cell. In QUICKIN thin dams are specified as single grid edges. In the Delft3D-FLOW GUI they can also be defined as a line of vortices.

Click at a grid vortex to define it as thin dam. Click on an existing thin dam to delete this point.

Pemark:

Thin dams for the hydrodynamic module Delft3D-FLOW can be defined in two ways: either using the Visualisation Area window of the Delft3D-FLOW Graphical User Interface, or using QUICKIN.

5.2.12 Observation points

Observation points are used to monitor the time-dependent behaviour of one or all computed quantities as a function of time at a specific location, i.e. water elevations, velocities, fluxes, salinity, temperature and concentration of the constituents. Observation points represent an Eulerian viewpoint at the results. Observation points are located at cell centres, i.e. at water level points.

Click inside a grid cell to define it as observation point; specify a name (maximum of 20 characters) for the point. Click on an existing observation point to delete this point.

(!)

Remark:

Observation points for the hydrodynamic module Delft3D-FLOW can be defined in two ways: either using the Visualisation Area window of the Delft3D-FLOW Graphical User Interface, or using QUICKIN.

5.2.13 Dredge and dump areas

The $Edit \rightarrow Dredge$ and Dump Areas menu item contains several items to define and edit the dredge and dump areas, see Figure 5.10, each item is discussed in a separate sections.

First you have to define the locations of dredge and dump areas by editing polygons. For each area a polygon is required. Next you give each area a meaningful name. Click the name field and specify the polygon name, reflecting for instance if it will be a dredge or a dump site, and specify a drege depth (if applicable).

The next step is to link (connect) each dredge area to a dump area. Individual links can be deleted

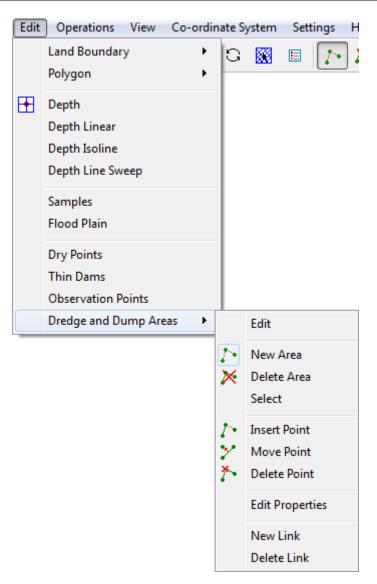


Figure 5.10: Options on the Edit \rightarrow Dredge and Dump Areas sub-menu

New area

First you have to define the locations of dredge and dump areas by editting polygons. Select $Edit \rightarrow Dredge \ and \ Dump \ Areas \rightarrow New \ Area$ and start defining a new area. Pressing the right-mouse button will stop defining the current polygon and the next left-mouse click will start a new area (polygon).

Edit properties

By pressing $Edit \rightarrow Dredge$ and Dump $Areas \rightarrow Edit$ Properties you can edit the properties of a dredge/dump area (i.e. name of area and the dredge depth, -999.000 means no dredging), see Figure 5.11.

If the area is a dredge area you have also to specify the amount of dredge material (percentages) which will be dumped in the linked dump areas, see Figure 5.12.




Figure 5.11: Options on the Dredge and Dump Properties window for a dredge area




Figure 5.12: Options on the Dredge and Dump Properties window for a dump area

Delete area

Up on selecting Edit o Dredge and Dump Areas o Delete Area you can delete a polygon which defines a dredge or dump area. Click with the left mouse button inside a polygon, then that polygon will be deleted and all the links from or to that area.

Insert point

Upon selecting $Edit \rightarrow Dredge \ and \ Dump \ Areas \rightarrow Insert \ Point$, you can insert a point into the polygon. The point will be inserted at the closest linear piece of the polygon.

Move point

Upon selecting $Edit \rightarrow Dredge \ and \ Dump \ Areas \rightarrow Move \ Point$, you can move a point on the polygon.

Delete point

Upon selecting $\textit{Edit} \rightarrow \textit{Dredge}$ and $\textit{Dump Areas} \rightarrow \textit{Delete Point}$, you can delete a point on the polygon by indicating it.

New link

Upon selecting $Edit \rightarrow Dredge$ and $Dump\ Areas \rightarrow New\ Link$, you can define a link (connection) between a dredge and a dump area. First click in a dredge area, subsequently in the dump area.

Delete link

Upon selecting $Edit \rightarrow Dredge$ and Dump $Areas \rightarrow Delete$ Link, you can delete a link (connection) between a dredge and a dump area. After selecting the menu-item select with the left mouse button the link which need to be deleted.

5.3 Operations menu

On the *Operations* menu, see Figure 5.13, you may choose to calculate depth values at grid points from sample values using various interpolation options (grid cell averaging, triangular interpolation, internal diffusion). The area and volume of (part of) a grid can be calculated.

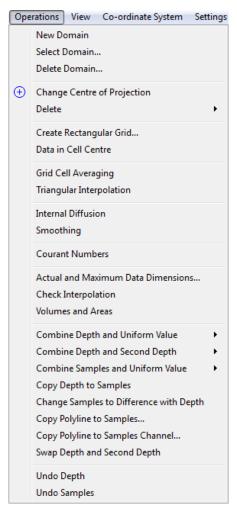


Figure 5.13: Options on the Operations menu

5.3.1 New Domain

On the Operations o New Domain menu, create a new domain. This means that every grid create action will add a new domain to your model. If you want to adjust your grid by the option Operations o Create Rectangular Grid..., deactivate this menu item first.

5.3.2 Select domain

If your project consists of multiple grids (so-called domain decomposition application) you can switch between the domains (grids) by clicking $Edit \rightarrow Select\ Domain$, or click on the toolbar. Next, click on the grid you want to become the active grid.

5.3.3 Delete domain

To delete a domain or grid, select $Edit \rightarrow Delete\ Domain$. Next, click on an active or inactive grid. When deleting a domain, also objects (except dredge and dump areas) defined on the grid will be deleted.

5.3.4 Change centre of projection

For spherical co-ordinates QUICKIN can use two different projections, plane projection and stereographic projection. For stereographic projection a special function is implemented to centring the computer screen to the centre of projection and the sphere. This function can be invoked by clicking the menu item $Operations \rightarrow Change\ Centre\ of\ Projection$, see Figure 5.13. When using this command the centre of the projection is set to the centre of the screen. This action requires recalculation of the projection and a new screen refresh. The centre of the projection does not change when using zoom in, zoom out or pan, so there is no performance drawback and a smooth screen-refresh is obtained.

5.3.5 Delete

Using this option you can (see Figure 5.14) delete the Land Boundary, Polygons, Depth, Second Depth and Samples. It is possible to indicate an area of influence, by defining a polygon. If a polygon is defined, the operation applies to points inside the polygon. When choosing $Delete \rightarrow Polygons$ all polygons will be deleted.

Land boundaries

If a polygon is defined, the land boundary points inside the polygon are removed. If no polygon exists you are asked if all land boundary points have to be removed. If you have defined two or more polygons, than only the points inside the first defined polygon will be removed.

Polygons

If polygons are present, they all will be removed.

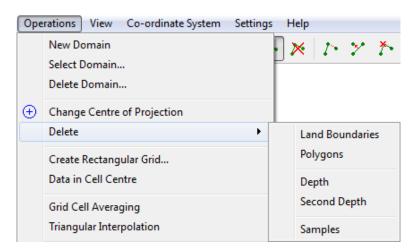


Figure 5.14: Options on the Operations → Delete menu

Depth

If a polygon is defined, the depths inside the polygon are removed. If no polygon exists you are asked if all depth points have to be removed. If you have defined two or more polygons, than only the depths inside the first defined polygon will be removed.

Second depth

If a polygon is defined, the second depths inside the polygon are removed. If no polygon exists you are asked if all second depth points have to be removed. If you have defined two or more polygons, than only the second depths inside the first defined polygon will be removed.

Samples

If a polygon is defined, the samples inside the polygon are removed. If no polygon exists you are asked if all samples have to be removed. If you have defined two or more polygons, than only the samples inside the first defined polygon will be removed.

5.3.6 Create Rectangular Grid

Specify the grid spacing, grid origin, rotation of the grid (counter clockwise) and the number of grid cells in both directions to quickly create a rectangular grid with rectangular cells. The parameters involved and their default values are, see Figure 5.15.

\Diamond	Number of Grid Cells in M-Direction	default: 50
\Diamond	Number of Grid Cells in N-Direction	default: 50
\Diamond	Delta X [m]	default: 100.0
	Grid cell size M-direction [m]	
\Diamond	Delta Y [m]	default: 100.0
	Grid cell size N-direction [m]	
\Diamond	Origin X [m]	default: 0.0
\Diamond	Origin Y [m]	default: 100.0
\Diamond	Rotation left [degrees]	default: 0.0

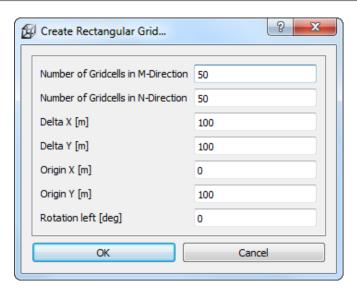


Figure 5.15: Create Rectangular Grid... form

5.3.7 Data in cell centre

QUICKIN can be applied to specify any spatially varying parameter, which may also be some initial condition or some spatially varying input parameter. Because some of these parameters may be defined at cell centres (rather than cell corners, as with Delft3D-FLOW depth values), the position of the points to interpolate (or average) to, can be changed to the cell centres. The water level is an example of a parameter defined at cell centres.

5.3.8 Grid cell averaging

This method is the preferred method if there are (many) more samples than grid points. The standard option is simple averaging. Also, the maximum or minimum value of the samples in the grid point vicinity can be chosen (maybe to guarantee a wetted gully), or the value of the closest sample within the vicinity. (See menu $Settings \rightarrow Averaging \ Options$). The default vicinity is defined as the area covered by an 8 point polygon surrounding the current grid point, with its four corners as the cell centres of the four grid cells around the grid point. In between these corner points, another four points are added that lie halfway between the grid point and its neighbouring grid points. The default area can be increased or decreased in size by a linear scaling factor that can be specified in the $Settings \rightarrow General$ form.

Defaults:

- ♦ Relative Search Cell Size for Averaging: 1.0
- Minimum Number of Averaging Points: 4
- Averaging Options: Average value of near points

default: 200

default: 10

default: 0.5

5.3.9 Triangular interpolation

The triangulation method is best suited for data sets that have a resolution that is about equal to or smaller than the grid resolution. The samples are first organised into a so-called Delaunay network, next grid values are interpolated. The amount of operations needed in the network creation process depends quadratically on the number of samples. So, consider working in portions rather than with the complete data sets. In that case, take special care at the border zones of adjacent interpolation areas. Maybe delete the border zones using a polygon and re-interpolate these zones using a slightly larger polygon.

Default:

 \diamond Default the 'interpolation process' is not shown, see the menu $\textit{View} \rightarrow \textit{Interpolation}$

5.3.10 Internal diffusion

Grid points that have no depth value yet, i.e. 'blank' points with the indicator value of -999, are modified in their value by the so-called 'Internal diffusion' mechanism. Basically, this mechanism is a smoothing process which is called repeatedly, but that does not change values of already existing depth values. Therefore, a smooth transition with the existing bathymetry is inherent. This gives an easy method to fill 'gaps' in a bathymetry, or to build new bathymetries in combination with the $Edit \rightarrow Depth Linear$ mode, as explained above. The Number of Internal Diffusion Steps can be specified in General form of menu Settings.

Default:

Number of Internal Diffusion Steps

5.3.11 Smoothing

In some bathymetries large depth gradients may occur, that may result in non-smooth numerical results in the hydrodynamic or wave programs. Isolate these regions and treat them with this volume conserving smoothing method.

The *Number of Smoothing Steps* and the *Smoothing Factor* can be specified in the *Settings* \rightarrow *General* form.

The defaults are:

♦ Number of Smoothing Steps

♦ Smoothing Factor

Courant numbers

5.3.12

The latter option copies the Courant numbers defined as

$$Courant = 2\Delta T c \sqrt{1/\Delta x^2 + 1/\Delta y^2}$$

see Delft3D-FLOW (2013), to the second depth array and sets display parameters such that the second depth is displayed as continuous shading. Δt is the computational time-step in seconds (see $Settings \to General$), and c the local wave celerity, $\sqrt{g(h+\zeta_0)}$ (see menu item $Settings \to General$).

The default values are:

♦ Time-step for Courant Number

 \diamond Reference Level ζ_0

Pemark:

Note that you have to specify the time-step in seconds, but in FLOW you specify minutes.

default: 60.0 [s]

default: 0.0 [m]

5.3.13 Actual and maximum data dimensions

The actual and maximum dimensions of various data objects are presented in 'history'.

5.3.14 Check interpolation

If both samples and depth values are opened in the program, it is possible to check the quality of the interpolation by reverse interpolation of the samples in the created bathymetry. The reverse interpolation is performed for all grid cells within the polygon that have depth values at all four grid cell-corners. The reverse-interpolation is realised by bilinear interpolation of the samples in the grid cells. The difference between these values and the original sample values gives an indication for the quality of the interpolation. (Or an indication of the variance of your sample data in relation to the resolution of the grid. Therefore, if you see large differences, do not conclude too hastily that the interpolation itself is poor!) The mean difference, the mean absolute difference and the maximum difference are presented via menu option $Operations \rightarrow Actual$ and maximum data dimensions, together with the number of samples that have been evaluated.

5.3.15 Volumes and areas

Volumes and areas are calculated for computational grid cells within the polygon. The area of the computational cells is always smaller then the area of the polygon. If no polygon is given, all grid cells are used. The volumes and areas are computed for those cells with four valid depth values (data at cell vertices) or with one valid depth value (data at cell centre). Also the depth should be positive ($\zeta_{\rm ref}+d^\zeta>0$) for a contribution to the volumes and areas. Where d^ζ is the depth value at the cell centre, for data defined at the cell vertices it is defined as mean value of the four surrounding depth values.

Areas are given in the squared unit of the grid (mostly given in metres); volumes are given in squared unit of the grid multiplied by the unit of the depth. (For a Delft3D-FLOW bathymetry, both must be in metres). Volumes are given below a user definable reference level. The origin of that reference level is equal to the reference level of the depth data. The reference level is defined positive in upward direction. (Whereas depth values are defined positive in downward direction.)

Default:

 \diamond Reference Level ζ_{ref} default: 0.0 [m]

5.3.16 Combine depth and uniform value

Using this option you can (see Figure 5.16) assign a value to not yet specified depths. For existing depths you can do some basic operations: add a constant value (for instance when you want to change the reference level), multiply with a constant value (for instance with -1 when your depths are positive upwards), or take the minimum or maximum of the depths and a specified value. Optionally, you can use a polygon to restrict the area of operation.

To use this options you first have to specify the uniform value (default: -999.0) in a pop-up window.

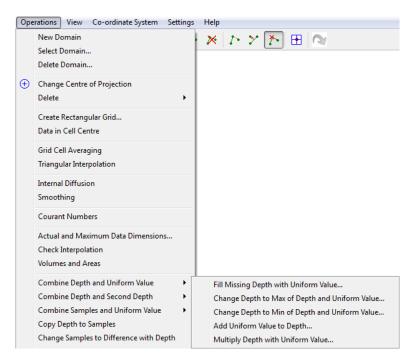


Figure 5.16: Options on the Combine Depth and Uniform Value sub-menu

Fill Missing Depths with Uniform Value

This option operates on grid points with non-existing depth values; they will be assigned the *Uniform Value*. The other options operate on grid points with existing (yet defined) depth values.

Change Depth to Max of Depth and Uniform Value

If the Uniform Value is larger than the depth, the depth value is replaced by the Uniform Value.

Change Depth to Min of Depth and Uniform Value

If the *Uniform Value* is smaller than the depth, the depth value is replaced by the *Uniform Value*.

Add Uniform Value to Depth

The Uniform Value is added to the depth value.

Multiply Depth with Uniform Value

The depth value is multiplied by the *Uniform Value* (for instance with -1 when your depths are positive upwards).

5.3.17 Combine depth and second depth

Using this option you can (see Figure 5.17) manipulate the depth using the second depth. The depth can be replaced by the second depth, the maximum or minimum can be taken, the second depth can be added or subtracted, the depth can be multiplied or divided by the second depth. If a polygon is defined, the operation applies to grid points inside the polygon.

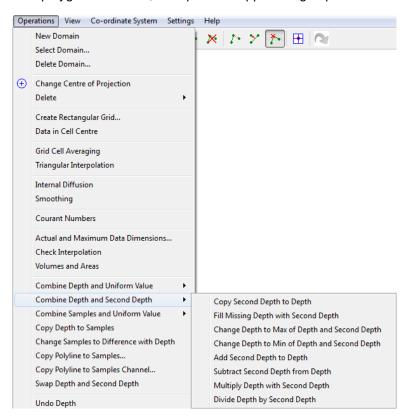


Figure 5.17: Options on the Combine Depth and Second Depth sub-menu

Copy Second Depth to Depth

If the second depth value is specified, the depth value will be replaced by the second depth value.

Fill Missing Depth with Second Depth

This option operates on grid points with non-existing depth values; they will be assigned the *Second Depth Value*.

Change Depth to Max of Depth and Second Depth

If the Second Depth Value is larger than the depth, the depth value is replaced by the Second Depth Value.

Change Depth to Min of Depth and Second Depth

If the Second Depth Value is smaller than the depth, the depth value is replaced by the Second Depth Value.

Add Second Depth to Depth

The Second Depth Value is added to the depth value.

Subtract Second Depth from Depth

The Second Depth Value is subtracted from the depth value.

Multiply Depth with Second Depth

The depth value is multiplied by the Second Depth Value.

Divide Depth by Second Depth

The depth value is divided by the Second Depth Value.

5.3.18 Combine samples and uniform value

Using this option you can (see Figure 5.18) manipulate samples compared to a *Uniform Value*. Optionally, you can use a polygon to restrict the area of operation.

To use these options you first have to specify the uniform sample value.

Change Samples to Uniform Value

Samples will get the Uniform Value.

Change Samples to Max of Sample and Uniform Value

Samples with a value smaller than the Uniform Value will get the Uniform Value.

Change Samples to Min of Sample and Uniform Value

Samples with a value larger than the *Uniform Value* will get the *Uniform Value*.

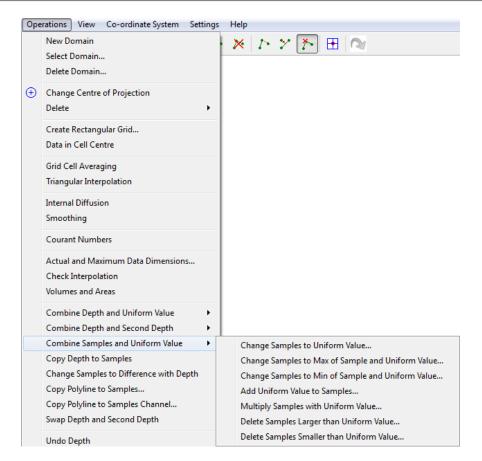


Figure 5.18: Options on the Combine Samples and Uniform Value sub-menu

Add Uniform Value to Samples

The *Uniform Value* will be added to the sample value.

Multiply Samples with Uniform Value

Samples will be multiplied by the Uniform Value.

Delete Samples Larger than Uniform Value

Samples larger than the *Uniform Value* will be deleted.

Delete Samples Smaller than Uniform Value

Samples smaller than the *Uniform Value* will be deleted.

5.3.19 Copy depth to samples

If you want to interpolate a detailed model based upon an existing overall model, first open the grid and the depths of the overall model. Then, copy the overall depth information to the samples and open the detailed model grid. Then, interpolate these samples to the detailed model. If a polygon is defined, the depth points inside the polygon are copied to samples.

46

5.3.20 Change samples to difference with depth

The depth value at sample point locations is interpolated based upon the depth values at the grid points. Next the original sample value is subtracted from this re-interpolated value.

5.3.21 Copy polyline to samples

A polyline can be changed to sample points by specifying the value at the begin and end of the polyline, see Figure 5.19. By linear interpolation the samples in-between are determined. If 'NO' linear interpolation is specified (0) the value at the begin of the polyline is used for all samples on the polyline (iso-line). The number of samples per line segment can be specified in the $Settings \rightarrow Polyline$ to Samples window, see Figure 5.19. Also, spline shape is possible for smooth isolines.

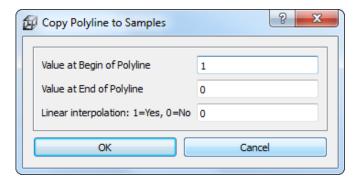


Figure 5.19: Copy Polyline to Samples parameters

The default values are:

- ♦ Value at Begin of Polyline default: 1.0 [m] If no linear interpolation is used, all points will have the value at the begin.
- ♦ Value at End of Polyline default: 0.0 [m]
- Linear Interpolation Yes or No default: 0 (No)

Remark:

♦ If you define more than one polygon, only the first polygon will be used.

5.3.22 Copy polyline to samples channel

A polyline can be changed to sample points of a channel where the polyline is the centre line of the channel. The depth and width at the bottom have to be specified at the beginning and end of the channel as well as the channel slope and the number of samples across the channel width, see Figure 5.20. If the channel is placed in an existing bottom (presented by samples) it is possible to remove channel samples above the original bottom and remove existing samples above the channel (dredged channel). To this end a triangle network is created by the program. The position where a line of the channel slope crosses a triangle, a sample is created with a depth which is determined by linear interpolation of the depth of the triangle edges. The number of samples and the shape of the channel line can be specified in the *Settings* menu, *Polyline to Samples* window, see Figure 5.20

The default values are:

Channel Width at Begin of Polyline

Deltares 47



default: 100.0 [m]

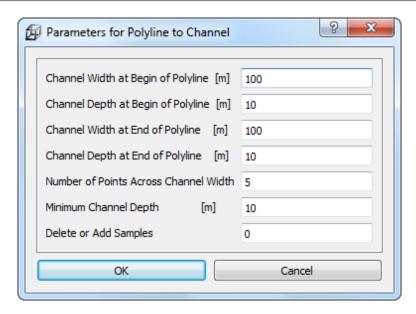


Figure 5.20: Parameters form for Polyline to Samples Channel

- ♦ Channel Depth at Begin of Polyline
- ♦ Channel Width at End of Polyline
- ♦ Channel Depth at End of Polyline
- Number of Points across Channel Width
- ♦ Channel Side Slope
- ♦ Minimal Channel Depth
- ♦ Delete or Add Samples

default: 10.0 [m]

default: 100.0 [m]

default: 10.0 [m]

default: 5 default: 5

default: 10.0 [m]

default: 0

(I) Remark:

♦ If you define more than one polygon, only the first polygon will be used.

5.3.23 Swap depth and second depth

This will interchange the depth and second depth points. If a polygon is defined, only the depth points inside the polygon are interchanged.

5.3.24 Undo depth

Reset the depth values to values prior to the last action. When applying the edit modes, pressing Esc has the same effect.

5.3.25 Undo samples

Reset the sample values to values prior to the last action. When applying the edit modes, pressing Esc has the same effect.

5.4 View menu

On the View menu, you may choose to display several data sets, see Figure 5.21

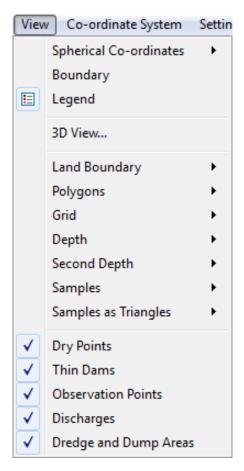


Figure 5.21: Options on the View menu

5.4.1 Spherical co-ordinates

Here you can select how to project the spherical co-ordinates onto the screen, see Figure 5.22.



Figure 5.22: Options on the View \rightarrow Spherical Co-ordinates sub-menu

Remarks:



- ♦ Only applicable for a spherical co-ordinate system.
- ♦ Default: A spherical grid is shown in stereographic projected co-ordinates.

Plane co-ordinates

Upon selecting $\textit{View} \rightarrow \textit{Spherical Co-ordinates} \rightarrow \textit{Plane Co-ordinates}$, you can choose to the display the co-ordinates as they are.

Stereographic projected co-ordinates

Upon selecting $\textit{View} \rightarrow \textit{Spherical Co-ordinates} \rightarrow \textit{Stereo Projected Co-ordinates}$, the coordinates are displayed using a stereographic projection onto the screen.

5.4.2 Boundary

Show or hide the computational boudary.

5.4.3 Legend

Show or hide the colour band on the left side of the screen.

5.4.4 3D View

Does not have the required performance, it very slow

In the **Delft3D-3DView** window a fully 3-dimensional view of the data is shown.

- c: Switch rendering mode
- h: Toggle help
- i: Inverse depth
- r: Reste view
- s: Toggle samples
- x: Increase depth
- z: Decrease depth

left mouse: Rotate in xy-plane

CTRL+left mouse: move origin xy-plane

middle-mouse: zoom right mouse: rotate *z*-axis

5.4.5 Land boundary

Upon selecting *View* → *Land Boundary*, you can show the land boundary.

The following view options are available:

♦ No Land Boundary

Do not show the land boundaries.

♦ Lines

Show the land boundaries as lines.

♦ Lines with Dots

Show the land boundaries as lines with dots at the land boundary points.

♦ Filled

Show the land boundaries as lines filled with a colour.

5.4.6 Polygons

The following view options are available:

♦ No Polygons

Do not show the polygons.

♦ Lines

Show the polygons as lines.

♦ Lines with Dots

Show the polygons as lines with dots at the polygon points.

♦ Filled

Show the polygons as lines filled with a colour.

5.4.7 Grid

The following view options are available:

♦ No grid

Do not show the grid.

♦ Lines

Show the grid with lines.

♦ Node numbers

Show the node numbers.

♦ Cell numbers

Show the grid cell numbers.

5.4.8 Depth

The following view options are available:

♦ No depth

Do not show the depth.

♦ Continuous shades

Show the depth as continuous shades interpolated from the values at the depth points.

♦ Patches

Show the depth as average of the depth points.

♦ Coloured Dots

Show the depth as coloured dots.

♦ Coloured Numbers

Show depth with numbers coloured according value.

♦ Mono coloured Numbers

Show depth with numbers in a single colour.

♦ Points yet to be found

Show the depth points with an undefined value.

5.4.9 Second depth

The following view options are available:

♦ No second depth

Do not show the second depth.

♦ Continuous shades

Show the second depth as continuous shades interpolated from the values at the depth points.

♦ Patches

Show the second depth as average of the values at the depth points.

♦ Coloured Dots

Show the second depth as coloured dots.

♦ Coloured Numbers

Show second depth with numbers coloured according value.

♦ Mono coloured Numbers

Show second depth with numbers in a single colour.

Points yet to be found

Show the second depth points with an undefined value.

5.4.10 Samples

The following view options are available:

♦ No Samples

Do not show the samples.

♦ Coloured Dots

Show the samples as coloured dots.

Coloured Numbers

Show samples with numbers coloured according value.

♦ Mono coloured Numbers

Show samples with numbers in a single colour.

5.4.11 Samples as triangles

The samples can be displayed as colour filled isolines using a triangle network. This is a slow visualisation method, zoom in to reduce the number of samples that must be triangulated. It is possible to display the slopes (α) of the individual triangles, or the local mild slope criterion. The slope is defined as the inner product of the triangle normal vector and the upward unit vector. The mild slope criterion is defined as $\alpha/kH,\,H$ being the total water depth, $(d+\zeta_0)$ and k being the wave number, which depends on the specified Wave Period. You can either display these values as numbers, or as green/red triangles indicating whether the slope or mild slope criterion is satisfied.

Deltares

The following display options are available:

- ♦ No Sample Triangles
- ♦ Edges
- ♦ Continuous Shading
- ♦ Edges and Continuous Shading
- ♦ Triangle Slopes

This option triggers the following sub-menu, see Figure 5.23

52

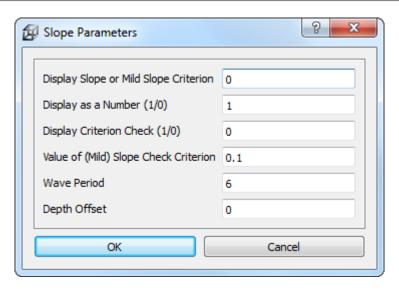


Figure 5.23: Options on the Slope Parameters window

♦ Display Slope or Mild Slope Criterion default: neither For each triangle, either the slope or the mild slope criterion can be displayed or be checked against some criterion.

♦ Display as a Number Yes/No

default: yes

♦ Display Criterion Check Yes/No

default: no

Shows in red/green whether the slope or mild slope criterion is satisfied

default: 0.1

♦ Value of (Mild) Slope Check Criterion

If a criterion check is requested, then its value can be specified here.

default: 6.0 [s]

Wave Period
 Needs only be specified if mild slape criterion is required

Needs only be specified if mild slope criterion is required *Depth Offset*

default: 0.0 [m]

Is used in wave period computation, added to local depth.

5.4.12 Dry points

Show or hide the dry points.

5.4.13 Thin dams

Show or hide the thin dams.

5.4.14 Observation points

Show or hide the observation points.

5.4.15 Discharges

Show or hide the discharge locations.

5.4.16 Dredge and dump areas

Show or hide the dredge and dump areas.

5.5 Co-ordinate System menu

If you want to import some files and you known on forehand what the co-ordinate system is you have to select it here. Sometimes this will be the case if you first load a land boundary and/or polygons before you import the grid.




Figure 5.24: Options on Co-ordinate System menu

There are two option for the co-orduinate system

- 1 Cartesian co-ordinates.
- 2 Spherical co-ordinates Only WGS84 is supported.

5.6 Settings menu

The following options can be accessed through the Settings menu, see Figure 5.25




Figure 5.25: Options on Settings menu

5.6.1 General

The following parameters influence the behaviour of the operations above. They are set via the following parameter list, see Figure 5.26

Go Back to Start-up Directory Yes or No default: 0 (No) When navigating through the directories in the file menu, you can specify whether to always go back to the start up directory, or keep the latest directory so that you have to navigate only once.

default: 200

Number of Internal Diffusion Steps

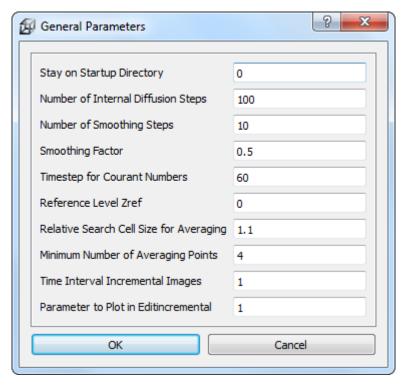


Figure 5.26: Options on Settings window

♦ Number of Smoothing Steps

default: 10

♦ Smoothing Factor

default: 0.05

A value of 0.0 gives no smoothing; a value of 1.0 makes a point the average of its neighbouring depth points.

- \diamond Time-step for Courant Number default: 60.0 [s] The time step is in seconds. The Courant number is computed following the definition in the Delft3D-FLOW User Manual, valid for the ADI method in a staggered grid. The local water depth is the depth value + the Reference Level ζ_0
- \diamond Reference Level Zref ζ_0 default: 0.0 [m] The reference level is defined as positive upward.
- Relative Search Cell Size for Averaging default: 1.1 Giving a cell search area of 1 grid cell, a value of two gives a factor 2 larger cells in both directions.
- ♦ Minimum Number of Averaging Points

default: 4

⋄ Time Interval Incremental Images

default: 0.05

♦ Parameter to Plot in Edit-incremental

default: 1

1 = water height, 2 = flow velocity, 3 = water level, 4 = U-component, 5 = V-component

⋄ Delete Polygon after Operations

default: 0 (No)

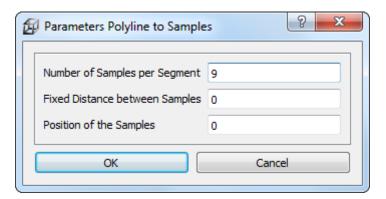


Figure 5.27: Options on Parameters Polyline to Sample window

5.6.2 Polyline to samples

In the parameter form, see Figure 5.27, you can specify the number of samples per polyline segment, the distance between the samples, and the shape of the polyline.

- ⋄ Number of Samples per Segment
- ♦ Fixed Distance between Samples default: 0.0 [m] A non-zero distance specifies the distance between the samples. If zero distance is specified, the distance depends on the segment size and the number of points per segment.

default: 9

Spline Shape Yes or No default: 0 (No) The shape of the Polyline to Samples and Polyline to Samples Channel operations can be a straight line (0) or a spline shape (1).

5.6.3 Change colour map

When clicking on the $Settings \rightarrow Change\ Colour\ Map$ menu, a form opens in which you can select the relation between a parameter (i.e. Depth) and the loaded colour maps; see Figure 5.28



Figure 5.28: Opions on Colour Map for Parameter window

5.6.4 Legend

When clicking on the $Settings \rightarrow Legend$ menu, a form opens in which you can define how the iso-colour figures should be displayed; see Figure 5.29

Autoscale Legend default: On Specify whether the program should determine the isocolour values automatically, or to do it yourself. If you leave it to the program, it will determine the minimum and maximum




Figure 5.29: Opions on Settings → Colours menu

depth value within the viewing area and display the number of iso-colours specified above. Zooming in will always result in display of the same number of iso-colours. If you want to specify the isocolour values yourself, you have to specify one of the three parameters below. When zooming in, the iso-colour values will remain fixed.

	below. When 200ming in, the 190 colour values will remain fixed.	
\Diamond	Number of digits	default: 3
	Specifying the number of digits used in the legend and on the map.	
\Diamond	Minimum Value	default: On
	Specifying this value turns autoscale off.	
\Diamond	Maximum Value	default: On
	Specifying this value turns autoscale off.	
\Diamond	Classes	default: 20
	The number of classes can be specified	
\Diamond	X Co-ordinate Legend	default: 16
	x Co-ordinate of lower left corner of legend in pixels	
\Diamond	Y Co-ordinate Legend	default: 20
	y Co-ordinate of lower left corner of legend in pixels	

5.6.5 Colours

When clicking on the $Settings \rightarrow Colours$ menu, a form opens in which you can define the colours for background, land boundary, polygons, etc.; see Figure 5.30

5.6.6 Sizes

When clicking on the $Settings \rightarrow Sizes$ menu, a form opens in which you can define the linewidth and dotsize in pixels. See Figure 5.31

5.6.7 Averaging options

For all averaging methods, see Figure 5.32, the surrounding area depends on the shape of the surrounding grid cells and the parameter $Relative\ Search\ Cell\ Size\ for\ Averaging\ (in\ Settings\ \to\ General).$ The default value of 1.0 gives an area of 1.0 grid cell, a value of two gives a factor 2.0 larger cells in both directions. The shape of the area around a given grid point is defined by an eight point polygon that has the surrounding cell centres as corners and the points halfway in between the grid point and the surrounding grid points in between these corners.

- ♦ Average Value of Near Points
- ♦ Value of Closest Point
- ♦ Maximum Value of Near Points
- ♦ Minimum Value of Near Points
- ♦ Shepard

The Shepard method is a weighted averaging method, with weights depending on the reciprocal of the squared distance between the grid point and the surrounding samples:

$$\overline{s} = \frac{\sum_{i=1}^{N} \frac{s_i}{d_i^2}}{\sum_{i=1}^{N} \frac{1}{d_i^2}}$$
 (5.1)

with:

 \overline{s} Averaged value

N number of samples within the polygon

 d_i distance between grid point and sample point i

 s_i value of sample point i

5.6.8 TEKAL block indicators

The next parameters (see Figure 5.33) can be specified to indicate which block of x, y and z values must be read from a TEKAL type file.

default: dept

default: 1.0

Block Indicator, (4 Characters)

Multiplication Factor for z Values

5.6.9 Order caches

The parameters set in the **Order caches** window, see Figure 5.34, influence the drawing order of the several items. The drawing order of the caches is: 5,4,3,2,1,0. Cache 5 is drawn first and cache 0 is drawn last. So the items which will drawn in cache 0 are drawn on top. If there is no need the draw a cache it will not be done, this improves the drawing performance by avoiding unnecessary drawing. So if an item is changed in cache 3 only caches 3,2,1 and 0 are drawn.

Resttextdefault: 0default: 0

\	Polygons	default: 1
\	Dredge and Dump	default: 1
\	Dry Points, Thin Dams, Observation Points	default: 1
\	Computational boundary	default: 1
\	Second Depth	default: 1
\	Active Grid	default: 2
\	Active Depth	default: 2
\	Samples	default: 2
\	Land Boundary	default: 1
\	Inactive Grids and Depths	default: 4
\	Triangle Samples	default: 5

5.7 Help menu

On the *Help* menu, you may choose to read the user manual or the version number of QUICKIN; see Figure 5.35

5.7.1 User manual

When clicking on the $Help \rightarrow User\ Manual$ the user manual of QUICKIN will be displayed (file <QUICKIN _User_manual.pdf>).

5.7.2 About

When clicking on the $Help \to About$ a window will display the current version number of QUICKIN.

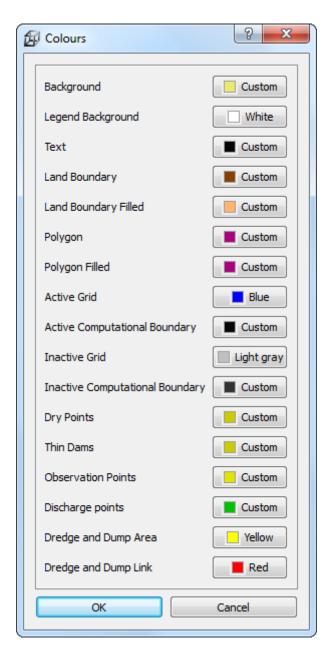


Figure 5.30: Opions on Settings → Colours menu

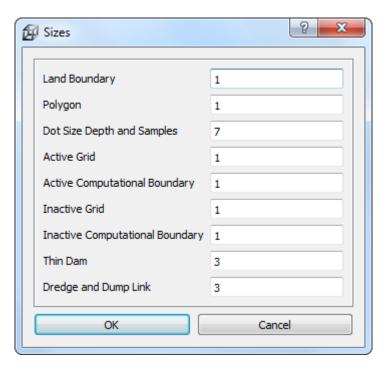


Figure 5.31: Opions on Settings \rightarrow Sizes menu

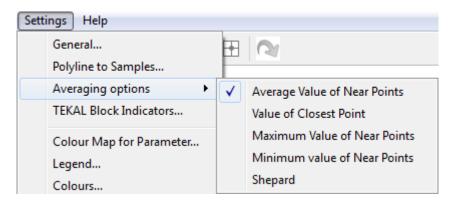


Figure 5.32: Options on Averaging Options menu

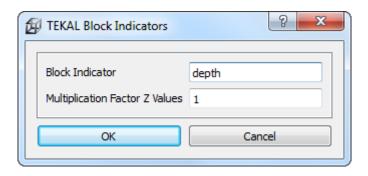


Figure 5.33: Options on TEKAL Block Indicator window

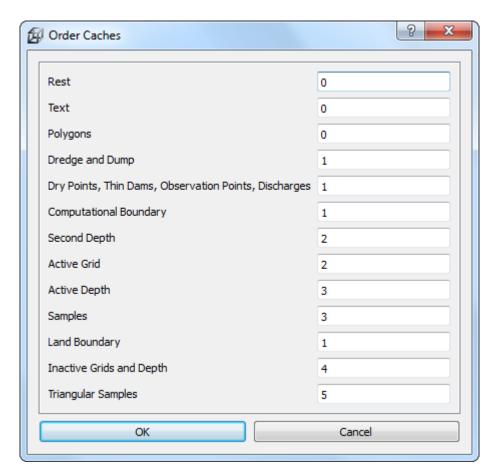


Figure 5.34: Options on Order Caches window




Figure 5.35: Opions on Help menu

6 Tutorial

6.1 Interpolation

6.1.1 Open grid and land boundary

For details, see Sections 3.2 and 3.3

- Start Delft3D and click Select working directory to enter the <tutorial\quickin\maracaibo> directory.
- ♦ Start QUICKIN.

For Lake Maracaibo we will exercise generating a bathymetry from samples for Delft3D-FLOW.

- ♦ On the File menu, select Attribute Files and click Open Land Boundary....
- ♦ Select and open the file <mar 01.ldb> that contains an outline of the land boundary.
- ♦ On the File menu, select Import and click Grid (RGFGRID)...; open <mar_02.grd>

The land boundary and grid look like in Figure 6.1.

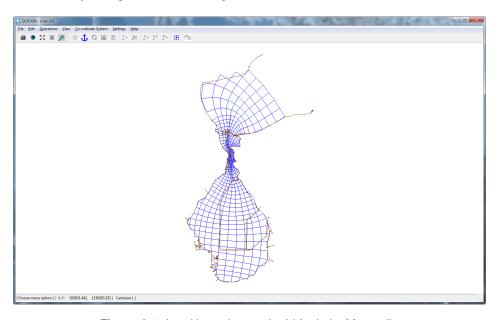


Figure 6.1: Land boundary and grid for Lake Maracaibo

In Delft3D-FLOW, the water level is defined in the centre of a grid cell that is surrounded by four grid points. In the next steps, the model bathymetry at the grid points will be created by interpolating the available depth samples.

6.1.2 Open samples

- ♦ On the File menu, select Attribute Files and click Open Samples....
- ♦ Open the scattered samples file <mar_02.xyz>.

Note: that the sample density is high in the centre part and low in the lower part. In low

★

sample density areas, triangulation is more suited, in high density areas, averaging is more suited, see Figure 6.2.

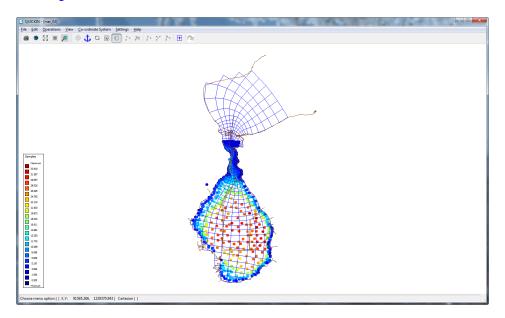


Figure 6.2: Samples covering the Lake Maracaibo model area

6.1.3 Zoom in and out

To zoom in or out several facilities are available:

- ♦ On the toolbar click to zoom in or to zoom out.
- ♦ Press the + or key while keeping the CTRL-key pressed.
- Use the mouse scroll wheel.

To zoom in on a specific area

- Click point on the toolbar and drag a box around the area.
- ♦ To zoom out to full extent, click on the toolbar.

To pane the grid: keep the CTRL-key pressed and move around with the cursor. Hereafter you will interpolate the sample data onto the grid.

6.1.4 High and low sample density

Areas with a high sample density need an other interpolation method then areas with a low sample density. In general grid cell averaging is used in areas with a high sample density, and triangulation is used in areas with a low sample density. High sample density is obtained where there are a few or more sample points in the direct neighbourhood of a grid point, low density is obtained when there is in average less then 1 sample point in the direct neighbourhood.

High sample density

The dense part is best interpolated by an averaging procedure, so that all samples within the direct surroundings of a grid point (see Figure 6.3) are taken into account to get the best volume for the grid cell.




Figure 6.3: Default relative search cell for grid cell averaging

The default relative search area is defined by the centres of the surrounding grid cells, and the mids of the grid cell faces, see Figure 6.3. The minimum number of samples for grid cell averaging is default 4. If there are less samples in the search area, no depth value is calculated. Moreover, if there are not enough samples available, the depth should be interpolated by triangulation. The relative search area and minimum number of averaging points can be changed in $Settings \rightarrow General$.

- ♦ Create a polygon by clicking on the toolbar and next by clicking the left mouse around the interpolation area, see Figure 6.4.
- Click the right-mouse button to close the polygon and leave the polygon edit mode.
- ♦ On the *Operations* menu, click *Grid Cell Averaging* to perform the averaging within the previously defined polygon.




Figure 6.4: Grid cell averaging result within a pre-defined polygon

Low sample density

The sparse part is best interpolated by a triangulation method ($Operations \rightarrow Triangular\ Interpolation$). For the moment hide the samples: $View \rightarrow Samples \rightarrow No\ Samples$. After a grid cell averaging method and a triangulation most of the depth points did get a value, see Figure 6.5.




Figure 6.5: Interpolation results after applying grid cell averaging and triangulation

(!) Remarks:

- ♦ Only grid points inside the polygon are taken into account for the operation.
- ♦ Only samples inside the polygon are taken into account for the operation.
- ♦ If a grid point has already a depth value assigned, the operation will not overrule this value
- ♦ If you do not use a polygon to define a limited area, all grid points and samples will be part of the operation.

6.1.5 Points outside area of influence

The result of the previous section is shown in Figure 6.5. Note that grid points that are outside the polygon are excluded from the operation.

As long as not every grid point has a depth value, you are not finished with generating a depth file.

Points that were not interpolated yet

First remove the polygon.

- On the Operations menu, select Delete and click Polygons, or click on the toolbar.
- On the View menu, select Depth and click Yet to be Found to see which grid points still have to be assigned a depth value.
- ♦ Edit a new polygon as shown in Figure 6.6.
- ♦ On the Operations menu, select Internal Diffusion to fill in these missing points within the polygon area. After selecting View → Depth → Continuous Shade from the menubar you obtain Figure 6.7.

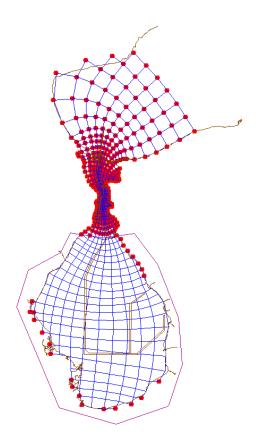


Figure 6.6: Display of Points Yet to be Found

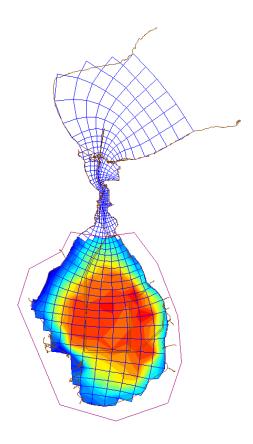


Figure 6.7: Continuous shade display, all grid points inside the polygon have a depth value

6.2 Save depth

To save the depth values at the grid points

♦ On the File menu, select Export and click Depth.

The file window **Save Depth** opens, see Figure 6.8.

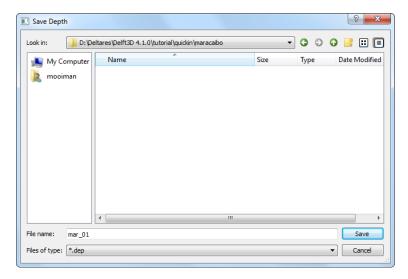


Figure 6.8: Save Depth window to save the depth files

♦ Enter <mar_01> and click *Save* to save the depth file.

6.3 Dredge and dump areas

Start QUICKIN in the <tutorial\quickin\dredge_and_dump> directory.

- ♦ On the File menu, select Attribute Files and click Open Land Boundary....
- ♦ Select and open file <manukau.ldb> that contains an outline of the land boundary.

You can fill the land boundary polygon by selecting the menu option $Settings \to Colours$ and set the appropriate colours for $Land\ Boundary$, $Land\ Boundary\ Filled$ and select menu item $View \to Land\ Boundary \to Filled$.

Now we will define some dredge and dump areas with polygons.

♦ On the Edit menu, click Dredge and Dump Areas and New Area

Define the polygons like in Figure 6.9, finish a polygon by clicking the right mouse button.

68

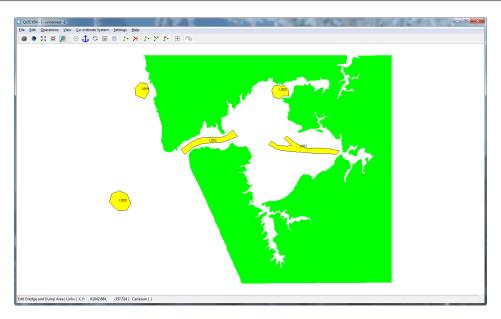


Figure 6.9: Location of dredge and dump areas

Renaming the default polygon names can be done by editing the properties of an area. Select $Edit \rightarrow Dredge \ and \ Dump \ Areas \rightarrow Edit \ Properties$, click in an area and change the polygon names as listed below.

- ♦ Rename the polygon in the north-east of the harbour "dredge 1"
- ♦ Rename the polygon in the east of the harbour "dredge 2"
- ♦ Rename the polygon in the entrance of the harbour "dredge 3"
- ♦ Rename the northerly polygon at sea "dump 1"
- ♦ Rename the southerly polygon at sea "dump 2"

You will see that the polygons are filled in and the names are shown at the mass-centre of the polygon, see Figure 6.10.

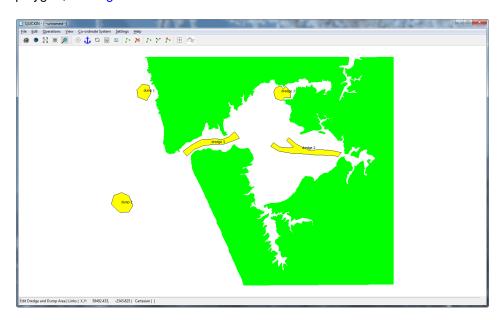


Figure 6.10: Edit Dredge and Dump, with polygon names

♦ When finished point to Files → Delft3D-FLOW Attribute files → Save Dredge and Dump Areas to save dredge and dump areas to the files <*.pol> and <*.dad>.

To define the links that connect dredge to dump areas, first press $Edit \rightarrow Dredge$ and Dump $Areas \rightarrow New Link$. Next, click inside a dredge polygon, followed by a click inside a dump polygon.

- ♦ Connect 'dredge 1' to 'dump 1'.
- ♦ Connect 'dredge 2' to 'dump 1'.
- ♦ Connect 'dredge 3' to 'dump 2'.

The result is shown in Figure 6.11.

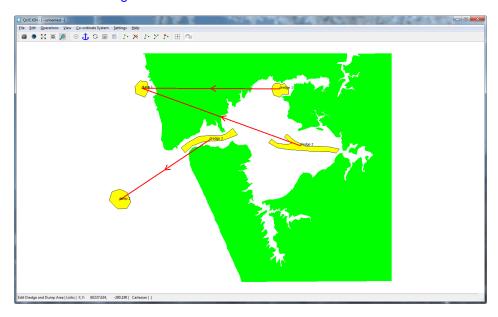


Figure 6.11: Dredge and Dump areas with their links

If you want to delete a link, first select $Edit \rightarrow Dredge \ and \ Dump \ Areas \rightarrow Delete \ Link$, and next click the dredge depth field of the link to be deleted.

To edit the dredging properties, select the $Edit \rightarrow Dredge$ and $Dump Areas \rightarrow Edit Properties$. Now you can edit the properties of the dredge and dump area by clicking them and typing the requested fields, see Figure 6.12.




Figure 6.12: Change the dredge and dump area properties

♦ Set the dredge depth in the areas 'dredge 1' and 'dredge 2' to "10.0 m", and in 'dredge 3' to "20.0 m", see Figure 6.12.

On the File menu, point to Delft3D-FLOW Attributes and click Save Dredge and Dump Areas, and save the dredge and dump characteristics to the files < option_1_characteristics.pol> and < option_1_characteristics.dad>.

If you already have saved the polygons, ignore the save question. If not, save the polygons.

♦ Exit QUICKIN.

6.4 Flooding animation

This functionality only applies for users of Delft1D2D.

Start QUICKIN in directory <tutorial\quickin\flooding_animation>.

- ♦ On the File menu, select Import and click Open Grid and Depth (Arc) and open <a tiel.aht>.
- ♦ On the *File* menu, select *Import* and click *Grid* (*Incremental*) and open the incremental file <tlt.inc>.
- On the Settings menu, click Colour Map for Parameters. Join the Depth parameter to the bathymetry (inverse) colour map and join the Flooding parameter to the jet colour map, see Figure 6.13.



Figure 6.13: Jooin parameter Flooding to colour map jet

♦ Press the spacebar to start/stop the animation. See Figure 6.14 for a certain time in the flooding animation.

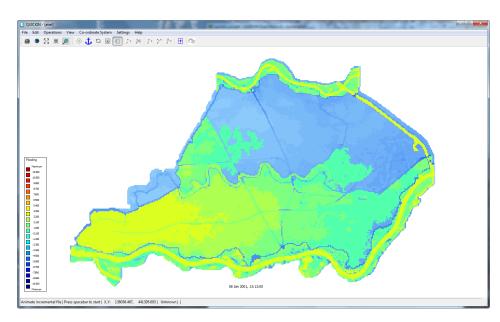


Figure 6.14: Example of a flooding image

♦ Exit QUICKIN.

6.5 QUICKIN in the ArcMap environment

In this case you should be familiar with using co-ordinate systems in ArcMap.

ArcMap layers (e.g. shape files, SDE layers) most times have also information about the coordinate system (spatial reference). If not available, ArcMap marks this as unknown. On the other hand, if it is known to you, spatial reference can be added to these layers by the program ArcCatalog.

If the layers in ArcMap have a projected co-ordinate system or probably an unknown co-ordinate system, then you can use *Cartesian* in QUICKIN. It is your responsibility the co-ordinates have the unit metres. You can see the used (projected) co-ordinate system of the layers and of the data frame via the properties of the data frame. For QUICKIN the co-ordinate system of the data frame is leading. As you know, ArcMap has possibilities to set the co-ordinate system of the data frame, while layers have different co-ordinate systems.

If you want to use spherical co-ordinates in QUICKIN while using ArcMap, the co-ordinate system of the data frame must be WGS84 (in ArcMap it has the name CGS_WGS_1984). This will be the case when all layers have this co-ordinate system.

If you are familiar with ArcMap you can have one or more layers with different co-ordinate systems and select (import) the WGS84 system for the data frame. Figure 6.15 shows the properties window of de data frame, <custom> give the co-ordinate system of the data frame.

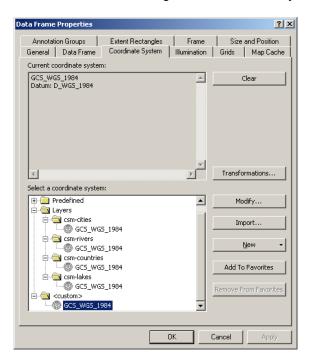


Figure 6.15: ARC-GIS data frame properties form

You start loading layers or an <*.mxd> file in ArcMap. The co-ordinate system of the data frame must be as described above. You will see that ArcMap displays the values of longitude and latitude as plane co-ordinates in degrees.

Then you can start using the commands and functions of QUICKIN. The program has a menu item to change into projected co-ordinates. When using this command, the layers in ArcMap are displayed as projected and also the grid, polygons, samples of the program.

When using the menu item $View \rightarrow Spherical Co-ordinates \rightarrow Plane Co-ordinates$, both the layers in ArcMap and the objects of QUICKIN are displayed as plane co-ordinates.

Centring the screen in stereographic mode

In the standalone version of QUICKIN, the visualisation using the stereographic projection method always uses the centre of the screen as the point where the screen touches the sphere. This is more difficult to realise when working within the GIS environment because screen handling now is governed by the GIS system. Therefore a special function has been implemented to perform this task of centring the computer screen. This function can be invoked by clicking the menu item $Operations \rightarrow Change\ Centre\ of\ Projection$, see Figure 6.16. When using this command the centre of the projection is set to the centre of the screen. This action needs recalculation of the projection and a new screen refresh. By using this command you are aware of changing the screen. When using zoom in, zoom out, pan, the centre of the projection does not change. So there is more performance and a smooth screen-refresh in this case.

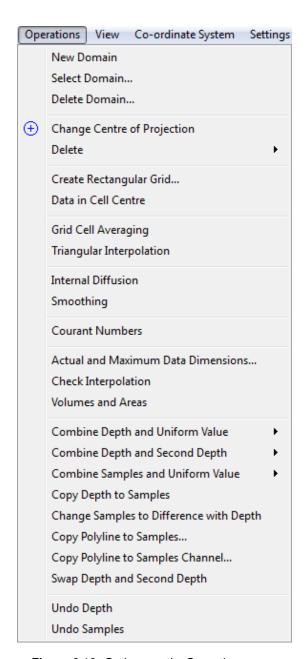


Figure 6.16: Options on the Operations menu

74

References

```
Delft1D2D, 2002. Delft1D2D User Manual. Deltares, 0.00 ed. 1, 5

Delft3D-FLOW, 2013. Delft3D-FLOW User Manual. Deltares, 3.14 ed. 1, 25, 41

GPP, 2013. Delft3D-GPP User Manual. Deltares, 2.14 ed. 24

QUICKPLOT, 2013. Delft3D-QUICKPLOT User Manual. Deltares, 2.14 ed. 24

RGFGRID, 2013. Delft3D-RGFGRID User Manual. Deltares, 4.00 ed. 1

SWAN, 2000. SWAN Cycle III version 40.11 User Manual (not the short version). Delft University of Technology, Delft, The Netherlands, 0.00 ed. 5
```

A Files of QUICKIN

In the following sections we describe the attribute files used in QUICKIN.

For each file which can handled by QUICKIN we give the following information:

- ♦ File contents.
- ♦ Filetype (free formatted, fix formatted or unformatted).
- ♦ Filename and extension.
- ♦ Generated by (i. e. how to generate the file).
- Restrictions on the file contents.
- ♦ Example(s).

Remarks:

- ♦ The access mode of all attribute files is sequential.
- ♦ In the examples the file content is printed in font Courier and comment (not included in the file) between curly brackets font, unless explicitly stated differently.

A.1 Delft3D project file

File contents Domain input for a model.

Filetype ASCII

File format Free formatted.
Filename < name.d3d>

Generated RGFGRID, QUICKIN, D-Waq DIDO, or manually offline

Record description:

A header block containing general information and then for each domain a detailed description

(1)

Deltares

77

Keyword	Description
FileInformation	
FileCreatedBy	Version string of the program who generated this file the first time
FileCreationDate	Creation date and time
FileVersion	Version number of <*.d3d> file
Geometry	
LandBoundaryName	Name of the file with the land boundaries
LandBoundaryFormat	Format of the land boundary file, possible values are: TEKAL, NETCDF or SHAPEFILE. The NetCDF file is according the 'World Vector Shoreline' format
DDBound	
FileDDBound	Name of the file with the domain decomposition boundaries

For each grid

Keyword	Description	
Grid		
Туре	Format of the grid file, possible values are: RGF, RGF_NETC DFLOW_FM, TELEMAC	
FileName	Name of grid file with the geographical co-ordinates	
FlowDepth	Name of the file containing the depth values at the cell corners of the grid	
Aggregation	Name of the aggregation file	



Restriction:

♦ The maximum record length in the file is 132.

Example:

The model friesian_tidal_inlet contains three different subdomains (f01, f02, f03) and the project file has the name <friesian_tidal_inlet.d3d.>

```
[FileInformation]
  FileGeneratedBy = Deltares, Delft3D-DIDO Version 4.04.00.11836M, Jun 21 2010, 12:09:34
  FileCreationDate = 2010-06-21, 13:35:22
  FileVersion = 0.03
[DDBound]
  FileDDBound = f34-123.ddb
```

```
[Grid]
                  = RGF
 Туре
 FileName = f01.grd
Aggregation = f34_dd-f01.dwq
 Monitoring Areas = f34_dd-f01.dmo
[Grid]
 Туре
                  = RGF
 FileName
                  = f02.grd
 Aggregation = f34_dd-f02.dwq
 Monitoring Areas = f34_dd-f02.dmo
[Grid]
                   = RGF
 Туре
                  = f03.grd
 FileName
 Aggregation = f34_dd-f03.dwq
 Monitoring Areas = f34_dd-f03.dmo
```

A.2 Land boundary file

File contents The co-ordinates of one or more polylines. Each polyline (piecewise

linear) is written in a single block of data.

Filetype ASCII

File format Free formatted Filename < name.ldb>

Generated RGFGRID, QUICKIN, etc

Record description:

Record	Record description
	Preceding description records, starting with an asterisk (*), and will be ignored.
1	A non blank character string, starting in column one
2	Two integers representing the numbers of rows and number of columns for this block of data
	Two reals representing the x,y or λ,ϕ -co-ordinate

Example:

```
* Polyline L007
L007
6 2
           132400.0
                       549045.0
                       549030.0
           132345.0
           132165.0
                       549285.0
           131940.0
                       549550.0
           131820.0
                       549670.0
           131585.0
                       549520.0
* Polyline L008
L008
```

```
4 2
           131595.0
                       549685.0
                       549865.0
            131750.0
           131595.0
                       550025.0
           131415.0
                       550175.0
* Polyline L009
L009
6 2
            131595.0
                       549655.0
           148975.0
                       564595.0
                       564935.0
            150000.0
           152105.0
                       565500.0
           153150.0
                       566375.0
            154565.0
                       567735.0
```

Pemark:

♦ In case this file is read as a polygon file then the polylines are closed by QUICKIN to get a polygon.

A.3 Sample file

File contents The location and value of samples.

Filetype ASCII

File format Free formatted Filename < name.xyz>

Generated Manually or Offline with QUICKIN and data from digitised charts or

GIS-database.

Record description:

Filetype	Record description
Free formatted	Location and sample value per row Two reals representing the x,y or λ,ϕ -coordinate and one real representing the sample value

Example:

Sample file with 12 sample values with their location (free formatted file).

213813.2	603732.1	-4.053000
214686.0	607226.1	-4.522000
214891.7	610751.2	-5.000000
210330.8	601424.1	-2.169000
211798.0	604444.8	-2.499000
212460.0	607475.7	-2.760000
212436.9	610362.5	-2.865000
185535.4	606607.9	1.360000
186353.0	603789.4	1.122000
187959.2	601197.6	0.9050000
190193.0	599101.5	0.7050000
208578.7	602513.7	-0.7990000

A.4 Polygon file

File contents The co-ordinates of one or more polygons. Each polygon is written

in a single block of data

Filetype ASCII

File format Free formatted Filename < name.pol>

Generated RGFGRID, QUICKIN, D-Waq DIDO, etc

Record description:

The file may contain one or more polygons. For every polygon the file should contain a line indicating the name of the polygon, followed by a line indicating the number of points making up the polygon and the number of coordinates, i.e. 2, finally followed by the coordinate data.

Record	Record description
	Preceding description records, starting with an asterisk (*), and will be ignored.
1	A non blank character string, starting in column one
2	Two integers representing the numbers of rows and number of columns for this block of data
	Two reals representing the x,y or λ,ϕ -coordinate

Restriction:

♦ The first record and the last record in the block should be the same

Example:

1.9522555E+05

```
* Deltares, Delft3D-DIDO Version 3.39.01.4423:4459, Sep 25 2008, 20:10:54
* 2008-09-25, 22:11:08
Observation Area 001
      5 2
  1.8768018E+05 6.1708738E+05
  1.8996981E+05 6.1001035E+05
  1.9746314E+05 6.1266423E+05
  1.9480925E+05 6.1838830E+05
  1.8768018E+05 6.1708738E+05
Observation Area 002
      5 2
  2.0011703E+05 6.1818015E+05
  1.9819166E+05 6.1063479E+05
  2.0568498E+05 6.0870942E+05
  2.0797461E+05
                 6.1599460E+05
  2.0011703E+05
                 6.1818015E+05
Observation Area 003
      5 2
  1.9340425E+05
                 6.1396516E+05
  2.0183425E+05
                 6.1365294E+05
  1.9944054E+05
                 6.0558720E+05
```

6.0595146E+05



1.9340425E+05 6.1396516E+05

A.5 Orthogonal curvilinear grid file

File contents The co-ordinates of the orthogonal curvilinear grid at the depth points.

Filetype ASCII

File format Free formatted
Filename < name.grd>
Generated RGFGRID

Record description:

Record	Record description
	Preceding description records, starting with an asterisk (*), will be ignored.
1	Record with Co-ordinate System = Cartesian or value Spherical
2	The number of grid <i>points</i> in m- and n-direction (2 integers).
3	Three real values (not used).
4 to K+3	A label and record number, the x -component of the world coordinates of all points in m-direction, starting with row 1 to row $nmax$, with as many continuation records as required by $mmax$ and the number of co-ordinates per record. The label and record number are suppressed on the continuation lines. This set of records is repeated for each row until $n=nmax$.
K+4 to 2K+3	A similar set of records for the y -component of the world coordinates.

K is the number of records to specify for all grid points a set of x- or y-co-ordinates.



Restrictions:

- ♦ The grid must be orthogonal.
- ♦ Input items in a record are separated by one or more blanks.

Example:

```
* Deltares, Delft3D-RGFGRID Version 4.16.01.4531, Sep 30 2008, 23:32:27
* File creation date: 2008-10-01, 23:19:22
Coordinate System = Cartesian
             7
0 0 0
Eta=
        1 0.000000000000000E+00
                                    1.0000000000000000E+02
                                                             2.000000...
            5.000000000000000E+02
                                    6.000000000000000E+02
                                                             7.000000...
Eta=
        2 0.000000000000000E+00
                                    1.0000000000000000E+02
                                                             2.000000...
            5.000000000000000E+02
                                    6.000000000000000E+02
                                                             7.000000...
```

Eta=	3	0.0000000000000000E+00	1.0000000000000000E+02	2.000000
		5.0000000000000000E+02	6.0000000000000000E+02	7.000000
Eta=	4	0.0000000000000000E+00	1.0000000000000000E+02	2.000000
		5.0000000000000000E+02	6.0000000000000000E+02	7.000000
Eta=	5	0.0000000000000000E+00	1.0000000000000000E+02	2.000000
		5.0000000000000000E+02	6.0000000000000000E+02	7.000000
Eta=	6	0.0000000000000000E+00	1.0000000000000000E+02	2.000000
		5.0000000000000000E+02	6.0000000000000000E+02	7.000000
Eta=	7	0.0000000000000000E+00	1.0000000000000000E+02	2.000000
		5.000000000000000E+02	6.0000000000000000E+02	7.000000
Eta=	1	1.0000000000000000E+02	1.0000000000000000E+02	1.000000
		1.0000000000000000E+02	1.0000000000000000E+02	1.000000
Eta=	2	2.0000000000000000E+02	2.0000000000000000E+02	2.000000
		2.0000000000000000E+02	2.0000000000000000E+02	2.000000
Eta=	3	3.0000000000000000E+02	3.0000000000000000E+02	3.000000
		3.0000000000000000E+02	3.0000000000000000E+02	3.000000
Eta=	4	4.0000000000000000E+02	4.0000000000000000E+02	4.000000
		4.0000000000000000E+02	4.0000000000000000E+02	4.000000
Eta=	5	5.000000000000000E+02	5.000000000000000E+02	5.000000
		5.000000000000000E+02	5.000000000000000E+02	5.000000
Eta=	6	6.0000000000000000E+02	6.0000000000000000E+02	6.000000
		6.0000000000000000E+02	6.0000000000000000E+02	6.000000
Eta=	7	7.0000000000000000E+02	7.0000000000000000E+02	7.000000
		7.0000000000000000E+02	7.0000000000000000E+02	7.000000

A.6 Bathymetry file

metres) for all grid points.

Filetype ASCII

File format Free formatted or unformatted

Filename < name.dep>

Generated FLOW-GUI (only for uniform depth values).

Offline with QUICKIN and data from digitised charts or GIS-database.

Record description:

Filetype	Record description
Free formatted	Depth values per row, starting at $N=1$ to $N=N$ max, separated by one or more blanks. The number of continuation lines is determined by the number of grid points per row (Mmax) and the maximum record size of 132.
Unformatted	Mmax depth values per row for N = 1 to N = Nmax.

Restrictions:

- ♦ The file contains one M and N line more than the grid dimension.
- ♦ The maximum record length in the free formatted file is 132.
- ♦ Depth values from the file will not be checked against their domain.
- ♦ The input items are separated by one or more blanks (free formatted file only).
- \diamond The default missing value is: -999.0

Example:



File containing 16 * 8 data values for a model area with 15 * 7 grid points (free formatted file).

1.0	2.0	3.0	4.0	-5.0	-5.0	-5.0	8.0	9.0	10.0	11.0
12.0	13.0	14.0	-5.0	-999.0						
3.0	4.0	5.0	6.0	7.0	-6.0	-6.0	10.0	11.0	12.0	13.0
14.0	15.0	16.0	17.0	-999.0						
5.0	6.0	7.0	8.0	9.0	10.0	-7.0	12.0	13.0	14.0	15.0
16.0	17.0	18.0	19.0	-999.0						
7.0	8.0	9.0	10.0	11.0	12.0	13.0	14.0	15.0	16.0	17.0
18.0	19.0	-7.0	19.0	-999.0						
9.0	10.0	11.0	12.0	13.0	14.0	15.0	16.0	17.0	18.0	19.0
20.0	19.0	18.0	17.0	-999.0						
-7.0	12.0	13.0	14.0	15.0	16.0	17.0	18.0	19.0	20.0	19.0
18.0	17.0	16.0	15.0	-999.0						
-8.0	-8.0	15.0	16.0	17.0	18.0	19.0	20.0	19.0	18.0	17.0
16.0	15.0	14.0	13.0	-999.0						
-999.0	-999.0	-999.0	-999.0	-999.0	-999.0	-999.0	-999.0	-999.0	-999.0	-999.0
-999.0	-999.0	-999.0	-999.0	-999.0						

A.7 Grid and depth file

represented by depth values (in metres) for all grid cells.

Filetype ASCII

File format Free formatted
Filename <name.asc>
Generated Extern program

Header description for the Arc-files:

Keywords	Value	Description
ncols nrows xllcorner yllcorner xllcenter yllcenter cellsize nodata_value	free free free free free free free free	number of columns used for datafield number of rows used for datafield x -co-ordinate of lower left corner of lower left grid cell y -co-ordinate of lower left corner of lower left grid cell x -co-ordinate of centre of lower left grid cell y -co-ordinate of centre of lower left grid cell gridsize in x -direction and y -direction value used for input that is to be neglected

Record description:

Filetype	Record description
Free formatted	Ncols values per row, starting at $N=1$ to $N=Ncols$, separated by one or more blanks. The number of continuation lines is equal to nrows, starting from $N=Nrows$ to $N=1$.

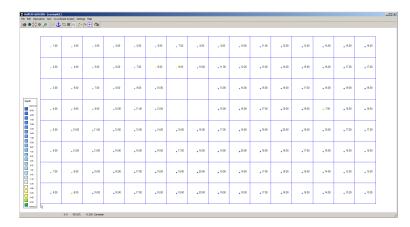


Figure A.1: Example 1, lower left corner is located at (100, 0)

Examples

Two examples are given, one example defining the lower left co-ordinate of the grid and one defining the lower left corner at the data point. Both examples has a data file containing 16*8 data values. The first example has its first data value located at (x,y)=(125,25) and grid corner at (x,y)=(100,0) (see Figure A.1), and the second example has its first data value located at (x,y)=(100,0) and grid corner at (x,y)=(75,-25) (see Figure A.2)

Example 1:

```
16
ncols
                 8
nrows
               100
xllcorner
yllcorner
                 0
cellsize
                50
nodata_value -9999
                                 6.0
                                              8.0
  1.0
         2.0
               3.0
                     4.0
                           5.0
                                       7.0
                                                    9.0 10.0
                                                              11.0 12.0 13.0 14.0 15.0
                                                                                               16.0
  2.0
                                -6.0 -6.0
                                           10.0
         4.0
               5.0
                     6.0
                           7.0
                                                  11.0
                                                         12.0
                                                               13.0 14.0
                                                                            15.0
                                                                                  16.0
                                                                                        17.0
                                                                                               17.0
   3.0
               7.0
                                10.0 -9999 -9999
                                                   13.0
         6.0
                     8.0
                           9.0
                                                         14.0
                                                               15.0
                                                                     16.0
                                                                            17.0
                                                                                 18.0
                                                                                        19.0
                                                                                               19.0
   4.0
         8.0
               9.0
                    10.0
                          11.0
                                12.0 -9999 -9999
                                                   15.0
                                                         16.0
                                                               17.0
                                                                     18.0
                                                                            19.0 -7.0
                                                                                        19.0
                                                                                               19.0
   5.0
        10.0
              11.0
                    12.0
                          13.0
                                14.0
                                      15.0
                                             16.0
                                                   17.0
                                                         18.0
                                                               19.0
                                                                     20.0
                                                                            19.0
                                                                                  18.0
                                                                                        17.0
                                                                                               17.0
   6.0
        12.0
              13.0
                    14.0
                          15.0
                                16.0
                                       17.0
                                             18.0
                                                   19.0
                                                         20.0
                                                               19.0
                                                                      18.0
                                                                            17.0
                                                                                  16.0
                                                                                        15.0
                                                                                               15.0
   7.0
        -8.0
              15.0
                    16.0
                          17.0
                                18.0
                                       19.0
                                             20.0
                                                   19.0
                                                         18.0
                                                               17.0
                                                                     16.0
                                                                            15.0
                                                                                  14.0
                                                                                        13.0
                                                                                               13.0
        -8.0
              15.0
                    16.0
                          17.0
                                18.0 19.0
                                            20.0
                                                   19.0
                                                         18.0
                                                               17.0
                                                                     16.0
                                                                            15.0 14.0
                                                                                        13.0
                                                                                               13.0
```

Example 2:

```
16
ncols
                 8
nrows
xllcenter
               100
yllcenter
                 0
cellsize
                50
nodata_value -9999
  1.0
         2.0
               3.0
                           5.0
                                 6.0
                                       7.0
                                              8.0
                                                    9.0 10.0 11.0 12.0 13.0 14.0 15.0
                                                                                               16.0
                     4.0
                                            10.0
                                                         12.0
                                                                     14.0
                                -6.0
                                                                            15.0
  2.0
         4.0
               5.0
                     6.0
                           7.0
                                     -6.0
                                                   11.0
                                                               13.0
                                                                                  16.0
                                                                                        17.0
                                                                                               17.0
  3.0
         6.0
               7.0
                     8.0
                                10.0 -9999 -9999
                           9.0
                                                   13.0
                                                         14.0
                                                               15.0
                                                                     16.0
                                                                            17.0
                                                                                  18.0
                                                                                        19.0
                                                                                               19.0
   4.0
         8.0
               9.0
                    10.0
                          11.0
                                12.0 -9999 -9999
                                                   15.0
                                                         16.0
                                                               17.0
                                                                      18.0
                                                                            19.0 -7.0
                                                                                        19.0
                                                                                               19.0
  5.0
        10.0
              11.0
                    12.0
                          13.0
                                14.0
                                       15.0
                                             16.0
                                                   17.0
                                                         18.0
                                                               19.0
                                                                      20.0
                                                                            19.0
                                                                                  18.0
                                                                                        17.0
                                                                                               17.0
                                       17.0
                                             18.0
                                                   19.0
                                                         20.0
                                                               19.0
                                                                            17.0
        12.0
              13.0
                    14.0
                          15.0
                                16.0
                                                                     18.0
                                                                                  16.0
                                                                                        15.0
                                                                                               15.0
        -8.0
              15.0
                    16.0
                          17.0
                                18.0
                                       19.0
                                             20.0
                                                   19.0
                                                         18.0
                                                               17.0
                                                                     16.0
                                                                            15.0
                                                                                  14.0
                                                                                        13.0
                                                                                               13.0
   7.0
        -8.0
             15.0
                    16.0
                          17.0
                                18.0 19.0
                                             20.0 19.0
                                                         18.0
                                                               17.0 16.0
                                                                            15.0 14.0
                                                                                        13.0
                                                                                               13.0
```

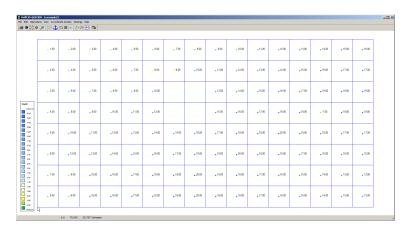


Figure A.2: Example 2, lower left corner is located at (75, -25)

A.8 Open boundary file

File contents The location and description of open boundaries.

Filetype ASCII

File format Fix formatted for text variables; free formatted for real and integer

values.

Filename < name.bnd>
Generated FLOW-GUI

Record description:

Record	Record description					
each record	· · · · · · · · · · · · · · · · · · ·	Name of the open boundary section (20 characters). Type of boundary (1 character).				
	Z C N Q T R	water level current Neumann discharge per grid cell total discharge for boundary section Riemann				
	integers).	astronomic harmonic QH tables (only for water level boundaries) time-series gin and end point of the boundary section (4 (1 real), not for Neumann or Riemann.				

Record	Record description
	Vertical profile (three strings); only for 3D simulations and velocity type boundaries (C, Q, T and R).
	Uniform Logarithmic
	3D profile
	Two labels (each 12 characters, no blanks in the label name) referencing to the blocks in the amplitude and phase file <*.bca>; only if the type of data is A.

Restrictions:

 \bigcirc

- ♦ Maximum record length in the free formatted file is 132.
- ♦ The boundary section name must start at position one in a record.
- ♦ The value of the reflection coefficient will not be checked on its domain.
- All input items in a record must be separated by one or more blanks.
- ♦ Astronomic and harmonic forced boundaries must be specified before QH-relation forced boundaries, which in turn should be specified before time-series forced boundaries.
- ♦ Astronomic and harmonic forced boundaries cannot be combined.

Example:

Two boundary sections with data type A(stronomic) and one with type T(ime series).

Paradise Bay 1	QA	1	1	1	5 0.0 Uniform	Paradise_1A	Paradisee_1B
Paradise Bay 2	C A	16	3	16	6 0.0 Logarithmic	Paradise_2A	Paradisee_2B
Sea Entrance	7. T	4	8	14	8 0 0		

Remarks:



- ♦ A label may not contain blanks between non-blank characters.
- ♦ For the labels 12 characters are read. Be sure the second label starts at least 13 positions after the start of the first.

A.9 Dry points file

File contents Index location of (permanently) dry points.

Filetype ASCII

File format Free formatted Filename < name.dry>

Generated QUICKIN or FLOW-GUI

Record description:

Record	Record description
each record	The grid indices of the begin and end point of a dry section (4 integers).

Restrictions:



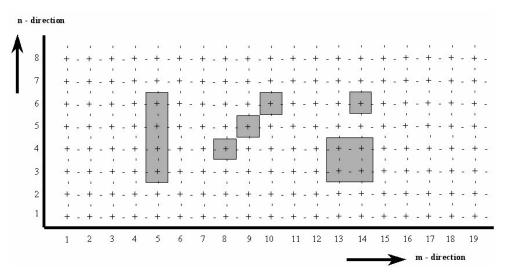


Figure A.3: Dry points in model area

- ♦ The angle of a line of dry points and the horizontal numerical grid axis can be an integer multiple of 45 degrees.
- ◇ Dry points may not be defined along the model boundaries (which by default lie along the lines M = 1, N = 1, M = Mmax or N = Nmax). Therefore, the indices of these points must lie between M = 2 and Mmax-1 and N = 2 and Nmax-1, respectively.
- ♦ The input items are separated by one or more blanks.
- ♦ The most lower-left dry point has indices (2, 2).

Example:

Five sets of dry points in a model area of 19 * 8 grid points, see Figure A.3.

5	3	5	6
8	4	10	6
13	3	14	3
13	4	14	4
14	6	14	6

A.10 Thin dams file

File contents Location and type of thin dams.

Filetype ASCII

File format Free formatted Filename < name.thd>

Generated QUICKIN or FLOW-GUI

Record description:

Record	Record description
each record	The grid indices of the begin and end point of a line of thin dams (4 integers). A character indicating the type of thin dams (U or V).

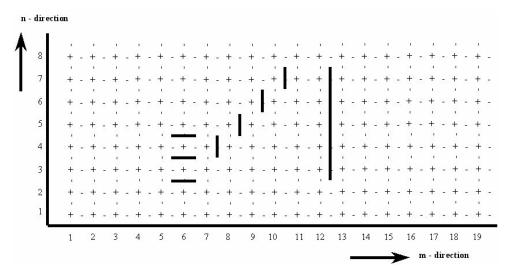


Figure A.4: Example of thin dams in a model area

Restrictions:

- 0
- ♦ The angle of the line segment and the horizontal numerical grid axis may be an integer multiple of 45 degrees.
- ♦ Thin dams can not be defined along the model boundaries (which by default lie along the lines M = 1, N = 1, M = Mmax or N = Nmax). Therefore, the indices of thin dams must lie between M = 2 and Mmax-1 and N = 2 and Nmax-1 respectively.
- Input items are separated by one or more blanks.
- ♦ The direction of the dam is perpendicular to the velocity direction over which the dams are superimposed!

Example:

Three (sets of) thin dams in model area of 19 * 8 grid points, see Figure A.4.

6 2 6 4 V 7 4 10 7 U 12 3 12 7 U

A.11 Observation points file

grid indices.

Filetype ASCII

File format Fix formatted for text variables, free formatted for integer values.

Filename < name.obs>

Generated FLOW-GUI or manually offline

Record description:

Record	Record description
each record	Name of observation point (20 characters), Location of the observation point in grid indices (2 integers).



Restrictions:

- ♦ One record per observation point.
- ♦ The name of the observation point must start in position one.
- ♦ The maximum record length is 132.
- ♦ Input items in a record must be separated by one or more blanks.

Example:

File containing 5 observation points:

Paradise Bay 1	10	11
Paradise Bay 2	11	11
Sea Entrance	4	8
Port Arthur	18	85
Deep Channel	22	44

A.12 Annotation file

File contents File with x and y co-ordinates, string and rgb-colour.

Filetype ASCII

File format Free formatted.
Filename <name.txt>
Generated manually offline

Record description:

Record	Record Description
1	Records starting with a * are comment lines Character string to define the datablock (nonblank)
2	Number of rows
3–N	real, real, string, integer: geographical co-ordinates (2 reals), text between quotes which need to be plotted (string) and rgb-colour (integer; $=256*256*r+256*g+b$)



Restriction:

♦ The maximum record length in the file is 132.

Example:

```
*
BL01
8 4
10.0 10.0 'string-01' 6553625
10.0 20.0 'string-02' 9830425
20.0 10.0 'string-03' 13120000
20.0 20.0 'string-04' 16724480
30.0 10.0 'string-05' 38425
30.0 20.0 'string-06' 65305
```

90

40.0	10.0	string-07'	255
40.0	20.0	string-08'	0

A.13 DD Boundary file

File contents Domain decomposition boundaries connecting two grids for the pre-

scribed indices.

Filetype ASCII

File format Fix formatted. Filename < name.ddb>

Generated RGFGRID, or manually offline

Record description:

Record	Record Description
N	Name of the first grid, followed by four integers indicating the gridline on which the boundary lies, followed by the name of the second grid and four integers indicating the gridline on which the boundary lies.

Restrictions:



♦ The maximum record length in the file is 132.

Example:

In the following example 4 sub-domains exist. Domain d01_ns is coupled to oa1_ns, ob1_ns and oc1_ns. Furthermore oa1_ns is coupled to ob1_ns, and ob1_ns to oc1_ns.

d01_ns.grd	5	16	5	1	oa1_ns.grd	28	35	28	20
d01_ns.grd	245	1	5	1	ob1_ns.grd	17	21	1	21
d01_ns.grd	245	52	245	1	oc1_ns.grd	1	44	1	27
ob1_ns.grd	1	4	1	21	oa1_ns.grd	28	3	28	20
ob1_ns.grd	17	4	17	21	oc1_ns.grd	1	10	1	27

A.14 Colour scheme file

Filetype ASCII

File format Free formatted

Filename < name.clr> or < name.clrmap>

Generated manually

Record description:



Record	Record description
1	COLORMAP
2	NAME=name
3	SPACE=RGB, RGB is the only allowed space for this program
4 – N	one real and three integers.

The first column represent the relative distribution of the defined colours in column 2–4 (representing the RGB values).

Example:

COLORMAP
NAME=copper
SPACE=RGB
0.0000 0 0 0
0.8000 255 159 101
1.0000 255 199 127

A.15 Settings file

File contents Settings of the program

Filetype ASCII

File format
Filename
Filename

Senerated
Fix formatted

Fix formatted

Fix formatted

Program

Senerated
Fix formatted

Record description:

Record	Record description			
FileInformation				
FileCreatedBy FileCreationDate	QUICKIN version number creation date and time			
FileVersion	version number of <*.ini> file			
QNParameter				
name	integer value			
TextSettings				
name	value (integer or real)			
QNsettings				
name	value (integer or real)			
Colours				
name	RGB value (3 integers) line width dots sizes			

Example:

```
[FileInformation]
 FileGeneratedBy = Deltares, Delft3D-QUICKIN Version 4.20.00.11763:11790M, Jun 16 2010, 14:26:47
 FileCreationDate = 2010-06-16, 14:27:41
 FileVersion = 0.02
[RGFSettings]
 MGridCells
                          = 50
 NGridCells
                          = 50
 \mathtt{DeltaX}
                            1.0000000000000000E+02
 {\tt DeltaY}
                         = 1.00000000000000E+02
 OriginX
                         = 0.000000000000000E+00
                         = 1.000000000000000E+02
 OriginY
                        = 0.000000000000000E+00
 RotationLeft
                             0.0000000000000000E+00
 RadiusCurvatureM
                             1.000000000000000E+00
 MFraction
 MaximumSizeUniformMSize =
                              1.000000000000000E+00
 NFraction
                              1.000000000000000E+00
 MaximumSizeUniformNSize
                              1.000000000000000E+00
[QNParameter]
 AutoscaleLegend
                             1
 XCoorLegend
                             16
 YCoorLegend
                             20
[TextSettings]
 Line1
 Line2
 Line3
 Fontsize
                          = 3.00000000000000E+00
 Xposition
                              0.000000000000000E+00
 Yposition
                              0.000000000000000E+00
```

```
FontsizeTimeDate
                                3.000000000000000E+00
 XposTimeDate
                                5.000000000000000E+01
 {\tt YposTimeDate}
                                5.000000000000000E+00
[QNSettings]
 StayOnStartupDirectory
                                0
 NrDiffusionStep
                           = 100
 NrSmoothingSteps
SmoothingFactor
                           = 10
                                5.000000000000000E-01
 DtCFLNumber
                                6.0000000000000000E+01
 ReferenceLevelZref
                                0.000000000000000E+00
 SearchCellSizeAveraging =
                                1.1000000000000009E+00
 MinAveragingPoints = DtIncrementalImages =
                                1.000000000000000E+00
 ParameterPlotIncremental =
 NrSamplePerSegment
 FixedDistanceSamplePoints =
                                0.000000000000000E+00
 PositionSamples
 DisplaySlopeCriterion =
                                0
 DisplayAsNumber
 DisplayCriterionCheck =
 ValueSlopeCheckCriterion =
                                1.0000000000000006E-01
 WavePeriod
                                6.000000000000000E+00
 DepthOffset
                                0.000000000000000E+00
 ChannelWidthBegin = ChannelDepthBegin =
                                1.000000000000000E+02
                                1.000000000000000E+01
 ChannelWidthEnd
                                1.000000000000000E+02
                                1.000000000000000E+01
 NrPointsAcrossChannel =
                                1.0000000000000000E+01
 MinDepth
 RemoveAddSamples
[Colours]
 ColourBackground = 255 255 210
 LegendColourBackground = 255 255 255
 lineColourText = 005 005 005
 lineColourLandBoundary = 132 066 000
 fillColourLandBoundary = 255 182 108


      lineColourPolygon
      = 170 000 127

      fillColourPolygon
      = 170 000 127

      lineColourActiveGrid
      = 000 000 255

 lineColourActiveCmpBnd = 005 005 005
 lineColourGrid = 192 192 192
                       = 050 050 050
 lineColourCmpBnd
 DryPoints
                          = 203 203 000
 ThinDams
ObservationPoints
                           = 203 203 000
                           = 227 227 000
                         = 255 255 000
 DredgeAndDumpLink
                           = 255 000 000
[Width]
 lineWidthLandBoundary
                                1
 lineWidthPolygon
                                1
 DotSizeSamples
                                7
 lineWidthActiveGrid
                                1
 lineWidthActiveCmpBnd
                                1
 lineWidthGrid
                                1
 lineWidthCmpBnd
                                1
 lineWidthThinDams
                                3
 DredgeAndDump
                                3
[Caches]
 rest
                                0
 text
                                0
 polygons
                                0
 dad
```

drythdobs	=	1
cmpbound	=	1
secdepth	=	2
actgrid	=	2
${\tt actdepth}$	=	3
samples	=	3
landboundary	=	1
inactgrid	=	4
trisample	=	5

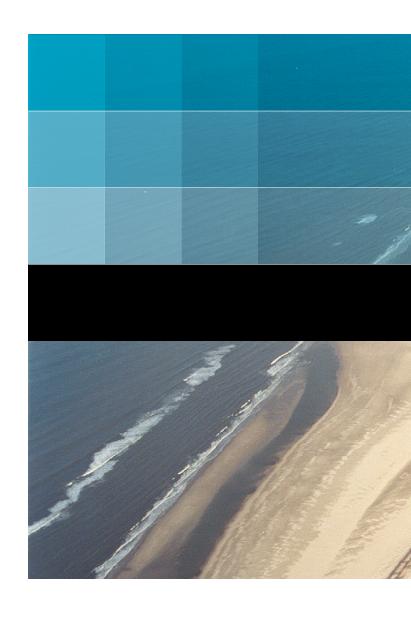

Deltares systems

PO Box 177 2600 MH Delft Rotterdamseweg 185 2629 HD Delft The Netherlands +31 (0)88 335 81 88 sales@deltaressystems.nl www.deltaressystems.nl