

# 1600 Series

## MULTI-CHANNEL FIBER OPTIC SERIAL DIGITAL VIDEO TRANSPORT SYSTEM



BCI reserves the right to make changes to the products described herein without prior notice or consent. No liability is assumed as a result of their use or application. All rights reserved.

©2005 Broaddata Communications, Inc.



## **SAFETY INSTRUCTIONS AND COMPLIANCE DECLARATIONS**

PLEASE OBSERVE THE FOLLOWING SAFETY  
PRECAUTIONS AS OUR PRODUCTS CONTAIN

### **CLASS I LASER PRODUCTS**

#### **WARNING**

Do not disconnect the fiber optic connector while the unit is powered up. Exposure to laser radiation is possible when the laser fiber optic connector is disconnected while the unit is powered up.

Although the fiber optic connectors in this product emit only Class 1 energy that is below the levels considered to be hazardous, one should never stare directly into a fiber optic connector or an unconnected fiber end unless one can be certain that no exposure to laser energy could occur.



#### **CAUTION**

This manual is intended for use by trained service personnel. The use of controls, making adjustments, or performing operations other than those specified may result in hazardous radiation exposure.

The following label or equivalent is located on the surface of laser products. This label indicates that the product is classified as a CLASS 1 LASER PRODUCT.



### **SURGE PROTECTION DEVICE RECOMMENDED**

This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shock, lightning strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equipment.

## TABLE OF CONTENTS


1.0	PRODUCT DESCRIPTION .....	5
2.0	SETUP .....	7
2.1	MOUNTING .....	8
2.2	CABLING AND CONNECTORS .....	8
2.2.1	ELECTRICAL CABLE CONNECTION .....	8
2.2.2	DIGITAL VIDEO CONNECTION .....	8
2.2.3	OPTICAL FIBER CONNECTION .....	10
2.4	AC POWER CONNECTION .....	12
3.0	OPERATION .....	12
4.0	MAINTENANCE AND TROUBLESHOOTING .....	13
4.1	MAINTENANCE .....	13
4.2	TROUBLESHOOTING .....	14
5.0	SPECIFICATIONS .....	16
6.0	SERVICE PROCEDURE .....	17
6.1	REPLACEMENT POLICY .....	17
6.2	RETURN AND REPAIR SERVICE .....	17
7.0	LIMITED WARRANTY .....	18

## 1.0 PRODUCT DESCRIPTION

The 1600 systems provide simultaneous transmission of up to 4 channels of SDI over one fiber. Employed with WDM or CWDM, the 1600 can be expanded to deliver 8 to 64 SDI channels over one fiber. Many versions of optical transmitter and receiver combinations are available to address different distance coverages.

No user adjustments are required in the 1600 system due to the use of advanced digital fiber optic transmission technology. This allows for a quick and easy setup, offering trouble-free operation for many years to come.


The 1600 is available in two packaging options: a rugged, standalone unit housed in a compact case, or a plug-in card for our card cage system. Panel connectors are provided for the serial digital video (BNC connector) and fiber connectors (FC-type for the singlemode version, or ST-type for the multimode version). The 1600 is easily monitored by front panel LED indicators for power, optical link, and channel activity.

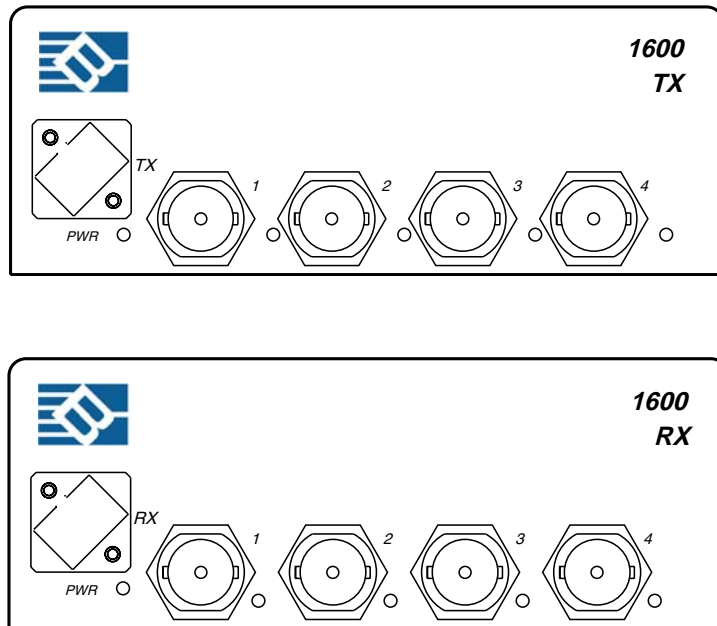

**Figure 1-1**  
**1600 Front Panels**

## 2.0 SETUP

The BCI 1600 Series units are used in pairs. In a unidirectional application, a 1600 transmitter (1600-T) is located at the near-end and connected through one fiber to a 1600 receiver (1600-R) located at the far-end. In a bi-directional application, one 1600 transceiver unit is located at the near end and connected through two optical fibers to identical 1600 transceiver located at the far end of the link. Each unit provides a separate electrical interface connector for the Serial Digital Video data signals. Connections are one to one between both units. Figure 2-1 depicts a typical installation.

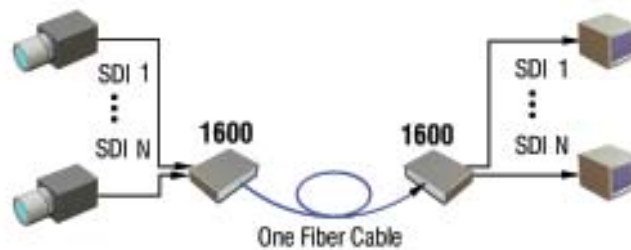

**Figure 2-1**  
**1600 Setup**

## **2.1 Mounting**

Before installing the units into your housing, make sure there is enough space to pull and connect both the electrical and optical cables without stressing them beyond the manufacturer's limitations (also known as the bend radius minimum). Rack Mount kits are available through special order.

## **2.2 Cabling and Connectors**

In order to set up the BCI 1600 properly, make sure to observe the following instructions when installing the proper cables. The 1600 requires two parts to the cabling setup: the electrical and the optical. For the optical part, observe the following procedures, as there are various types of optical connectors as illustrated on the following page.

### **2.2.1 Electrical Cable Connection**

The only available cable connections on the electrical side are for video sources.


Proceed with the following instructions when connecting the various electrical devices.

### **2.2.2 Digital Video Connection**

The 1600 unit provides 75 Ohm BNC connectors for digital video input and output ports. Use the following procedure for connections.

1. On the near end, connect the user's digital video sources to the 1600-T (transmitter) unit's digital video input ports, using a coaxial cable (i.e., Belden 8281 or better).

2. On the far end, connect the 1600-R (receiver) unit's digital video output ports to the user's digital video receivers, using coaxial cables. (See Figure 2-2).

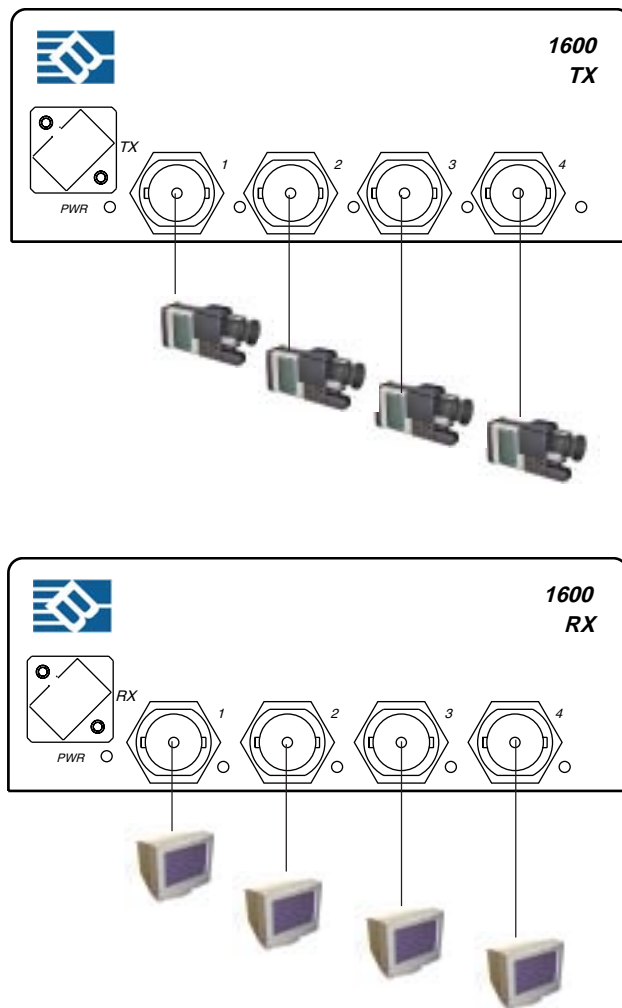


**Figure 2-2**  
**Video Connection for 1600 Receiver and Transmitter**



### 2.2.3 Optical Fiber Connection

Most cable manufacturers identify individual fibers in the fiber cable. Select an appropriate terminated fiber. Each unit's optical ports in the system are specified for use with multimode (62.5/125 micron) fiber, or singlemode (9/125 micron) fiber. Follow these instructions for installing and connecting the fiber optic links:

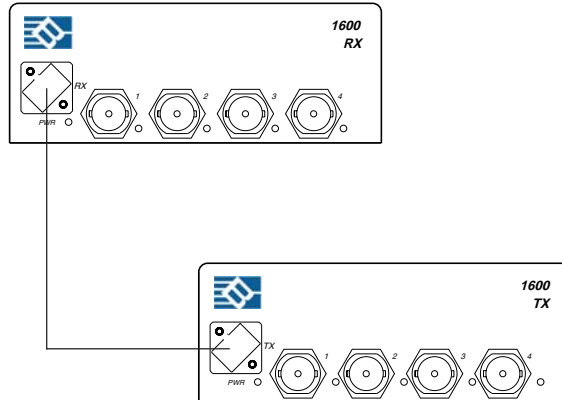1. Ensure the power is off before proceeding with the fiber optic cable installation.
2. Prior to connecting the fiber optic cables, remove and save the dust caps from the optical port of both the 1600 units and the user's device. Clean the fiber optic connector and use a lint-free cloth dampened with alcohol to thoroughly wipe the side and end of the ferrule. Table 1 shows the connection mechanisms for both ST and FC connectors.
3. Cross-connect the fibers from one unit to the other connecting the near end 1600 unit's optical TX port to the far end 1600 unit's optical RX port as illustrated in Figure 2-3. Observe the type of connector you have and connect the optical connector by following the instructions and guidelines provided in Table 1.
4. Make the following connections between the 1600 units. Connect the near-end 1600-T (transmitter) unit's optical TX port to the far-end 1600-R (receiver) unit's optical RX port with an optical fiber.



**Figure 2-3**  
**Optical Fiber Connection**

Connector	Illustration	Description
ST	 ST Connector	Hold the connector by the strain-relief boot* and insert the connector ferrule into the port. Rotate the boot until the "key" engages in the slot of the coupling. Push the connector housing forward until it can be turned clockwise to latch to the port.
FC	 FC Connector	Hold the connector by the strain-relief boot* and insert the connector ferrule into the port. Rotate the boot until the "key" engages in the slot of the coupling. Push the connector housing forward and screw clockwise until it is tight.

**Table 1**  
**Fiber Optic Connector Legend**

## 2.4 Power Connection

Congratulations! You are now ready to power up the BCI 1600 and set up your network connection. In order to make sure that you have a proper installation, please observe the following:

1. Your AC jack has power.
2. Your electrical system has proper grounding (this ensures that your power supply does not suffer from voltage variations).
3. **Power Surge Protection. This is optional**, but highly recommended. A UPS system provides voltage regularity as well as prevents spikes from occurring, thus protecting your 1600 from sensitive voltage conditions.

To provide power to the 1600, simply connect the power cord, already provided with the units, and connect it to the wall jack. (You will find one power cord per unit). Once the power cord has been connected to the wall jack, connect the other end to the unit and turn the switch on (I).

If you have any problems or concerns, regarding the installation, make sure that you have taken the proper steps to ensure a proper power connection. Otherwise, feel free to contact us for any questions you may have.

## 3.0 OPERATION

After the installation procedure is completed, the units are ready for operation. To operate the BCI 1600 units, simply apply power as indicated in the previous step. Note that the front panel link status indicator, shown in Table 2, will be activated.

## 4.0 MAINTENANCE AND TROUBLESHOOTING

### 4.1 Maintenance

There is no operator maintenance other than keeping the units clean. However, observe the following light indicators to make sure that the unit is working properly:

TRANSMITTER	Description
LOCK	This GREEN LED indicates that the digital video signal is locked
PWR	This RED LED indicates that the transmit module is properly powered.

**Table 2(a)**  
**TX Status Indicators**

RECEIVER	Description
LOCK	This GREEN LED indicates that the digital video signal is locked.
PWR	This RED LED indicates that the receiver module is properly powered.

**Table 2(b)**  
**RX Status Indicators**

## 4.2 Troubleshooting

If the BCI 1600 units do not operate properly after installation, check for possible cable breaks, loose connections, and incorrect cable connections. If a problem exists on the fiber link, please check your fiber connectors for improperly cleaned fiber cables and connectors. If problems persist that may be fiber related, contact BCI at 1-800-214-0222 for further assistance.

For electrical problems, perform the following troubleshooting procedures:

- 1. If the POWER indicator is OFF, check for the following:**
  - a. The line cord is plugged into the unit and your outlet has power.
  - b. The 1600 unit is switched on.
  - c. Check for blown fuses (located in the rear panel-entry module).
- 2. If the POWER indicator is ON, but the Optical Link indicator is OFF, check for the following:**
  - a. Make sure the appropriate (singlemode or multimode) fibers are being used.
  - b. Fiber and fiber connectors are not broken. Ensure that the optical loss does not exceed the specified optical power attenuation .
  - c. For each unit, the transmit (TX) fiber is connected to the other unit's receiver (RX).
- 3. If the POWER indicator and Optical Link indicator are ON, but the video channels are not operating, then:**
  - a. Check to see that the attached user equipment is turned on.

- b. Both ends of the link are connected to the corresponding equipment and to the same corresponding channel port.
- c. Cable connections at both the video channels are securely fastened to each connector. Turn the power off, then back on to reset the link.
- d. Output levels of the user's video sources are not above the allowed input levels of the 1600 units.

## 5.0 SPECIFICATIONS

### Electrical

Signal Format	SMPTE-259M Serial Digital Video
Signal Resolution	10 bits
Data Rate	270 Mb/s
Signal Level	800mVp-p +/- 10%
Return Loss	> 15dB
Connector	75 Ohm BNC

### Physical

Dimension (H x W x D)	
Standalone 1600	1.72" x 8.58" x 12"
Card-cage plug-in card	5.24" x 0.94" x 11.6"
Power Level	110-240 VAC
Operating Temperature	0 to +50°C
Humidity	0 to 95% RH, non-condensing
Status Indicators	Power, Optical Link, Video Activity

### Optical

Fiber Type	Multimode and Singlemode
Number of Fibers	1 (Unidirectional) 2 (Bi-directional)
Wavelength	1310 and/or 1550 nm
Fiber Optic Connector	ST (Multimode) FC (Singlemode)

## 6.0 SERVICE PROCEDURE

### 6.1 Replacement Policy

Standard products found defective on arrival (DOA) will be replaced, based on availability. Please call Customer Service at **800-214-0222** for information.

### 6.2 Return/Repair Service

The 1600 System contains no user serviceable components. If you have a problem with your unit, please contact the Customer Service Department. To facilitate our return/repair processing please contact Broadata Communications, Inc. to obtain a Return Material Authorization (RMA). Please include the following information:

- Product model number
- Serial Number
- Complete description of problem
- Hardware installation description

Broadata Communications, Inc.  
2545 West 237th Street, Suite K  
Torrance, CA 90505  
**1-800-214-0222**  
(310) 530-1416  
(310) 530-5958 (Facsimile)  
e-mail: [CustomerService@Broadatacom.com](mailto:CustomerService@Broadatacom.com)  
Website: [www.broadatacom.com](http://www.broadatacom.com)

## **7.0 LIMITED WARRANTY**

Broaddata Communications, Inc. (BCI) warrants, for a period of one year from date of shipment, each product sold shall be free from defects in material and workmanship. BCI will correct, either by repair, or at BCI's election, by replacement, any said products that in our sole discretion prove to be defective and are returned to the manufacturing location within 30 days after such defect is ascertained. All warranties are limited to defects arising under normal use and do not include malfunctions or failure resulting from misuse, abuse, neglect, alterations, electrical power problems, usage not in accordance with product instructions, improper installation, or damage determined by BCI to have been caused by the Buyer or repair made by a third party. Limited warranties granted on products are to the initial customer end-user and are not transferable. OUR LIABILITY UNDER THIS WARRANTY SHALL IN ANY CASE BE LIMITED TO THE INVOICE VALUE OF THE PRODUCT SOLD AND BCI SHALL NOT BE LIABLE TO ANYONE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM THE USE OF ITS PRODUCTS OR THE SALE THEREOF. We make NO WARRANTY AS TO THE MERCHANTABILITY OF ANY GOODS, OR THAT THEY ARE FIT FOR ANY PARTICULAR PURPOSE OR END APPLICATION NOR DO WE MAKE ANY WARRANTY, EXPRESSED OR IMPLIED OTHER THAN AS STATED ABOVE.



## Notes

## Notes

## Notes

Broadata Communications, Inc.  
2545 West 237th Street, Suite K  
Torrance, CA 90505  
**1-800-214-0222**  
(310) 530-1416  
(310) 530-5958 (Facsimile)  
e-mail: [CustomerService@Broadatacom.com](mailto:CustomerService@Broadatacom.com)  
Website: [www.broadatacom.com](http://www.broadatacom.com)



60000-1600