

1
Side:A

2

3



4

5

6

Đ,ÇÓ	Ä Ẽ	Č Č	μ μ		
Δ	XXXXXXXXXXXXXXXX	XXXXXXXX	XXXXXX	XXXXXX	

PRODUCTION

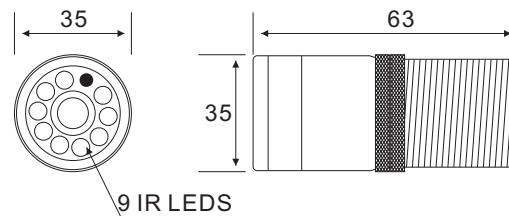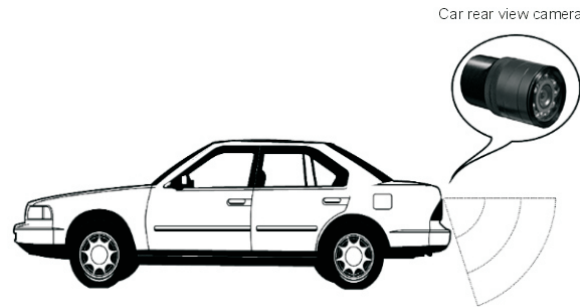

JMK®

CAR REAR VIEW CAMERA

User's Manual



URZ0107
MODEL NO:JK-115



Before you use this product,please read the introduction
REMARK:Design and specifications are subject to change without notice.

A

B

C

D

A

B

C

D

1

2

3

4

5

6

Ä ž μ × †				Í , †	ÑÉ†	μšÉ
				†Á±Ä†		
É ††	ÁÔ»	É š†		††±š†	CUM-JMK-JK115CMS	
, š†				č Č††	JMK Ó† JK-115CMS ĚÄẼ	
Ň ††				č Ö†	157g†Ö	Ň':1/2
Í ×†				† ††	190(L)X130(H)mm	°':1.0

1		2		3		4		5		6		
Side:B								Đ,ÇÓ	Ä Ẓ	Č Ć	μ μ	
								Δ	XXXXXXXXXXXXXXXX	XXXXXXXX	XXXXXX	
A												A
B												B
C												C
D												D
1		2		3		4		5		6		

PRODUCT DESCRIPTION				COLOR CMOS CAMERA			
1.Users should not disassemble the camera from the front direction.				Pick-up Device1/3~ CMOS1/4~ CMOS			
2.Always handle the camera with care,Please do not apply a shock or vibration as much as possible and do not take cautions to cause damage or make a scratch on the camera due to careless storage.				TV SystemNTSC(EIA)PAL(CCIR)			
3.Please do not install the camera with the rainy place or highly humid areas,And do not operate the camera in the wet place.				Picture Element510(H)~492(V)628(H)~582(V)			
4.Do not clean the camera body with strong abrasives or soaps.When the camera becomes dirty clean it with dry rags.Especially make sure to use the dedicated rugsfor lens to clean the dome cover.				Scan frequency15.734KHz(H)/59.94Hz(V)15.625KHz(H)/50Hz(V)			
5.Please select the camera in the cool area that is not exposed to the direct sunlight.If you do it can cause bad effects on the product.				Horizontal Resolution380TV Lines			
6. The camera design matches well with the product quality.It looks so elegant as much as the camera quality stands for.The unique face aims to best fit to the environment decorative to any place, It lasts its beautiful shape				Electronic Shutter1/60~1/100000(sec)1/50~1/100000(sec)			
				Gamma Characterlstic0.45			
				S/N Ratio40dB			
				Minimum Illumination0Lux			
				Sensitivity+18DB--AGL ON-OFF			
				Video Output1.0Vp-p,75Ω,Unbalanced			
				Sync.SystemInternal			
				Scanning System2:1 Interlace			
				White BalanceAuto			
				Operation Temperature-10~+50°			
				Storage Temperature-20~+60°			
				Power sourceDC12V(~10%)			

Ä ž μ × †				Í , †		Ň Ě †		μ † Ě	
				Ĥ Á ± Ĥ †					
É † †		Á Ő »		É † †		CUM-JMK-JK115CMS			
, † †						JMK Ó Ĥ JK-115CMS Ě Ě Ě			
Ň Ĥ †						Ö †		Ň † :2/2	
Í × †						† † †		° † :1.0	