

FS Future Serie®

# Waterfinder

User's manual

Any information contained in these operating instructions may be changed without prior notice.

OKM does not make any warranty for this document. This also applies without limitation to implied assurances of merchantability and fitness for a specific purpose. OKM does not assume any responsibility for errors in this manual or for any incidental or consequential damage or loss associated with the delivery, exploitation or usage of this material.

This documentation is available „*as presented*“ and without any kind of warranty. In no circumstances OKM takes responsibility for lost profits, usage or data loss, interruption of business activities or all kind of other indirectly damages, which developed because of errors in this documentation.

This instruction manual and all other stored media, which are delivered with this package should only be used for this product. Program copies are allowed only for security- and safety purposes. The resale of these programs, in original or changed form, is absolutely forbidden.

This manual may not be copied, duplicated or translated into another language, neither in part nor completely, over the copyright matters without the prior written consent of OKM.

Copyright ©2002 – 2007 OKM Ortungstechnik GmbH. All rights reserved.

## Contents

<b>1</b>	<b>Preface</b>	<b>5</b>
<b>2</b>	<b>Important Notes</b>	<b>6</b>
2.1	General Notes . . . . .	6
2.2	Possible Health Hazards . . . . .	6
2.3	Surrounding Area . . . . .	6
2.4	Voltage . . . . .	6
<b>3</b>	<b>Technical Specifications</b>	<b>7</b>
3.1	Control Unit . . . . .	7
<b>4</b>	<b>Scope of Delivery</b>	<b>8</b>
<b>5</b>	<b>Assembly</b>	<b>10</b>
<b>6</b>	<b>Control Elements</b>	<b>11</b>
6.1	Front View . . . . .	11
6.2	Back View . . . . .	12
6.3	Touchpad for Menu Navigation . . . . .	13
<b>7</b>	<b>Detection of Water Deposits</b>	<b>14</b>
<b>8</b>	<b>Danger of Explosion during Excavation</b>	<b>16</b>
<b>9</b>	<b>Maintenance and Services</b>	<b>17</b>

## List of Figures

1	Scope of Delivery . . . . .	9
2	Connection of Electrodes . . . . .	10
3	Connection of External Power Supply . . . . .	10
4	Front View . . . . .	11
5	Back View . . . . .	12
6	Touchpad for Menu Navigation . . . . .	13
7	Connection of Electrodes . . . . .	14
8	Rarefy a Measurement . . . . .	15

## List of Tables

1	Technical Specifications (Control Unit) . . . . .	7
2	Scope of Delivery . . . . .	8

# 1 Preface

Dear customer,

in the first instance we want to thank you that you made your decision on a product of OKM Ortungstechnik GmbH.

The present product is based on a geo-electric measuring method which can be used to locate water deposits in the target area.

With our team of specialists we guarantee that our products are under recurrent control. Our specialists try to implement new developments in terms of further quality improvements for you.

Of course by selling our products we cannot guarantee that you really make a find during your research. The recognition of hidden objects and structures depends on a hugh number of factors - like you know. Determining factors are the dielectricity constant of the ground, the grade of mineralisation and the dimensions of an object relating to its depth. Specially in very wet soil, clay and sand with high conductivity of the ground, recording of the measured results can be falsified strongly.

With this product you purchased a device which stood the tests in regular operation like all other products of us. If you are interested in where our devices have gone into action please visit our homepage.

For our company it is necessary that we protect our developments within the framework of existing legislation to a patent or trademark registration. Therewith we offer you a higher warranty while using our products.

Please take your time consecutively, read this user's manual and familiarize yourself with the utilisation and operation of this Waterfinder.

## 2 Important Notes

Please read these operating instructions carefully and closely before using *Waterfinder* and its accessories! These instructions give information on how to use the device and point out potential sources of danger.

### 2.1 General Notes

Being an electronic device, *Waterfinder* has to be treated with the caution and care necessary when such devices are used. Any failure to observe the safety precautions given or any use for purposes other than the ones it is conceived for may result in a damage or destruction of the processing unit and connected components.

The device will get destroyed if it is opened improperly.

### 2.2 Possible Health Hazards

If used properly the device normally does not pose any health hazards. According to current scientific knowledge, the high-frequency signals are not harmful to the human body on account of their low power.

### 2.3 Surrounding Area

Having been transferred from a cold to a warmer place, the device should not be operated immediately afterwards. Any condensation, which may have formed, might cause the device to get destroyed. Avoid strong magnetic fields, which may occur in places such as near machines or loudspeakers, and avoid using a detector within a radius of 50 meters.

### 2.4 Voltage

The power supply should not be outside the indicated range of values. Use only chargers, batteries and rechargeable batteries which are included in the scope of delivery.

*Never use the 230 Volt mains supply.*

## 3 Technical Specifications

The following technical indications are medial values. During operation small variations are quite possible.

### 3.1 Control Unit

Dimensions (H x W x D)	430mm x 150mm x 260mm
Weight	about 3kg
Voltage	12 VDC
Processor	Motorola, 4 MHz
Operating Temperature	0°C – 50°C
Storage Temperature	-20°C – 60°C
Air Humidity	5% – 75%
Waterproof	No

Table 1: Technical Specifications (Control Unit)

## 4 Scope of Delivery

In the following section you can find all standard equipment. The scope of delivery can be different in some circumstances because of some optional accessories which should not be included in the basic equipment.

- 1 Control Unit
- 4 Electrodes (with about 20m cable)
- 1 Manual
- 1 Carrying Case
- 1 External Power Supply
- 1 Charger for External Power Supply
- 1 Cable for External Power Supply

Table 2: Scope of Delivery

Beware that pictures in this manual could be different to delivered parts.



Control Unit



Electrode



External Power Supply



Charger for External Power Supply



Cable for External Power Supply

Figure 1: Scope of Delivery

## 5 Assembly

In this section is explained how to assemble the device and how to prepare a measurement.



Figure 2: Connection of Electrodes

In figure 2 you can see how to connect the electrodes to the device in the right way. Do it without any unnecessary application of force! The detailed discription how to connect the electrodes you can find in section 7 on page 14.



Figure 3: Connection of External Power Supply

In figure 3 you can see how the external power supply has to be connected. Please take care that you use the 12V output of the external power supply for the correct cable connection.

## 6 Control Elements

In this section you will learn more about the fundamental use of all control elements for this measuring instrument. All connections, inputs and outputs are explained in detail.

### 6.1 Front View

Figure 4 shows the front side of the device.

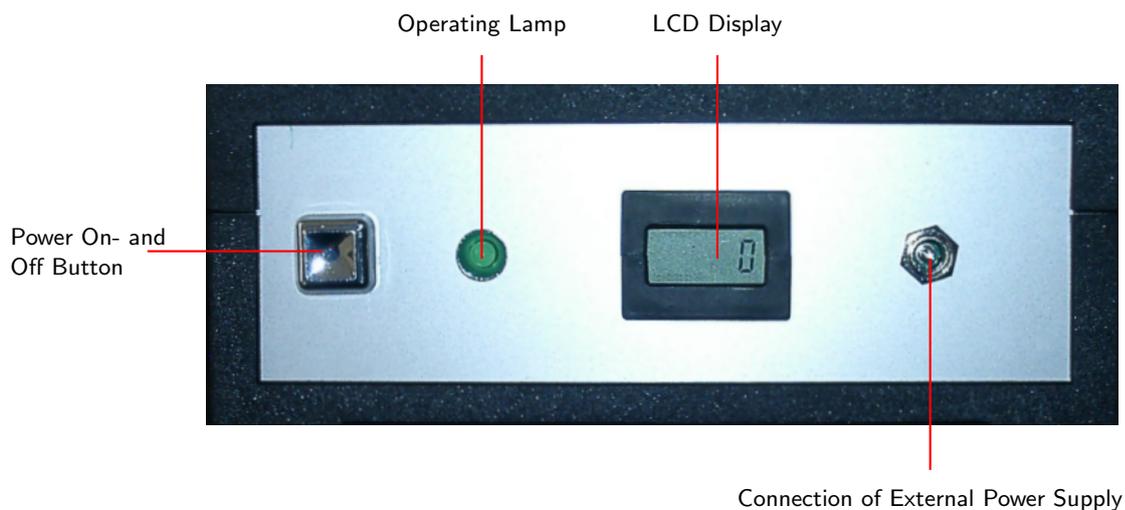


Figure 4: Front View

The Power On and Off Button is used to switch on and off the control unit. Before operating with your device you have to be sure that the device is charged.

The Operating Lamp shines, when the device is powered on and indicates the operating readiness of the control unit.

The LCD Display indicates how often the device was powered on. This display is only of interest for the repair and maintenance service.

On the Connection of External Power Supply the external battery has to be connected. Be sure that the battery is full charged before operation.

## 6.2 Back View

Figure 5 shows the back side of the control unit with all connections.

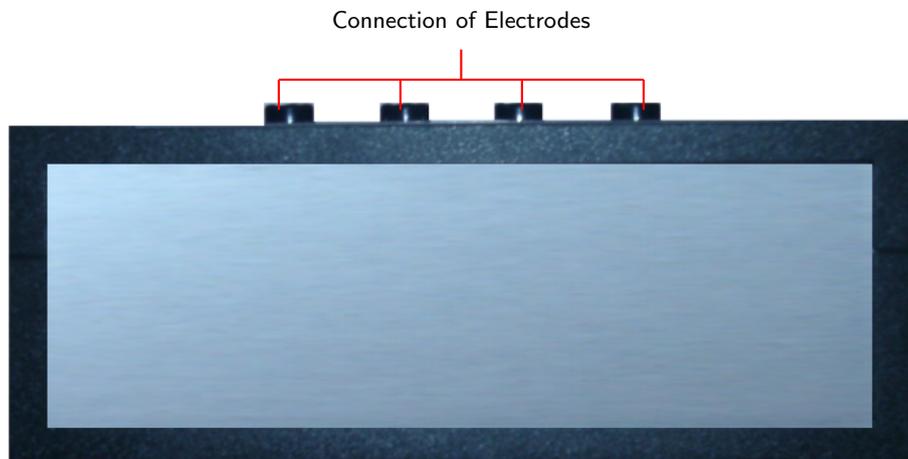


Figure 5: Back View

The Connection for Electrodes is used to connect the delivered electrodes.

### 6.3 Touchpad for Menu Navigation

The top of the device is including a touchpad like in figure 6. The represented arrows have no particular use for the Waterfinder and are not necessary for operating the device.

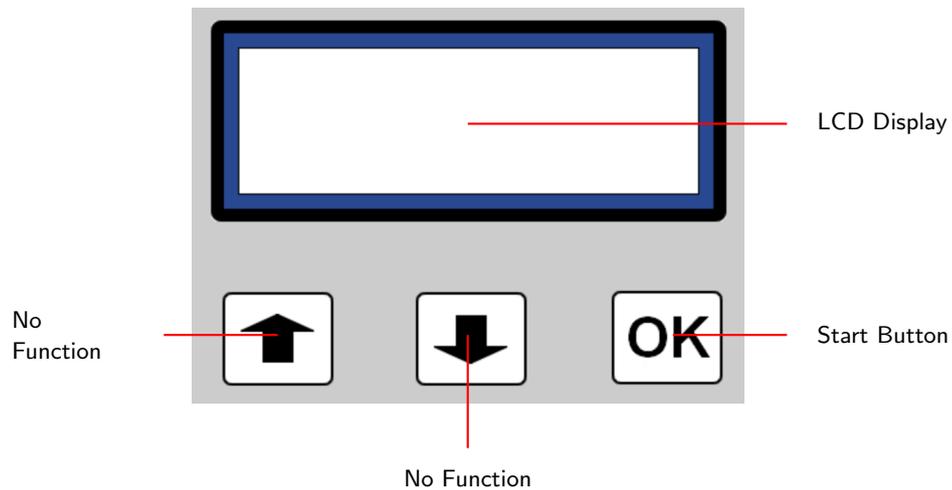


Figure 6: Touchpad for Menu Navigation

The LCD Display indicates the measured results.

With the Start Button the measurement procedure can be started.

## 7 Detection of Water Deposits

The *Waterfinder* offers you a geo-electrical measuring method to detect water. The device is not able to determine the exact depth of a located water deposit.

There are four connections for the electrodes on the control unit. You have to keep a certain manner to connect the electrodes in the right way. The correct connection is represented in figure 7.

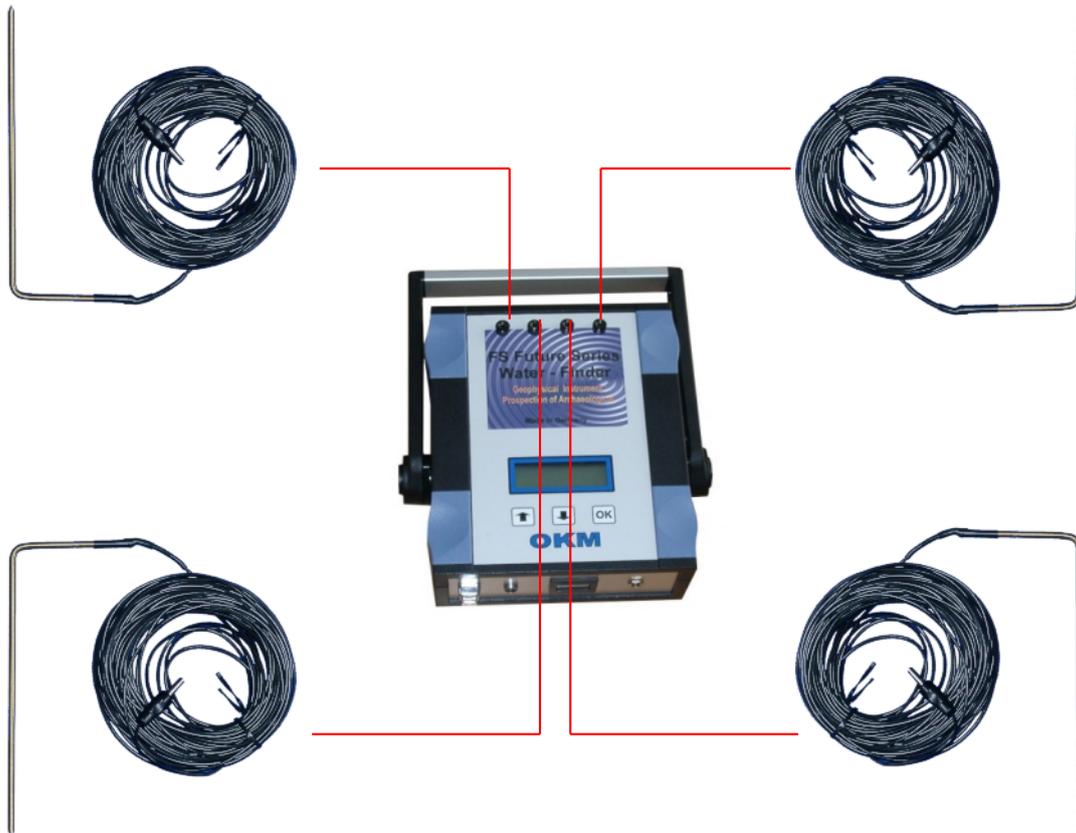


Figure 7: Connection of Electrodes

Try to define a square area with the four electrodes and connect the cables to the main unit. Therefore you have to plug in the electrode cable of the upper left electrode in the first connection of the device from left to right. The following electrode cable which is placed next to it counter clockwise has to be plugged into the next connection. Go on in the same direction until all electrodes are connected.

To perform a measurement plug in the electrodes like explained above and connect them in the correct way. Power on the device with the Power On- and Off Button. The message *Press OK scan active* appears on the LCD Display. You can start the measurement by pressing the Start Button. During the measurement procedure the message *Water-Finder scan active* appears on your LCD Display, after a short time the measured results are represented. If a water deposit has

been detected than the percentage of water relative to your destination area is represented. For example the message  $Water = 20\%$  will be shown on the display. If no water has been detected the message  $Water = 0$  is shown. The indications which are shown on the display during the measurement are only for internal use, and have no relevance for you.

If this is your first measurement it is advised to define a wide area to find out in generally if there is a water deposit or not. To detect the exact location of water (if water exists in this area) split your measured field in four smaller parts and repeat the measurement in every subsection. This method you can repeat as often as you like until you found the exact location of the water.

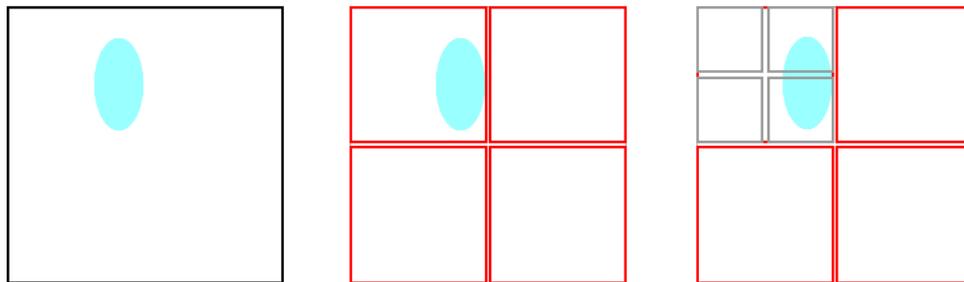


Figure 8: Rarefy a Measurement

In figure 8 the explained measuring method is represented once again. At first measure the wide area which is here represented in black color. On the display of the device the message  $Water = 20\%$  appears. Then divide this area in four smaller subsections and repeat your measurement inside these red represented fields again. Only in the upper left field the result  $Water = 40\%$  will be shown. All other fields will indicate the message  $Water = No$  on the display. Now you can split this red marked subsection again to specify the position and size of the detected cavity.

## 8 Danger of Explosion during Excavation

Unfortunately, the last two world wars also made the ground in many places of the world a potentially explosive scrap heap. A host of those lethal relics are still buried in the ground. Do not start digging and hacking for an object wildly when you receive a signal of a piece of metal from your device. Firstly, you might indeed cause irreparable damage to a truly rare find, and secondly, there is a chance that the object reacts in an insulted way and strikes back.

Note the colour of the ground close to the surface. A red or reddish color of the ground is an indicator of rust traces. As regards the finds themselves, you should definitely pay attention to their shape. Curved or round objects should be a sign of alarm, especially if buttons, rings or little pegs can be identified or felt. The same applies to recognizable ammunition or bullets and shells. Leave that stuff where it is, do not touch anything and, most importantly, do not take any of it home with you. The killing machines of war made use of diabolical inventions such as rocker fuses, acid fuses and ball fuses. Those components have been rusting away in the course of time, and the slightest movement may cause parts of them to break and be triggered. Even seemingly harmless objects such as cartridges or large ammunition are anything but that.

Explosives may have become crystalline over time, that is, sugar-like crystals have formed. Moving such an object may cause those crystals to produce friction, leading to an explosion. If you come across such relics, mark the place and do not fail to report the find to the police. Such objects always pose a danger to the life of hikers, walkers, farmers or children.

## 9 Maintenance and Services

In this section you will learn how to maintain your measuring instrument with all included accessories to keep it in good condition a long time and to get good measuring results.

The following list indicates what you absolutely should avoid:

- penetrating water
- strong dirt and dust deposits
- hard impacts
- strong magnetic fields
- high and long lasting heat effect

If you want to clean your device please use a dry rag of soft material. To avoid any damage you should transport the device and accessories always in the appropriate carrying cases.

Beware that all batteries and accumulators are always charged fully while operating with your system. You should only load the batteries when they are completely discharged no matter if you are working with the external power supply or with the internal accumulators. In this way a long durability of the used batteries is guaranteed.

*To load the external and internal batteries you have to use only chargers which are part of our scope of delivery.*

## Index

Air Humidity, 7

Dimensions, 7

electrode cable, 14

electrodes, 10, 14

LCD Display, 13, 14

measured results, 14

Operating Temperature, 7

Power On- and Off Button, 14

Power Supply, 10

Processor, 7

Start Button, 13, 14

Storage Temperature, 7

Voltage, 7

Weight, 7