Evolutionary solution for fat reduction



## **SE-C80**

**User Manual** 



Http://www.SPAelf.com

I -1. General Structure



- ∮ 63 applicator connector
- ∮ 38 applicator connector

I -2. Description of Applicators





§ 63 ApplicatorUsed to treat larger and wider area


•Red LED

 38 Applicator


 Used to treat smaller and targeted area

 Red LED

I -3. Operating Board

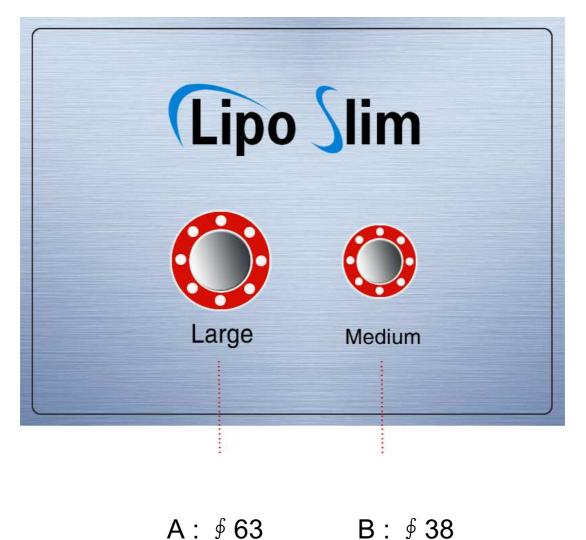

- M. 100 D. 10
- A. Big : Used to treat large area
- B. Small : Used to treat narrow area

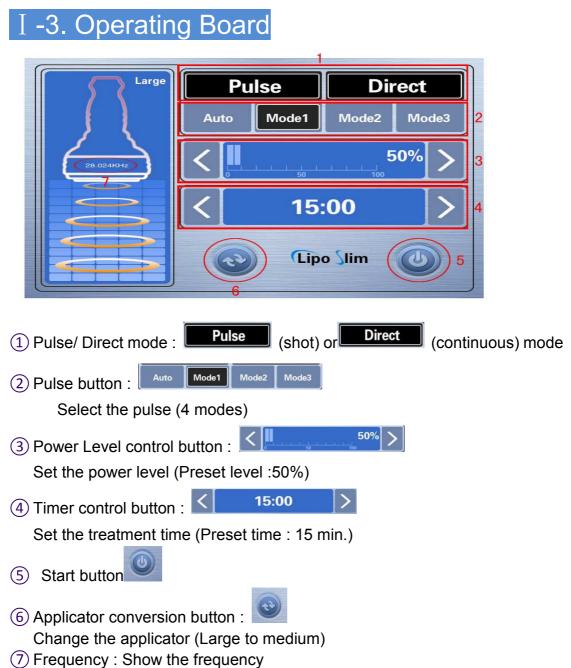

II-1: Installation



1. Hold § 63 applicator on the holder



3. Hold § 38 applicator on the holder



2. Connect the applicator cable to the upper connector



4. Connect the applicator cable to the lower connector



5. Connect power cable to AC Inlet

## II -2 : Operation

1. Select the hand-piece ( § 63 or § 38)




2. Select the m

		Pres butt	s the on	
Large	Pu	ulse Direct		rect
	Auto	Mode1	Mode2	Mode3
28.024KHz				
	< <u>15:00</u> >			
	•	) Lip	o <mark>S</mark> lim	٢

•Preset : Pulse Mode (ON for 5 sec. OFF for 3 sec.)

II -2 : Operation

#### 3. Set the output level

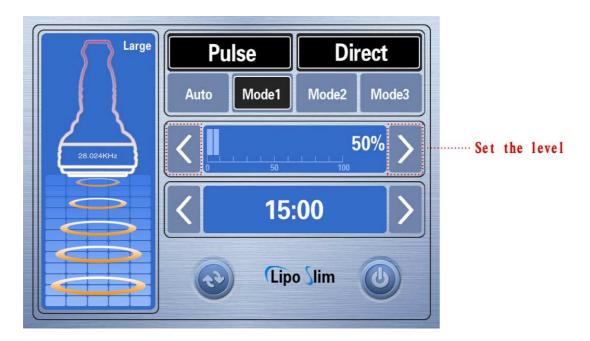


4. Set the time

			ก
	Pulse	Direct	
	Auto Mode1	Mode2 Mode3	
28.024KHz			
	<b>&lt; 15</b> :	Set the time	
	Cipe	o Slim	

• Preset time : 15 Min. (Adjustable from 0 to 30 minutes)

II -2 : Operation

5. Select the pulse

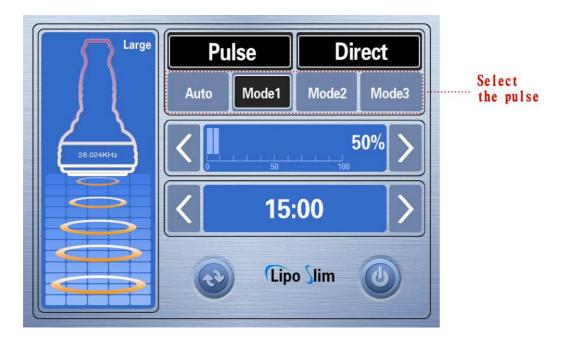


A u t o : Auto mode : (operated at "Direct" mode only)

[Continuous ]-[2/3]-[1/2] repeats automatically

- Mode1 : Continuous pulsation
- Mode2 : 2/3 pulsation
- Mode3 : 1/2 pulsation
- 6. Apply ultrasound gel on the treatment area

#### II -2 : Operation

7. Press "Start" button to begin operation

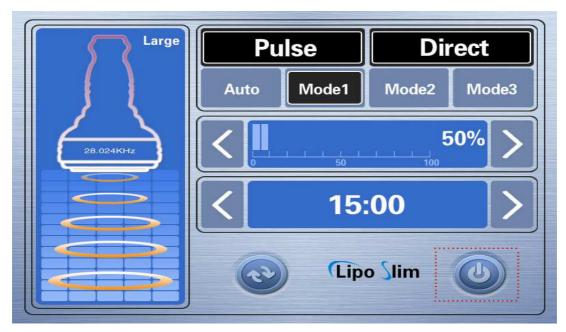

\* Once "Start" button is pressed, red LED on the applicator is automatically lit on.

\* If the chosen level or mode doesn't fit to the patients, adjust the level or mode.

#### Cautions!!


No mode or button except power level control button can be changedwhen start button is on

#### II -3 : Finish


- 1. When finish the treatment, press "Start" button off
- 2. Turn off the power switch on the back of the machine.
- 3. Clean the accessories after treatment.

# III. Practical Applications

#### III-1 : Abdomen / Back / Thigh

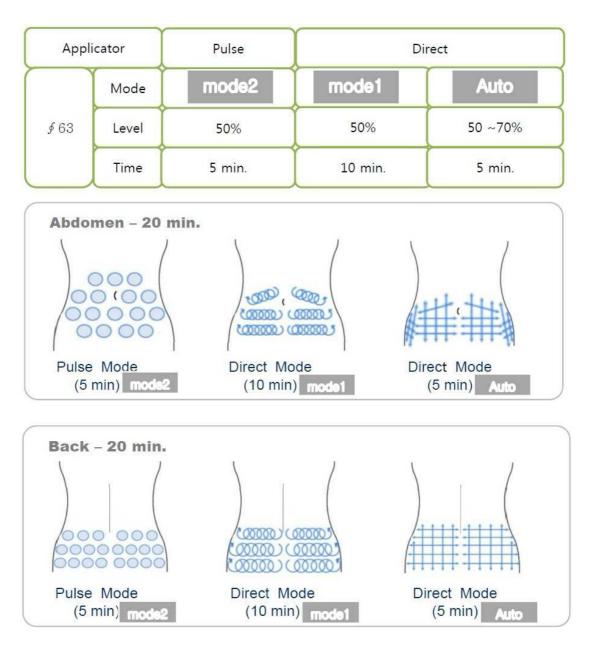


 $\sqrt{For}$  abdomen circumference reduction, performing the treatment of Abdomen and back together get the best result.

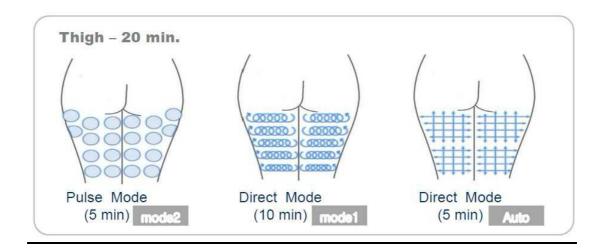

## III 2:Arm

Appl	icator	Pulse	Dir	ect
	Mode	mode2	mode1	Auto
∮38	Level	50%	50%	50%
	Time	2.5 min.	5 min.	2.5 min.

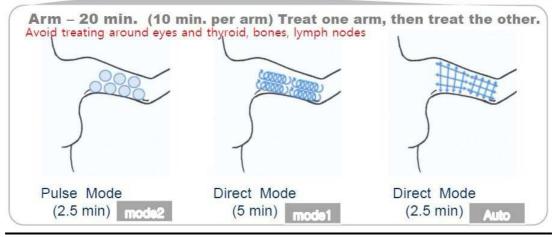

#### IV. Caution

#### IV-1 : Contraindication

#### Please avoid the treatment from these people or part as

below,

- a. Pregnancy
- b. Scarring, infection of the treatment area
- c. History of keloid scarring
- d. Use of medication known to induce photosensitivity
- e. Fragile skin
- f. Patients undergoing the surgical procedure without consulting with a surgeon
- g. Patients with tumors
- i. Patients with serious disease
- j. Patients with low/high blood pressure

#### IV-2 : Caution when use

- 1. This equipment should be used by the person who took a equipment training.
- 2. Avoid treating around eyes and thyroid, bones, lymph nodes.
- 3. Avoid treating on cuts, eyeballs, insensate parts, ears.
- 4. In case of resting during treatment, please "Start Off" to avoid over-output of the machine.
- If the machine can't operate in normal condition, please turn off the power and contact the distributor or manufacturer immediately.

#### IV. Caution

#### IV-3 : Maintenance

- 1. After treatment, keep the power on about 3 minutes to make inner board cooling.
- 2. Please keep Liposlim in the shade, avoiding direct lay of light.
- 3. Don't drop the machine & keep it out of any shock.
- 4. Clean applicators after use.
- 5. Moving the machine, be careful not to drop applicators

#### IV-4 : Solution

# Light of power switch is not on although turn the power switch

- a. Please check whether power cord is put to plug on the machine
- b. Please check whether fuse has been broken down

## VI. Specification

Handpieces	63 ø , 38 ø
Ultrasonic Frequency	43 KHz, 32KHz
Output Power	50 Watt
User Interface	Digital Touch Screen
Weight / Dimensions	7.9Kg / 50*42*49.5cm