

Wired Beltpack



1 Connect Beltpack to Command Center



2 Connect and Position Headset

Place the microphone directly in front of mouth, almost touching the lips.



3 Power the Beltpack

Turn the volume knob clockwise to turn on




4 Adjust the Volume Level

A) Press the Talk Button and the Talk LED turns green.

B) Turn the Volume up all the way and then back down a quarter of a turn. Your own voice may sound low to you, but others will hear you loud and clear.



5 Set the Channel

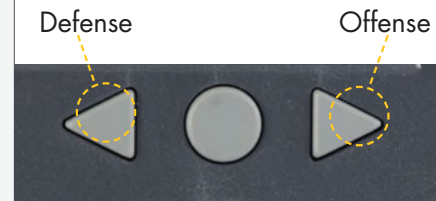

6 Repeat

Repeat this procedure for the other wired beltpacks that will be in use.

Contact Information

Customer Service Department

1.800.749.2761
8 AM – 5 PM CST M-F
customer.service@coachcomm.com

Refer to the Connex User Manual for Important FCC Information

CXQSG-REV5 ©Copyright 2011 CoachComm, LLC. All Rights Reserved.



Powered by



The Proven Choice For Winning Programs



SETTING UP THE

Command Center

SETTING UP THE

Wireless Beltpack



1 Connect the Antenna

For best results, position the antenna **horizontally** as shown and place the Command Center within the **line of sight** of headset users.



2 Connect to a Power Source

(If outlet is available)



3 Power the Command Center

Important! Press and hold power button for 3 seconds.



4 Connect and Position the Headset



Place the microphone directly in front of mouth, almost touching the lips.



5 Adjust the Volume Level


A) Press the Talk Button and the Talk LED lights green.

B) Turn the Volume up all the way and then back down a quarter of a turn. Your own voice may sound low to you, but others will hear you loud and clear.



Note: All Talk Buttons should be turned off whenever the headset for that Talk Button is not on someone's head. This will avoid noise or echo in the system.

6 Set the Command

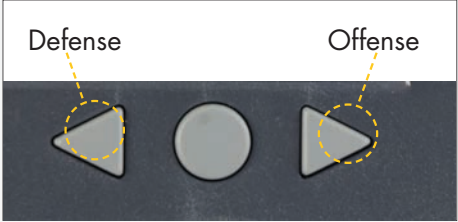

7 Repeat

Repeat Steps 4 through 6 for the other Command Center position if it will be used.

8 Optional External Antenna

Attach the directional antenna to a secure structure or stand, and aim the directional antenna toward the center of the work site where your users will be located.



1 Connect and Position Headset

Place the microphone directly in front of mouth, almost touching the lips.



2 Power the Beltpack

Turn the volume knob clockwise to turn on
Note: One of the five battery LEDs should come on and flash to indicate that the Beltpack is logged onto the Command Center.




3 Adjust the Volume Level

A) Press the Talk Button and the Talk LED turns green.

B) Turn the Volume up all the way and then back down a quarter of a turn. Your own voice may sound low to you, but others will hear you loud and clear.



4 Set the Channel

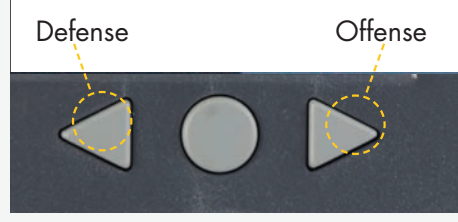

5 Repeat

Repeat this procedure for the other wireless beltpacks that will be in use.

Specifications

Command Center	Beltpack
Dimensions: 6" x 4" x 3.25"	Dimensions: 5.28" x 3.8" x 1.15"
Weight: 2 lbs 12 ounces (including batteries)	Weight: 10 ounces (including battery)
Power Requirements: 5VDC from supplied wall power supply or internal battery	Power Requirements: internal battery for normal operation 5VDC from supplied wall power supply for battery charging
Current Draw: 385 mA at 5VDC (worst case)	Current Draw: 208 mA operating from internal battery (worst case)
Battery Capacity and Run Time: 2 Lithium Ion 2000 mA batteries for at least 15-16 hours of continuous run time	Battery Capacity and Run Time: 1 Lithium Ion 2000 mA battery for at least 16 hours of continuous run time