

Core Alignment Fusion Splicer

Single Optical Fiber Fusion Splicer

US Patent 11/912,109

Swift-s3



Features

- Core Alignment by IPAS Technology
- Resistant Shock, Dust and Rain
- Powerful Battery with Large Capacity
- Dual Sleeve Heater
- Automatic Execution of Discharge Calibration
- Compatible for SOC Connector (Option)
- Smallest, Lightest & Fastest
- 4.3" Color LCD Monitor with Touch Panel
- Bidirectional Operation System
- Attached Sleeve Loader
- Attached Night Light
- ROHS Compliant

Benefits and Features

Swift-S3



IPAS Technology basis Core Alignment

Swift-S3 is the core alignment splicer based on IPAS (Image Pattern Analysis Alignment System) Technology

Smallest, Lightest and Fastest

This splicer is the smallest, lightest and fastest among all the existing core alignment splicers

Dimension : 138(W) × 160(L) × 135(H)

Weight : 2.3kg

Splicing Time : 9 seconds,

Tube heat : 26 seconds

} Battery and shock proof rubbers are included

Resistant Shock, Dust and Rain

The splicer has stable performance even in a harsh environment

Powerful Lithium Polymer Battery with Large Capacity

Performs 250 cycles of fusion splicing and sleeve heating with the standard battery

Automatic Execution of Discharge Calibration

Detects the surrounding environment of temperature, humidity, air pressure and measures discharge calibration rate automatically

Compatible for SOC Connector

Telcordia-GR-326 Compatible



SC Connector-APC, UPC

LC Connector-APC, UPC

FC Connector-APC, UPC

ST Connector-APC, UPC

Refer to Swift SOC Catalog




SC Connector

LC Connector

FC Connector

ST Connector



Swift-S3

Benefits and Features

4.3-inch Color LCD Monitor with Touch Panel

Magnification : 300X, 187X

For user's convenience, LCD monitor has been designed with touch panel in addition to the operation keys.




Bidirectional Operation System

For user's ergonomic preference, the screen can be turned around for one's chosen viewing direction.



Equipped with Sleeve Loader to Prevent Contamination and Provide Convenience

While working in a man hole, the loader prevents the supplementary sleeve from falling and being contaminated. Working in aerial space such as telephone pole, the loader also prevents the supplementary sleeve from falling down.

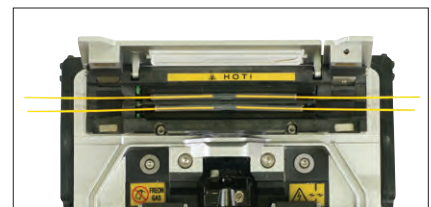


Built-in Dual Sleeve Heaters

By using the dual sleeve heaters, a user can improve one's productivity by 30%

STANDARD PACKAGE



OPTION

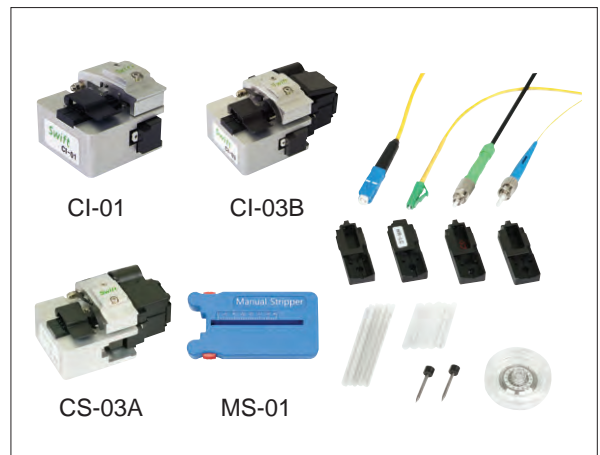

SPECIFICATIONS

Subject	Description
Alignment	IPAS Core to Core Alignment (Image Pattern Analysis Alignment System)
Applicable fibers	SMF(ITU-T G.652), MMF(ITU-T G.651), DSF(ITU-T G.653), NZDSF(ITU-T G.655), EDFA, EI980, Splicing available with different type fiber(SM/MM), ITU-T G.657
Fiber Diameter	cladding : 80 μ m ~ 150 μ m, coating : 100 μ m ~ 1000 μ m (single)
Fiber cleave length	250 μ m (Coat) : 8 ~ 16mm, 900 μ m : 16mm
Typical splice loss	SMF : 0.02dB, MMF : 0.01dB, DSF : 0.04dB, NZDSF : 0.04dB
Return loss	Less then -60dB
SPLICE Time	SPLICE : Typical 9sec, Tube Heat : Typical 26sec with S-160(60mm) Tube
Program	SPLICE Mode : 100, Heat Mode : 50
Storage of splice result	the last 2,000 results (Image 100 results)
Operating altitude	0 ~ 5000m above sea level
Operating condition	-10 $^{\circ}$ C to 50 $^{\circ}$ C, humidity : 95%, non-Condensing
Storage condition	-40 $^{\circ}$ C to 80 $^{\circ}$ C, 0 to 95% RH
Protection	Wind 15 $\frac{m}{s}$, shock proof, water proof, dust proof
SIZE, Weight	138W \times 160L \times 135H (include Monitor & Rubber), 2.3Kg (include Battery)
Terminal	USB, RCA, External Power
Power	DC 14.8V Battery (5600mAh), 100 ~ 240V AC Adapter
Additional power	DC 12V automobile power outlet available
No of splice/Heating with Battery	250cycle, lithium polymer batteries
Electrode	more than 2,500 times splicing without exchange
Mechanical proof test	2N / 4.4N (OPTION)
Display	Two CMOS cameras and 4.3" color LCD monitor, with touch panel
Fiber view and magnification	X/Y 300X, 187X

STANDARD PACKAGE

Description	Model	Q'ty
Fusion Splicer	S3	1
AC Adapter	S311	1
Sleeve Loader	S312	2
Spare Electrodes	EI-21	1
Battery Pack	S313	1
Alcohol Dispenser		1
Cooling Tray	CT	1
Sleeving Clamp	SC-01	1
Manual Stripper	MS-01	1
Carrying Case		1
User Manual		1

OPTION

Description	Model
Connector Holder	HS-SC, LC, FC, ST Refer to All in one Swift F1 catalog
Cleaver Blade	BI-05
Fiber Cleaver	CS-03B, CI-01, CI-03A
Battery Pack	S313
Protection Sleeves	S-160(60mm), S-140(40mm)
Manual Stripper	MS-01
SOC Connector	SC, LC, FC, ST Refer to SOC catalog

Headquarter : #703 Gwanpyung-dong Yusung-gu Daejeon, Korea (Korea)
Tel : +82 42 671 5609 Fax : +82 42 671 5612

America branch : 4230 LBJ Freeway Suite 235C Dallas Texas 75244, USA (Dallas)
Tel : +1 972 556 0916 Fax : +1 972 910 8384


Europe branch : Ludwig-Erhard str, 30-34 65760 Eschborn, Deutschland (Germany)
Tel : +49 1522 3689 747

India branch : A-26/4 Mohan Cooperative Estate Mathura Road Delhi, India (Delhi)
Tel : +91 11 4055 5954, +91 11 4056 7229

China branch : E3-8F Juneyao International Plaza NO789 Zhaoyang Rd, (Shanghai)
Shanghai 200032, China
Tel : +86 21 5836 0950, +86 21 5836 0189 Fax : +86 21 5836 0951

Russia branch : Kolomenskiy proezd 14 6th floor office 15 Moscow, Russian Federation, (Moscow)
Tel : +7 495 78 78443

Brazil (Sao paulo) : Korea Business Development Center - Sao Paulo
Alameda Santos 1827 Conj 82 CEP 01506-000 Sao Paulo SP, Brazil

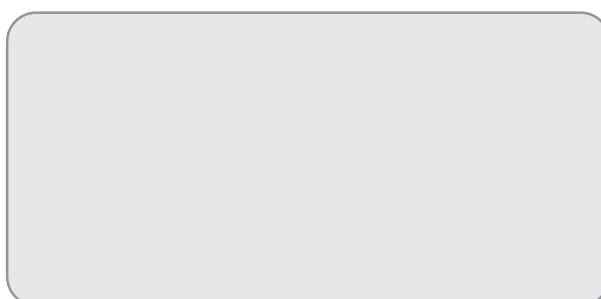

 ILSINTECH Co., Ltd. www.ilsintech.com