

# BeSafe®

## User manual

GB



GROUP

0+ / 1

WEIGHT

0-18

AGE

6m-4y

[www.besafe.eu](http://www.besafe.eu)

iZi Kid X1 Isofix™

SEMI-UNIVERSAL

Complies with revised  
standard:

ECE R44/04

Tested and Approved




ECE R44/04  
semi-universal 0-18 kg



R 44 04200

Updated version 3.12.08


Thank you for choosing Besafe iZi Kid ISOfix.


 It is important that you read this user manual BEFORE installing your iZi Kid ISOfix. Incorrect installation could endanger your child.

## Contents

Vital information	2
Preparing to install	4
Before installation	6
Installation in the car	8
Warning: potential misuse	11
Sitting positions	12
Car seat protection	12
Removing the iZi Kid ISOfix	13
After an accident	15
Guarantee	15
Removing and refitting the cover	16
Important advice	18
Point of sale information	20


## Vital information

-  - iZi Kid ISOfix can only be installed rearward facing. The car must be equipped with ISOfix anchorage points.
- iZi Kid ISOfix is not allowed to mount in front passenger seat with an activated airbag.
  - The floor support must always be used.
  - The harness must always be used when the child is in the seat.
  - For children under 1 year and/or under 10 kg weight, we recommend that the most reclined sitting position is used.
  - We recommend that this seat is used only for children who can sit upright, so not younger than 6 months.

 Under the fabric cover we use EPS foam. Do not push or pull too hard against the foam, since you might damage the foam.


### Second-hand car seats

BeSafe recommends that child seats are not bought or sold second-hand.

 DO NOT use on a passenger seat fitted with activated frontal airbag.







### Important:

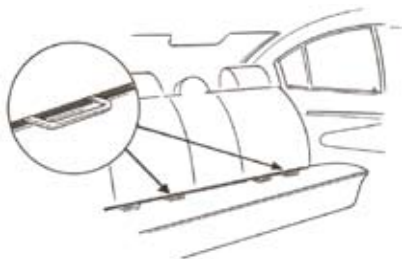







BeSafe iZi Kid ISOfix is only possible to mount in cars with ISOfix anchorage points, see the instruction manual of the car for more information.
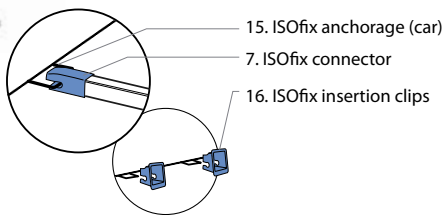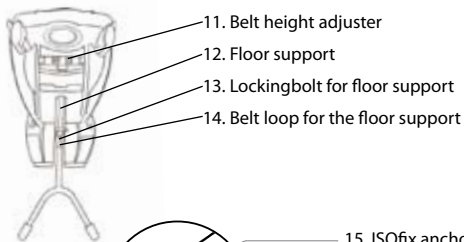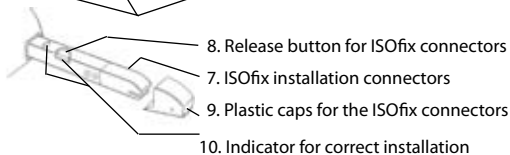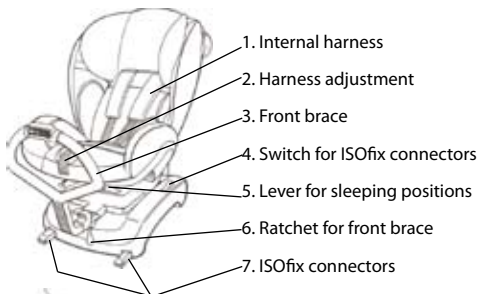
# Preparing to install

## Crucial parts




## Height adjustment of harness system

- a** Position of the shoulder strap:  
Check that the shoulder strap slots are levelled with your child's shoulders.
- 
- b** Height can be adjusted by releasing the height adjustment device on the back of the iZi Kid ISOfix, place it in the correct position and clicking it in. Twist and pull the shoulder belts on the front side of the seat until the belts are adjusted into the correct position. Check the webbing has not become twisted.
- 
- c** Tighten the belts by pulling them towards you and in this way straighten them out inside the construction.
- 
- d** Pull out the shoulder belts while pressing the button on the harness adjustment mechanism.
- 
- e** Lay the shoulder straps over the sides of the iZi Kid ISOfix, before your child is seated. Then place the straps over the shoulders of your child and close the buckle; Click!
- 
- f** Position the pads on the shoulder straps over the child's shoulders. Place one hand on the front of the car seat and pull the harness adjustment strap towards you. Continue pulling until the harness is a comfortable but firm fit.
- 

**!** You must adjust the shoulder belt of the harness to the correct position for your child before installing the seat, as it cannot be adjusted in the car. The harness must be fastened and adjusted correctly at all times. Children should be encouraged to remain within the harness system.


## Before installation

**DO NOT** use on a passenger seat fitted with activated frontal airbags.

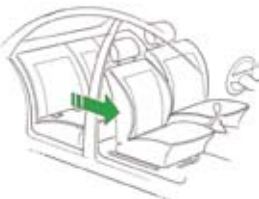


When mounting in the back seat, push the front seat as far forward as possible.

When mounting in the front seat, adjust the backrest in a upright position.

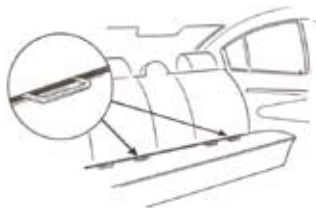


Find the ISOfix anchorage points in the car (15).




If your car is not equipped with ISOfix insertion clips (16), insert these to make installation easier.

You can find the ISOfix insertion (16) clips under the base of your iZi Kid ISOfix.


Clip the insertion clips into the anchorage points.

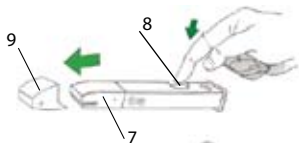

Remove the plastic caps (9) from the ISOfix connectors (7) by pressing down the ISOfix release button (8).




Use the ratchet (6) to adjust the front brace to the inmost position. The ratchet (6) is used to adjust the front brace in both directions. Switch the knobs on the ratchet to change direction.

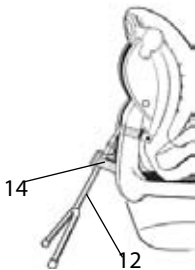

Assemble the floor support before you install the iZi Kid ISOfix in your car.

**Important: The belt loop must be led into this hook**

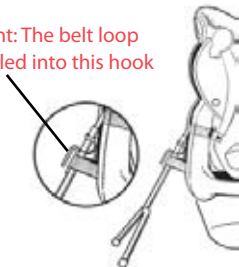

The floor support (12) must go through the belt loop (14). The belt loop must also be led into the hook on the floor support.

Do not fasten the locking bolt (13) yet.

## Installation in the car

⚠ The BeSafe iZi Kid ISOfix can **ONLY** be installed rearward facing in cars with ISOfix anchorage points.

⚠ The BeSafe iZi Kid ISOfix must not be used in the front passenger seat without deactivating the airbag.

BeSafe iZi Kid ISOfix is installed the same way in the front and back seat.

1



Place the seat into the car by racing the seat with the front brace first.

2



Turn the seat into the right position (with the front brace against the backrest).


3



Push the floor support down to the floor. The floor support (12) must go through the belt loop (14) and the belt loop must be led into the hook on the floor support. See explanation in the chapter "BEFORE INSTALLATION".



4




Pull both ISOfix connectors (7) as far out as possible.




The switch (4) then goes into the lowest position and locks the connectors (7).

5




Click the ISOfix connectors (7) in the ISOfix anchorages (15).

6



Make sure that the two indicators (10) are green, both in the hole and on the inside of the release gear.


7

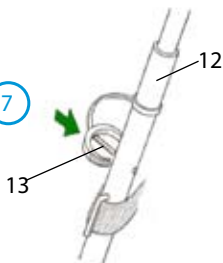

Adjust the floor support (12) so that it is in contact with the floor of the vehicle.

Lock the floor support with the locking bolt (13).


8

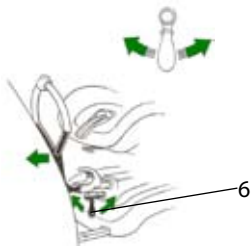

Adjust the front brace outwards with the ratchet (6). Continue tightening until the brace is pressed well into the backrest of the car seat.

If possible, push the front seat backwards so that it is in contact with the child seat. If it is not possible to obtain contact with the child seat, push the backrest of the front seat forward so that the distance between child seat and backrest is minimum 25 cm.

### Correct installation

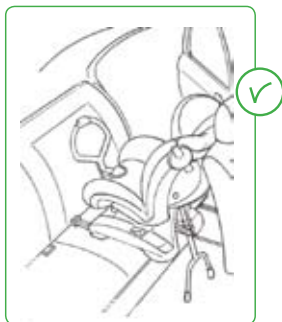

⚠ Make sure the floor support is fully pushed down and locked.


⚠ Make sure all ISOfix indicators are green before you drive.


⚠ DO NOT use on a passenger seat fitted with activated frontal airbags.




AIRBAG


## Warning: Potential misuse


 NEVER use BeSafe iZi Kid ISOfix without the floor support.

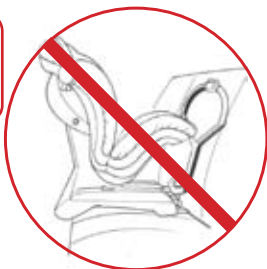


 NEVER use BeSafe iZi Kid ISOfix without tightening the front brace.



 ALWAYS make sure that the indicator for correct installation of the ISOfix anchorages shows GREEN.



 NEVER USE iZi Kid ISOfix on a passenger seat fitted with activated frontal airbag.




## Sitting positions

BeSafe iZi Kid ISOfix has 5 sitting positions.



The sitting positions can be regulated by using the lever (5)




## Car seat protection

To avoid damage to the fabric of the car seat, especially with leather car seats, protect your car seat with a BeSafe protection cover.

## Removing the iZi Kid ISOfix


1

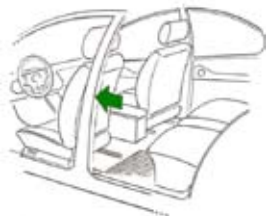

If your iZi Kid ISOfix is installed in the back seat, push the front seat as far forward as possible.


Adjust the backrest as far backwards as possible, when removing from the front seat.

2




Remove the locking bolt (13) from the floor support (12).

3




Use the front brace ratchet (6) to adjust the front brace(3) towards the iZi Kid ISOfix base.

4

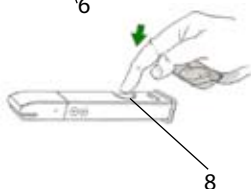

Release the ISOfix connectors by pressing the release mechanism (8) on the ISOfix installation connectors. Now the indicator for right installation (10) shows red and not green.

5

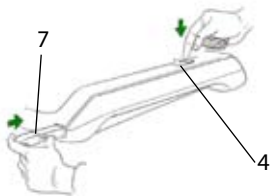

Push the switch (4) on each side, and push the ISOfix installation connectors (7) into the base.

6



Pull the iZi Kid ISOfix back towards the front seat.

Turn the seat so you can easily remove the seat.

Remove your iZi Kid ISOfix from the car.

7



Remove the insertion clips (16) from the car seat. Place them under the base of the iZi Kid ISOfix.

## After an accident

After an accident, the iZi Kid ISOfix must be replaced. Although it may look undamaged, if you were to have another accident, the iZi Kid ISOfix may not be able to protect your child as well as it should.

## Guarantee

All BeSafe products are carefully designed, manufactured and tested. All of our BeSafe child safety seats are tested periodically out of our continuous production in our test laboratory. Furthermore they are tested by independent test institutes.

Should this product prove faulty within 24 months of purchase due to materials or manufacturing fault, except covers and child safety belt, please return it to the original place of purchase.

The guarantee is only valid when you use your seat appropriately and with care. Please contact your dealer, he will decide if the seat will be returned to the manufacturer for repair. Replacement or return cannot be claimed. The guarantee does not get extended through repair.

The guarantee expires:

- When there is no receipt.
- When defects are caused by wrong and improper use.
- When defects are caused by abuse, misuse or negligence.

## Removing and refitting the cover

⚠ Never use the iZi Kid ISOfix without the cover. The cover may only be replaced by an original iZi Kid ISOfix cover.

⚠ ALWAYS use the harness provided with the iZi Kid ISOfix.

### Removing the cover


Pay attention when you remove the cover, as fitting the cover is done in the opposite way.

1

To remove the cover, the child seat hip belt must be released at both sides. See red arrow.

2

Race the seat part of the cover and unhook both belts from the metal hooks in the bottom of the seat. The cover can now be removed.



### Refit the cover

When fitting the cover, start by hooking the hip belts to the hooks in the bottom of the seat. Pull hard in the belts to ensure that they are correctly installed.

To bring the cover under the rear part of the sidewall, turn it inside out and guide it under the sidewall before straightening it out.



## Washing instructions



The cover of the iZi Kid ISOfix must be washed in accordance with the instructions (on the inside of the cover).



## Cleaning harness and seat



**DO NOT** use any cleaning products; these may harm the construction material of the iZi Kid ISOfix.

## Important advice



- DO NOT use on a passenger seat fitted with activated frontal airbag.



- ALWAYS use the harness provided with the iZi Kid ISOfix at all times.
- Warranty will expire if non-original parts or accessories are used.
- Never leave your child unattended in an iZi Kid ISOfix.
- Make sure all passengers are informed about how to release your child in case of emergency.
- An unoccupied iZi Kid ISOfix should still be fastened.
- Make sure luggage or other objects are properly secured.

Unsecured luggage may cause severe injuries to children and adults in case of accident.

- Never use the iZi Kid ISOfix without the cover. The cover may only be replaced by an original iZi Kid ISOfix cover.
- The cover of the iZi Kid ISOfix must be washed in accordance with the instructions inside the cover.
- Do not use any aggressive cleaning products; these may harm the construction material of the iZi Kid ISOfix.



- KEEP this user manual for later use.
- DO NOT attempt to dismantle, modify or add any part to the iZi Kid ISOfix.
- DO NOT use anything, such as a cushion, to raise the iZi Kid ISOfix off the passenger seat. In an accident the iZi Kid ISOfix will not be able to protect your child as well as it should.
- DO NOT use the iZi Kid ISOfix for longer than 5 years. Due to ageing, the quality of the material may change.
- DO NOT use at home. It has not been designed for home use and can only be used in a car.
- We recommend using BeSafe protection cover under your child safety seat to avoid cuts, marks or decolouring on the interior of the car and especially in cars with leather interior.
- Check the car manufacturer's handbook before mounting the iZi Kid ISOfix.
- **When the child weighs over 18 kg or the child's head grows above the seat, the child must change to a group 2/3 seat.**

## Point of sale information

### Notice

1. This is a semi-universal ISOfix CHILD RESTRAINT SYSTEM. It is approved to regulation No. 44.04, series of amendments for general use in vehicles fitted with ISOfix anchorage systems.
2. It will fit vehicles with positions approved as ISOfix positions (as detailed in the vehicle handbook), depending on category of the child seat and of the fixture.
3. The mass group and the ISOfix size class for which this device is intended is: C
4. The iZi Kid ISOfix is suitable for fixing into the seat positions of the cars listed in the appendix 'carlist'. Seat positions in other cars may also be suitable to accept this child restraint. If in doubt, consult either the child restraint manufacturer or the retailer. For updated carlist see: [www.besafe-europe.com](http://www.besafe-europe.com).
5. For ISOfix installation: Make sure you read the car manufacturer's handbook.