



Single Scull Car Rack Slings Assembly Manual

Items to purchase:

- (1) 8 foot long 2 X 4 board
- (4) 1/4" X 4" long bolts
- (8) 1/4" washers
- (4) 1/4" nylock nuts
- (2) 2.5" X 6" U-bolts

Tools Needed:


- Marker or Pen
- Tape Measure
- Drill or Drill Press
- 1/4" Drill Bit
- (2) 7/16" wrenches



Using your tape measure and your marker, measure 1" from each end of your 8 foot long 2 X 4 and mark a line at each of these points. Mark the lines on the narrow side of the 2 X 4.



Lay your Single Scull Car Rack Slings across each end of your 2 X 4 and line up the edge of your slings with the lines you just marked. Use your marker to mark the locations for 2 drill holes for each sling.

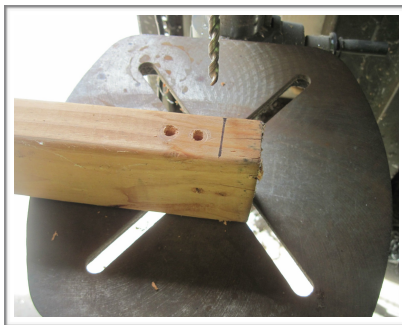

Using your drill or drill press and your 1/4" drill bit, drill all the way through your 2 X 4 in the long dimension, creating (4) holes total.



Attach your Single Scull Car Rack Slings to your newly created 2 X 4 rail using the (4) 1/4" X 4" bolts, (8) 1/4" washers and (4) 1/4" nylock nuts.



You are now ready to attach your custom rack to your vehicle roof racks. Please refer to the Single Scull Car Rack User's Manual for instructions on how to attach your Single Car Rack Slings to your existing vehicle roof racks and how to safely use your Single Car Rack Slings.

Still have questions?

Please contact us directly: **770-561-9995** or **info@revolutionrowing.com**

Car Rack Guidelines

When using Revolution Rowing Single Scull Car Rack Slings, there are precautionary measures that the user must follow. The following list will guide you to use your product in a safe manner.

- Only use approved fasteners and mounting hardware provided by Revolution Rowing to assemble and attach your Single Scull Car Rack Slings to your existing vehicle roof racks. Fasteners and hardware should be inspected periodically for wear, corrosion and fatigue.
- Never exceed the manufacturer's recommended weight limit for your vehicle roof racks. Total weight is the sum of the weight of your load plus the weight of accessories used to carry the load.
- Check your load at stops during your trip. Straps, ropes and U-bolts should be tightened and re-tightened to keep your load safe.
- Know local, state and federal laws regarding over length and oversize loads. Be aware at all times how far your load projects beyond the limits of your vehicle. Long loads should always be secured to the front and rear of the vehicle using bow and stern lines and flagged for safety.
- Follow all posted speed limits and traffic cautions. Adapt your driving to road conditions and the load being carried.
- Remove your Revolution Rowing Single Scull Car Rack Slings when not in use.
- Revolution Single Scull Car Racks Slings are not for use on trailers or towed vehicles.
- Consult Revolution Rowing if you have any questions about the operation or limitations of Revolution Rowing products.

Limited 30 Day Warranty

Effective September 3, 2015

Revolution Rowing will warranty all Revolution Rowing brand Single Scull Car Rack Slings manufactured by Revolution Rowing for a period of 30 days after purchase. This warranty is available to the original retail purchaser and will terminate if the purchaser transfers the product to any other person.

Subject to the limitations and exclusions described in this warranty, Revolution Rowing will remedy defects in materials or workmanship by repairing or replacing, at its option, a defective product without charge for parts or labor. In addition, Revolution Rowing may elect, at its option, not to repair or replace a defective product but rather issue to a purchaser a refund equal to the purchase price paid for the product, minus shipping charges.

No warranty is given for defects caused by normal wear and tear, cosmetic rust, scratches, accidents, unlawful vehicle operation, or modification of, or any types of repair of, a Revolution Rowing travel products other than those authorized by Revolution Rowing.

No warranty is given for defects resulting from conditions beyond Revolution Rowing's control including, but not limited to, misuse, overloading, or failure to assemble, mount or use the product in accordance with Revolution Rowing's written instructions or guidelines.

No warranty is given for Revolution Rowing products purchased outside of the United States.

In the event that a product is defective, the purchaser should contact Revolution Rowing via the contact information available at the web address at the bottom of this page.

In the event that a product needs to be returned to Revolution Rowing, Revolution Rowing will provide the purchaser with the appropriate mailing address and any additional instructions. Please note that the purchaser will be responsible for the cost of mailing the product to Revolution Rowing.

Disclaimer of Liability

Repair or replacement of a defective product or the issuance of a refund or credit (as determined by Revolution Rowing) is a purchaser's exclusive remedy under this warranty. Damage to a purchaser's vehicle, cargo and/or to any other person or property is excluded.

This warranty is expressly made in lieu of any and all other warranties, express or implied.

Revolution Rowing's sole liability to any purchaser is limited to the remedy set forth above. In no event will Revolution Rowing be liable for any lost profits, lost sales, or for any consequential, direct, indirect, incidental, special, exemplary, or punitive damages or for any other damages of any kind or nature.