

# ECO-i™ Submittal Data



Building Life.

## APR-CHRZP900BAB Kit Heat Recovery: Outdoor Units

Job Name: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted to: \_\_\_\_\_  
 Submitted by: \_\_\_\_\_  
 Reference: \_\_\_\_\_


Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Unit #: \_\_\_\_\_  
 Drawing #: \_\_\_\_\_



### APR-CHRZP900BAB

For outdoor unit (Capacity after distribution joint is 307.100 BTU/h or less.)

Note that the dimension marked with every alphabetical letter in the diagram shows the inner diameter.

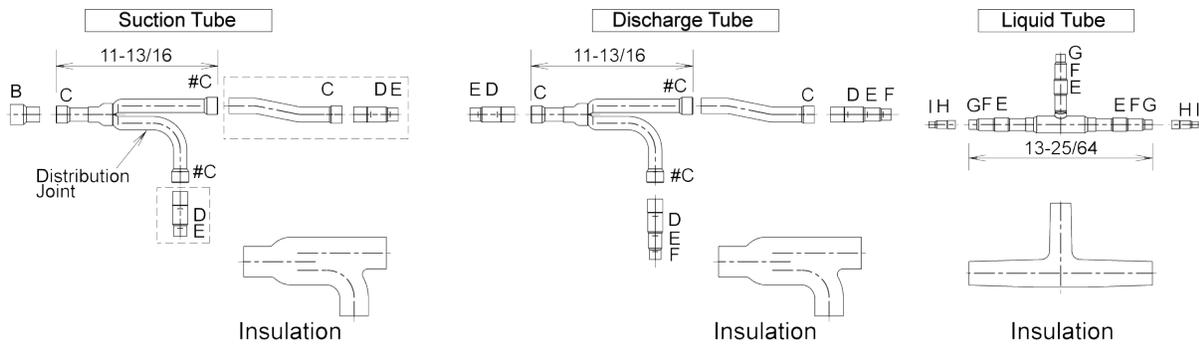

Unit: in.

\*Insulators for both the Suction tube and the Discharge tube are the same.

\*Suction tube and Discharge tube are similar in sizes and both the tube entrances have the same diameter. So the both Distribution joints can fit into different tubes. Since the diameter of the tube ends for both Suction and Discharge tube are different, take care not to connect the distribution joint different. See the "# " marks on the above figures.

Size	Part B	Part C	Part D	Part E	Part F	Part G	Part H	Part I
Inch	1 3/8"	1 1/8"	1 1/8"	7/8"	3/4"	5/8"	1/2"	3/8"