



# IR Bullet Camera User Manual

**Warning:** Please read this manual carefully before installation and use!

## 1. INTRODUCTION

This camera uses a high sensitive 1/3" Color Sony Super HAD II (Hi-Res.) sensor, producing pictures reaching up 700 TV lines of horizontal resolution.

### KEY FEATURES

- 1/3" Color Sony Super HAD II (Hi-Res.)
- Built-in Varifocal Lens
- Built-in IR-LED
- WDR (Wide Dynamic Range) Function
- HLC(High Light Compensation) Function
- BLC (Back Light Compensation)
- Motion Detection
- On-Screen Display Function
- 3-Axis Mechanism Design



**IV-BV7660IR**

## 2. PRECAUTIONS

- Do not install the product in extreme temperature conditions. Only use the camera under conditions where temperatures are between 14F and + 122F. Be especially careful to provide ventilation when operating under high temperatures.
- Do not use or store the camera in humid environment. It may cause poor image quality.
- Do not use the camera in unstable lighting conditions. Inconsistent lighting or flickering may cause poor image.
- Never use the camera close to gas or oil leak. It may not operate properly.
- Do not disassemble the camera. There is no user serviceable part inside.
- Do not drop the camera or apply force on it. It may cause a malfunction.
- Never face the camera to strong light for long periods of time. It may damage the CCD sensor.
- Do not expose the camera to rain or any types of liquid. If wet, wipe the moisture out immediately. Liquids can contain minerals that corrode the electronic components.

## 3. EQUIPMENT INSTALLATION

1. Open the attachment pack, use screws to fasten chassis to the wall or ceiling and attach camera to the chassis.

2. Plug the external cables according to the use requirements of equipment.


2.1 Video output BNC connector.



2.2 Power input connector.



3. The up and down or so regulating equipment, according to the use requirements set equipment of direction.

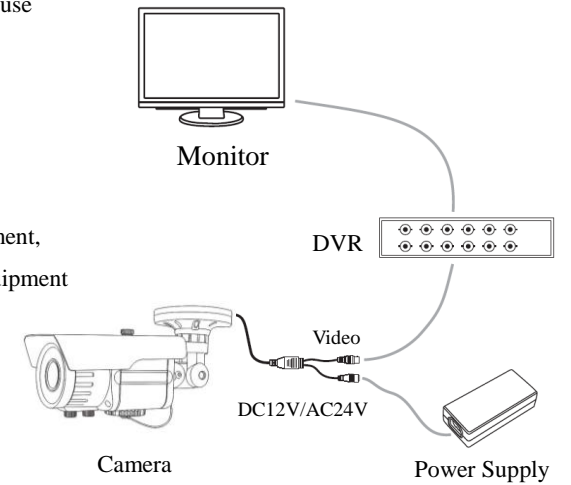

## 4. SPECIFICATIONS

Model	IV-BV7660IR
Image Sensor	1/3" Color Sony Super HAD II (Hi-Res.)
Active Pixel	NTSC:976*494, PAL: 976*582 (H*V)
Resolution	Color:700TV Lines; B/W:750TV Lines
Min.Illumination	Color:0.1 Lux, 0 Lux (IR ON)
S/N Ratio	More than 50dB(AGC off)
WDR	ATR
Lens	Varifocal Lens 6-60mm (Megapixel)
AGC	Auto
Shutter Speed	NTSC:1/60~1/100,000 sec
Backlight	Off/BLC/HLC
Day&Night	Auto/Color/EXT1/EXT2/B&W
White Balance	ATW/PUSH/USER/ANTI CR/Manual/PUSH LOCK
Mirror	Off/On
Motion Detection	4Masks
Privacy Mask	4Masks
Language	Eight country languages (Option)
Infrared Luminary	60 Pieces Φ5 IR-LED (850 nm)
Illumination Distance	150~180 ft
Power(Max.) supply	AC24V/ DC12V ±10% 12W
Video Output	CVBS: 1 Vp-p /75 Ohms BNC connector
Weatherproofing	IP66
Operating Temp.	14°F ~ 122°F
Storage Temp.	-22°F ~ 140°F

## 5. PACKING LIST

- Camera \* 1      User Manual \* 1      OSD menu setting \* 1      Accessory pack \* 1