
A.O.SMITH

ONE OR TWO TEMPERATURE—
ONE HEATER MEDIUM TEMPERATURE
STORAGE WITH OR WITHOUT
RECIRCULATION

GAS FIRED TANK TYPE BT-65 THRU BT-100

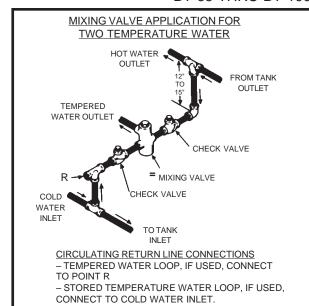



HOT WATER SUPPLY * TEMPERATURE AND PRESSURE RELIEF VALVE HEATER


HEATER WITH OR WITHOUT MIXING VALVE

CAUTION:

IF BUILDING COLD WATER SUPPLY HAS A BACKFLOW PREVENTER, CHECK VALVE OR WATER METER WITH CHECK VALVE, PROVISIONS FOR THERMAL EXPANSION OF WATER IN THE HOT WATER SYSTEM MUST BE PROVIDED.



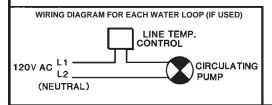

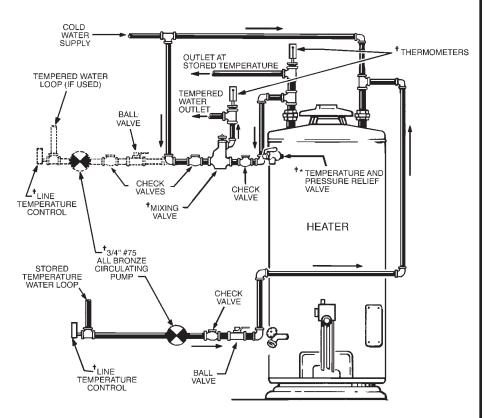

HEATER WITH MIXING VALVE AND RECIRCULATED LOOP

INSTALL IN ACCORDANCE WITH LOCAL CODES.
*PIPE RELIEF VALVE TO OPEN DRAIN.
†AVAILABLE FROM A. O. SMITH.




Revised March 1997 A 111.0

ONE OR TWO TEMPERATURE— ONE HEATER MEDIUM TEMPERATURE STORAGE WITH OR WITHOUT RECIRCULATION

A.O.SMITH

GAS FIRED TANK TYPE BTC-120 THRU BTC-500 BTP-139 THRU BTP-700

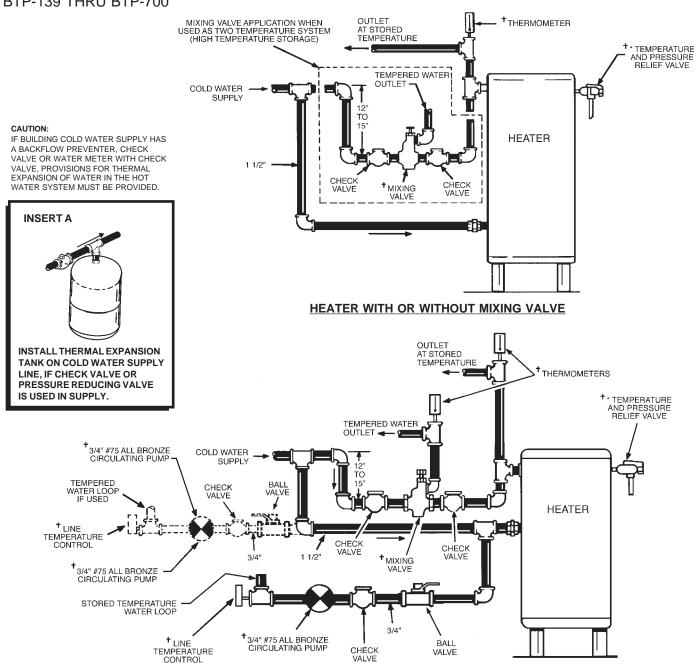

HEATER WITH MIXING VALVE AND RECIRCULATED LOOP

WIRING DIAGRAM FOR EACH WATER LOOP (IF USED)

LINE TEMP.
CONTROL

120V AC L1
L2
(NEUTRAL)

CIRCULATING
PUMP

INSTALL IN ACCORDANCE WITH LOCAL CODES.

- * PIPE RELIEF VALVE TO OPEN DRAIN.
- **=** AVAILABLE FROM A. O. SMITH.