



LevelOne

User Manual

WBR-6022

300Mbps Wireless HomeGuard 22 Router

Ver. 1.4

Safety

FCC WARNING

This equipment may generate or use radio frequency energy. Changes or modifications to this equipment may cause harmful interference unless the modifications are expressly approved in the instruction manual. The user could lose the authority to operate this equipment if an unauthorized change or modification is made.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- 1) Reorient or relocate the receiving antenna.
- 2) Increase the separation between the equipment and receiver.
- 3) Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- 4) Consult the dealer or an experienced radio/TV technician for help.

CE Declaration of conformity

This equipment complies with the requirements relating to electromagnetic compatibility, EN 55022 class B for ITE, the essential protection requirement of Council Directive 89/336/EEC on the approximation of the laws of the Member States relating to electromagnetic compatibility.

CE Marking Warning

Hereby, Digital Data Communications, declares that this product (Model-no. WBR-6022) is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

The CE-Declaration of Conformity can be downloaded at:

<http://www.levelone.eu/support.php>



General Public License

This product incorporates open source code into the software and therefore falls under the guidelines governed by the General Public License (GPL) agreement.

Adhering to the GPL requirements, the open source code and open source license for the source code are available for free download at <http://global.level1.com>.

If you would like a copy of the GPL or other open source code in this software on a physical CD medium, LevelOne (Digital Data Communications) offers to mail this CD to you upon request, for a price of US\$9.99 plus the cost of shipping.

Table of Content

TABLE OF CONTENT.....	4
1 INTRODUCTION.....	5
2 PRODUCT FEATURES.....	6
3 PACKAGE CONTENTS & HARDWARE INSTALLATION.....	8
4 SETUP THE WBR-6022 HOME SURVEILLANCE	14
4.1 EASY SETUP UTILITY	14
4.2 QUICKLY TO SETUP A HOMEGUARD SYSTEM.....	22
4.2.1 HOMEGUARD CONFIGURATION.....	23
4.2.2 SEARCH NEW DEVICE.....	25
4.2.3 SETUP DEVICE & LEVEL1DNS.....	28
4.2.4 VIEW THE VIDEO	32
4.2.5 PLAYBACK THE RECORD.....	34
4.2.6 SCHEDULE RECORD.....	35
4.3 DETAIL TO SETUP A HOMEGUARD SYSTEM	37
4.3.1 VIEW , SNAP AND RECORD	37
A. VIEW ALL IP CAMERAS	37
B. VIEW SINGLE IP CAMERA.....	37
C. VIEW PTZ IP CAMERA.....	38
D. SNAP THE SCREEN SHOT.....	38
E. RECORD IP CAMERA	39
F. CHECK THE RECORD FILE	39
4.3.2 SCHEDULING RECORD.....	40
4.3.3 ADVANCED SETTING	41
1. ACCOUNT MANAGEMENT	41
A. ADMINISTRATOR MANAGEMENT.....	41
B. ADD NORMAL USER	41
C. NORMAL USER MANAGEMENT.....	42
2. EMAIL ALERT	42
3. UNREGISTER	42
4. CHANGE ALIAS DOMAIN NAME.....	43
5. LOGIN TOOL.....	44
5 ROUTER SETTING	45
5.1 WIZARD.....	45
5.2 ADVANCED SETUP	47
5.2.1 BASIC SETTING.....	48
5.2.2 FORWARDING RULES.....	63
5.2.2.1 SECURITY SETTINGS	67
5.2.2.2 ADVANCED SETTINGS.....	75
5.2.2.3 TOOLBOX	85
TECHNICAL SPECIFICATIONS.....	99

Default Settings

IP Address	192.168.0.1
Username	admin
Password	password
Wireless Mode	Enable
Wireless SSID	LevelOne
Wireless Security	None

1 Introduction

Congratulations on your purchase of LevelOne WBR-6022 *Wireless HomeGuard 22 Router*. This product is specifically designed for Small Office and Home Office needs. It provides a complete SOHO solution for Internet surfing, and is easy to configure and operate even for non-technical users.

Instructions for installing and configuring this product can be found in this manual. Before you install and use this product, please read the manual carefully for fully exploiting the functions of this product.

User Manual Overview

Introduction	Describes the WBR-6022 Wireless HomeGuard 22 Router.
Unpacking and Setup	Helps user to get started with the basic installation of the router.
Hardware Installation	Describes the LED indicators router.
Configuration	Describes the functionalities and its settings.
Technical Specifications	Lists the technical (general, physical and environmental) specifications of the router.

2 Product Features

This chapter provides the package contents and setup information for the *Wireless HomeGuard 22 Router*.

Features

HomeGuard functions

- **Camera View**
Get supporting IP Cameras and after pairing with them, this device could show the camera screen on web UI.
- **Camera Record**
Get supporting IP Cameras and storage devices, after pairing with them, this device could record the video data of camera into storage HDD. It also supports schedule and manually recording.
- **Level1DNS.net**
The WBR-6022 had build-in a DDNS account, user can easily to remote access via internet, the default DDNS account also allow user to modify by level1dns.net (Level1 Service)

Router Basic functions

- **Auto-sensing Ethernet Switch**
Equipped with a 4-port auto-sensing Ethernet switch.
- **WAN type supported**
The router supports some WAN types, Static, Dynamic, PPPoE , PPTP ,L2TP, Dynamic IP with Road Runner.
- **Firewall**
All unwanted packets from outside intruders are blocked to protect your Intranet.
- **DHCP server supported**
All of the networked computers can retrieve TCP/IP settings automatically from this product.
- **Web-based configuring**
Configurable through any networked computer's web browser using Netscape or Internet Explorer.
- **Virtual Server supported**
Enable you to expose WWW, FTP and other services on your LAN to be accessible to Internet users.
- **User-Definable Application Sensing Tunnel**
User can define the attributes to support the special applications requiring multiple connections, like Internet gaming, video conferencing, Internet telephony and so on, then this product can sense the application type and open multi-port tunnel for it.
- **DMZ Host supported**
Lets a networked computer be fully exposed to the Internet; this function is used when special application sensing tunnel feature is insufficient to allow an application to function correctly.
- **Statistics of WAN Supported**
Enables you to monitor inbound and outbound packets

Wireless functions

- **High speed for wireless LAN connection**
Up to 80Mbps data rate by incorporating Orthogonal Frequency Division Multiplexing (OFDM).
- **Roaming**
Provides seamless roaming within the IEEE 802.11b (11M) and IEEE 802.11g (54M) WLAN infrastructure.
- **WDS(Wireless Distribution System):** It is a system that enables the interconnection of access points wirelessly.
- **WPS(WiFi Protection Setup):**WPS is WiFi Protection Setup which is similar to WCN-NET and offer safe and easy way in Wireless Connection.
- **IEEE 802.11b compatible (11M)**
Allowing inter-operation among multiple vendors.
- **IEEE 802.11g compatible (54M)**
Allowing inter-operation among multiple vendors.
- **IEEE 802.11n compatible (300M)**

Green functions

- **Standby mode:**
When No Wireless Station is associated with Green Router in several minutes, it will be automatically switched into Standby mode. Of course, this mode will not influence on end users to roam Internet, such as noon Reset time 12:00~13:30.

- **Sleep Mode:**
When time matches with rule of Schedule, Green Router will detect whether any client or Network flow. If No, Green Router will be in Sleep mode. Otherwise, it will not go to sleep mode until no data flowing in network. This mode can save almost 100% energy. (**End-user can't use Internet in Sleep Mode.**) Such as 11:00PM~10:00AM for Family or 19:00PM~07:00AM for Office or in Weekend.
- **Smart Schedule:**
When time matches with Schedule rule, for example,11:00PM~08:00AM is in Sleep Mode, Green Router will detect if Network flow or Wireless Stations at 11:00PM, if no, it will go in Sleep Mode until 8:00AM. If yes, Green Router will detect until no data flowing and Wireless Stations then go "Sleep Mode".
Smart Schedule has another feature is when end-user wakes up at 3:00AM,then click On/Sleep button to awaken Green Router to use Internet until 5:00AM, then Green Router will detect no flow and Wireless Stations ,then go "Sleep Mode" until 08:00AM.
- **On/Sleep Button:**
End users can wake up Green Router from Sleep Mode via this Button.
 - ✧ There is a limit that End-user forces to sleep via this button and has to wake Green Router up by this Button. And Force to wake up via this button and can Sleep by Schedule.

Security functions

- **Packet filter supported**
Packet Filter allows you to control access to a network by analyzing the incoming and outgoing packets and letting them pass or halting them based on the IP address of the source and destination.
- **Domain Filter Supported**
Let you prevent users under this device from accessing specific URLs.
- **URL Blocking Supported**
URL Blocking can block hundreds of websites connection by simply a **keyword**.
- **VPN Pass-through**
The router also supports VPN pass-through.
- **802.1X supported**
When the 802.1X function is enabled, the Wireless user must authenticate to this router first to use the Network service.
- **Support WPA-PSK and WPA version 1 and 2**
When the WPA function is enabled, the Wireless user must authenticate to this router first to use the Network service
- **SPI Mode Supported**
When SPI Mode is enabled, the router will check every incoming packet to detect if this packet is valid.
- **DoS Attack Detection Supported**
When this feature is enabled, the router will detect and log the DoS attack comes from the Internet.
- **Qos(Quality of Service)**
Provide different priority to different users or data flows, or guarantee a certain level of performance.

Advanced functions

- **System time Supported**
Allow you to synchronize system time with network time server.
- **E-mail Alert Supported**
The router can send its info by mail.
- **Dynamic dns Supported**
At present,the router has some ddns providers,like.dyndns,no-ip TZO.com and dhs.org.
- **SNMP Supported**
The router supports basic SNMP function.
- **Routing Table Supported**
Now, the router supports static routing.
- **Schedule Rule supported**
Customers can control some functions, like virtual server and packet filters when to access or when to block.

Other functions

- **UPNP (Universal Plug and Play)Supported**
The router also supports this function. The applications: X-box(360), Msn Messenger, Windows Messenger and NDSL.

3 Package contents & Hardware Installation

3.1. Package Contents

Open the box of the *Wireless HomeGuard 22 Router* and carefully unpack it. The box should contain the following items:

- WBR-6022 *Wireless HomeGuard 22 Router*
- Power Adapter
- Cat.5 Cable
- Antenna x2
- CD Manual / Utility
- Quick Installation Guide

If any item is found missing or damaged, please contact your local reseller for replacement.


PS: the setup wizard utility in the CD, it will help user to setup the environment easily.

Front View



WLAN Button	<ul style="list-style-type: none"> Press and hold for 3 seconds to turn the Wireless LAN on or off. Please confirm WLAN status as indicated by WLAN Light
Status Light	<ul style="list-style-type: none"> A steady blinking light indicates the device is ready
WAN Light	<ul style="list-style-type: none"> A solid light indicates the WAN port is connected.
WLAN Light	<ul style="list-style-type: none"> Off indicates Wireless LAN is turned off, or no wireless client is connected to the router. LED blinks during wireless data transmission, or when there is a wireless client connected to the router. Fast and steady blinking indicates WPS function is activated and the router is pairing with wireless client.
LAN Lights	<ul style="list-style-type: none"> A solid light indicates to an Ethernet enable computer on ports 1 ~ 4. LED blinks during data transmission.
Sleep Light	<ul style="list-style-type: none"> When solid light (orange) means that the router is in sleep mode.
WPS Button	<ul style="list-style-type: none"> Wi-Fi Protected Setup push button. Press to activate WPS pairing with wireless client.
Reset (WLAN and WPS Buttons)	<ul style="list-style-type: none"> Press the WLAN and WPS buttons together for 5 seconds to reboot and restore the device to factory default settings.

Rear View

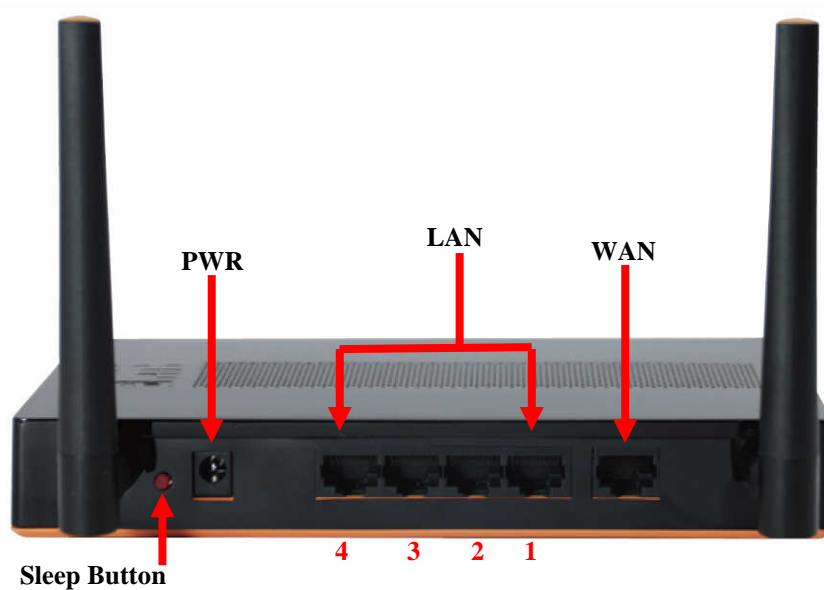

Power Jack	<ul style="list-style-type: none"> • Receptor for the supplied power adapter
LAN Ports (1~4)	<ul style="list-style-type: none"> • Connect Ethernet devices such as Level1 IP Cameras, computers, switches or other network devices.
WAN Port	<ul style="list-style-type: none"> • The WAN port is the connection for the Ethernet cable to the Cable or DSL Modem.
Sleep Button	<ul style="list-style-type: none"> • This button is used to force the router to enter sleep mode, or wake up. It has the highest priority and overrides the Power Saving Schedule. • Green Router is in Sleep Mode.(Press this button about 1 sec.) • Green Router is in Standby or On mode. (Press this button about 1 sec.)
Antennas	<ul style="list-style-type: none"> • Detachable antennas allow users to change antenna if necessary.

3.2. Hardware Installation

3.2.1. Decide where to place your Wireless Router

You can place your Wireless Router on a desk or other flat surface. For optimal performance, place your Wireless Router in the center of your office (or your home) in a location that is away from any potential source of interference, such as a metal wall or microwave oven. This location must be close to power and network connection.

- A. Attach the included antennas.



- B. Connect your broadband internet connection to WBR-6022's WAN port.



C. Connect the Computer LAN cable.



D. Plug in the Power Adapter



E. Wait until the Status light is blinking steadily. This means the router is ready for use.



F. Plug in the IP Camera & NAS for the Surveillance environment


Please refer the below Diagram



3.2.2. Check Your Network Settings

A. Please make sure your PC can get IP address automatically so the WBR-6022 can communicate with your PC during configuration.

- Select “Control Panel” > “Network Connections”.
- Right click the “Local Area Connection” and choose “Properties”.
- Select the TCP/IP protocol for your network card.
- Click on the Properties button. You should then see the following screen and make sure you have selected “Obtain IP address automatically”

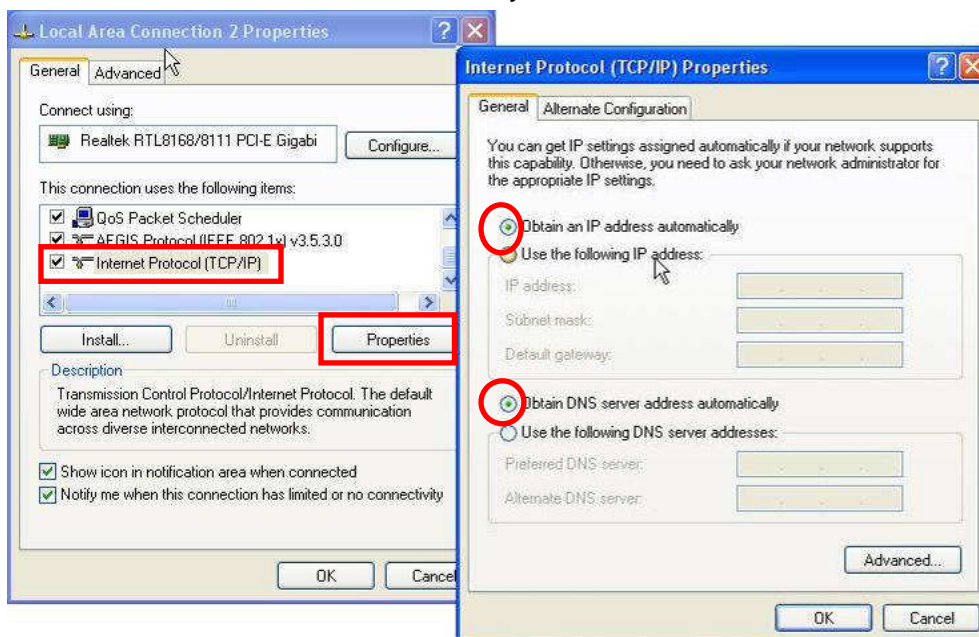

B. Reboot computer to make sure you have received the IP address correctly form the Router.

4 Setup the WBR-6022 Home Surveillance


Once properly configured, the WBR-6022 *Wireless HomeGuard 22 Router* will obtain and assign IP address information automatically. Configuration settings can be established through the Web-Based Configuration Menu, or the Easy Setup Utility on the CD.

4.1 Easy Setup Utility


Insert the CD into your CD-ROM drive of your computer.

The autorun program should start automatically.
If it does not, please run autorun.exe on your CD.


In the autorun screen, click **Utility** to begin the Easy Setup Utility.

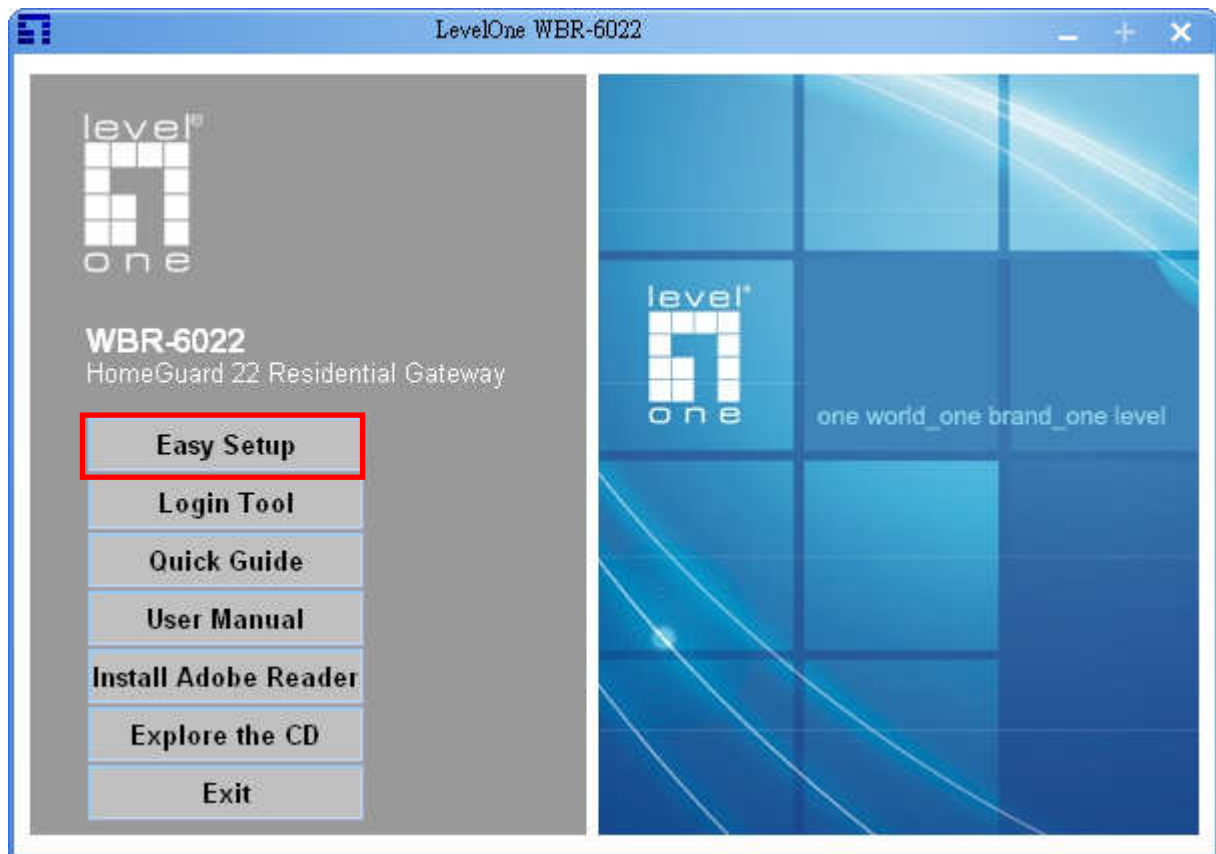


Before running Easy-Setup, please make sure that your PC is correctly connected with the router. After executing it, you could see following screen:

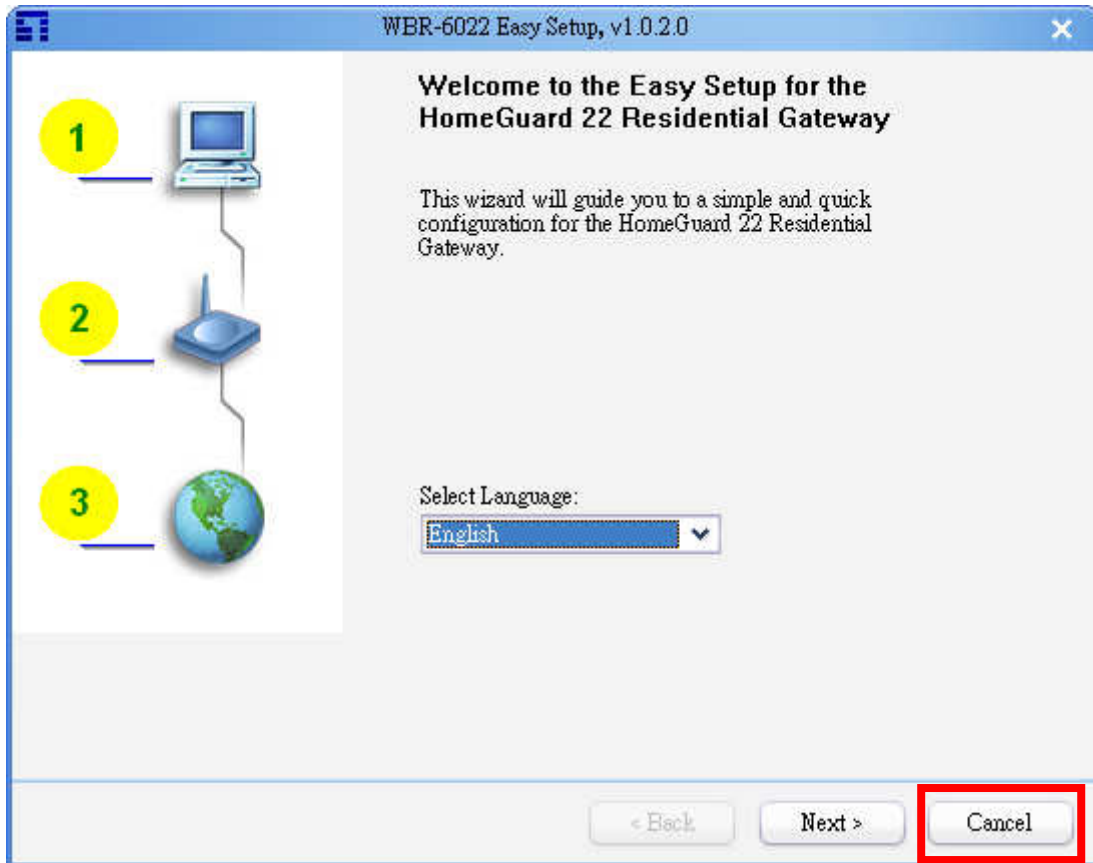


Click "Next" to continue.

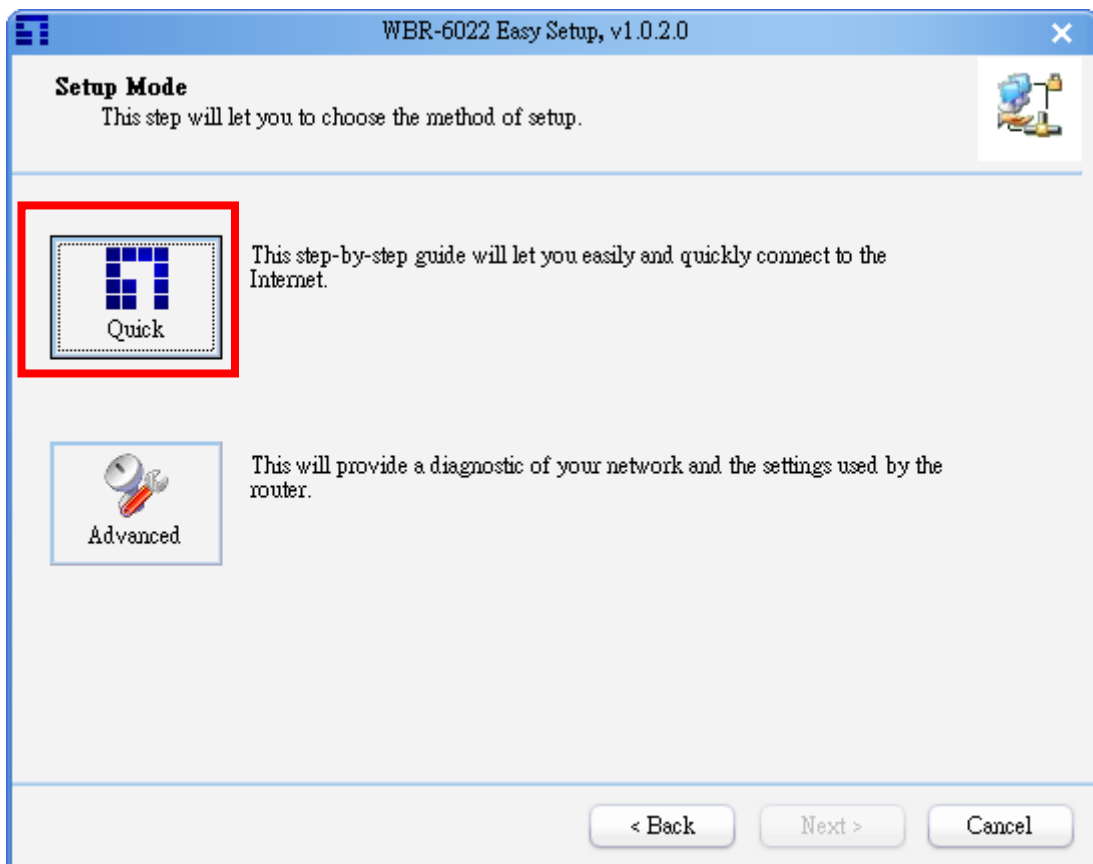


Select Wizard, the application will go steps one by one.

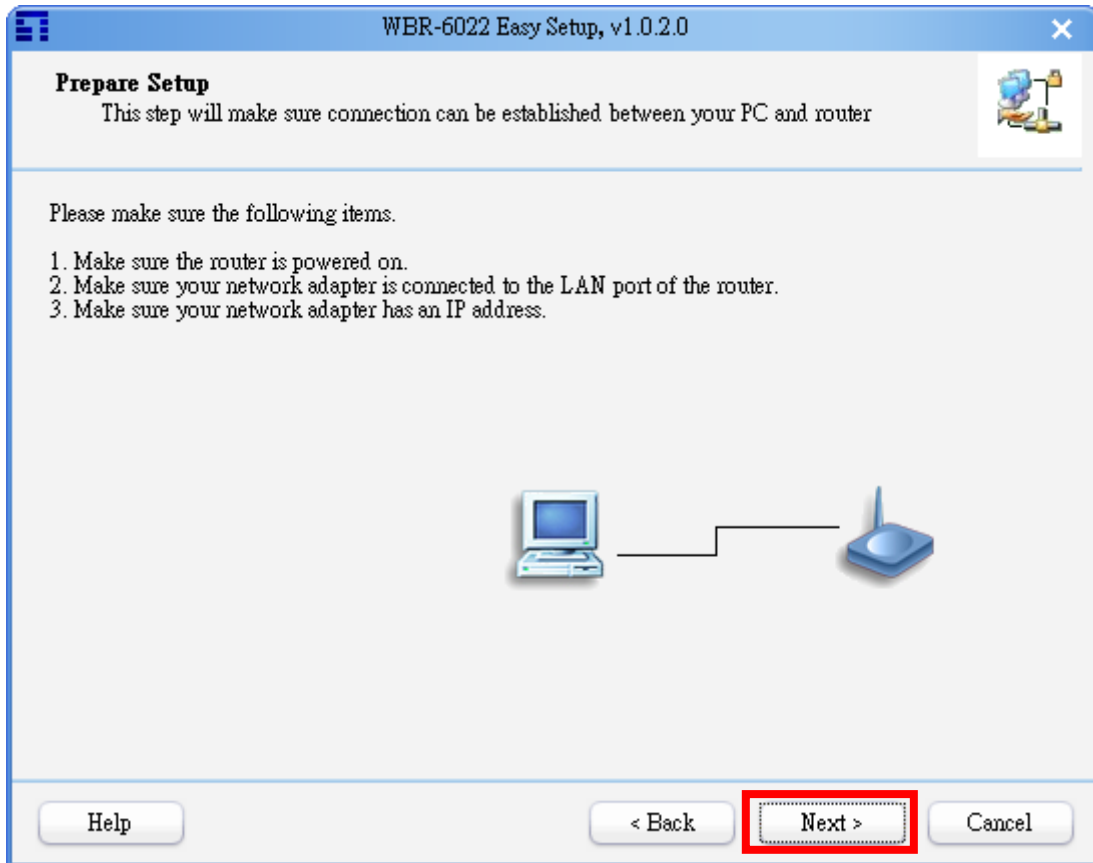

First, you have to make sure that your hardware connections are all correct. Click “Next” to continue.

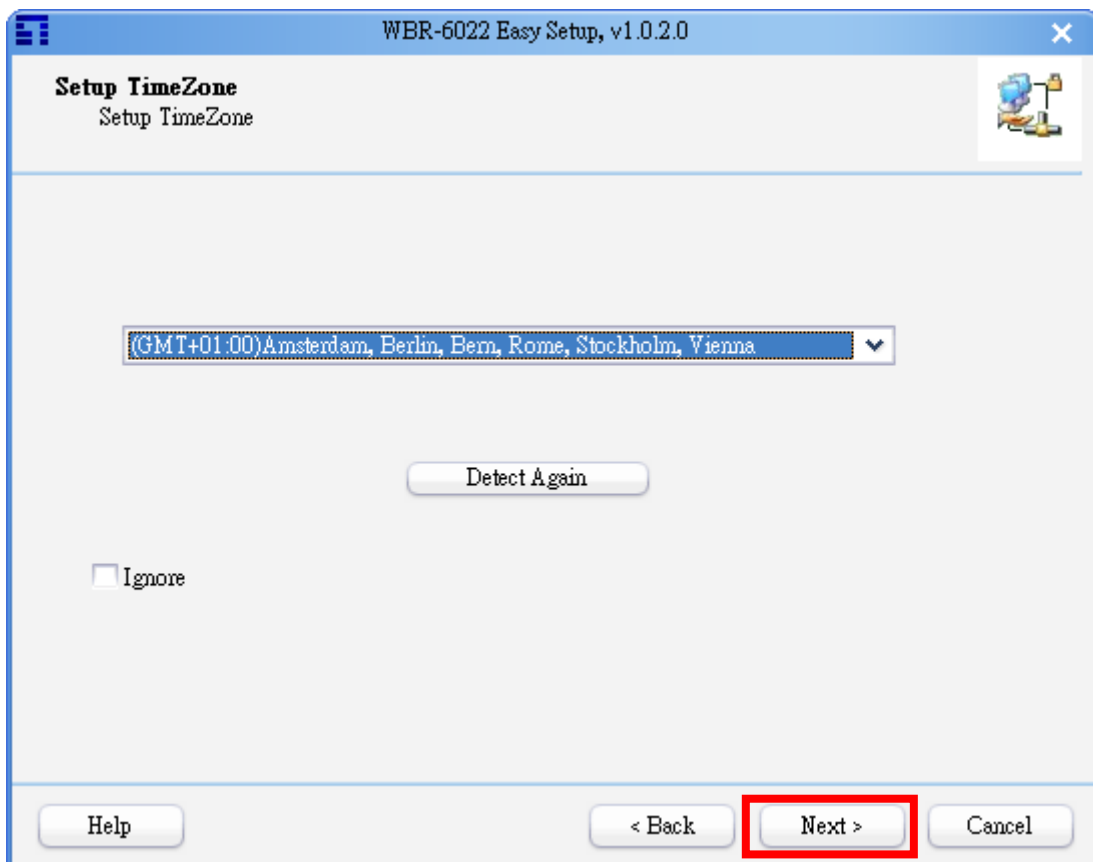


Then, you have to adjust the time zone. This router could manage the power by time scheduling, so we have to correct its system time. Click “Next” to continue.

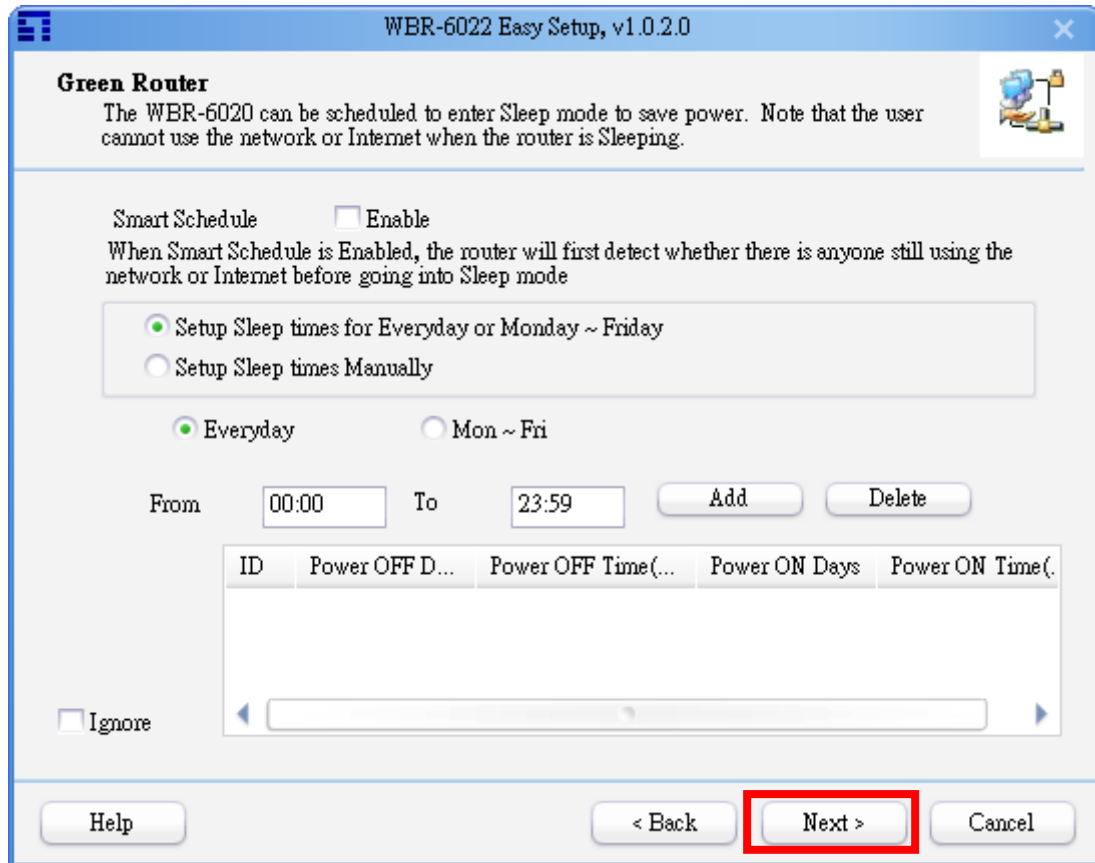


Setup the Power Management schedule, and then click “Next” to continue.

Smart Schedule means, when the router should go to sleep mode due to the schedule rule, it would check the network packet first. If there are still some network packets being transferred, the rule would not be executed immediately until the network flow is stop.

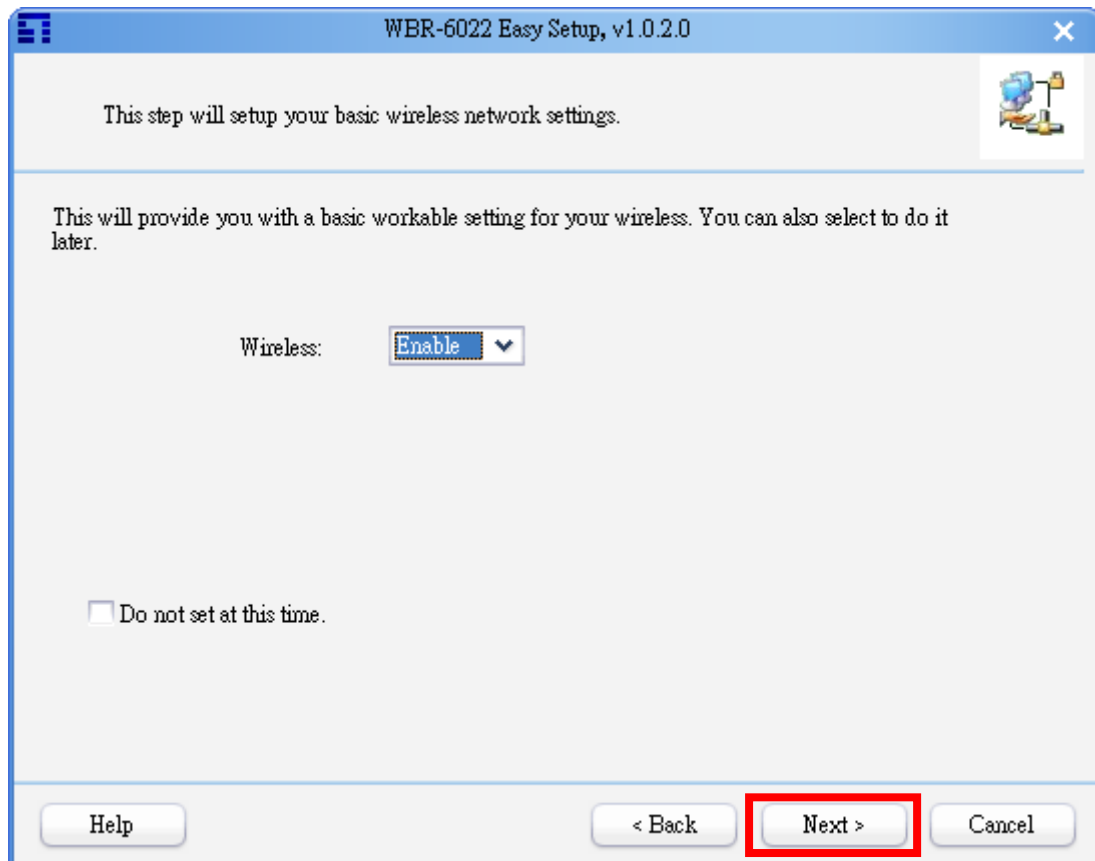


Set wireless enable or disable, and then click “Next” to continue.

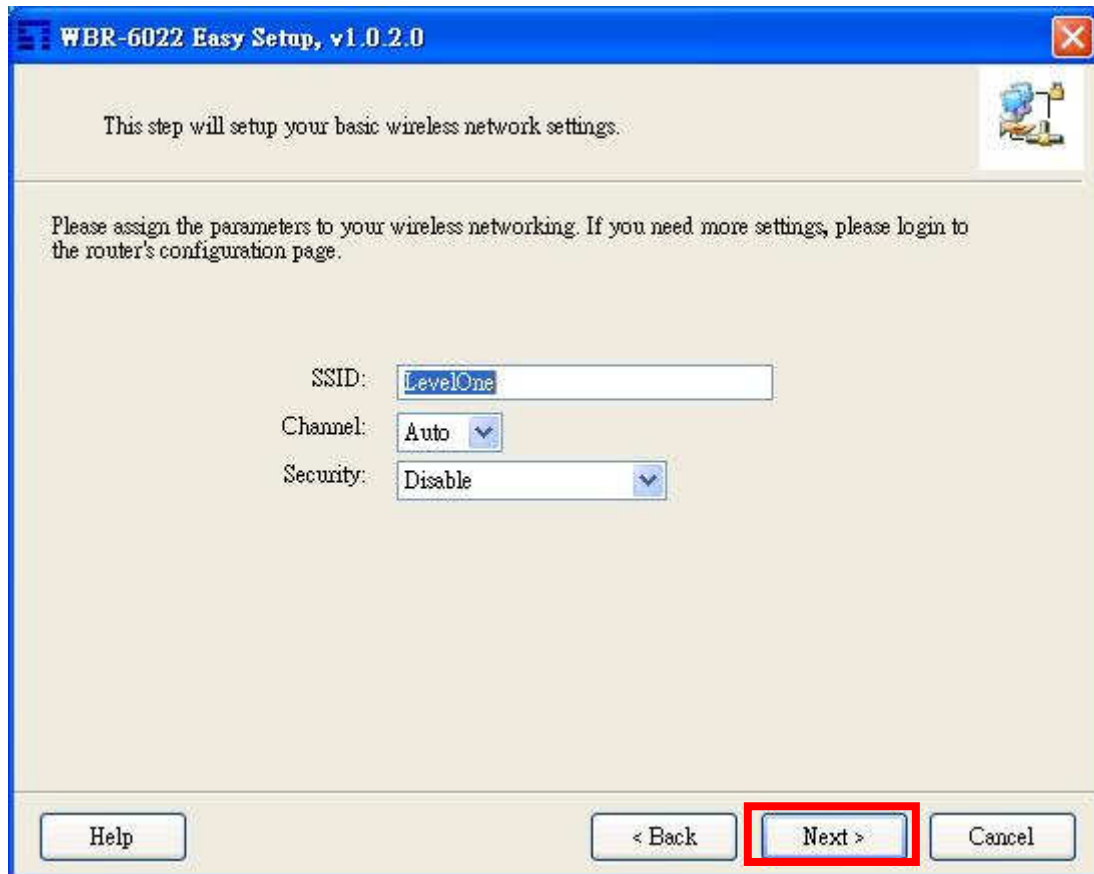


For wireless setting, the default SSID of wireless interface is “LevelOne”, default channel is 11, and default encryption option is “NONE”. You could change it right now or later through WEB UI. We strongly suggest you change the encryption option as soon as possible, because the non-encrypted wireless network is not secured. **Click “Next” to continue.**




Click “Next” to continue.

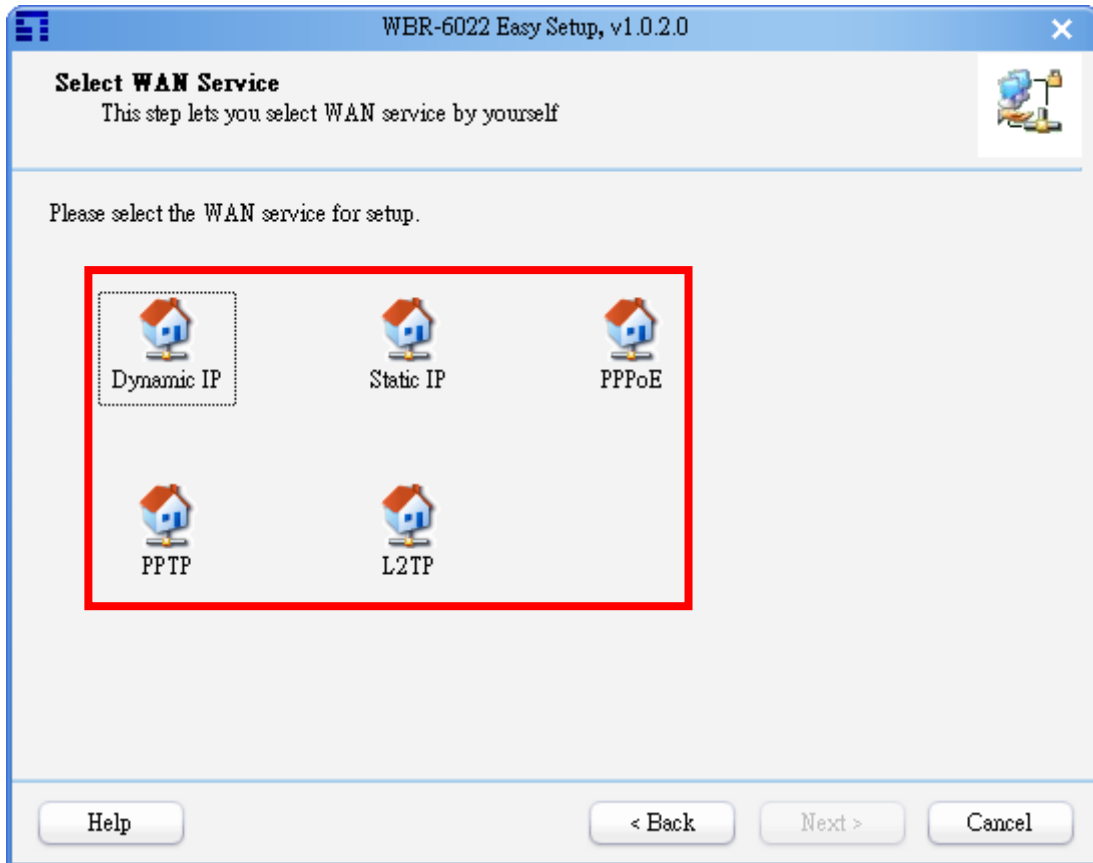


Next step, we will help you to setup the WAN configurations.
Please follow the wizard, and choose the WAN type you used.

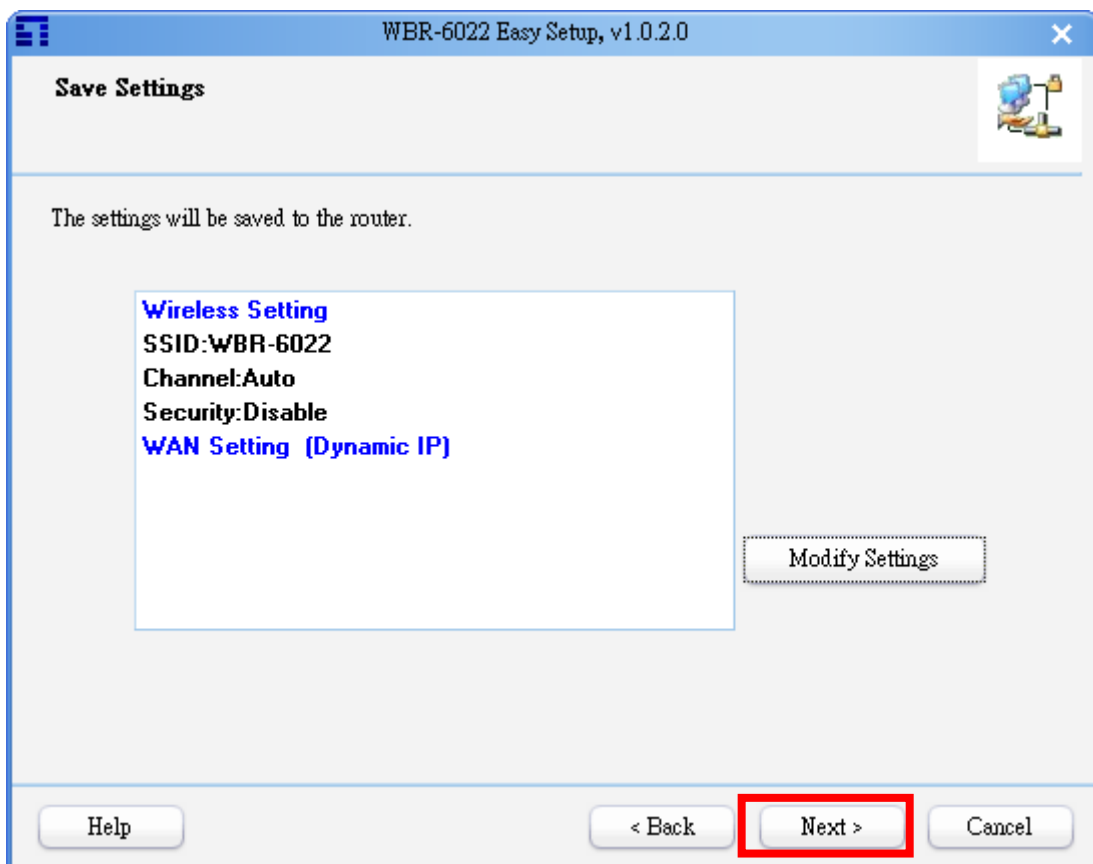


Click "Next" to continue

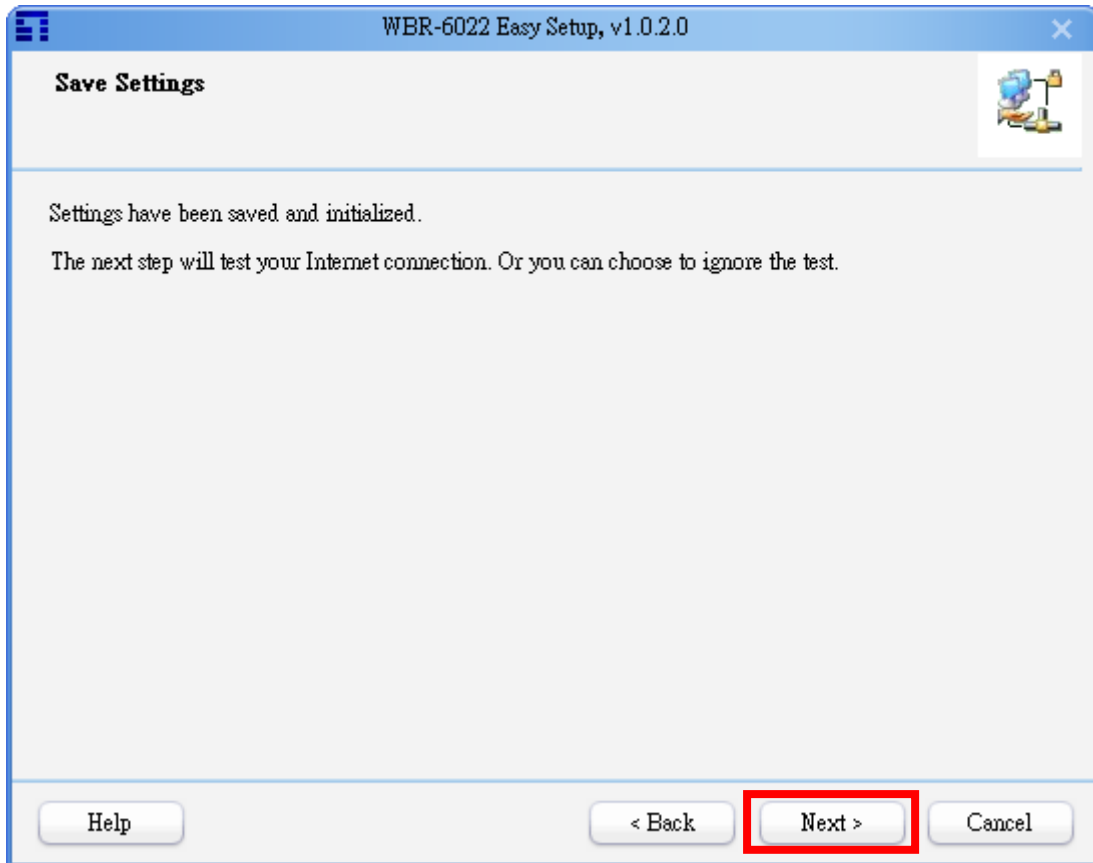

Click "Next" to continue

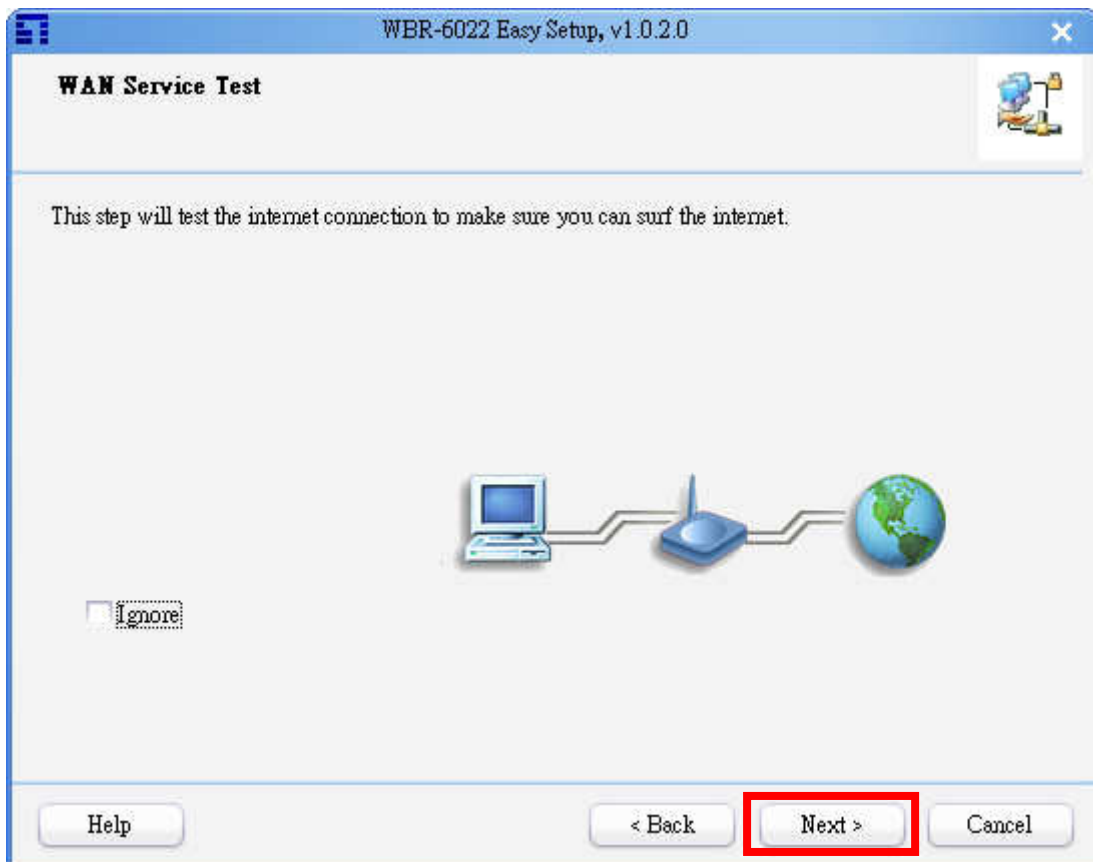

Now prepare to test the WBR-6022's Level1DNS connection and account name. Click "Next" to continue.

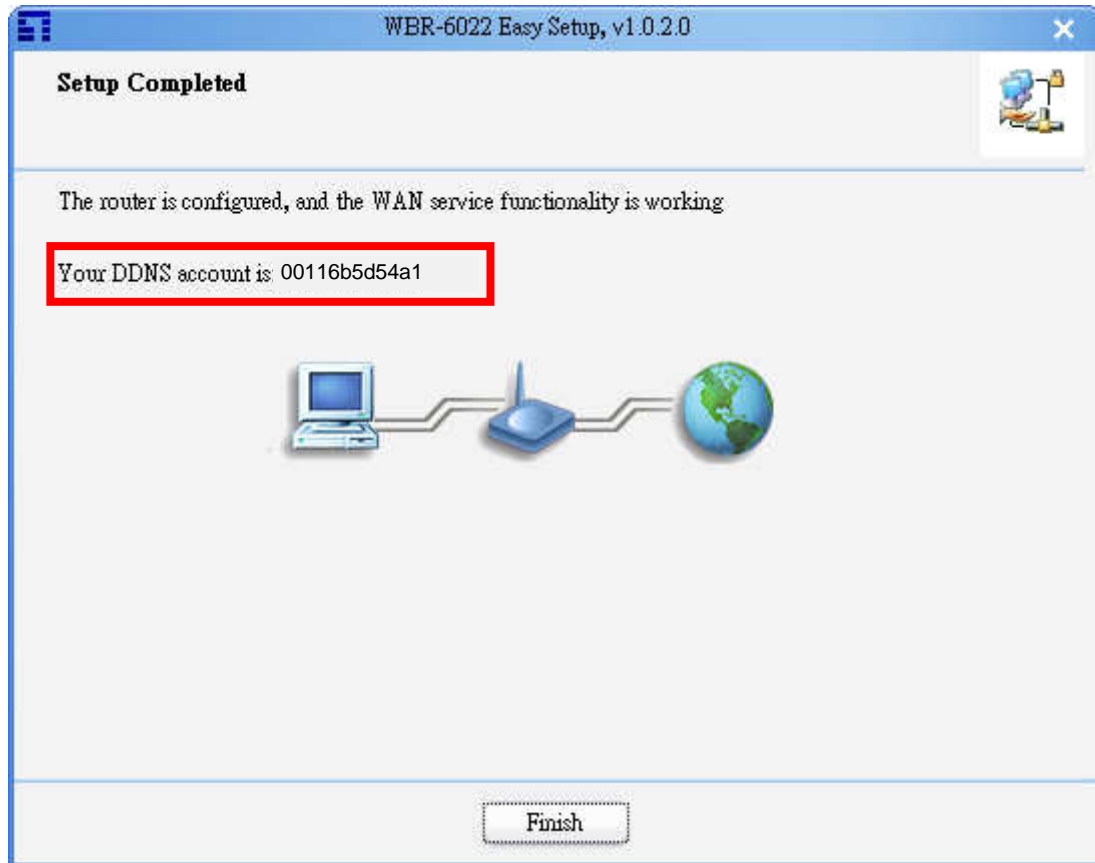

The application would show you a default domain name that combined with this product, please remember this domain name, next time you want to remotely control this HomeGuard system, you could use it to connect. It may be not easy to remember, so that you could set another domain name that you prefer after entering the web UI.

The default Level1DNS format is "MAC address"+"level1dns.net", you can also change your prefer alias name later through WEB UI.

Example the Level1DNS account will be 001150185d54a1, then you're full DDNS dome is "00116b5d54a1.level1dns.net"


4.2 Quickly to Setup a HomeGuard system

To setup the HomeGuard system it needs few steps to complete all the setting:

1. Connect all the IP cameras and FNS-1020v2 with WBR-6022, then power on all device
2. Make sure WBR-6022 is connected to internet (If you want to use IP cam function).
3. Press WPS button on WBR-6022 for 5 Sec
4. Press WPS button on IP Cam for 5 Sec (step 3. & 4. are optional) then wait for 20 Sec
5. Search new device and register them each
6. Change each device name if you need.
7. Change preferred domain name of WBR-6022 on Level1DNS service
8. Recording setup if you have FNS-1020v2 registered
9. View the video form the registered IP cameras
10. Playback: if you have FNS-1020v2, you can record & playback the video.


4.2.1 HomeGuard Configuration

A.



Open an IE browser and type in the IP Address <http://192.168.0.1>
(The Active-X works with IE only)

B.

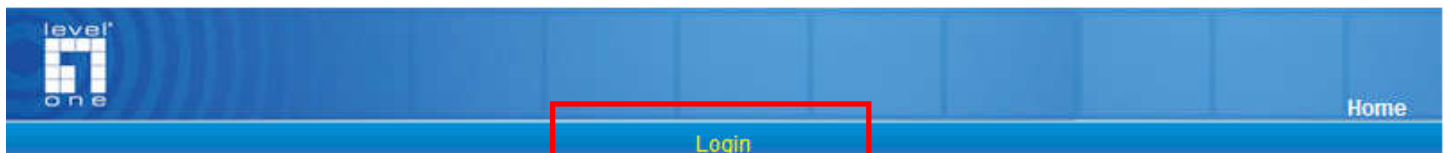

Please login

Username(default:admin) :

Password(default:password) :

Click "Login"


(The default username and password is "admin" and "password")

C.

Main page

Main Feature


Multi-Language Select

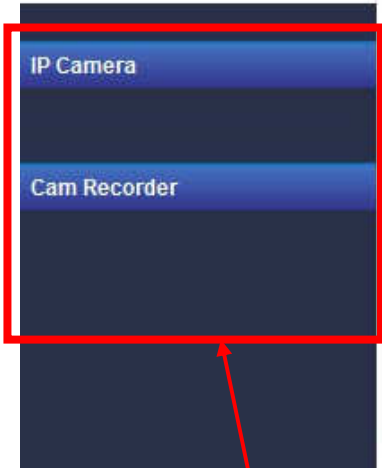

IP Devices List

Welcome, admin

March 17
2010

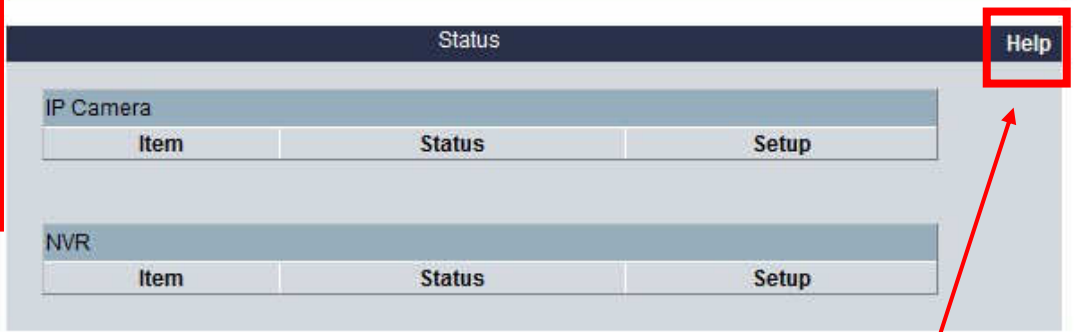


On Line Help

Select your Language

4.2.2 Search New Device

Click the "Search New Device" icon, the HomeGuard start searching all compatible IP devices Connected by WBR-6022's

Step1

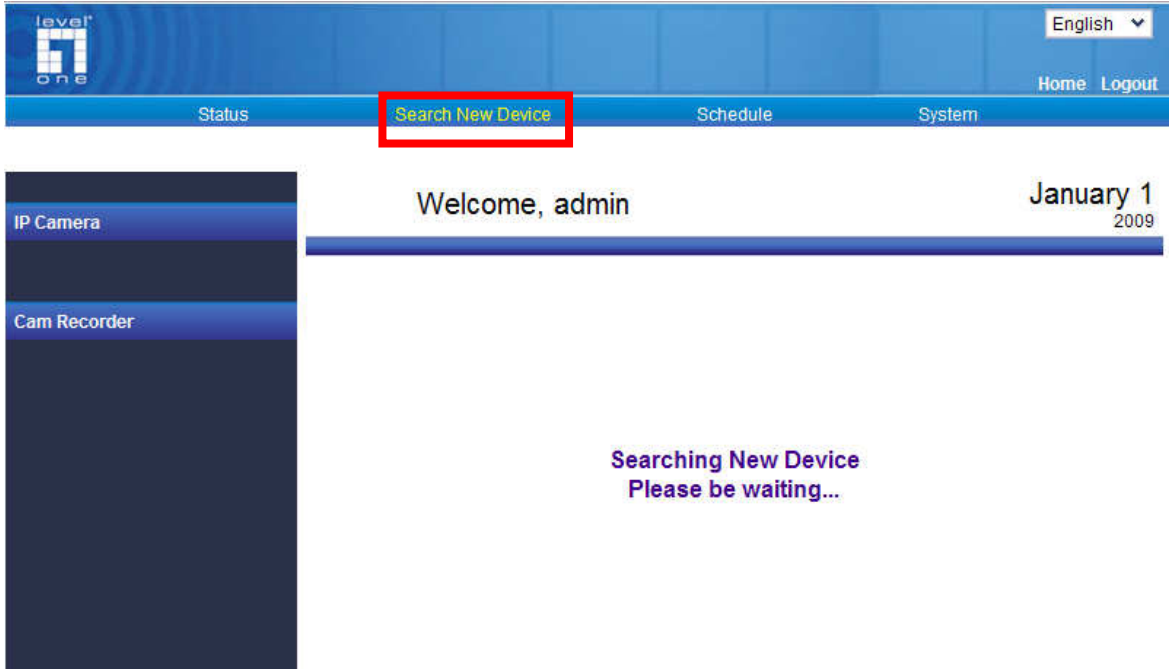

Click "Search New Device"

Step2:



Input
User Name / Password

Model Name & Username / Password

Model Name	Username / Password
FCS-0010 / WCS-0010	Default username is "administrator" and leave the password by blank
FCS-0020 / WCS-0020	Default username is "administrator" and leave the password by blank
FCS-1030v2 / WCS-2030v2	Default username is "root" and leave the password by blank
FCS-1060 / WCS-2060	Default username is "root" and leave the password blank
FCS-1081A	Default username is "root", and password is the MAC address (in capital letters)
FCS-1091 / WCS-1090	Default username is "administrator" and leave the password by blank
FCS-1101	Default username is "root", and password is the MAC address (in capital letters)
FCS-0030 / WCS-0030	Default username is "admin" and the password is "admin"

(MAC address will be show on Label of your devices)
(Example: 00116B73092E)

Step3

The screenshot shows a web interface with a 'Status' header and a 'Help' link. It contains two tables: 'IP CAMERA' and 'New NVR'. The 'IP CAMERA' table has columns for ID, Device Name, IP Address, User Name, Password, and Save As. Two rows are shown, both with 'admin' in the User Name and Password fields. The 'New NVR' table has columns for ID, Device Name, IP address, and Save As, with one row showing 'FNS-1020' and '192.168.0.3'. Below the tables are three buttons: 'Register', 'Refresh', and 'Back'. The 'Register' button is highlighted with a red box.

IP CAMERA					
ID	Device Name	IP Address	User Name	Password	Save As
1	FCS-0030-548a	192.168.0.2	admin	admin	IPCam 1 ▾
2	WCS-0030-3355	192.168.0.4	admin	admin	IPCam 2 ▾

New NVR			
ID	Device Name	IP address	Save As
1	FNS-1020	192.168.0.3	NVR 1 ▾

Register Refresh Back

Click "Register"

Step 4

Status Search New Device Schedule System

IP Camera
• FCS-0030-548a
• View All

Cam Recorder
• FNS-1020

Welcome, admin March 17 2010

System Time

Item	Setting
▶ Time Zone	(GMT+01:00) Brussels, Copenhagen, Madrid, Paris
▶ Auto-Synchronization	<input checked="" type="checkbox"/> Enable
	Time Server (RFC-868): Auto

Save Undo

Sync with Time Server

Sync with my PC (Wednesday March 17, 2010 16:20:47)

Sync the device's System Time & Click "Save"

Step5

* FCS-0030-548a >>> Success
* WCS-0030-3355 >>> Success
* FNS-1020 >>> Success

Next

Click "Next"

4.2.3 Setup Device & Level1DNS

A. Setup the Status for Camera & NVR

HomeGuard Status Page:

Item	Status	Setup
FCS-0030-548a	Not configure NVR yet	Setup
WCS-0030-3355	Not configure NVR yet	Setup

Item	Status	Setup
FNS-1020	Free space : 36.84 GB	Setup

Click "Status"

HomeGuard will show the registered IP camera on the list. It can be configure in detail when clicked camera. Once you have installed the IP camera on the list, you can click respective camera or view all to see the live view

IPCAM Setting

Current Device Name : FCS-0030-548a

New Device Name :

UserName : admin

PassWord : ●●●●●

This IPCAM Save to: None

Save Back


You can change new device name

Ignore this step unless you have changed IP camera's Username & Password

Only works if you have FNS-1020v2, please select NVR1

Please select NVR1 & click "Save"

NVR Settings

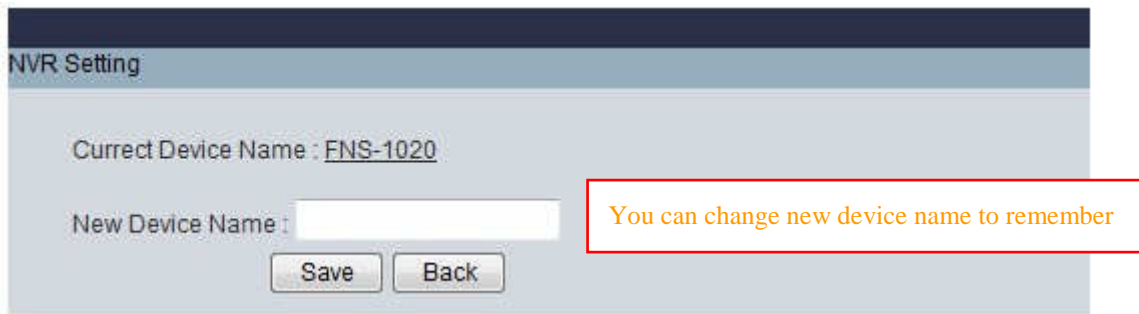

NVR Setting


Current Device Name : FNS-1020

New Device Name :

You can change new device name to remember

You can change New device name or leave by blank then **Click “Save”**

B. Setup the Level1DNS Dome Name

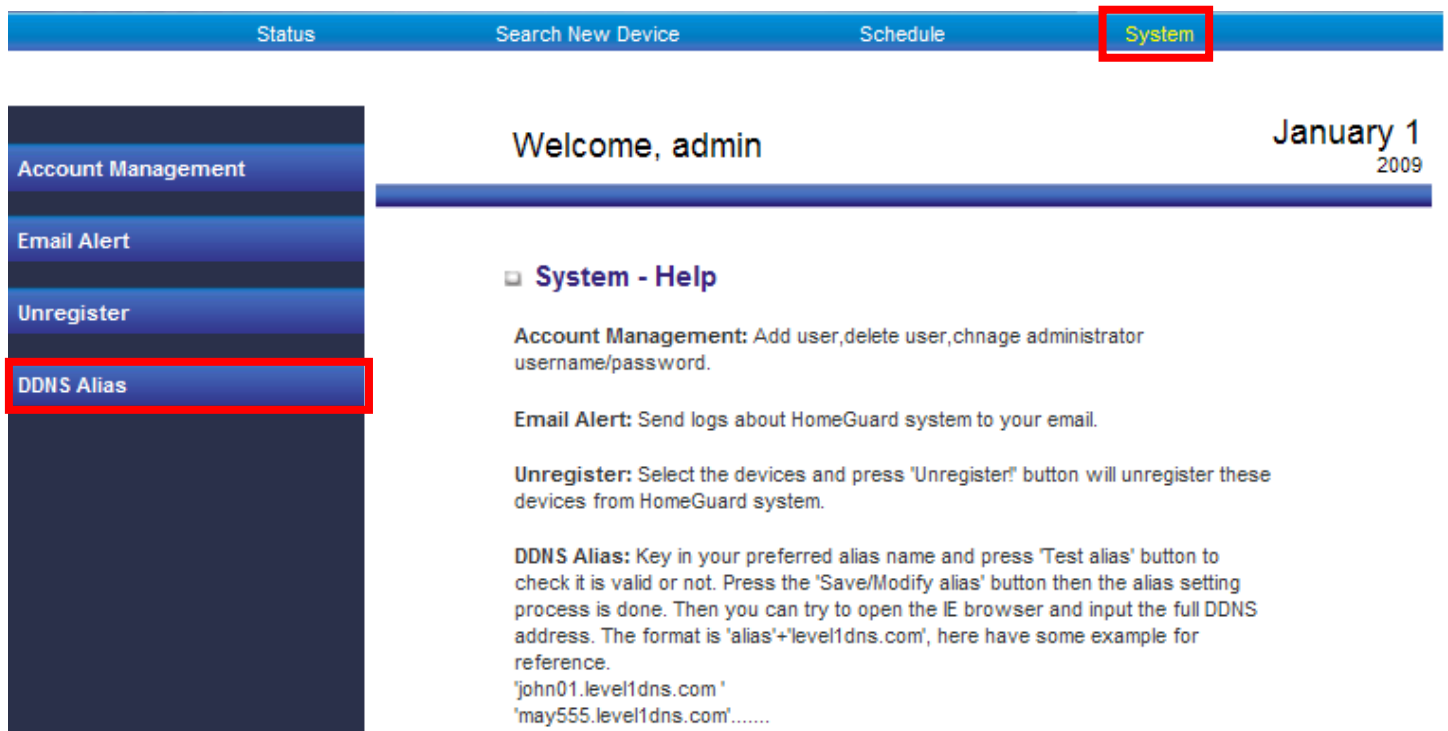

Status Search New Device Schedule **System**

Account Management

Email Alert

Unregister

DDNS Alias

Welcome, admin January 1
2009

System - Help

Account Management: Add user,delete user,chnage administrator username/password.

Email Alert: Send logs about HomeGuard system to your email.

Unregister: Select the devices and press 'Unregister!' button will unregister these devices from HomeGuard system.

DDNS Alias: Key in your preferred alias name and press 'Test alias' button to check it is valid or not. Press the 'Save/Modify alias' button then the alias setting process is done. Then you can try to open the IE browser and input the full DDNS address. The format is 'alias'+level1dns.com', here have some example for reference.
'john01.level1dns.com '
'may555.level1dns.com'.....

Click “System” and Then Click “DDNS Alias”

The screenshot shows a web interface titled "DDNS Alias" with a "Help" link in the top right corner. The main content area has a light gray background. It displays the text "Your alias : 88888" in a dark gray font. Below this, there is a label "Alias :" followed by a white rectangular input field with a red border. Underneath the input field are two blue buttons with white text: "Test Server" and "Search my alias". At the bottom of the interface, the text "Your alias is: 88888" is displayed in a blue font.

**Enter your preferred Domin Name for your dedicated WBR-6022 HomeGuard
(Example: henry)**



Please click the bottoms by order

1. Click “Test server” to Test the connection with the Level1DNS.net service available or not
2. Click “Search my alias” to Search your alias name
3. Click “Test alias ” to test the alias name available or not
4. Click “Save/modify” to **Save the setting**

By default the domain name will be MAC address (Example: 00116B73092E) , after you changed your Alias your Domain name will be “your name” .level1DNS.net (Example: henry.level1DNS.net) You can view video anywhere by IE browser after you type [http:// “your name” .level1DNS.net](http://“your name” .level1DNS.net)

4.2.4 View the video

A. View the single IP Camera's Video

Step1




The screenshot shows a web interface for managing IP cameras. On the left is a navigation menu with sections for 'IP Camera', 'Cam Recorder', and 'FNS-1020'. Under 'IP Camera', there are three items: 'FCS-0030-548a', 'WCS-0030-3355', and 'View All'. The 'IP Camera' section is highlighted in blue. The main area displays a 'Welcome, admin' message and the date 'March 17 2010'. Below this is a 'Status' section with a 'Help' link. The 'IP Camera' table lists two cameras: 'FCS-0030-548a' and 'WCS-0030-3355', both with a status of 'Save to FNS-1020' and a 'Setup' button. Below the table is an 'NVR' section with a table showing 'FNS-1020' with a status of 'Free space : 36.84 GB' and a 'Setup' button.

Item	Status	Setup
FCS-0030-548a	Save to FNS-1020	Setup
WCS-0030-3355	Save to FNS-1020	Setup

Item	Status	Setup
FNS-1020	Free space : 36.84 GB	Setup

Click the IP Camera list on the left

Step2

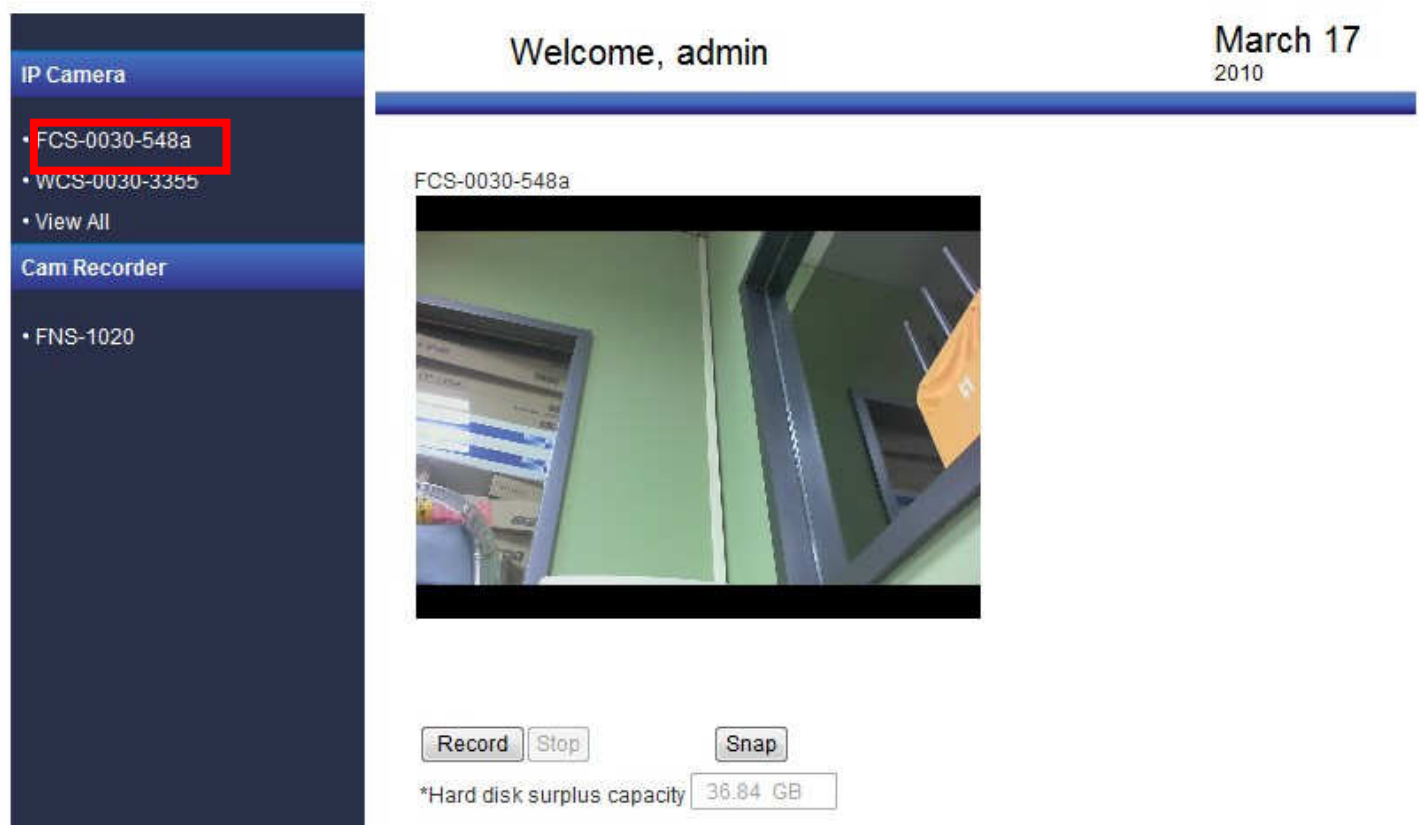

The screenshot shows the same web interface as in Step 1, but now the video feed for camera 'FCS-0030-548a' is displayed. The navigation menu on the left is the same, but 'FCS-0030-548a' is now highlighted in red. The main area shows 'Welcome, admin' and 'March 17 2010'. Below this is the camera's name 'FCS-0030-548a' and a video feed showing a room with a desk and a chair. Below the video feed are three buttons: 'Record', 'Stop', and 'Snap'. At the bottom, there is a text field for '*Hard disk surplus capacity' with the value '36.84 GB'.

Record Stop Snap

*Hard disk surplus capacity 36.84 GB

Select device(s) and viewing

Step3

FCS-0030-548a



*Hard disk surplus capacity

**Click "Record" each time will only save for 10 mins to FNS-1020
Going to "Schedule" to configure always record**

If you can not see the video display, please use the IE Bowser to install Active-X first.

4.2.5 Playback the Record

Notice: this feature only available when you have registered FNS-1020v2

The screenshot shows the web interface of the FNS-1020v2 system. At the top, there is a navigation bar with 'Status', 'Search New Device', 'Schedule', and 'System'. The 'Status' button is highlighted with a red box. Below the navigation bar, the main content area is divided into two sections. On the left is a sidebar menu with 'IP Camera' and 'Cam Recorder' sections. Under 'Cam Recorder', the 'FNS-1020' option is highlighted with a red box. The main content area displays 'Welcome, admin' and the date 'March 17 2010'. Below this is the 'IPCam Viewer' section, which includes buttons for 'FCS-0030-548a', 'WCS-0030-3355', 'IPCam3', and 'IPCam4'. A 'View Mode: All' dropdown menu is also present. A table of records is shown, with the first entry '1' and '2010/03/16 Tue 19:33:12' highlighted by a red box. A red arrow points from this entry to a 'Record File(S)' button. Below the table are buttons for 'Refresh', 'Delete', 'Protect', and 'UnProtect', along with a 'Go to page: 1' dropdown. An 'Advanced Setting' section contains a date search form with fields for 'Year', 'Month', and 'Day', and a 'Search' button. A 'Message' section at the bottom displays 'No Log!'.

Click "Status" then Click "FNS-1020"
Please **right-click** the record files to save and play

If you can not see the video display, please **install** the new Media Player /Codec, example "VLC Media Player" , or "K-Lite Codec Pack" , or "KMPlayer" , then try again.

4.2.6 Schedule Record

Step1

The screenshot shows a web interface with a top navigation bar containing 'Status', 'Search New Device', 'Schedule', and 'System'. The 'Schedule' tab is highlighted with a red box. Below the navigation bar, the main content area displays 'Welcome, admin' and the date 'March 17, 2010'. A sidebar on the left lists 'IP Camera' (with sub-items 'FCS-0030-548a', 'WCS-0030-3355', and 'View All') and 'Cam Recorder' (with sub-item 'FNS-1020'). The main content area features a 'Status' window with a 'Help' button. This window contains two tables. The first table, titled 'IP Camera', has columns 'Item', 'Status', and 'Setup'. It lists two cameras: 'FCS-0030-548a' with status 'Disabled' and a 'Setup' button (highlighted in red), and 'WCS-0030-3355' with status 'Disabled' and a 'Setup' button. The second table, titled 'NVR', has columns 'Item' and 'Status' and shows 'FNS-1020' with 'Free space : 36.84 GB'.

Item	Status	Setup
FCS-0030-548a	Disabled	Setup
WCS-0030-3355	Disabled	Setup

Item	Status
FNS-1020	Free space : 36.84 GB

Click "Schedule" then Click "Setup" to enter schedule setting

Step2

Status Search New Device Schedule System

Welcome, admin March 17
2010

IP Camera

- FCS-0030-548a
- View All

Cam Recorder

- FNS-1020

IPCam Schedul Rule

▼ **Schedul Rule Settings**

Schedul Rule: Enable

Each file's recording time length: 10 Minutes

Reserved disk space: 1 (GB)

When no enough space: Stop record Overwrite oldest file.

▼ **Select Schedul Type**

Set date Set weekday Always

Save


Click "Save"

4.3 Detail to Setup a HomeGuard system

4.3.1 View , SNAP and Record

A. View All IP Cameras

Enter the "View All" page under "Status" tag, the IP cameras that you registered correctly would show their image here.
PS: the WBR-6022 can support view up to 4 cameras in a web ui.

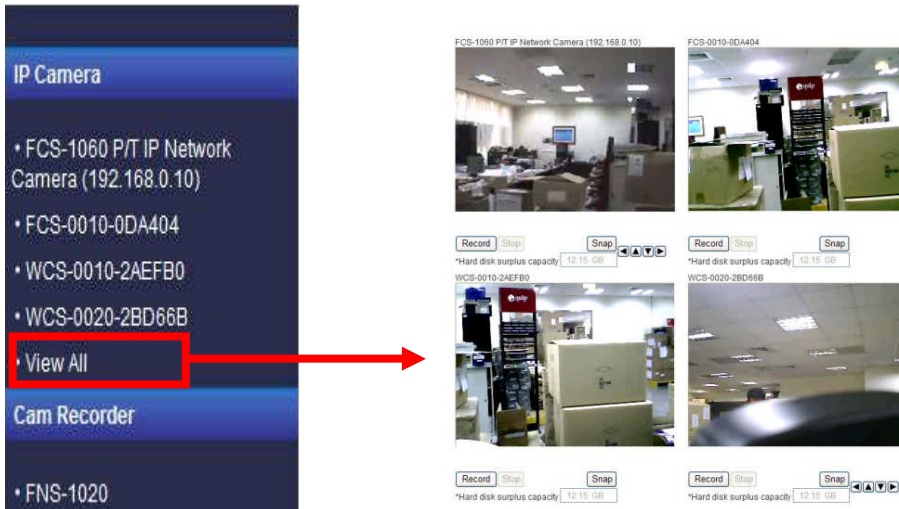

B. View Single IP Camera

Enter the IP camera's page under "Status" tag, the IP camera that you selected would show its image here.




C. View PTZ IP Camera

The WBR-6022 also support some of Pan/Tilt camera, it will show the Pan/Tilt control item after camera registered.



D. Snap the screen shot

When you are viewing the IP cameras, you could press “Snap” button to get the current screen shot. The image file would be saved into your PC.

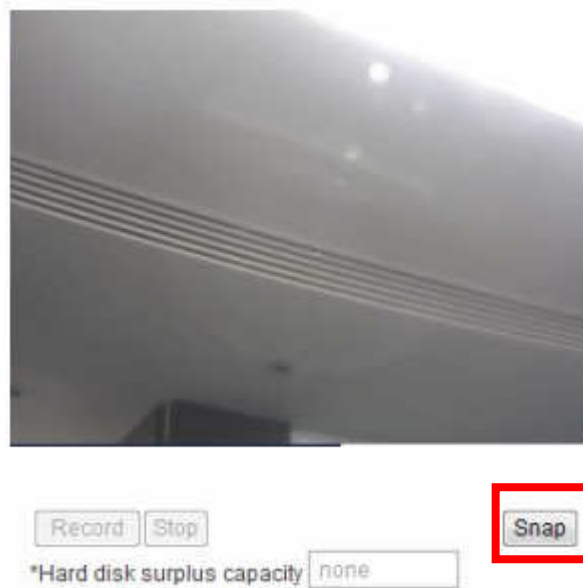

E. Record IP camera

- I. When you are viewing the IP cameras, you could press “Record” button to record video from IP camera to network storage till you press the “Stop” button.
- II. The maximum file size is 10 minutes recording time.



F. Check the record file

Check the Cam Recorder

After recording the video, you could check it from WEB UI.

Please enter the “Storage” page; the video data would list here, sorted by date, tagged with each IP camera.

Click on the record you want to check then you could download it from the network storage. You have to install the media player that supports the file format to view it.

IP Camera

- FCS-1060 P/T IP Network Camera (192.168.0.10)
- FCS-0010-0DA404
- WCS-0010-2AEFB0
- WCS-0020-2BD66B
- View All

Cam Recorder

- FNS-1020

Welcome, admin October 8 2009

IPCam Viewer

FCS-1060 P/T IP... FCS-0010-0DA404

WCS-0010-2AEFB0 WCS-0020-2BD66B View Mode:

All

1 20091007

Refresh Delete Protect UnProtect Go to page: 1

Advanced Setting

Year Month Day

Search files in this date

Search

Refresh

Click the “Refresh” button to refresh this page.

Delete

Click the “Delete” button would remove the remark record.

Protect

Click the “Protect” button could prevent the record from being deleted if the Cam Recorder disk space is not enough while scheduling or always recording.

UnProtect

Click the “UnProtect” button will overwrite record if the storage space is not enough while scheduling or always recording.

4.3.2 Scheduling Record

This device allowed you to set your scheduling rules for recording the IP camera video.

You could set the time period, the specified IP camera and which network storage to save.

For example:

Each time, we record 15 minutes on 8:30 to 17:30 every Monday, Tuesday, and Wednesday.

If you choose “Overwrite oldest file” option, when the storage space is less then reserved disk space you setup, the HomeGuard system would remove the oldest record from the storage to store the new record. Otherwise, the NVR would stop to record.

The image shows two screenshots from an NVR interface. The left screenshot, titled "Status", displays a table of IP cameras and their recording schedules. A red box highlights the "Setup" button for the first camera entry. The right screenshot, titled "IP Cam Scheduling Rule", shows the configuration page for the selected camera. It includes options for "Select Scheduling Type" (Set date, Set weekday, Always), date and time selection fields, recording time length (15 minutes), and reserved disk space (0 GB). A "Save" button is located at the bottom right of the configuration page.

IP CAMERA	
WCS-0010-2AEFB0 PoE IP Camera - 00116B730025	2009/05/15 ~ 2009/05/15 18:00 ~ 18:10 Setup
WCS-1090-0CB207	00:00 ~ 00:00 Setup
WCS-0020-2BD66B	00:00 ~ 00:00 Setup

NVR

FNS-1020 Free space : 78.13 GB

IP Cam Scheduling Rule

Select Scheduling Type

Set date Set weekday Always

From: 20 / / To: 20 / /
(Year /Month /Day)


From: 00 : 00 To: 00 : 00 (hh:0-23,mm:0-59)

Each file's recording time length: 15 Minutes

Reserved disk space: 0 (GB)

[Save](#)

4.3.3 Advanced Setting

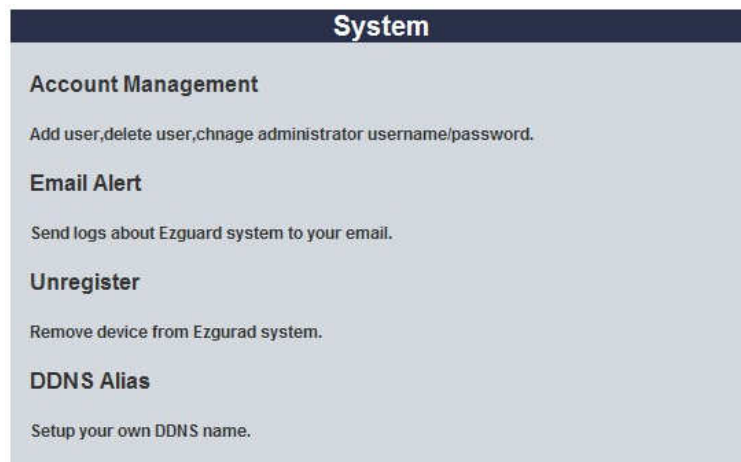

1. Account Management

Press the "Account Management" link under "System" tag.

A. Administrator Management

You could modify administrator account username/password here..

Please be noted, only administrator account has the right to modify the setting of HomeGuard system.

The screenshot shows a form titled "Administrator Management" with a light blue header. It contains three input fields: "Administrator Name" with the value "admin", "Administrator Password" with masked characters "*****", and "Confirm Administrator Password" which is empty. A "Save" button is located at the bottom left of the form.

B. Add Normal User


You could add new normal user account here.

For normal users, you can decide to enable/disable their record function.

The screenshot shows a form titled "Add Normal User" with a light blue header. It contains four input fields: "User Name", "User Password", and "Confirm Password", all of which are empty. The "Record Function" field has two radio buttons, "Enable" and "Disable", both of which are unselected. A "Save" button is located at the bottom left of the form.

C. Normal User Management

You also could modify normal user account here.

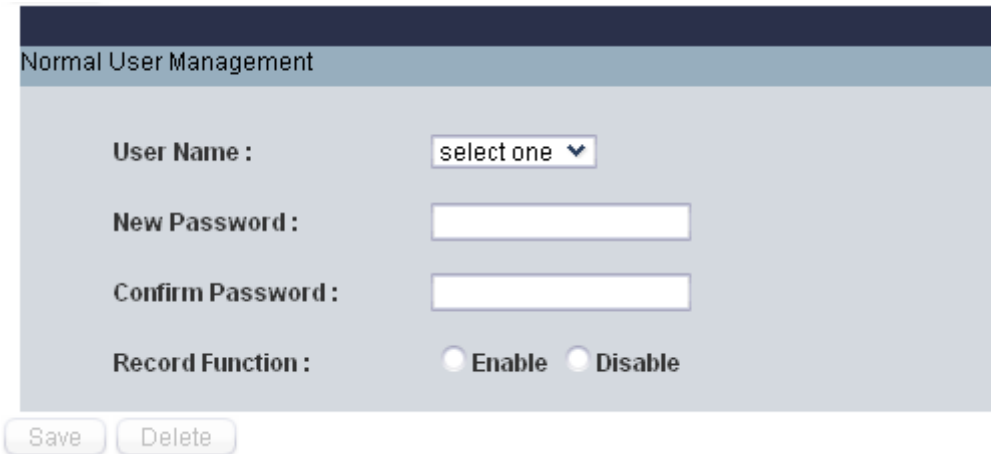

Normal User Management

User Name :


New Password :

Confirm Password :

Record Function : Enable Disable

2. Email Alert

Press the “Email Alert” link under “System” tag, you could see screen like this:

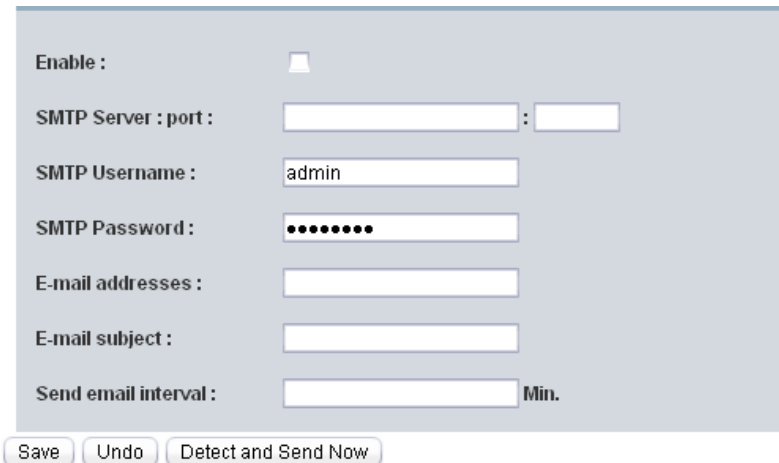

Enable :

SMTP Server : port : :

SMTP Username :

SMTP Password :

E-mail addresses :

E-mail subject :


Send email interval : Min.

Please enter the information of your email setting to enable the email alert function.

The HomeGuard system will send email to inform you when any system device was become disconnected.

3. Unregister

Press the “Unregister” link under “System” tag.

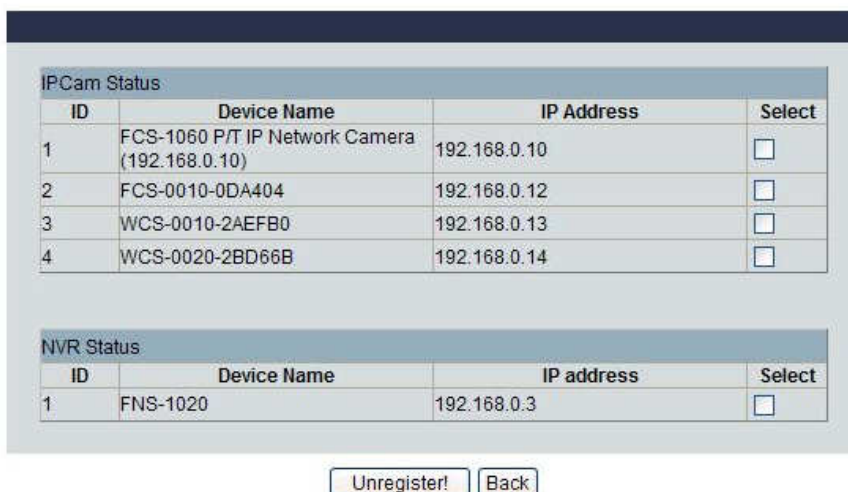

IPCam Status

ID	Device Name	IP Address	Select
1	FCS-1060 P/T IP Network Camera (192.168.0.10)	192.168.0.10	<input type="checkbox"/>
2	FCS-0010-0DA404	192.168.0.12	<input type="checkbox"/>
3	WCS-0010-2AEFB0	192.168.0.13	<input type="checkbox"/>
4	WCS-0020-2BD66B	192.168.0.14	<input type="checkbox"/>

NVR Status

ID	Device Name	IP address	Select
1	FNS-1020	192.168.0.3	<input type="checkbox"/>

Select the devices and press “Unregister!” button will unregister these devices from HomeGuard system.

4. Change Alias Domain Name

Press the "DDNS Alias" link under "System" tag.



The screenshot shows a web interface for configuring DDNS aliases. At the top, it says "DDNS Alias". Below that, it displays "Your alias : level1". There is an input field labeled "Alias :" containing the text "level1". Below the input field are four buttons: "Test Server", "Search my alias", "Test alias", and "Save/Modify alias".

The WBR-6022 had build-in level1dns.net service, default is using device MAC address name, here is the format: "MAC address".level1dns.net. Example: 00116BE356A3.level1dns.net

But you can use your prefer name to replace the "MAC address"

DDNS Alias: Key in your preferred alias name and press "Test alias" button to check it is valid or not. Press the "Save/Modify alias" button then the alias setting process is done. Then you can try to open the IE browser and input the full DDNS address. The format is "alias"+"level1dns.net", here have some example for reference.

The format is "alias"+"level1dns.net", here have some example for reference.

"john01.level1dns.net "

"may555.level1dns.net".....

Function of Buttons

Test Server	Test the connection with the Level1DNS.net service available or not
Search my alias	Search your alias name
Test alias	You can test the alias name available or not
Save/Modify alias	Save the setting


Notice: this feature have to make sure the HomeGuard WAN port has to work on public IP to ensure this DDNS function 100% available. Because it may failed by others issue (example NAT, time out.....)

5. Login Tool


The WBR-6022 had build-in level1dns.net service, it will bundle a DDNS number for remote access. **Please make sure the WBR-6022 has to get public IP address first, then start to use login tool.**

The login tool has 2 parts:

a. When user want to use remote control at WBR-6022, please click “Access form WAN”, then input the IP or domain name as below steps to open the browser.

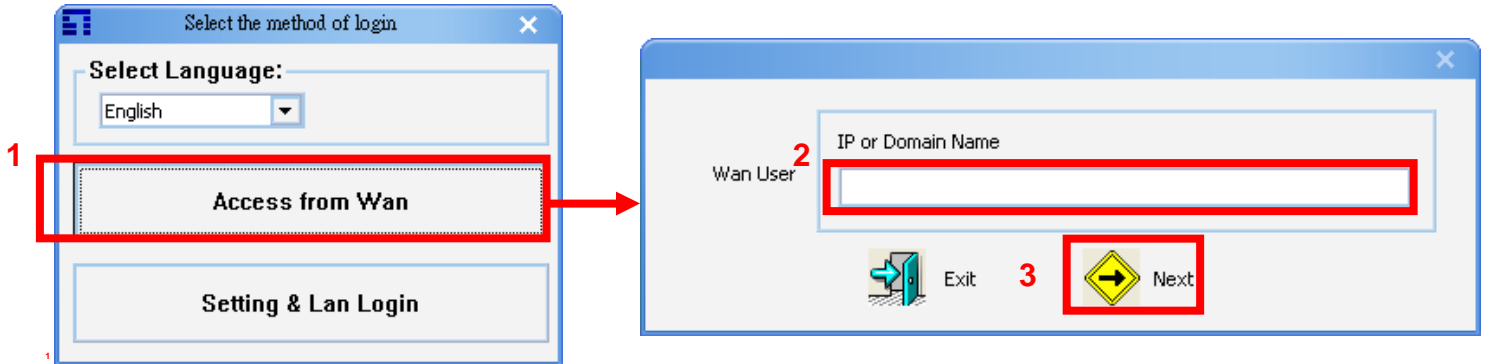


b. if the computer had connect WBR-6022 LAN port, then can click the “Setting & Lan Login” to open the browser.

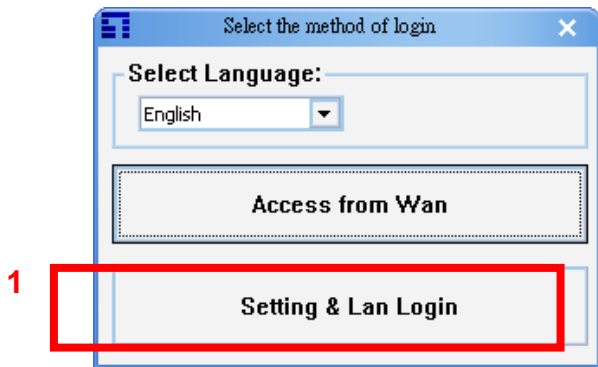


5 Router setting

Type in "password" (without quotes) in the Password box, then click Login
Note: password is the default login password for the unit.

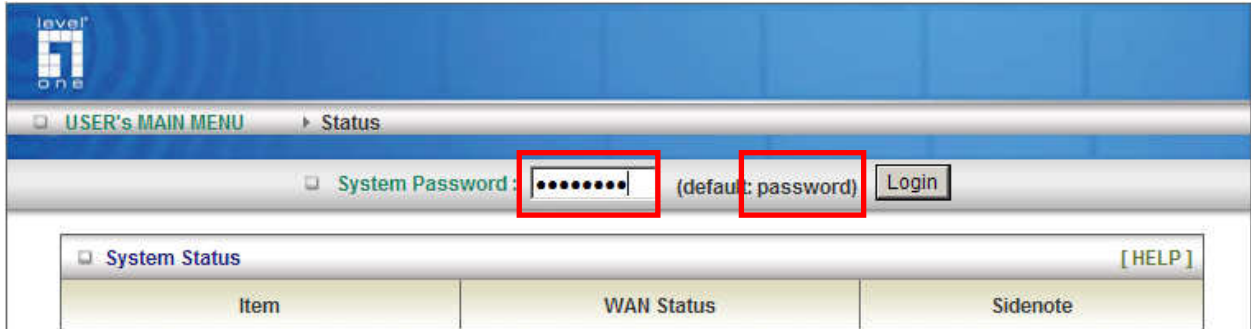


5.1 Wizard


The user can setup step by step to finish the connection with Wizard.
If you are an advanced user, you can access the configurations directly in the Advanced Setup

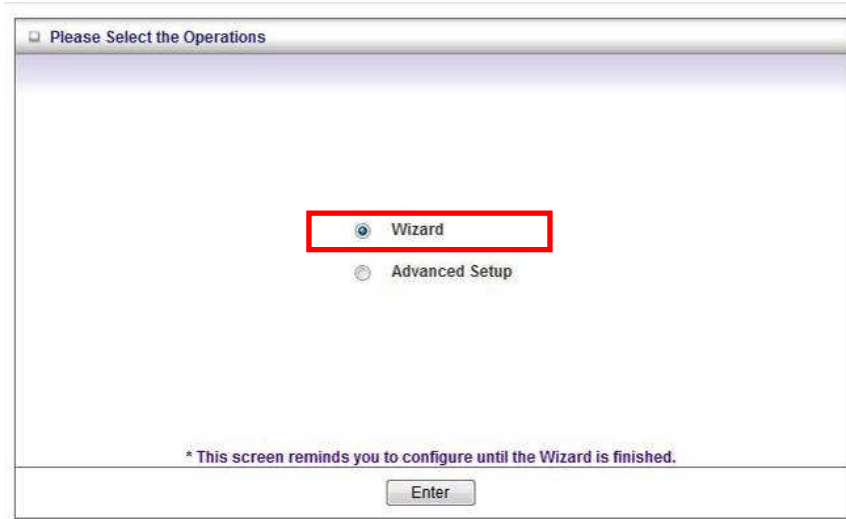


Setup Wizard will guide you through a basic configuration procedure step by step. Press **Next** to begin.

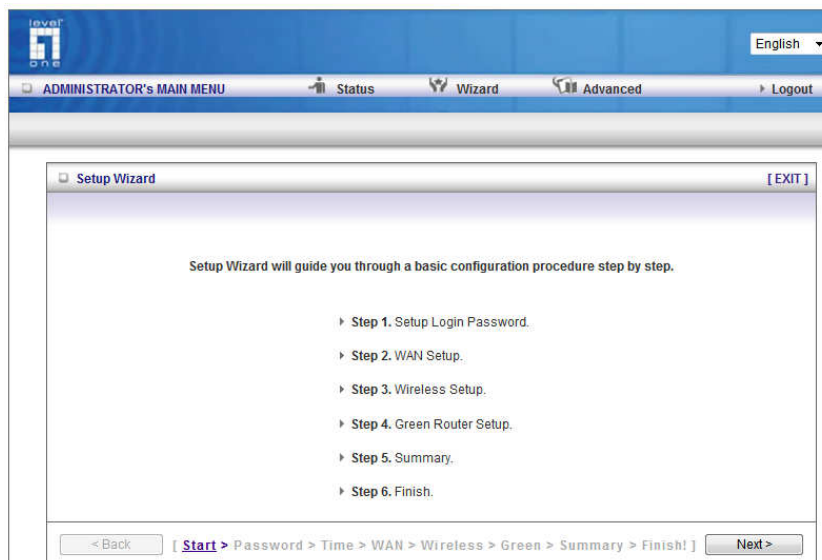

Remember to set up the Sleep Mode to enable the Power Saving features.

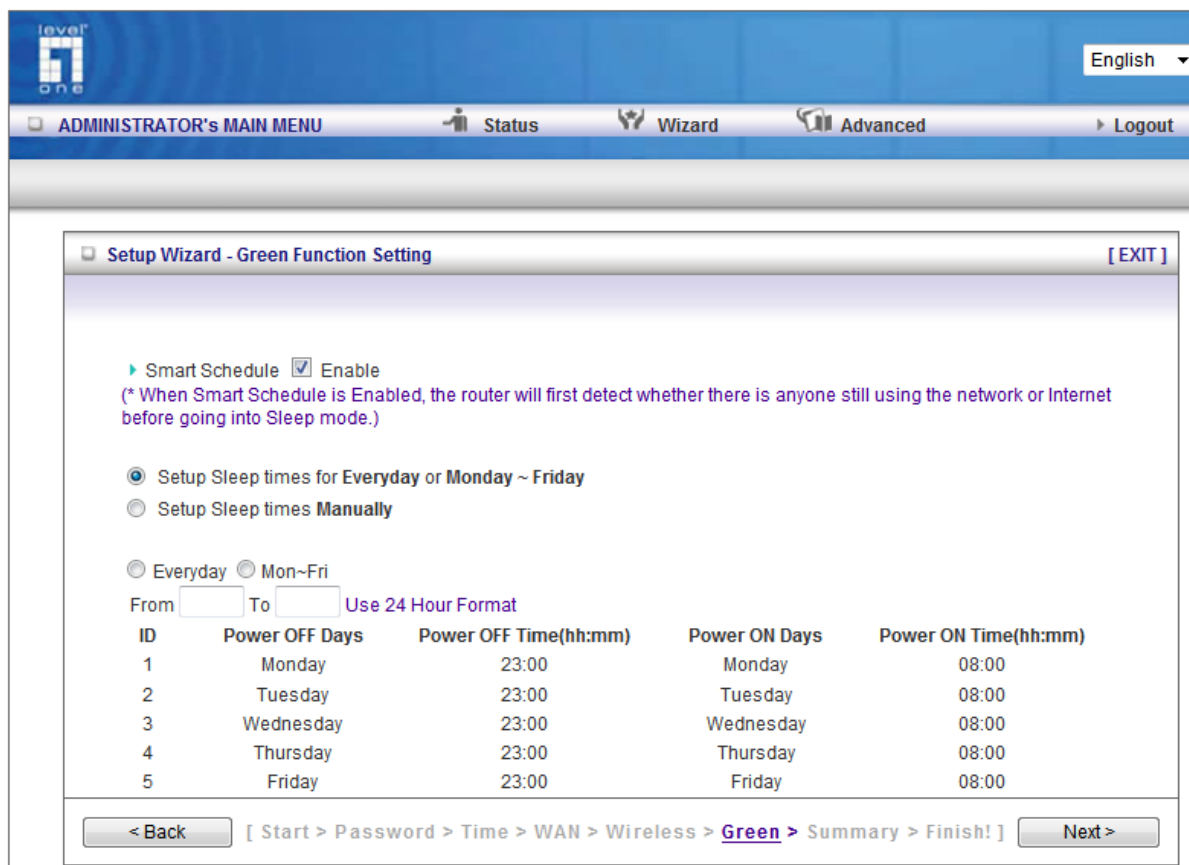


Once the user finishes those steps and the router screen displayed as below. It means that the Internet connection is now established.

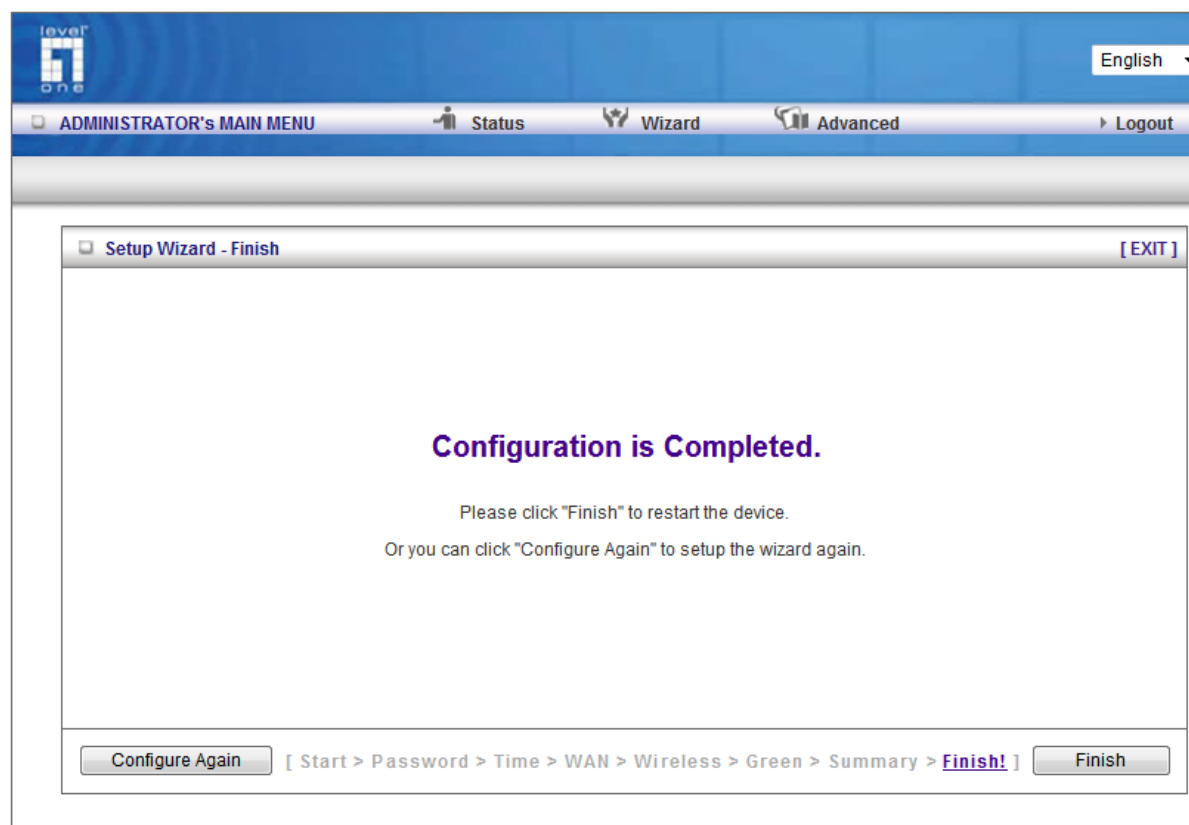


5.2 Advanced Setup


To access the Advanced Setup, click on **Advanced Setup** at the top of the page.

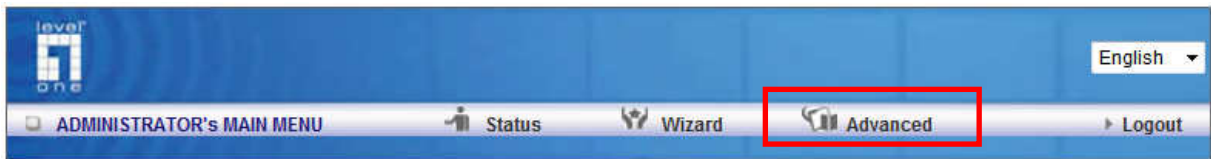

Or, for first time installation, choose Advanced Setup and click **Enter**.

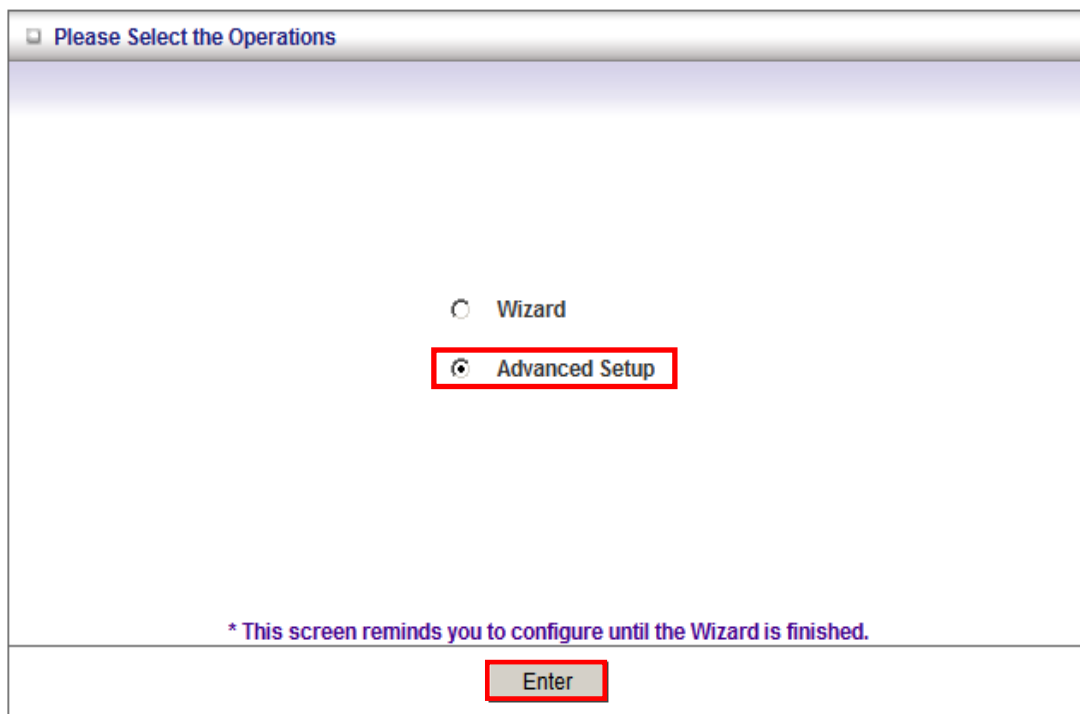


Once in the Advanced Setup, you will be presented with the following menu.

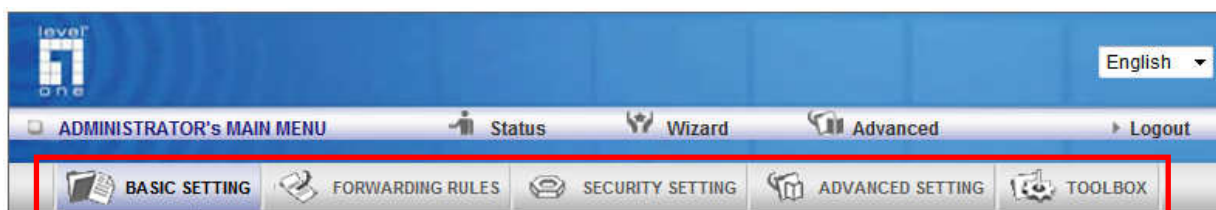

5.2.1 Basic Setting

These are the basic settings of the unit. Click on the menu on the left to access the respective settings page.

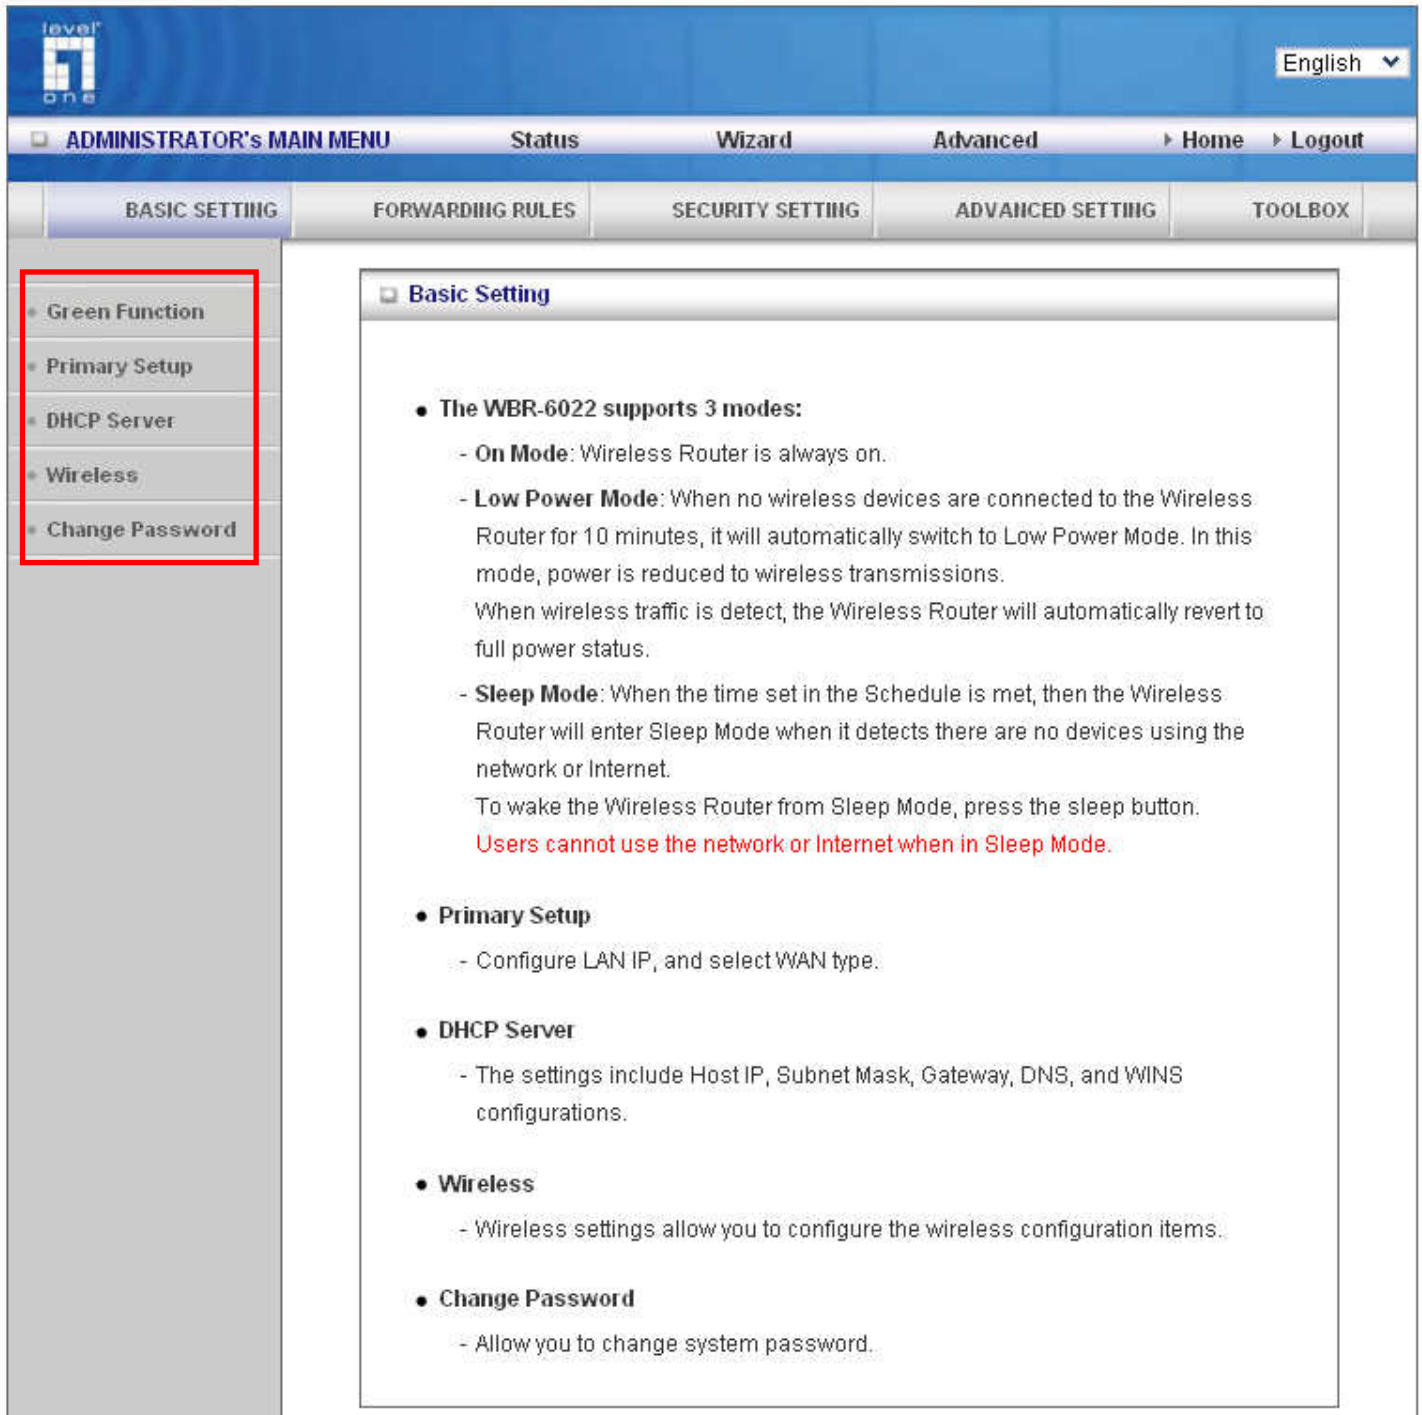

The screenshot displays the web interface for the Level One WBR-6022. The top navigation bar includes the Level One logo, a language dropdown set to 'English', and menu items for 'ADMINISTRATOR's MAIN MENU', 'Status', 'Wizard', 'Advanced', 'Home', and 'Logout'. Below this is a secondary menu with 'BASIC SETTING', 'FORWARDING RULES', 'SECURITY SETTING', 'ADVANCED SETTING', and 'TOOLBOX'. The left sidebar contains a list of settings: 'Green Function', 'Primary Setup', 'DHCP Server', 'Wireless', and 'Change Password', with a red box highlighting the first five items. The main content area is titled 'Basic Setting' and contains the following information:

- **The WBR-6022 supports 3 modes:**
 - **On Mode:** Wireless Router is always on.
 - **Low Power Mode:** When no wireless devices are connected to the Wireless Router for 10 minutes, it will automatically switch to Low Power Mode. In this mode, power is reduced to wireless transmissions. When wireless traffic is detected, the Wireless Router will automatically revert to full power status.
 - **Sleep Mode:** When the time set in the Schedule is met, then the Wireless Router will enter Sleep Mode when it detects there are no devices using the network or Internet. To wake the Wireless Router from Sleep Mode, press the sleep button. **Users cannot use the network or Internet when in Sleep Mode.**
- **Primary Setup**
 - Configure LAN IP, and select WAN type.
- **DHCP Server**
 - The settings include Host IP, Subnet Mask, Gateway, DNS, and WINS configurations.
- **Wireless**
 - Wireless settings allow you to configure the wireless configuration items.
- **Change Password**
 - Allow you to change system password.

Green Function

The Power saving function allows you to set the time that the router enters into Sleep Mode. This means that the router can automatically power on and off at user specified times.

Green Function				
Item		Setting		
▶ Low Power Wireless Mode		<input checked="" type="checkbox"/> Enable		
▶ Sleep mode		<input checked="" type="checkbox"/> Enable Warning: Users cannot use the network or Internet when in Sleep Mode.		
▶ Smart Schedule		<input checked="" type="checkbox"/> Enable		
ID	Power OFF Days	Power OFF Time(hh:mm)	Power ON Days	Power ON Time(hh:mm)
1	Monday ▾	23:00	Monday ▾	08:00
2	Tuesday ▾	23:00	Tuesday ▾	08:00
3	Wednesday ▾	23:00	Wednesday ▾	08:00
4	Thursday ▾	23:00	Thursday ▾	08:00
5	Friday ▾	23:00	Friday ▾	08:00
6	-- choose one -- ▾		-- choose one -- ▾	
7	-- choose one -- ▾		-- choose one -- ▾	
8	-- choose one -- ▾		-- choose one -- ▾	
9	-- choose one -- ▾		-- choose one -- ▾	
10	-- choose one -- ▾		-- choose one -- ▾	
11	-- choose one -- ▾		-- choose one -- ▾	
12	-- choose one -- ▾		-- choose one -- ▾	
13	-- choose one -- ▾		-- choose one -- ▾	
14	-- choose one -- ▾		-- choose one -- ▾	
15	-- choose one -- ▾		-- choose one -- ▾	
16	-- choose one -- ▾		-- choose one -- ▾	
<input type="button" value="Save"/> <input type="button" value="Undo"/> <input type="button" value="Bootup/Sleep Time Log"/>				

Low Power Wireless Mode: When no wireless clients are connected to the router, it will reduce power to the radio to save power. When a device connects wirelessly to the router, it will revert to full power immediately.

Sleep Mode: When Enabled, the router will follow the times set in the schedule below to enter Sleep Mode, or wake up to normal mode. When the router is in Sleep Mode, the user will not be able to connect to the Local network, nor the Internet.

Note: The Sleep button on the back of the router can override the current router setting. You can force the router to enter Sleep Mode, or revert back to normal mode.

Smart Schedule: When Enabled, the router will first check whether there is any network activity on router before entering Sleep Mode. This is to prevent your network usage to be interrupted.

Bootup / Sleep Time Log: A log of the times that the router entered Sleep Mode, or woke up back to normal mode.

Primary Setup

This page lets you change the LAN (Local Area Network) settings on your WBR-6022 Wireless HomeGuard 22 Router and WAN (Wide Area Network) connection.

Primary Setup [Help]	
Item	Setting
▶ LAN IP Address	<input type="text" value="192.168.0.1"/>
▶ WAN Type	<input style="border: none; border-bottom: 1px solid black;" type="text" value="Dynamic IP Address"/> ▼
▶ Host Name	<input type="text" value="WBR-6022"/> (optional)
▶ ISP registered MAC Address	<input type="text"/> <input type="button" value="Clone"/>
▶ Connection Control	<input style="border: none; border-bottom: 1px solid black;" type="text" value="Connect-on-Demand"/> ▼
▶ NAT disable	<input type="checkbox"/> Enable

LAN IP Address: The local IP address of this device. The computers on your network must use the LAN IP address of your product as their Default Gateway. You can change it if necessary.

WAN Type: WAN connection type of your ISP. You can use the drop-down men to choose the most suitable one from the following options:

Connection Control: You can choose the method that the router maintains connection to the internet.

Connect-on-Demand: The router will automatically connect to the Internet when a computer in the network requests Internet usage.

Auto-reconnect (always on): The router will maintain connection to the Internet at all possible times. It will also reconnect automatically when it detects it has been disconnected.

Manually: You will need to connect to the Internet manually each time

Primary Setup [Help]	
Item	Setting
▶ LAN IP Address	192.168.0.1
▶ WAN Type	Dynamic IP Address ▼
▶ Host Name	Static IP Address Dynamic IP Address (optional)
▶ ISP registered MAC Address	PPP over Ethernet PPTP L2TP Clone
▶ Connection Control	Connect-on-Demand ▼
▶ NAT disable	<input type="checkbox"/> Enable

This option is primary to enable this product to work properly. The setting items and the web appearance depend on the WAN type. Choose correct WAN type before you start.

Static IP Address: ISP assigns you a static IP address.

Dynamic IP Address: Obtain an IP address from ISP automatically.

PPP over Ethernet: Some ISPs require the use of PPPoE to connect to their services.

PPTP: Some ISPs require the use of PPTP to connect to their services.

L2TP: Some ISPs require the use of L2TP to connect to their services

Static IP Address

WAN IP Address, Subnet Mask, Gateway, Primary and Secondary DNS: enter the proper setting provided by your ISP.

Dynamic IP Address

1. Host Name: Optional. Required by some ISPs, for example: @Home.
2. Renew IP Forever: This feature enables this product to renew your IP address automatically when the lease time is expiring-- even when the system is idle.

PPP over Ethernet

1. PPPoE Account and Password: the account and password your ISP assigned to you. For security, this field appears blank. If you don't want to change the password, leave it empty.
2. PPPoE Service Name: Optional. Input the service name if your ISP requires it. Otherwise, leave it blank.
3. Maximum Idle Time: the amount of time of inactivity before disconnecting your PPPoE session. Set it to zero or enable Auto-reconnect to disable this feature.
4. Maximum Transmission Unit (MTU): Most ISP offers MTU value to users. The most common MTU value is 1492.
5. Connection Control: There are 3 modes to select:
6. Connect-on-demand: The device will link up with ISP when the clients send outgoing packets.
7. Auto-Reconnect (Always-on): The device will link with ISP until the connection is established.
8. Manually: The device will not make the link until someone clicks the connect-button in the Status-page.

PPTP

First, please check your ISP assigned and Select Static IP Address or Dynamic IP Address.

1. My IP Address and My Subnet Mask: The private IP address and subnet mask your ISP assigned to you.
2. Server IP Address: The IP address of the PPTP server.
3. PPTP Account and Password: The account and password your ISP assigned to you. If you don't want to change the password, keep it empty.
4. Connection ID: Optional. Input the connection ID if your ISP requires it.
5. Maximum Idle Time: The time of no activity to disconnect your PPTP session. Set it to zero or enable Auto-reconnect to disable this feature. If Auto-reconnect is enabled, this product will connect to ISP automatically, after system is restarted or connection is dropped.
6. Connection Control: There are 3 modes to select:
7. Connect-on-demand: The device will link up with ISP when the clients send outgoing packets.
8. Auto-Reconnect (Always-on): The device will link with ISP until the connection is established.
9. Manually: The device will not make the link until someone clicks the connect-button in the Status page.

L2TP

First, please check your ISP assigned and Select Static IP Address or Dynamic IP Address.

For example: Use Static

1. My IP Address and My Subnet Mask: The private IP address and subnet mask your ISP assigned to you.
2. Server IP Address: the IP address of the PPTP server.
3. PPTP Account and Password: the account and password your ISP assigned to you. If you don't want to change the password, keep it empty.
4. Connection ID: optional. Input the connection ID if your ISP requires it.
5. Maximum Idle Time: the time of no activity to disconnect your PPTP session. Set it to zero or enable Auto-reconnect to disable this feature. If Auto-reconnect is enabled, this product will connect to ISP automatically, after system is restarted or connection is dropped.
6. Connection Control: There are 3 modes to select:
 - Connect-on-demand: The device will link up with ISP when the clients send outgoing packets.

- Auto-Reconnect (Always-on): The device will link with ISP until the connection is established.
- Manually: The device will not make the link until someone clicks the connect-button in the Status-page.

Virtual Computers (Only for Static and dynamic IP address WAN type)

Used when WAN is set as DHCP or Static IP, the user can assign a global IP address to a LAN IP Address.

Virtual Computers [Help]			
ID	Global IP	Local IP	Enable
1	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
2	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
3	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
4	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
5	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>

Virtual Computer enables you to use the original NAT feature, and allows you to setup the one-to-one mapping of multiple global IP address and local IP address.

- **Global IP:** Enter the global IP address assigned by your ISP.
- **Local IP:** Enter the local IP address of your LAN PC corresponding to the global IP address.
- **Enable:** Check this item to enable the Virtual Computer feature.

DHCP Server

This page allows you to configure the DHCP server on the Router

DHCP Server [Help]	
Item	Setting
▶ DHCP Server	<input type="radio"/> Disable <input checked="" type="radio"/> Enable
▶ IP Pool Starting Address	<input type="text" value="2"/>
▶ IP Pool Ending Address	<input type="text" value="50"/>
▶ Lease Time	<input type="text" value="86400"/> Seconds
▶ Domain Name	<input type="text"/>
▶ Primary DNS	<input type="text"/>
▶ Secondary DNS	<input type="text"/>
▶ Primary WINS	<input type="text"/>
▶ Secondary WINS	<input type="text"/>
▶ Gateway	<input type="text"/> (optional)

For more settings click on **More**.

DHCP Server: To either Disable or Enable DHCP Server.

IP Pool Starting/Ending Address: The pool of IP's that can be allocated to clients

Lease Time: DHCP lease time to the DHCP client

Domain Name: To assign a Domain Name (optional)

Primary DNS/Secondary DNS: To assign DNS Servers (optional)

Primary WINS/Secondary WINS: To assign WINS Servers (optional)

Gateway: The IP address of an alternate gateway (optional)

Clients List: Check the DHCP client list.

Fixed Mapping: Take you to the Security > MAC Control page.

After you finish your selections click either **Save** to store your settings, or **Undo** to exit.

Wireless Settings

Wireless Setting [Help]	
Item	Setting
Wireless Module	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Wireless Operation Mode	AP mode <input type="button" value="v"/>
Network ID(SSID)	LevelOne <input type="text"/>
SSID Broadcast	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Channel	Auto <input type="button" value="v"/>
Wireless Mode	11 B/G/N mixed <input type="button" value="v"/>
Security	None <input type="button" value="v"/>
<input type="button" value="Save"/> <input type="button" value="Undo"/> <input type="button" value="WDS Setting..."/> <input type="button" value="WPS..."/> <input type="button" value="Wireless Client List..."/>	

Wireless - Enabled by default. Disabling this will turn off the wireless feature of this unit.

Wireless Operation Mode: Select between Access Point or Wireless Client mode.

Note: Wireless Client modes supports the following Wireless Encryption modes:
WEP, WPA-PSK (TKIP), WPA2-PSK (AES)

Network ID (SSID): Service Set Identifier (SSID) is the name designated for a specific wireless local area network (WLAN). The SSID's factory default setting is **LevelOne**. The SSID can be easily changed to establish a new wireless network.

Note: SSID names may contain up to 32 ASCII characters.

SSID Broadcast: The WBR-6022 will broadcast beacons that contains SSID and other wireless information so that Computers or other wireless devices can find the WBR-6022 when scanning for wireless networks. Disable this function if you want to hide your wireless network.

Channel: The radio channel number. The permissible channels depend on the Regulatory Domain. The default is AUTO which means the WBR-6022 will find the least used channel to avoid interference.

Note: Channel range depends on your regional regulations. Please see specifications for Channel details.

Wireless Client List: You can use this function to see the devices connected to the WBR-6022 through the wireless network.

Security: Security - You may select from three levels of encryption to secure your wireless network: No Encryption, WEP, 802.1x RADIUS, WPA-PSK, WPA, WPA2-PSK (AES), WPA2 (AES), WPA-PSK / WPA2-PSK and WPA1 / WPA2.

LevelOne recommends **WPA2-PSK (AES)** for simple and secure wireless encryption.

After configuring the wireless security settings on the WBR-6022, you will also need to configure the same settings on your wireless adapter before you attempt a wireless connection.

Please note that not all adapters support all the available security functions.

No Encryption is the default (as shown in the screen above).

WEP:

WEP (Wired Equivalent Privacy). Enabling the security can protect your data while it is transferred to the WBR-6022. Enter the 10 digit WEP Key.

Wireless Setting [Help]	
Item	Setting
Wireless Module	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Wireless Operation Mode	AP mode ▾
Network ID(SSID)	WBR-6022
SSID Broadcast	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Channel	Auto ▾
Wireless Mode	11 B/G/N mixed ▾
Security	WEP ▾
<input checked="" type="radio"/> WEP Key 1	HEX ▾ 1234567890
<input type="radio"/> WEP Key 2	HEX ▾ 1234567890
<input type="radio"/> WEP Key 3	HEX ▾ 1234567890
<input type="radio"/> WEP Key 4	HEX ▾ 1234567890
<input type="button" value="Save"/> <input type="button" value="Undo"/> <input type="button" value="WDS Setting..."/> <input type="button" value="WPS..."/> <input type="button" value="Wireless Client List..."/>	

WPA-PSK, WPA2-PSK, WPA / WPA2-PSK

This security is more secure compared to WEP. Please enter the key in the Preshare Key field. The field can be between 8 and 63 characters long and can be any combination of letters and numbers.

Wireless Setting [Help]	
Item	Setting
Wireless Module	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Wireless Operation Mode	AP mode ▾
Network ID(SSID)	WBR-6022
SSID Broadcast	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Channel	Auto ▾
Wireless Mode	11 B/G/N mixed ▾
Security	WPA-PSK / WPA2-PSK ▾
Preshare Key	1234567890
<input type="button" value="Save"/> <input type="button" value="Undo"/> <input type="button" value="WDS Setting..."/> <input type="button" value="WPS..."/> <input type="button" value="Wireless Client List..."/>	

802.1x and RADIUS

To use this security feature, you will need to have a RADIUS server on your network to authenticate access. Please type in the details for your RADIUS server.

Wireless Setting [Help]	
Item	Setting
Wireless Module	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Wireless Operation Mode	AP mode ▾
Network ID(SSID)	WBR-6022
SSID Broadcast	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Channel	Auto ▾
Wireless Mode	11 B/G/N mixed ▾
Security	802.1x and RADIUS ▾
RADIUS Server IP	
RADIUS port	1812
RADIUS Shared Key	
<input type="button" value="Save"/> <input type="button" value="Undo"/> <input type="button" value="WDS Setting..."/> <input type="button" value="WPS..."/> <input type="button" value="Wireless Client List..."/>	

RADIUS Server

IP Address, or the RADIUS server's domain-name.

RADIUS Shared Key

Key value shared by the RADIUS server and this router. This key value is consistent with the key value in the RADIUS server.

WPA, WPA2, WPA1/WPA2

Similar to 802.1X security using WPA / WPA2 for encryption. You will need a RADIUS server for authentication. Please enter the details of your RADIUS server.

Wireless Setting [Help]	
Item	Setting
▶ Wireless Module	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
▶ Wireless Operation Mode	AP mode ▼
▶ Network ID(SSID)	WBR-6022
▶ SSID Broadcast	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
▶ Channel	Auto ▼
▶ Wireless Mode	11 B/G/N mixed ▼
▶ Security	WPA / WPA2 ▼
▶ RADIUS Server IP	
▶ RADIUS port	1812
▶ RADIUS Shared Key	

RADIUS Server

- IP address or the RADIUS server's domain-name.
- Port number of the RADIUS Server
- Enter the RADIUS Shared Key
Key value shared by the RADIUS server and this router. This key value is consistent with the key value in the RADIUS server.

WPS (WiFi Protected Setup)

WPS feature is following the Wi-Fi Alliance WPS standard and it eases the set up of security-enabled Wi-Fi networks in the home and small office environment.

It reduces the user steps required to configure a network and supports two methods that are familiar to most consumers to configure a network and enable security.

Please ensure you have wireless security set up on the WBR-6022 before initializing WPS functions.

Set PIN number of WBR-6022

Make sure the Router is set in “Enrollee” mode.

Click the “Generate New PIN” button to randomly create a new PIN number for the WBR-6022. Then click “Save” to apply the settings.

Set your wireless adapter as Registrar and enter this PIN number to initiate the WPS function.

Wi-Fi Protected Setup	
Item	Setting
▶ WPS	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
▶ AP PIN	13010775 <input type="button" value="Generate New PIN"/>
▶ Config Mode	Enrollee ▼
▶ Config Status	UNCONFIGURED <input type="button" value="Set"/>
▶ Config Method	PIN Code ▼
▶ WPS status	Not in Use
<input type="button" value="Save"/> <input type="button" value="Trigger"/> <input type="button" value="Cancel"/> No change!	

WPS AP List			
ID : 0x0004	WBR-6020	00-11-68-53-94-E8	1
ID :	PMWBR-6001	00-11-68-2A-30-C6	7

WPS Profile List	
WBR-6600	


Information	
Pin Code	13010775 <input type="button" value="Renew"/>
Config Mode	Registrar ▼

Detail	
PIN	<input type="button" value="PIN"/>
PBC	<input type="button" value="PBC"/>
<input checked="" type="checkbox"/> WPS Associate IE	
<input checked="" type="checkbox"/> WPS Probe IE	

Progress >> 0%

Enter PIN number of Wireless Adapter


It is also possible to use the PIN number you have set on the wireless adapter. Set the adapter as Enrollee and enter the PIN you want.

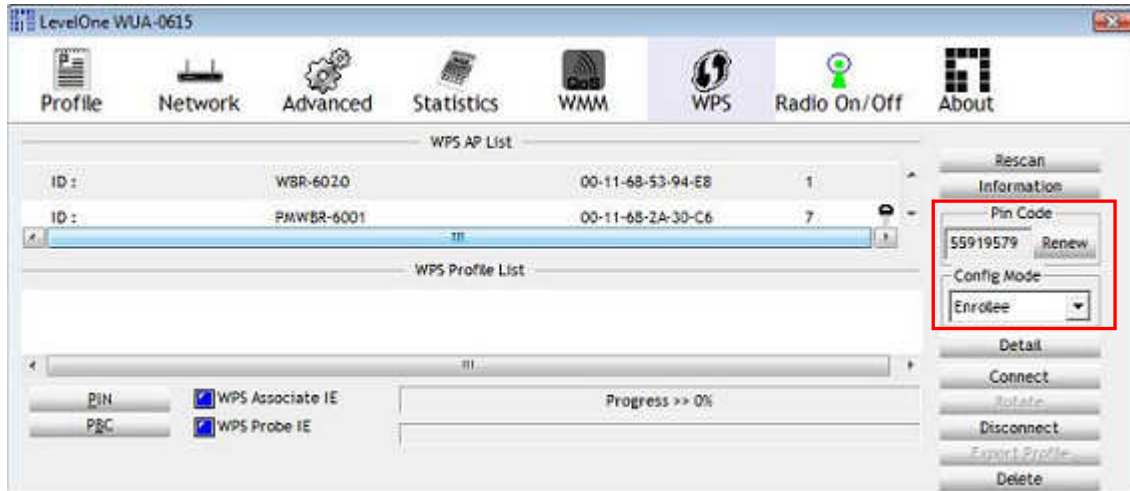

Enter the enrollee's (computer's wireless adapter) PIN number and then click "Save."

Wi-Fi Protected Setup	
Item	Setting
▶ WPS	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
▶ AP PIN	36185641 <input type="button" value="Generate New PIN"/>
▶ Config Mode	<input type="text" value="Registrar"/>
▶ Config Status	UNCONFIGURED <input type="button" value="Set"/>
▶ Config Method	<input type="text" value="PIN Code"/> <input type="text" value="55919579"/>
▶ WPS status	Not in Use
<input type="button" value="Save"/> <input type="button" value="Trigger"/> <input type="button" value="Cancel"/>	
Saved! Changes take effect immediately!	

Now initiate the WPS by clicking the PIN button on the wireless adapter's utility.

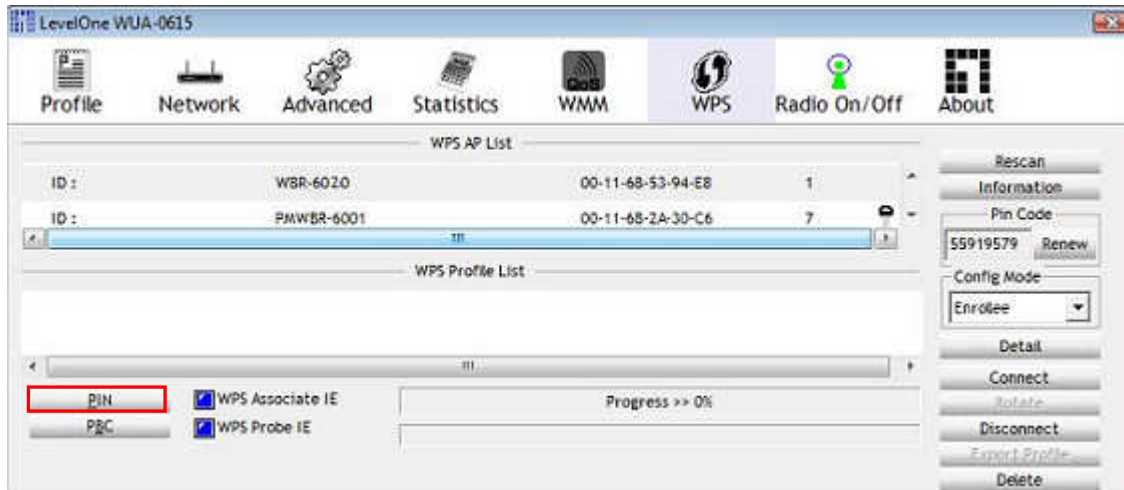

Push Button Method

Change the Config Method to "Push Button."

Wi-Fi Protected Setup	
Item	Setting
▶ WPS	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
▶ AP PIN	77869241 <input type="button" value="Generate New PIN"/>
▶ Config Mode	Enrollee ▼
▶ Config Status	UNCONFIGURED <input type="button" value="Set"/>
▶ Config Method	Push Button ▼
▶ WPS status	Not in Use

Saved! Changes take effect immediately!


Then press the WPS button at the front of the router until the WLAN light starts flashing. This indicates that WPS is activated.



Then press and hold the WPS button on your wireless client for 1 second.



If your device has no physical WPS push button, then you can push the software button in the utility.

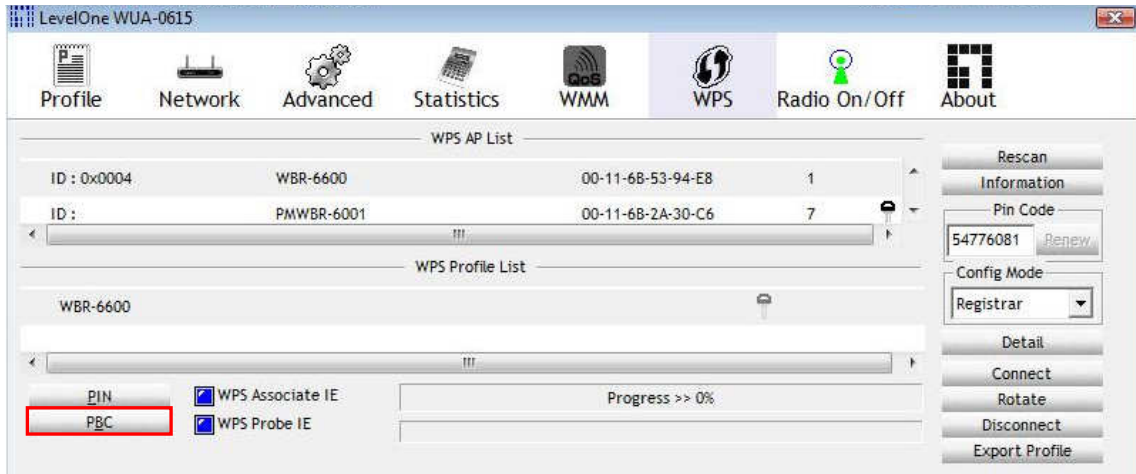

WDS (Wireless Distribution System)

WDS operation as defined by the IEEE802.11 standard has been made available. Using WDS it is possible to wirelessly connect Access Points, and in doing so extend a wired infrastructure to locations where cabling is not possible or inefficient to implement.

For maximum compatibility, it is recommended that WDS be set up using only the same models, in this case, WBR-6022. Also note that the standard only supports WEP encryption.

Click **Enable** to activate the WDS function.

Then type in the MAC addresses of other Access Points in the **Remote AP MAC** fields. Or you can copy the ones from **Scanned AP's MAC** list.

Click **Save** to save the settings and **Undo** to cancel.

Note: WDS supports WEP Wireless Encryption mode.

WDS Setting [Help]			
Item	Setting		
▶ Wireless Bridging	<input checked="" type="radio"/> Enable <input type="radio"/> Disable		
▶ Remote AP MAC 1	<input type="text"/>		
Remote AP MAC 2	<input type="text"/>		
Remote AP MAC 3	<input type="text"/>		
Remote AP MAC 4	<input type="text"/>		
▶ Encryption type	None ▾		
Scanned AP's MAC -- select one -- ▾ <input type="button" value="Copy to"/> Remote AP MAC -- ▾			
Wireless AP List			
ID	SSID	Channel	MAC Address
1	MeetingRoom	7	00:11:6B:B0:87:9C
2	WAP-0003	6	00:11:6B:60:6A:C5
3	ZyXEL	6	00:13:49:3D:DA:2D
4	QC-6000	11	00:11:6B:17:48:F6
5	WBR-6001TSD	11	00:11:6B:29:30:84
6	8FB1	6	00:09:7C:F1:F3:1B
7	MyPlace	2	00:18:84:A4:DB:06
8	TSD10	11	00:11:6B:39:A9:73
9	WAP-6010	11	00:05:9E:8D:85:C8
10	MyPlace	2	00:18:84:A4:DB:06
<input type="button" value="Save"/> <input type="button" value="Undo"/> <input type="button" value="Scan AP"/> <input type="button" value="Back"/>			

Change Password

This page allows you to change the WBR-6022 Web Configuration password. Please type in the old password (factory default password is **password**) and then type in the new password.


Change Password	
Item	Setting
▶ Old Password	<input type="text"/>
▶ New Password	<input type="text"/>
▶ Reconfirm	<input type="text"/>
<input type="button" value="Save"/> <input type="button" value="Undo"/>	

If you change the password, make sure you use the new password next time you log into the web configuration.

Click **Save** to save the settings and **Undo** to cancel.

5.2.2 Forwarding Rules

This page allows you to configure the port forwarding management of the WBR-6022. Use the menu on the left to access the setting pages.

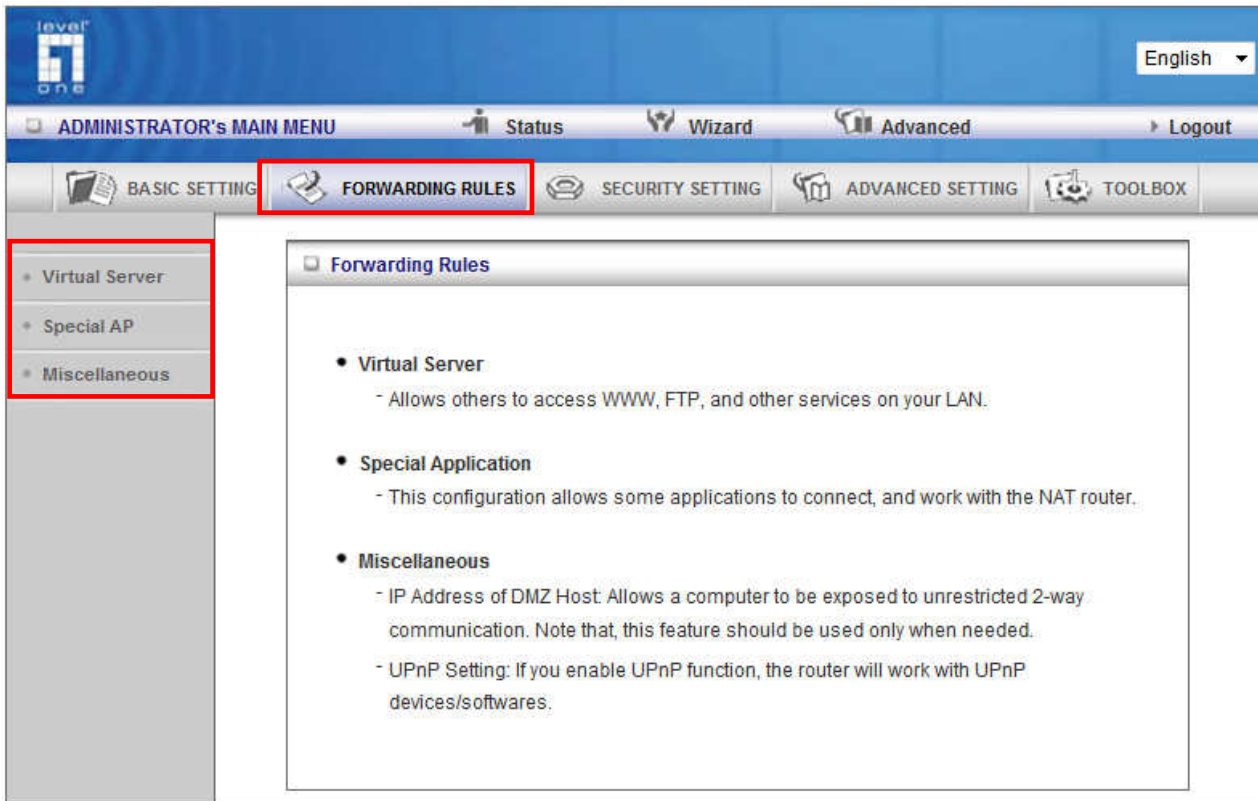

The port forwarding feature is required because the Wireless Router's NAT (Network Address Translation) will block incoming traffic from the Internet to the LAN if the specific port mapping is not set up in the NAT table.

This is to provide a level of protection to computers on your LAN, however as a result creates connectivity problems when you want to make LAN resources available on the Internet. These include FTP servers, network game servers or other server applications.

There are three ways to work around the NAT and enable LAN resources on the Internet. Port Forwarding (Virtual Server), Port Triggering (Special AP page) and DMZ Host (Miscellaneous page).

Virtual Server

Virtual Server
[Help]

Well known services -- select one -- Copy to ID --

ID	Server IP	Public Port	Private Port	Protocol	Enable	Use Rule#
1	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
2	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
3	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
4	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
5	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
6	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
7	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
8	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
9	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
10	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
11	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
12	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
13	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
14	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
15	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
16	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
17	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
18	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
19	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always
20	<input type="text"/>	<input type="text"/>	<input type="text"/>	Both	<input type="checkbox"/>	(0) Always

Save Undo

A virtual server is defined as a Service Port, and all requests to this port will be redirected to the computer specified by the Server IP. Virtual Server can work with Scheduling Rules, and give user more flexibility on Access control. For Detail, please refer to Scheduling Rule (Advanced Setting > Schedule).

For example, if you have an FTP server (port 21) at 192.168.0.1, a Web server (port 80) at 192.168.0.2, and a VPN server at 192.168.0.6, then you need to specify the following virtual server mapping table:

You can specify different ports to be used for Public and Private source and destinations.

Public Port	Private Port	Server IP	Enable
20	21	192.168.0.2	V
80	80	192.168.0.3	V
1721	1723	192.168.0.6	V

Special AP

Special Applications [Help]			
Popular applications -- Select one -- Copy to ID --			
ID	Trigger	Incoming Ports	Enable
1	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
2	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
3	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
4	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
5	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
6	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
7	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
8	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
Save Undo			

Some applications require multiple connections, like Internet games, Video conferencing, Internet telephony, etc. Because of the firewall function, these applications cannot work with the WBR-6022. The **Special Applications** feature allows some of these applications to work with this product. If this fails to make an application work, try setting that computer as the **DMZ host** instead. Please refer to Forwarding Rules > Miscellaneous section.

1. **Trigger:** The outbound port number that will be triggered by the application.
2. **Incoming Ports:** When the trigger packet is detected, the inbound packets sent to the specified port numbers and are allowed to pass through the firewall.

The WBR-6022 also comes with predefined settings for some popular applications. To use the predefined settings, select your application from the list, select an unused ID and then click **Copy** to add the predefined setting to your list.

Note: At any given time, only one PC can use each Special Application tunnel.

Miscellaneous Items

Miscellaneous Items		[Help]
Item	Setting	Enable
▶ IP Address of DMZ Host	<input type="text"/>	<input type="checkbox"/>
▶ UPnP setting		<input checked="" type="checkbox"/>
▶ IGMP setting		<input type="checkbox"/>

IP Address of DMZ Host

Here you can set the DMZ (Demilitarized Zone) Host. It is a computer that does not have the WBR-6022's built-in firewall applied. It allows the computer to be exposed to unrestricted communication to the Internet.

This setting is most commonly used for Internet gaming, Video conferencing, Internet telephony and other special applications.

To enable DMZ, enter the IP address of the PC and tick on Enable.

UPnP Setting


The WBR-6022 supports Universal Plug and Play. However this depends on your operating system.

IGMP setting

IGMP is a protocol used for multicasting applications where the content data is transmitted from one source to a number of recipients. This function must be enabled if any applications in your LAN are in a multicast group.

5.2.2.1 Security Settings

This section allows you to configure the security management of the unit. Click on the menu on the left to access the respective setting page.

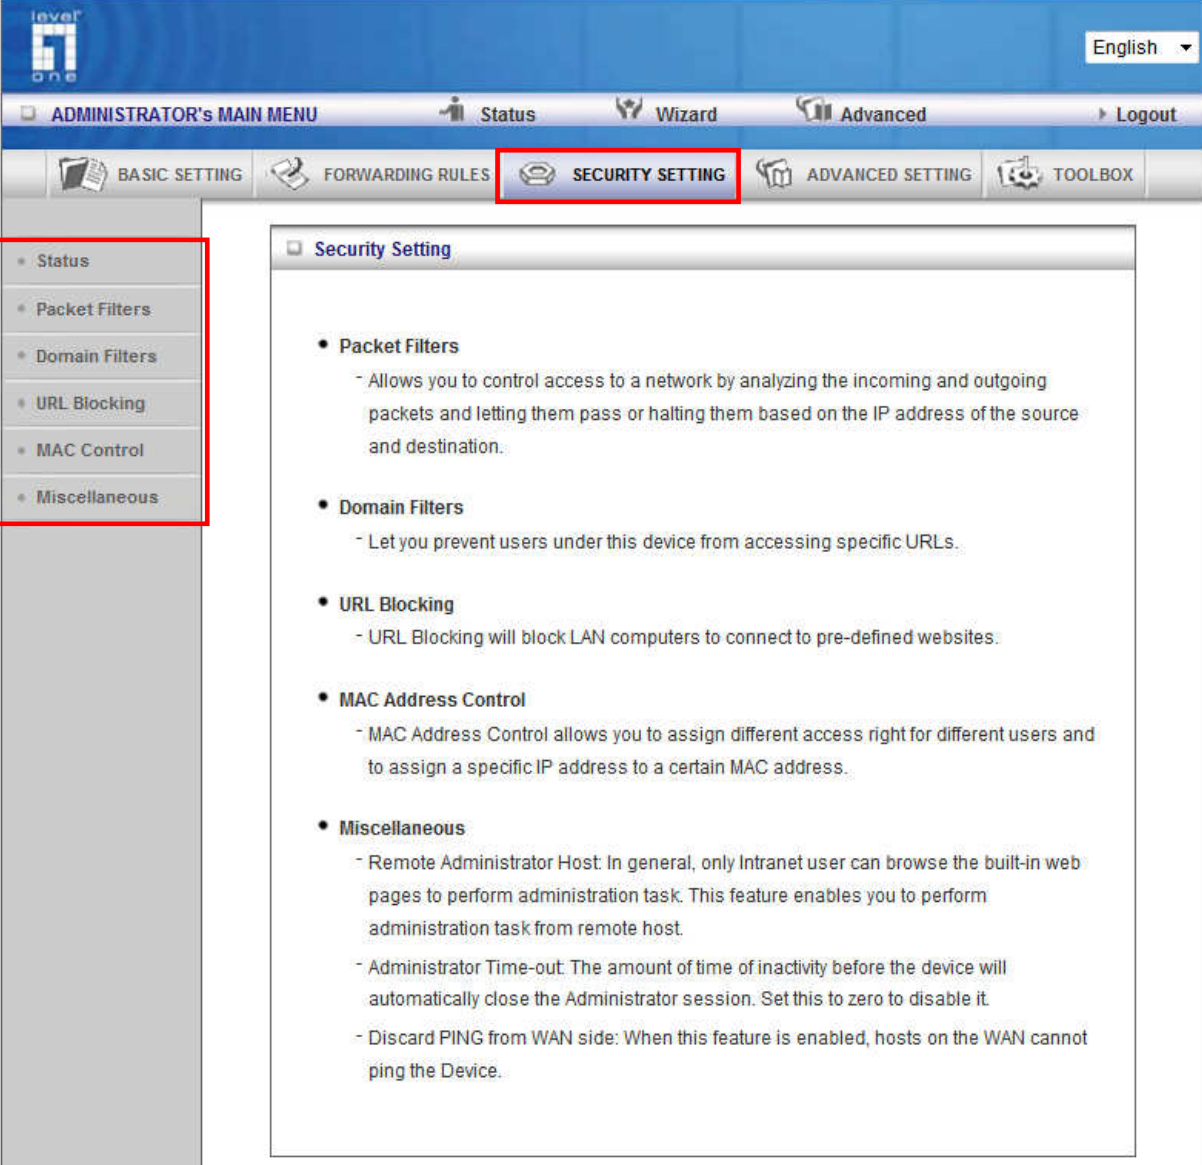

The screenshot displays the Level One administrator interface. At the top, there is a blue header with the Level One logo and a language dropdown set to English. Below the header is a navigation bar with 'ADMINISTRATOR's MAIN MENU' and icons for 'Status', 'Wizard', and 'Advanced', along with a 'Logout' link. A secondary navigation bar contains icons and labels for 'BASIC SETTING', 'FORWARDING RULES', 'SECURITY SETTING' (highlighted with a red box), 'ADVANCED SETTING', and 'TOOLBOX'. On the left side, a vertical sidebar menu is also highlighted with a red box, listing 'Status', 'Packet Filters', 'Domain Filters', 'URL Blocking', 'MAC Control', and 'Miscellaneous'. The main content area is titled 'Security Setting' and contains a list of security features:

- **Packet Filters**
 - Allows you to control access to a network by analyzing the incoming and outgoing packets and letting them pass or halting them based on the IP address of the source and destination.
- **Domain Filters**
 - Let you prevent users under this device from accessing specific URLs.
- **URL Blocking**
 - URL Blocking will block LAN computers to connect to pre-defined websites.
- **MAC Address Control**
 - MAC Address Control allows you to assign different access right for different users and to assign a specific IP address to a certain MAC address.
- **Miscellaneous**
 - Remote Administrator Host: In general, only Intranet user can browse the built-in web pages to perform administration task. This feature enables you to perform administration task from remote host.
 - Administrator Time-out: The amount of time of inactivity before the device will automatically close the Administrator session. Set this to zero to disable it.
 - Discard PING from WAN side: When this feature is enabled, hosts on the WAN cannot ping the Device.

Packet Filter

Packet Filters allows you to control what packets are allowed to pass through the WBR-6022. The Outbound Filter applies to all outbound packets and the Inbound Filter only applies to packets that are destined to Virtual Servers or the DMZ Host only.

Outbound Packet Filter [Help]				
Item		Setting		
▶ Outbound Filter		<input checked="" type="checkbox"/> Enable		
<input checked="" type="radio"/> Allow all to pass except those match the following rules.				
<input type="radio"/> Deny all to pass except those match the following rules.				
ID	Source IP	Destination IP : Ports	Enable	Use rule#
1	<input type="text"/>	<input type="text"/> : <input type="text"/>	<input type="checkbox"/>	(0) Always ▼
2	<input type="text"/>	<input type="text"/> : <input type="text"/>	<input type="checkbox"/>	(0) Always ▼
3	<input type="text"/>	<input type="text"/> : <input type="text"/>	<input type="checkbox"/>	(0) Always ▼
4	<input type="text"/>	<input type="text"/> : <input type="text"/>	<input type="checkbox"/>	(0) Always ▼
5	<input type="text"/>	<input type="text"/> : <input type="text"/>	<input type="checkbox"/>	(0) Always ▼
6	<input type="text"/>	<input type="text"/> : <input type="text"/>	<input type="checkbox"/>	(0) Always ▼
7	<input type="text"/>	<input type="text"/> : <input type="text"/>	<input type="checkbox"/>	(0) Always ▼
8	<input type="text"/>	<input type="text"/> : <input type="text"/>	<input type="checkbox"/>	(0) Always ▼
Save Undo Inbound Filter... MAC Level...				

To enable the Outbound Filter, tick the **Enable** tick box.

There are two types of filtering policies:

1. Allow all to pass except those match the specified rules
2. Deny all to pass except those match the specified rules

You can specify 8 rules for each direction: inbound or outbound.

For each rule, you can define the following:

- Source IP address
- Source port
- Destination IP address
- Destination port
- Protocol: TCP or UDP or both.
- Use Schedule Rule#

For source or destination IP address, you can define a single IP address (192.168.0.1). An empty implies all IP addresses.

For source or destination port, you can define a single port (80) or a range of ports (1000-1999). You also need to add prefix "T" or "U" to specify TCP or UDP protocol, for example T80, U53, U20002999. No prefix indicates both TCP and UDP are defined. An empty implies all port addresses.

Packet Filter can also work with Scheduling Rules and give users more flexibility on Access control. For more detail, please refer to Scheduling Rule (Advanced Setting > Scheduling).

Each rule can be enabled or disabled individually.

Inbound Filter:

To access the Inbound Packet Filter page, click on **Inbound Filter** on the bottom of the page. All settings on this page are similar to Outbound Filters.

Inbound Packet Filter [Help]				
Item		Setting		
▶ Inbound Filter		<input type="checkbox"/> Enable		
<input checked="" type="radio"/> Allow all to pass except those match the following rules. <input type="radio"/> Deny all to pass except those match the following rules.				
ID	Source IP	Destination IP : Ports	Enable	Use rule#
1	<input type="text"/>	<input type="text"/> : <input type="text"/>	<input type="checkbox"/>	(0) Always ▼
2	<input type="text"/>	<input type="text"/> : <input type="text"/>	<input type="checkbox"/>	(0) Always ▼
3	<input type="text"/>	<input type="text"/> : <input type="text"/>	<input type="checkbox"/>	(0) Always ▼
4	<input type="text"/>	<input type="text"/> : <input type="text"/>	<input type="checkbox"/>	(0) Always ▼
5	<input type="text"/>	<input type="text"/> : <input type="text"/>	<input type="checkbox"/>	(0) Always ▼
6	<input type="text"/>	<input type="text"/> : <input type="text"/>	<input type="checkbox"/>	(0) Always ▼
7	<input type="text"/>	<input type="text"/> : <input type="text"/>	<input type="checkbox"/>	(0) Always ▼
8	<input type="text"/>	<input type="text"/> : <input type="text"/>	<input type="checkbox"/>	(0) Always ▼
<input type="button" value="Save"/> <input type="button" value="Undo"/> <input type="button" value="Outbound Filter..."/> <input type="button" value="MAC Level..."/>				

Domain Filter

The Domain Filter enables you to prevent users from accessing specific domain addresses (web sites).

Domain Filter [Help]			
Item	Setting		
▶ Domain Filter	<input checked="" type="checkbox"/> Enable		
▶ Log DNS Query	<input checked="" type="checkbox"/> Enable		
▶ Privilege IP Addresses Range	From <input type="text" value="101"/> To <input type="text" value="105"/>		
ID	Domain Suffix	Action	Enable
1	<input type="text" value="www.msn.com"/>	<input checked="" type="checkbox"/> Drop <input checked="" type="checkbox"/> Log	<input checked="" type="checkbox"/>
2	<input type="text" value="www.sina.com"/>	<input type="checkbox"/> Drop <input checked="" type="checkbox"/> Log	<input checked="" type="checkbox"/>
3	<input type="text" value="www.google.com"/>	<input checked="" type="checkbox"/> Drop <input type="checkbox"/> Log	<input checked="" type="checkbox"/>
4	<input type="text"/>	<input type="checkbox"/> Drop <input type="checkbox"/> Log	<input type="checkbox"/>
5	<input type="text"/>	<input type="checkbox"/> Drop <input type="checkbox"/> Log	<input type="checkbox"/>

To enable Domain Filter, make sure to tick the **Enable** tick box.

- **Log DNS Query:** Check if you want to log the action when someone accesses the specific URLs.
- **Privilege HOST / Netmask:** Setting a group of computers that have privilege to access the internet without any restrictions.
- **Domain Suffix:** A suffix of URL to be restricted; For example, ".com", "xxx.com".
- **Action:** When someone is accessing the URL that meets the domain suffix, what kind of action you want the WBR-6022 to take. Tick on **Drop** to block the access and/or tick on **Log** to log this access.

In this example:

1. URL include "www.msn.com" will be blocked, and the action will be record in log-file.
2. URL include "www.sina.com" will not be blocked, but the action will be record in log-file.
3. URL include "www.google.com" will be blocked, but the action will not be record in log-file.
4. IP address X.X.X.1~ X.X.X.20 can access network without restriction.

URL Blocking

URL Blocking will block LAN computers from connecting to a pre-defined Web Site. The major difference between Domain Filter and URL Blocking is that Domain Filter requires the user to input suffixes (eg: xxx.com, ttt.net) while URL Blocking only requires user to input a keyword.

In other words, Domain filter can block specific website, while URL Blocking can block hundreds of websites by simply a keyword.

URL Blocking [Help]		
Item	Setting	
▶ URL Blocking	<input checked="" type="checkbox"/> Enable	
ID	URL	Enable
1	<input type="text" value="msn"/>	<input checked="" type="checkbox"/>
2	<input type="text" value="cnn"/>	<input checked="" type="checkbox"/>
3	<input type="text" value="cnn"/>	<input checked="" type="checkbox"/>
4	<input type="text" value="espn"/>	<input checked="" type="checkbox"/>
5	<input type="text"/>	<input type="checkbox"/>
6	<input type="text"/>	<input type="checkbox"/>
7	<input type="text"/>	<input type="checkbox"/>

To enable URL Blocking, make sure to tick **Enable**.

To set an URL Blocking rule, you will require:

- **URL:** If any part of the Website's URL matches the predefined word, the connection will be blocked.
- **Enable:** Tick to enable the rule.

In this example:

1. URL include "msn" will be blocked, and the action will be record in log-file.
2. URL include "sina" will be blocked, but the action will be record in log-file
3. URL include "cnnsi" will not be blocked, but the action will be record in log-file.
4. URL include "espn" will be blocked, but the action will be record in log-file

MAC Address Control

The Domain Filter enables you to prevent users from accessing specific domain addresses (web sites).

MAC Address Control [Help]				
Item	Setting			
▶ MAC Address Control	<input checked="" type="checkbox"/> Enable			
<input checked="" type="checkbox"/> Connection control	Wireless and wired clients with C checked can connect to this device; and <input type="text" value="allow"/> ▾ unspecified MAC addresses to connect.			
<input checked="" type="checkbox"/> Association control	Wireless clients with A checked can associate to the wireless LAN; and <input type="text" value="deny"/> ▾ unspecified MAC addresses to associate. Note: Association control has no effect on wired clients.			
DHCP clients <input type="text" value="-- select one --"/> ▾ <input type="button" value="Copy to"/> ID <input type="text" value="--"/> ▾				
ID	MAC Address	IP Address	C	A
1	<input type="text" value="00:50:B6:05:B2:B1"/>	<input type="text" value="192.168.0.2"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
2	<input type="text" value="00:12:F0:13:B0:50"/>	<input type="text" value="192.168.0.3"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
3	<input type="text" value="00:0E:35:96:2E:32"/>	<input type="text" value="192.168.0.5"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
4	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>	<input type="checkbox"/>
<input type="button" value=" << Previous"/> <input type="button" value=" Next >>"/> <input type="button" value=" Save"/> <input type="button" value=" Undo"/>				

To enable MAC Address Control, make sure to tick on **Enable**.

There are two types of controls available:

- **Connection Control:** To control which wired and wireless clients can connect to this device. If a client is denied access, it means the client cannot access the Internet either. Choose “allow” or “deny” to allow or deny the clients whose MAC addresses are not in the list.
- **Association Control:** To control which wireless client can be associated with this WBR-6022. If a client is denied, then it means the client cannot send or receive any data via this WBR-6022. Choose “allow” or “deny” to allow or deny the clients with MAC addresses that are not in the list to associate to the wireless network.

MAC Address	MAC address indicates a specific client.
IP Address	Expected IP address of the corresponding client. Keep it empty if you don't care its IP address.
C	When " Connection control " is checked, check " C " will allow the corresponding client to connect to this device.
A	When " Association control " is checked, check " A " will allow the corresponding client to associate to the wireless LAN.

In this page, we provide the following Combo box and button to help you to input the MAC address.

DHCP clients ID

You can select a specific client in the DHCP clients Combo box, and then click on the "Copy to" button to copy the MAC address of the client you select to the ID selected in the "ID" Combo box.

Previous and Next Page

To make this setup page simple and clear, we have divided the "Control Table" into several pages. You can use these buttons to navigate to different pages.

Example:

In this scenario, there are three clients listed in the Table. Clients 1 and 2 are wireless, and client 3 is wired.

1. The MAC Address Control" function is enabled.
2. **Connection Control** is enabled and all the wired and wireless clients not listed in the Control table are "Allowed" to connect to this device.
3. **Association control** is enabled, and all of the wireless clients not listed in the Control table are "Denied" to associate to the wireless LAN.
4. Clients 1 and 3 have fixed IP address either from the DHCP server of this device or manually assigned:

ID 1 - "00-50-B6-05-B2-B1" --> 192.168.0.2

ID 3 - "00-0E-35-96-2E-32" --> 192.168.0.5

Client 2 will obtain its IP address from the IP Address pool specified in the "DHCP Server" page or can use a manually assigned static IP address.

For example, Client 3 tries to use an IP address different from the address listed in the Control Table (192.168.0.5), it will be denied to connect to the WBR-6022.

5. Clients 2 and 3 and other wired clients with a MAC address unspecified in the Control table are all allowed to connect to this device. But client 1 is denied to connect to this device.
6. Clients 1 and 2 are allowed to associate to the wireless LAN, but a wireless client with a MAC address not specified in the Control table is denied to associate to the wireless LAN. Client 3 is a wired client and so is not affected by Association control.

Miscellaneous Items

This page allows you to change various miscellaneous security settings.

Miscellaneous Items		[Help]
Item	Setting	Enable
▶ Administrator Time-out	<input type="text" value="300"/> seconds (0 to disable)	
▶ Remote Administrator Host : Port	<input type="text"/> : <input type="text" value="8080"/>	<input type="checkbox"/>
▶ Discard PING from WAN side		<input type="checkbox"/>
▶ DoS Attack Detection		<input type="checkbox"/>

Administrator Timeout: The amount of time with no activity before the user will be logged out of the web configuration pages. Set to zero to disable this feature.

Remote Administrator Host/Port: By default, only LAN user can browse the built-in web configuration pages to perform administration task. This feature enables you to perform administration task from the Internet. If this feature is enabled, only the specified IP address can perform remote administration. If the specified IP address is blank, any host can connect to this product to perform administration task.

For better security, you can specify just one IP address or use subnet mask bits “/n” notation to specify a group of trusted IP addresses. For example, "10.1.2.0/24".

NOTE: When Remote Administration is enabled, the web server port will be shifted to 80. You can change web server port to other port.


Discard PING from WAN side: When enabled, any host on the WAN cannot ping this MobilSpot™.

DoS Attack Detection:

When this feature is enabled, the router will detect and log the DoS attack comes from the Internet. Currently, the router can detect the following DoS attack: SYN Attack, WinNuke, Port Scan, Ping of Death, Land Attack etc.

5.2.2.2 Advanced Settings

These pages allow you to configure the more advanced settings on the unit.

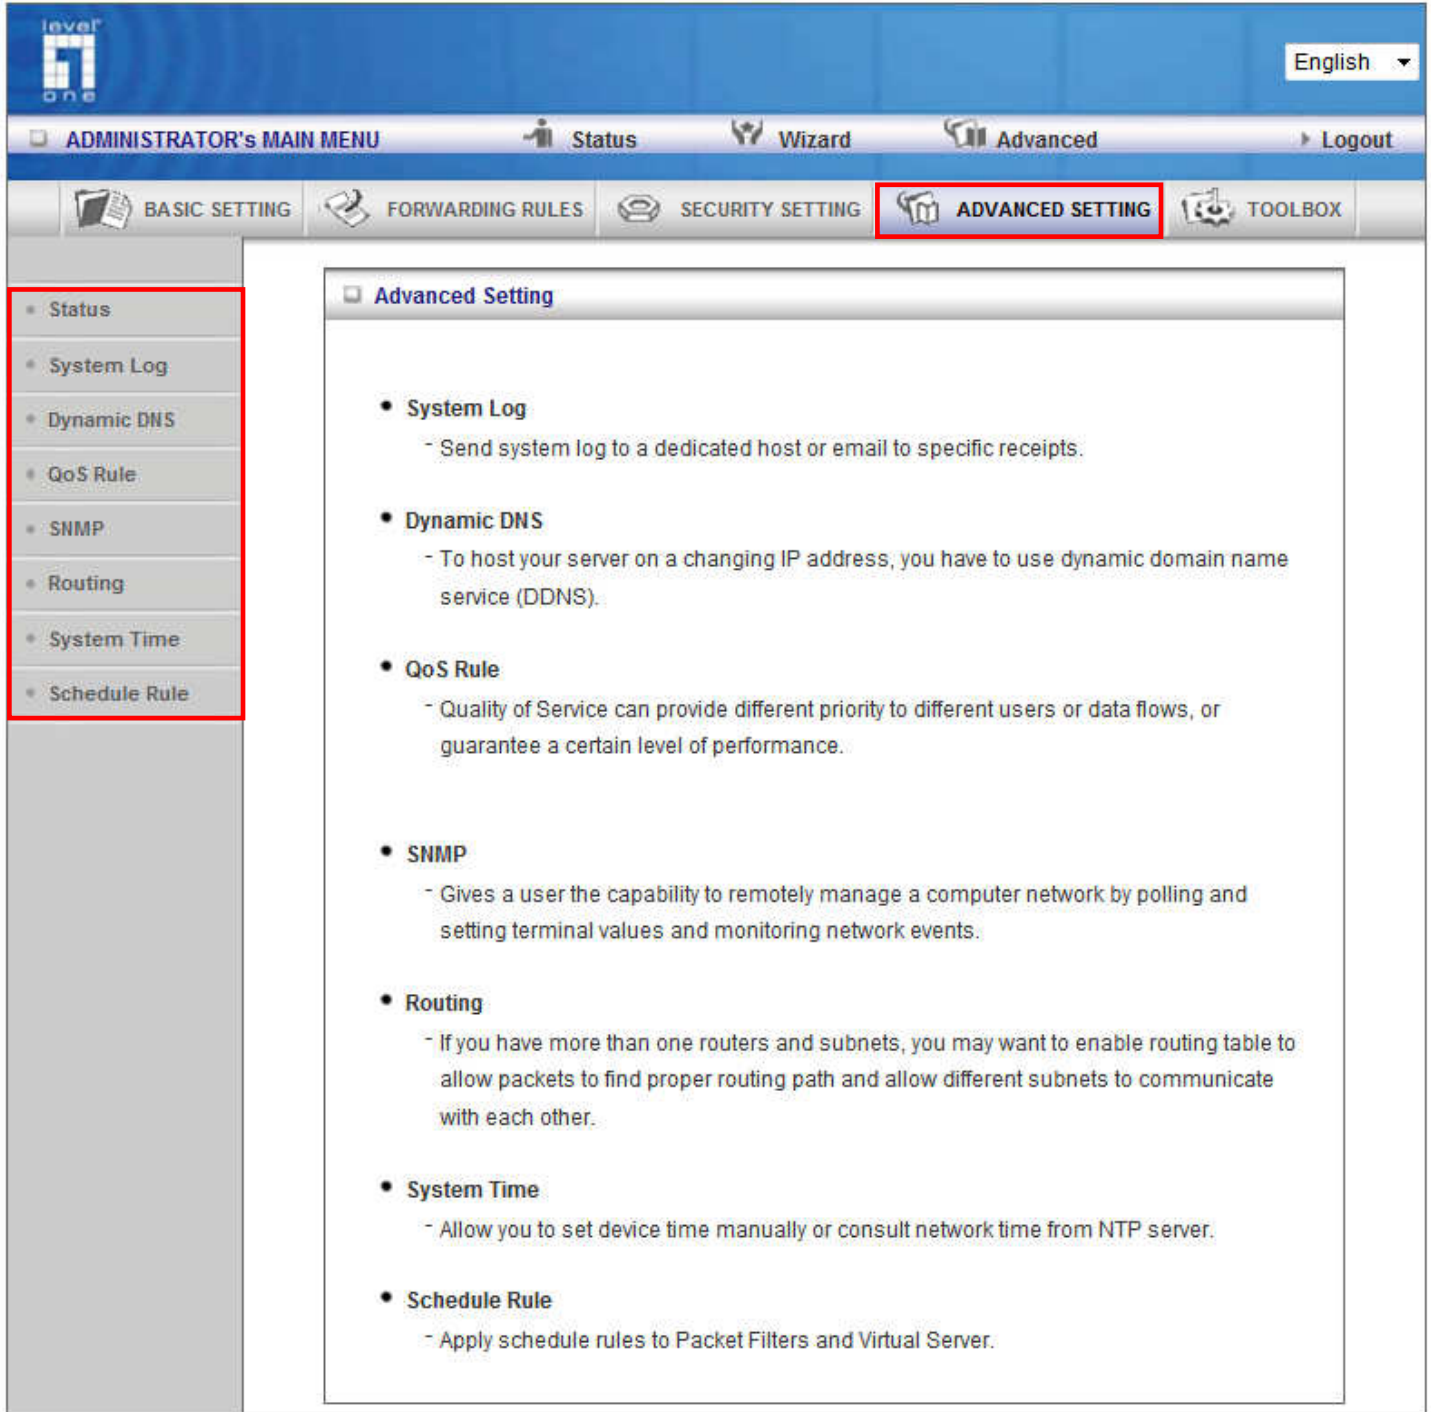

The screenshot displays the Level One Administrator's Main Menu. The top navigation bar includes 'ADMINISTRATOR's MAIN MENU', 'Status', 'Wizard', 'Advanced', and 'Logout'. Below this, a secondary menu highlights 'ADVANCED SETTING' in a red box, alongside 'BASIC SETTING', 'FORWARDING RULES', 'SECURITY SETTING', and 'TOOLBOX'. A left-hand sidebar menu is also visible, with 'Status', 'System Log', 'Dynamic DNS', 'QoS Rule', 'SNMP', 'Routing', 'System Time', and 'Schedule Rule' listed. The main content area, titled 'Advanced Setting', contains a list of configuration options:

- **System Log**
 - Send system log to a dedicated host or email to specific receipts.
- **Dynamic DNS**
 - To host your server on a changing IP address, you have to use dynamic domain name service (DDNS).
- **QoS Rule**
 - Quality of Service can provide different priority to different users or data flows, or guarantee a certain level of performance.
- **SNMP**
 - Gives a user the capability to remotely manage a computer network by polling and setting terminal values and monitoring network events.
- **Routing**
 - If you have more than one routers and subnets, you may want to enable routing table to allow packets to find proper routing path and allow different subnets to communicate with each other.
- **System Time**
 - Allow you to set device time manually or consult network time from NTP server.
- **Schedule Rule**
 - Apply schedule rules to Packet Filters and Virtual Server.

System Log

The WBR-6022 supports both Syslog (using UDP packets) and E-Mail alert.

System Log		[Help]
Item	Setting	Enable
▶ IP Address for Syslog	<input type="text"/>	<input type="checkbox"/>
▶ Setting of Email alert		<input type="checkbox"/>
• SMTP Server IP/Port	<input type="text"/> : <input type="text"/>	
• SMTP User name	<input type="text"/>	
• SMTP Password	<input type="text"/>	
• E-mail address	<input type="text"/>	
• E-mail Subject	<input type="text"/>	
<input type="button" value="Save"/> <input type="button" value="Undo"/> <input type="button" value="View Log..."/> <input type="button" value="Email Log Now"/>		

For Syslog, you will need to enter the IP address of the host computer that will be receiving the syslog messages and tick on **Enable**.

For E-Mail alert, you will need to define the following:

- **E-Mail Alert:** Tick **Enable** to enable this feature.
- **SMTP Server IP and Port:** Enter the IP address and port of the SMTP server, separated by “.” (no quotes). If you do not specify the port number, the default value of 25 will be used.
- **SMTP User Name / Password:** Username and Password if your SMTP server requires log in.
- **E-mail address:** Enter the e-mail addresses of the recipients for the email logs. To assign more than one recipient, use “;” or “,” (no quotes) to separate the e-mail addresses.
- **E-Mail Subject:** Enter the subject for the e-mail (optional)

Dynamic DNS

Dynamic DNS is a feature that allows users to set up a static domain name even when they have a dynamic internet IP address. So even if your IP address changes every time you connect to your ISP, the IP address can be mapped to a host name so that anyone who wants to connect to the WBR-6022, or any services behind the router from the internet can just use the Dynamic DNS hostname instead of the IP address which might change.

Dynamic DNS [Help]	
Item	Setting
▶ DDNS	<input checked="" type="radio"/> Disable <input type="radio"/> Enable
▶ Provider	DynDNS.org(Dynamic) ▼
▶ Host Name	<input type="text"/>
▶ Username / E-mail	<input type="text"/>
▶ Password / Key	<input type="text"/>
<input type="button" value="Save"/> <input type="button" value="Undo"/>	

Before you enable **Dynamic DNS**, you need to register an account on one of the supported Dynamic DNS providers in the list. After successfully registering the account, the Dynamic DNS provider would provide you with the following details:

- Host Name
- Username/Email
- Password

To enable Dynamic DNS click the check box next to Enable in the DDNS field and choose the respective Dynamic DNS provider. Enter the required details and then click **Save** to save the settings or **Undo** to cancel.

QoS Rule

Here you can set the parameters for QoS (Quality of Service). This function allows you to specify which types of data packets are given priority. For example you can increase the priority of Voice Over IP or gaming packets so that they are handled first by WBR-6022.

QoS Rule					
Item		Setting			
▶ QoS Control		<input type="checkbox"/> Enable			
▶ Bandwidth of Upstream		<input type="text"/> kbps (Kilobits per second)			
ID	Local IP : Ports	Remote IP : Ports	QoS Priority	Enable	Use Rule#
1	<input type="text"/> : <input type="text"/>	<input type="text"/> : <input type="text"/>	High ▼	<input type="checkbox"/>	(0) Always ▼
2	<input type="text"/> : <input type="text"/>	<input type="text"/> : <input type="text"/>	High ▼	<input type="checkbox"/>	(0) Always ▼
3	<input type="text"/> : <input type="text"/>	<input type="text"/> : <input type="text"/>	High ▼	<input type="checkbox"/>	(0) Always ▼
4	<input type="text"/> : <input type="text"/>	<input type="text"/> : <input type="text"/>	High ▼	<input type="checkbox"/>	(0) Always ▼
5	<input type="text"/> : <input type="text"/>	<input type="text"/> : <input type="text"/>	High ▼	<input type="checkbox"/>	(0) Always ▼
6	<input type="text"/> : <input type="text"/>	<input type="text"/> : <input type="text"/>	High ▼	<input type="checkbox"/>	(0) Always ▼
7	<input type="text"/> : <input type="text"/>	<input type="text"/> : <input type="text"/>	High ▼	<input type="checkbox"/>	(0) Always ▼
8	<input type="text"/> : <input type="text"/>	<input type="text"/> : <input type="text"/>	High ▼	<input type="checkbox"/>	(0) Always ▼
<input type="button" value="Save"/> <input type="button" value="Undo"/>					

To enable QoS Control, tick **Enable**.

Local IP: Please input Client IP, Example: 192.168.12.33. This is the computer that the rule applies.

Remote IP: Please input Global IP and port, Example: 168.96.2.3 and port 21. This is so that the QoS Rule only applies to packets from this Internet source.

Priority: Please set whether this particular rule should be given a High, Normal or Low priority.

Schedule Rule #: Specify which schedule this rule will follow. Eg: What times the rule applies.

SNMP Setting

SNMP (Simple Network Management Protocol) is designed to give users the ability to remotely manage a computer or network device.

SNMP Setting [Help]	
Item	Setting
▶ Enable SNMP	<input type="checkbox"/> Local <input type="checkbox"/> Remote
▶ Get Community	<input type="text"/>
▶ Set Community	<input type="text"/>
▶ IP 1	<input type="text"/>
▶ IP 2	<input type="text"/>
▶ IP 3	<input type="text"/>
▶ IP 4	<input type="text"/>
▶ SNMP Version	<input checked="" type="radio"/> V1 <input type="radio"/> V2c
▶ WAN Access IP Address	<input type="text"/>
<input type="button" value="Save"/> <input type="button" value="Undo"/>	

To enable SNMP, please set the following:

- **Enable SNMP:** You must check either Local or Remote or both to enable SNMP function. If Local is checked, this unit will respond to requests from LAN. If Remote is checked, the unit will respond to requests from WAN.
- **Get Community:** Set the community of GetRequest. This will act as a password.
- **Set Community:** Set the community of SetRequest. This will act as a password.
- **IP 1,IP 2,IP 3,IP 4:** Enter the IP addresses of the managed PCs. The unit will send SNMP Trap messages only to the IP addresses listed.
- **SNMP Version:** Please select the SNMP Version of your SNMP Management software.

Click on **Save** to save the settings or **Undo** to cancel.

Routing

When you have more than one WBR-6022, or router with different subnets on the network, you will need to enable this function to allow the different subnets to communicate with each other.

Routing Table [Help]					
Item		Setting			
▶ Dynamic Routing		<input checked="" type="radio"/> Disable <input type="radio"/> RIPv1 <input type="radio"/> RIPv2			
▶ Static Routing		<input checked="" type="radio"/> Disable <input type="radio"/> Enable			
ID	Destination	Subnet Mask	Gateway	Hop	Enable
1	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
2	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
3	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
4	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
5	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
6	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
7	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
8	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="checkbox"/>
<input type="button" value="Save"/> <input type="button" value="Undo"/>					

There are two types of routing supported by the WBR-6022.


- **Dynamic Routing:** This method uses Routing Information Protocol (RIP) to enable the devices to determine the best route for each packet based on the number of hops between the source and destination.

Tick the **Enable** box to enable Dynamic Routing. Use RIPv2 only if you have different subnets in your network. Otherwise, please select RIPv1 if you need this protocol.

- **Static Routing:** Allows computers that are connected to the WBR-6022 to communicate with computers on other LAN segments which are connected to the WBR-6022 using a different router. You can specify up to eight routing rules.

The details below are required to set the routing rules:

- IP Address
- Subnet Mask
- Gateway
- Hop, number of hops
- Tick **Enable** for each rule.

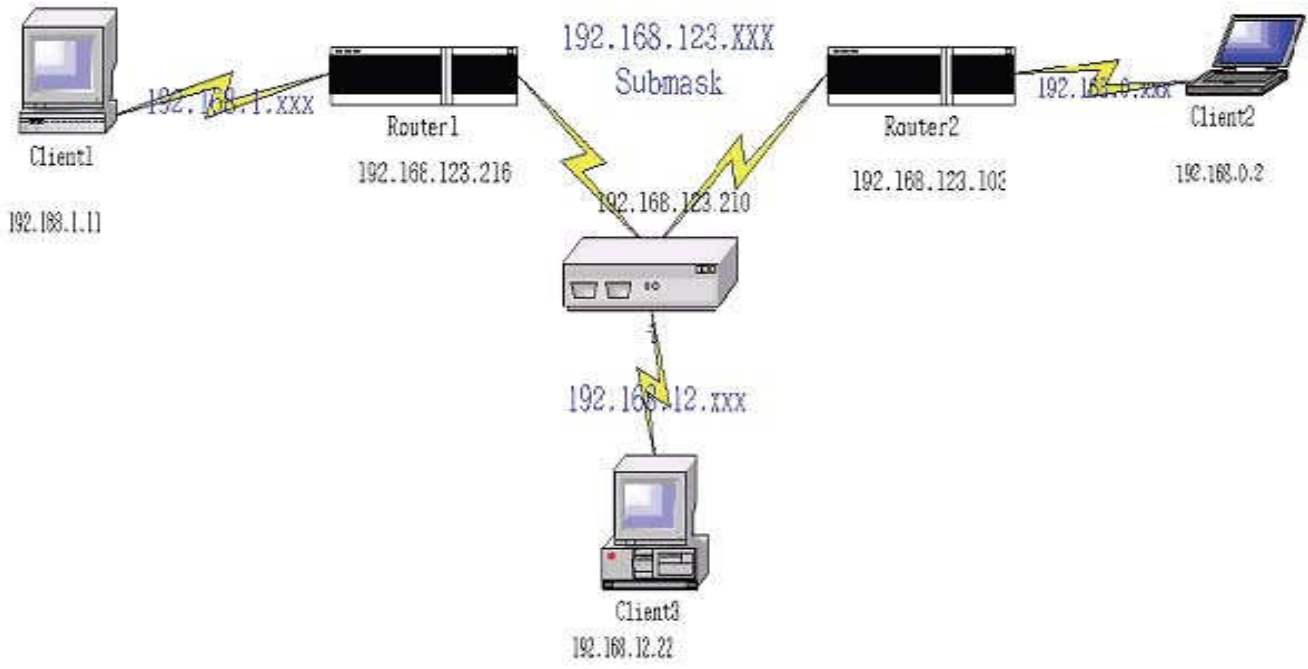

Destination	Subnet Mask	Gateway	Hop	Enabled
192.168.1.0	255.255.255.0	192.168.123.216	1	✓
192.168.0.0	255.255.255.0	192.168.123.103	1	✓

So if, for example, Client3 wants to send an IP data packet to 192.168.0.2, it would use the above table to determine that it had to go via 192.168.123.103 (Router 2)

And if it sends Packets to 192.168.1.11 will go via 192.168.123.216 (Router 1)
 Each rule can be enabled or disabled individually.

After **routing table** setting is configured, click the **save** button.

System Time

This page allows you to set the time settings of the WBR-6022.

System Time [Help]	
Item	Setting
▶ Time Zone	(GMT+08:00) Beijing, Chongqing, Hong Kong, Urumqi ▼
▶ Auto-Synchronization	<input checked="" type="checkbox"/> Enable Time Server (RFC-868): Auto ▼
<input type="button" value="Save"/> <input type="button" value="Undo"/>	
<input type="button" value="Sync with Time Server"/> <input type="button" value="Sync with my PC (Tuesday July 28, 2009 15:44:46)"/>	

Time Zone: Select the time zone for your location.

Auto-Synchronization: The router will automatically keep sync with a NTP Time Server.

Sync with Time Server: Force the router to sync with a Time Server.

Sync with my PC: The router will use the time set on your computer.

Schedule Rule

This feature allows you to define the time schedule of Virtual Server and Packet Filter rules.

Schedule Rule		[Help]
Item	Setting	
▶ Schedule	<input checked="" type="checkbox"/> Enable	
Rule#	Rule Name	Action
1		New Add
2		New Add
3		New Add
4		New Add
5		New Add
6		New Add
7		New Add
8		New Add
9		New Add
10		New Add
<input data-bbox="507 1115 667 1144" type="button" value=" << Previous "/> <input data-bbox="687 1115 778 1144" type="button" value=" Next >> "/> <input data-bbox="799 1115 858 1144" type="button" value=" Save "/> <input data-bbox="863 1115 1086 1144" type="button" value=" Add New Rule..."/>		

To enable Scheduling, tick **Enable** and click **Save**.

Then create new rules by pressing the **New Add** button.

Schedule Rule Setting [Help]			
Item		Setting	
▶ Name of Rule 1		<input type="text"/>	
▶ Policy		Inactivate <input type="button" value="v"/> except the selected days and hours below.	
ID	Week Day	Start Time (hh:mm)	End Time (hh:mm)
1	Sunday <input type="button" value="v"/>	<input type="text"/>	<input type="text"/>
2	-- choose one -- <input type="button" value="v"/>	<input type="text"/>	<input type="text"/>
3	-- choose one -- <input type="button" value="v"/>	<input type="text"/>	<input type="text"/>
4	-- choose one -- <input type="button" value="v"/>	<input type="text"/>	<input type="text"/>
5	-- choose one -- <input type="button" value="v"/>	<input type="text"/>	<input type="text"/>
6	-- choose one -- <input type="button" value="v"/>	<input type="text"/>	<input type="text"/>
7	-- choose one -- <input type="button" value="v"/>	<input type="text"/>	<input type="text"/>
8	-- choose one -- <input type="button" value="v"/>	<input type="text"/>	<input type="text"/>
<input type="button" value="Save"/> <input type="button" value="Undo"/> <input type="button" value="Back"/>			

Enter the Rule's Name and set the Start and End Times for each day. Then click **Save** to save the new rule.

Once defined, you can use it for Virtual Server and Packet Filters by entering the rule number in the "Schedule Rule#" fields.

5.2.2.3 Toolbox

This section has some basic tools to maintain the WBR-6022's systems.

The screenshot displays the Level One administrator interface. At the top, there is a blue header with the Level One logo on the left and a language dropdown menu set to 'English' on the right. Below the header is a navigation bar with the following items: 'ADMINISTRATOR's MAIN MENU', 'Status', 'Wizard', 'Advanced', and 'Logout'. A secondary navigation bar contains icons and labels for 'BASIC SETTING', 'FORWARDING RULES', 'SECURITY SETTING', 'ADVANCED SETTING', and 'TOOLBOX'. The 'TOOLBOX' tab is highlighted with a red box. On the left side, a vertical sidebar menu is also highlighted with a red box, listing the following options: 'System Info', 'Firmware Upgrade', 'Backup Setting', 'Reset to Default', 'Reboot', and 'Miscellaneous'. The main content area, titled 'Toolbox', contains a list of tools with their descriptions:

- **View Log**
 - View the system logs.
- **Firmware Upgrade**
 - Prompt the administrator for a file and upgrade it to this device.
- **Backup Setting**
 - Save the settings of this device to a file.
- **Reset to Default**
 - Reset the settings of this device to the default values.
- **Reboot**
 - Reboot this device.
- **Miscellaneous**
 - MAC Address for Wake-on-LAN: Let you to power up another network device remotely.
 - Domain Name or IP address for Ping Test: Allow you to configure an IP, and ping the device. You can ping a specific IP to test whether it is alive.

System Info


View the Log of the router. It can also be exported to a text file.

System Information	
Item	Setting
▶ WAN Type:	Dynamic IP Address
▶ Display time	2009/01/02 09:45:29
System Log	
Time	Log
Jan 2 02:45:47	commander: CMD_DHCP_renew: ip=0.0.0.0 nm=0.0.0.0
Jan 2 02:45:48	udhcpd[17816]: udhcpd (v0.9.9-pre) started
Jan 2 03:11:25	udhcpd[18090]: Sending discover...
Jan 2 03:11:28	udhcpd[18090]: Sending discover...
Jan 2 03:11:31	udhcpd[18090]: Sending discover...
Jan 2 03:11:34	udhcpd[18090]: No lease, failing.
Jan 2 03:11:34	udhcpd[18115]: udhcpd (v0.9.9-pre) started
Jan 2 03:11:36	udhcpd[18391]: Received SIGTERM
Jan 2 03:11:38	commander: CMD_DHCP_renew: ip=0.0.0.0 nm=0.0.0.0
Jan 2 03:11:38	udhcpd[18426]: udhcpd (v0.9.9-pre) started
Jan 2 03:24:21	udhcpd[18700]: Sending discover...
Jan 2 03:24:24	udhcpd[18700]: Sending discover...
Jan 2 03:24:27	udhcpd[18700]: Sending discover...
Jan 2 03:24:30	udhcpd[18700]: No lease, failing.
Jan 2 03:24:31	udhcpd[18721]: udhcpd (v0.9.9-pre) started

Page: 1/67 (Log Number: 1000)

Firmware Upgrade

This page allows you to perform updates to the firmware of the WBR-6022.

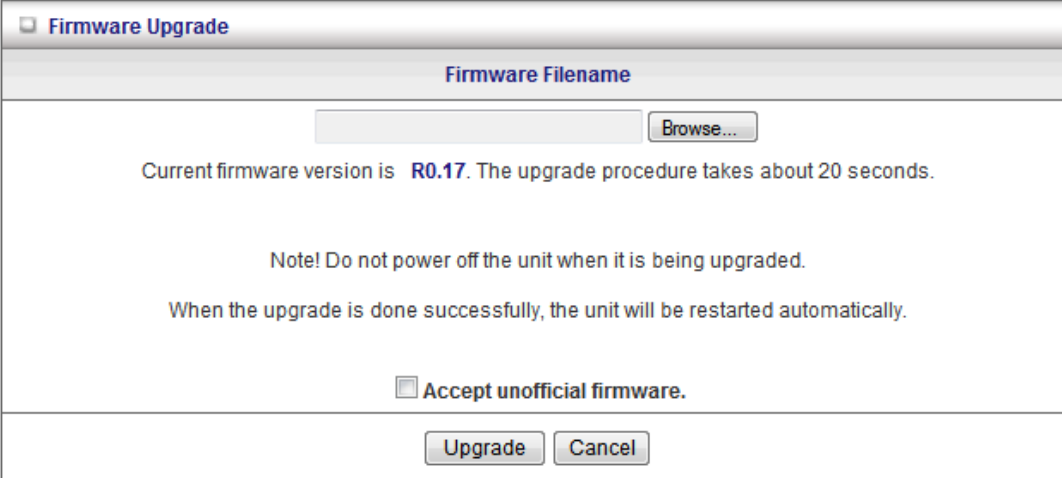

The screenshot shows a dialog box titled "Firmware Upgrade". At the top, there is a header bar with the title. Below the header, the text "Firmware Filename" is displayed above a text input field and a "Browse..." button. The main content area contains the following text: "Current firmware version is **R0.17**. The upgrade procedure takes about 20 seconds." followed by a "Note! Do not power off the unit when it is being upgraded." and "When the upgrade is done successfully, the unit will be restarted automatically." Below this is a checkbox labeled "Accept unofficial firmware." At the bottom of the dialog, there are two buttons: "Upgrade" and "Cancel".

To use, click **Browse** and locate the firmware image file, then click **Upgrade**.

Note: Please connect to the WBR-6022 using a wired LAN connection as if the connection breaks during the update, it will render the unit unworkable. Also disable any anti-virus or firewall program before beginning the update.

Accept unofficial firmware: Force the router to accept unofficial firmware files. LevelOne does NOT recommend this function be used.

Backup Setting

You can backup your settings by clicking the **Backup Setting** button and save it as a bin file. Once you want to restore these settings, please click **Firmware Upgrade** button and use the bin file you saved.

Reset to Default

You can also reset the unit back to factory default settings by clicking the **Reset to Default** button and click OK. Please wait while the unit reboots.

Reboot

To reboot the unit manually, click the **Reboot** button and click OK.

Miscellaneous Items

Miscellaneous Items [Help]	
Item	Setting
▶ MAC Address for Wake-on-LAN	<input type="text"/> <input type="button" value="Wake up"/>
▶ Domain Name or IP address for Ping Test	<input type="text"/> <input type="button" value="Ping"/>
<input type="button" value="Save"/> <input type="button" value="Undo"/>	

MAC Address for Wake-on-LAN

Wake-on-LAN is a technology that enables you to power up a networked device remotely. In order to enjoy this feature, the target device must be Wake-on-LAN enabled and you have to know the MAC address of this device, say 00-11-22-33-44-55. Clicking "Wake up" button will make the router to send the wake-up frame to the target device immediately.

Domain Name or IP Address for Test

Allow you to configure an IP, and ping the device. You can ping a specific IP to test whether it is alive.

Appendix A 802.1x Setting

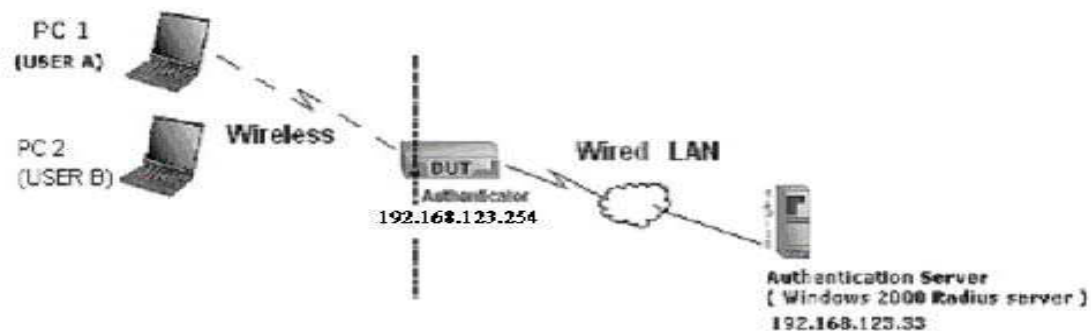


Figure 1: Testing Environment (Use Windows 2000 Radius Server)

Equipment Details

PC1: Microsoft Windows XP Professional without Service Pack 1 and LevelOne Wireless PCI Card

PC2: Microsoft Windows XP Professional with Service Pack 1a or later and LevelOne Wireless PCI Card.

Authentication Server: Windows 2000 RADIUS server with Service Pack 3 and HotFix Q313664.



Note. Windows 2000 RADIUS server only supports PEAP after upgrade to service pack 3 and HotFix Q313664 (You can get more information from <http://support.microsoft.com/default.aspx?scid=kb;en-us;313664>)

DUT Configuration:

1. Enable DHCP server.
2. WAN setting: static IP address.
3. LAN IP address: 192.168.123.254/24.
4. Set RADIUS server IP.
5. Set RADIUS server shared key.
6. Configure WEP key and 802.1X setting.

The following test will use the inbuilt 802.1X authentication method such as ,EAP_TLS, PEAP_CHAPv2(Windows XP with SP1 only), and PEAP_TLS(Windows XP with SP1 only) using the Smart Card or other Certificate of the Windows XP Professional.

DUT and Windows 2000 Radius Server Setup

Setup Windows 2000 RADIUS Server

We have to change authentication method to MD5_Challenge or using smart card or other certificate on RADIUS server according to the test condition.

Setup DUT

1. Enable the 802.1X (check the “Enable checkbox”).
2. Enter the RADIUS server IP.
3. Enter the shared key. (The key shared by the RADIUS server and DUT).
4. We will change 802.1X encryption key length to fit the variable test condition.

Setup Network adapter on PC

1. Choose the IEEE802.1X as the authentication method. (Fig 2)
2. Choose MD5-Challenge or Smart Card or other Certificate as the EAP type.
3. If choosing use smart card or the certificate as the EAP type, we select to use a certificate on this computer.
4. We will change EAP type to fit the variable test condition.



Figure 2 is a setting picture of Windows XP without service pack 1. If users upgrade to service pack 1, then they can't see MD5-Challenge from EAP type list any more, but they will get a new Protected EAP (PEAP) option.

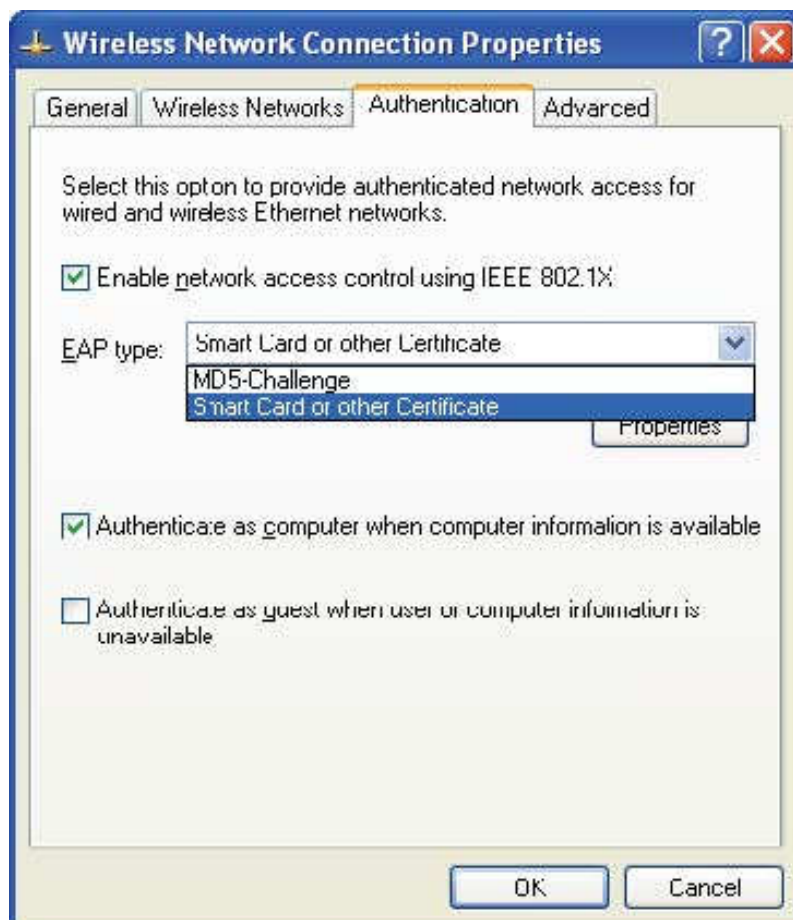


Figure 2: Enable IEEE 802.1X access control / Smart card or certificate properties

Windows 2000 RADIUS server Authentication testing:

DUT authenticate PC1 using certificate. (PC2 follows the same test procedures.)

1. Download and install the certificate on PC1. (Fig 4)
2. PC1 chooses the SSID of DUT as the Access Point.
3. Set authentication type of wireless client and RADIUS server both to EAP_TLS.
4. Disable the wireless connection and enable again.
5. The DUT will send the user's certificate to the RADIUS server, and then send the message of authentication result to PC1. (Fig 5)
6. Windows XP will prompt that the authentication process is success or fail and end the authentication procedure. (Fig 6)
7. Terminate the test steps when PC1 get dynamic IP and PING remote host successfully.

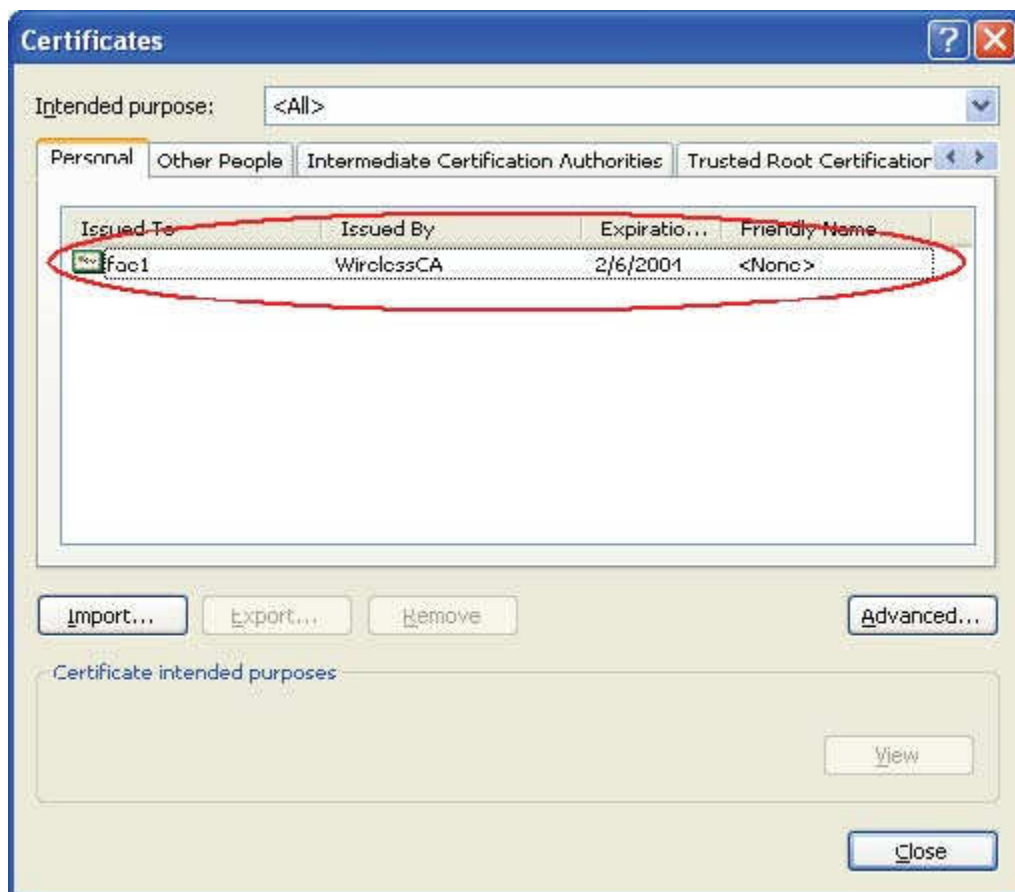


Figure 4: Certificate information on PC1

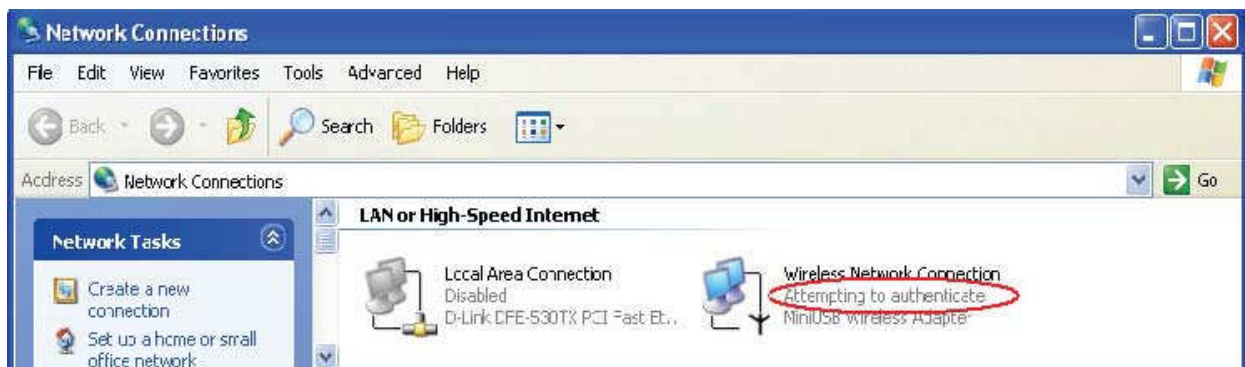


Figure 5: Authenticating

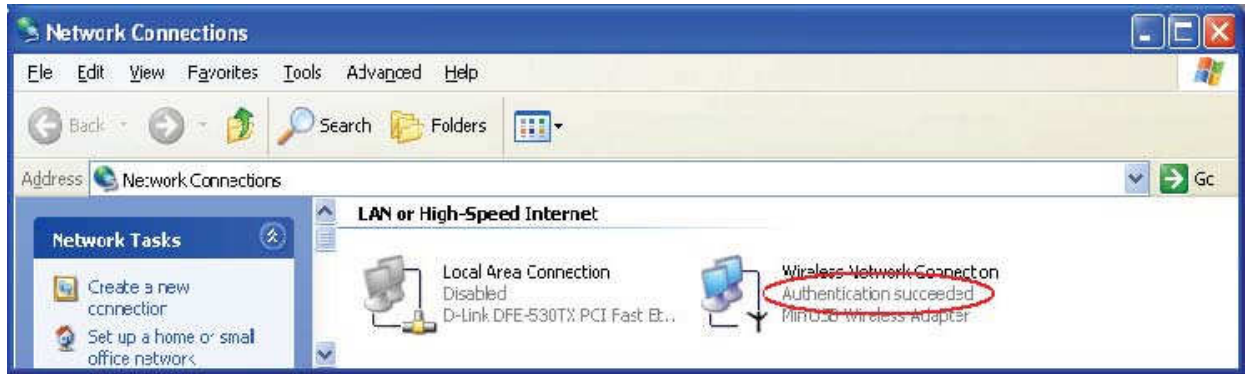


Figure 6: Authentication success

DUT authenticate PC2 using PEAP-TLS.

1. PC2 chooses the SSID of DUT as the Access Point.
2. Set authentication type of wireless client and RADIUS server both to PEAP_TLS.
3. Disable the wireless connection and enable again.
4. The DUT will send the user's certificate to the RADIUS server, and then send the message of authentication result to PC2.
5. Windows XP will prompt that the authentication process is success or fail and end the authentication procedure.
6. Terminate the test steps when PC2 get dynamic IP and PING remote host successfully.


Support Type: The router supports the types of 802.1x Authentication: PEAP-CHAPv2 and PEAP-TLS.

Appendix B FAQ and Troubleshooting

What can I do when I have some trouble at the first time?


1. Why can't I configure the router even if the cable is plugged in the ports of Router and the LED is also lit?

A: First, make sure that which port is plugged. If the cable is in the WAN port, please change to plug in LAN port 1 or LAN port 4:

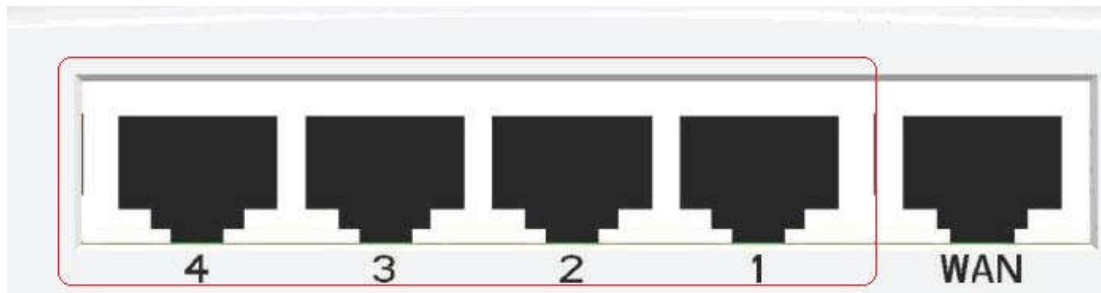

Then, please check if your PC can get an IP address from the Router.

Click Start, Run

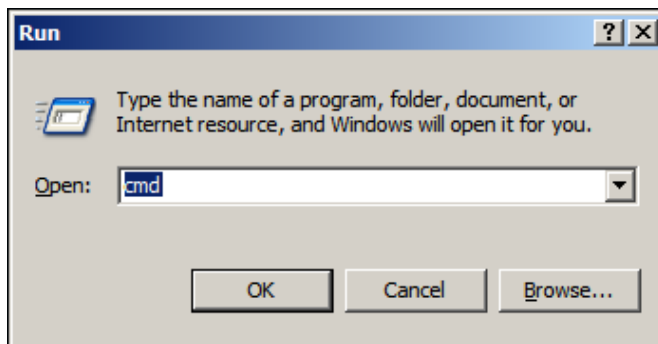

Type **CMD** and then click "OK"

Type **ipconfig** in the command prompt as shown below.

```
Connection-specific DNS Suffix . :  
IP Address . . . . . : 192.168.0.169  
Subnet Mask . . . . . : 255.255.255.0  
Default Gateway . . . . . : 192.168.0.1
```

If you see that your PC has an IP address, then open your Web-Browser, and type 192.168.0.1 in the address bar.

If not, please type **ipconfig /release**, then **ipconfig /renew**, to update your IP address.

2. Why can't I connect the router even if the cable is plugged in LAN port and the LED is light?

A: First, please check Status LED. If the device is normal, the LED will blink once per second. If not, please check the blinking Status LED as shown:

Status LED stays constantly on or off:

The system is frozen. Suggest powering off and on the router. If this symptom continues to occur, please reset to default settings or upgrade to the latest firmware and try again.

Status LED flashes irregularly: There is an error in the system. Please reset to default settings and reboot the router.

3. How to reset to factory default?

A: There are 2 methods to reset to default.

Method 1) Restore with RESET button (WLAN and WPS together)

First, turn off the router. Then press the WLAN and WPS buttons together and power on the router. Keep the buttons pressed until the Status LED starts flashing, and then remove your fingers. If the Status LED flashes about 8 times, the RESTORE process is completed. However, if LED flashes 2 times, repeat steps and try again.

Method 2) Restore directly when the router power on

First, push the WLAN and WPS buttons for about 5 seconds (Status will start flashing about 5 times), remove the finger. The RESTORE process is completed.

4. Why can I not connect to the Internet even though the cables are plugged in WAN port and LAN port and the LEDs are blink? In addition, the Status LED is also normal and I can configure the web management?

A: Make sure that the network cable from DSL or Cable modem is plugged in WAN port of Router and that the network cable from LAN port of router is plugged in Ethernet adapter. Then, please check which WAN type you use. If you are not sure, please call the ISP. Then please go to this page to input the information given to you by your ISP.

Primary Setup [Help]	
Item	Setting
▶ LAN IP Address	<input type="text" value="192.168.0.1"/>
▶ WAN Type	Dynamic IP Address ▼
▶ Host Name	Static IP Address <input type="text"/> (optional) Dynamic IP Address
▶ ISP registered MAC Address	PPP over Ethernet <input type="button" value="Clone"/> PPTP L2TP
▶ Connection Control	Connect-on-Demand ▼
▶ NAT disable	<input type="checkbox"/> Enable

5. When I use Static IP Address to connect to the Internet, I can access or ping global IP addresses such as 202.93.91.218. However, I cannot access the a website by using its domain name, for example <http://espn.com> ?

A: Please check the DNS configuration of Static IP Address. Please refer to the information of ISP and assign one or two DNS servers.

How do I connect router by using wireless?

1. How to start to use wireless?

A: First, make sure that you already installed wireless client device in your computer. Then check the configuration of wireless router. The default is below:

Wireless Setting [Help]	
Item	Setting
▶ Wireless Module	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
▶ Wireless Operation Mode	AP mode ▼
▶ Network ID(SSID)	WBR-6022
▶ SSID Broadcast	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
▶ Channel	Auto ▼
▶ Wireless Mode	11 B/G/N mixed ▼
▶ Security	None ▼
<input type="button" value="Save"/> <input type="button" value="Undo"/> <input type="button" value="WDS Setting..."/> <input type="button" value="WPS..."/> <input type="button" value="Wireless Client List..."/>	

About wireless client, you will see wireless icon:



Then click and will see the AP list that wireless client can be accessed:


The screenshot shows a network management interface with the following components:

- Navigation Menu:** Profile, Network (selected), Advanced, Statistics, WMM, WPS, CCX, Radio on/off.
- AP List Table:**

Sorted by >>	SSID	Channel	Signal	AP List >>
	5400lab	11	13%	[Signal Bar]
	WAP	1	31%	[Signal Bar]
	MeetingRoom	7	94%	[Signal Bar]
	PM_AP	3	23%	[Signal Bar]
	PMWBR-6001	7	100%	[Signal Bar]
	QC-6000	11	31%	[Signal Bar]
	▶ WAP-0003	6	73%	[Signal Bar]
- Buttons:** Rescan, Add to Profile, Connect.
- Connection Details (for WAP-0003):**
 - Status >> WAP-0003 <-> 00-11-6B-60-6A-C5
 - Extra Info >> Link is Up [TxPower:100%]
 - Channel >> 6 <-> 2437 MHz
 - Authentication >> Open
 - Encryption >> WEP
 - Network Type >> Infrastructure
 - IP Address >> 169.254.12.208
 - Sub Mask >> 255.255.0.0
 - Default Gateway >> 0.0.0.0
- Performance Metrics:**
 - Link Quality >> 84%
 - Signal Strength 1 >> 70%
 - Noise Strength >> 26%
 - Transmit Link Speed >> 54.0 Mbps
 - Throughput >> 27.792 Kbps

If the client cannot find your wireless router, please refresh network list again. Choose the one that you will want to connect and connect:

If successfully, the computer will show something similar.

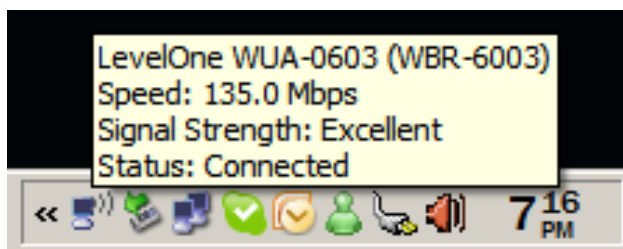

User will also retrieve IP from router, for example:

```


Connection-specific DNS Suffix . :
IP Address . . . . . : 192.168.0.169
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 192.168.0.1
  
```

2. How can I use AES encryption of WPA-PSK to connect?

A: First, you must check if the driver of wireless client supports AES encryption. Please refer to the below:



If SSID is default and click “Properties” to check if the driver of wireless client supports AES encryption.

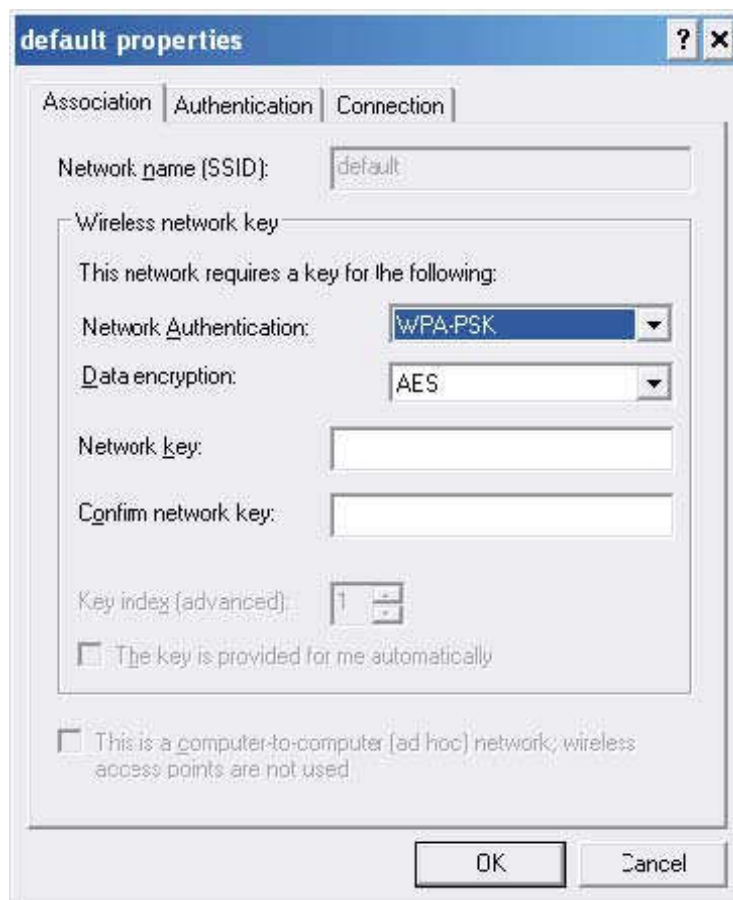

3. When I use wireless to connect the router, but I find the signal is very low even if I am close to the router?

A: Please check if the wireless client is normal, first. If yes, please send the unit to the seller and verify what the problem is.

Technical Specifications

General	
Model	WBR-6022 <i>Wireless HomeGuard 22 Router</i>
Data Transfer Rate	1, 2, 5.5, 6, 9, 11, 12, 18, 24, 36, 48, 54Mbps Max physical rate up to 300 Mbps in 802.11n mode
Transmit Power	802.11b: 17±2dBm 802.11g: 15±2dBm 802.11n: 14±2dBm
Frequency Range	America/ FCC: 2.412~2.462GHz (11 Channels) Europe/ ETSI: 2.412~2.472GHz (13 Channels)
Modulation Schemes	DBPSK/DQPSK/CCK/OFDM
Channels	1~11 channels (FCC), 1~13 channels (ETSI),
Security	WEP Encryption, WPA-PSK, WPA2-PSK, WPA, WPA2, 802.1x
Diagnostic LED	Sleep Status WAN WLAN LAN
Antenna	2x 2dbi Removable and 1x 2dbi Internal Antennas
Physical and Environmental	
Operating Systems Supported	Windows 2000, Windows XP, Windows Vista, Linux, MAC OSX
Temperature	Operating: 0° ~ 40° C, Storage: -20° ~ 70° C
Humidity	10% ~ 85% RH, no condensation
Dimensions	187mm (L) x 112mm(W) x 29mm (D)
Certifications	FCC, CE