

# NanoSync IV



## Military-Grade Position, Navigation, Timing (PNT) & Frequency Reference System, With SAASM GPS

- Suitable for Fixed, Ground Mobile, Airborne and Maritime Systems
- Flexible Choice of SAASM Receivers for Specific Applications
- Rubidium Atomic Clock for High Precision Time & Frequency Outputs with Extended Holdover Performance when GPS is Degraded or Denied
- Ethernet Interface Supporting PTPv2 Grandmaster, NTP & Status & Control For Network-Based Applications
- JASA Version 3, Annex 1, TFNG Compliant

▶ High Performance Position & Navigation Engine

▶ Precise Time & Frequency Reference

▶ COTS for Military Applications

▶ Compact, Rugged Design

▶ Low Power - < 20W Steady-State

▶ Wide Operating Temperature Range

▶ No Maintenance Required

# NanoSync IV

## FEATURES

- Accuracy
  - Time: < 25 ns to UTC
  - Frequency: 1E-12 (24 hour average)
- SAASM GPS Receiver Options
  - Trimble Force 22E
  - Rockwell Collins MPE-S
- Status & Control Ports
  - RS-232 Serial
  - 10/100 Ethernet
- Standard Output Configuration
  - (2) 1 PPS
  - (2) 10 MHz
  - NTP v2, v3, v4
  - PTPv2 IEEE 1588-2008
  - Time Code Output:
    - User Programmable
    - BCD: 24b or 40b
    - HaveQuick:
      - HQ2 (STANAG 4246)
      - PTTI HQ (ICD-GPS-060)
      - XHQ (STANAG 4430)
      - IRIG: B02x (x=2,3,6,7)

## Options:

- Low g-sensitivity Oscillator for High Vibration & Shock Environments
- 704A / 1275D Compliant Input Power Option
- EMI Gasket for MIL-STD-461G compliance (RE & RS)
- Combination EMI/Drip Proof Gasket for MIL-STD-810E Rain/Drip (Method 506.5)
- MIL Circular Connectors (5015 or 38999 Series as req.) for ruggedization, EMI / Drip

Custom Options Available,  
For More Information Call:  
888-886-7465



## Model 424 Position, Navigation, Time (PNT) and Frequency Reference System, With SAASM GPS





The NanoSync IV is a small form factor GPS Position, Navigation, Time (PNT) and Frequency reference system that provides multiple reference outputs and includes support for NTP & PTPv2 IEEE 1588-2008. The NanoSync IV has a Rubidium oscillator and is equipped with a SAASM receiver (Rockwell-Collins MPE-S GB-GRAM or Trimble Force 22E MRU) for military users. The NanoSync IV is packaged in a small, rugged enclosure ideally suited for embedded electronic warfare applications.

The NanoSync IV incorporates proven features designed into all FEI-Zyfer products, including exceptional holdover performance when GPS signals are lost or degraded. This assures continued system operation as a time and frequency reference. The NanoSync IV can be monitored and controlled through an RS-232 port using FEI-Zyfer's Serial Communication Protocol and via the 10/100Base-TX RJ-45 Ethernet port.

As with all FEI-Zyfer time and frequency products, the NanoSync IV incorporates advanced, proprietary learning algorithms that compensate for external temperature changes and aging characteristics of the oscillator while operating in holdover. This FEI-Zyfer feature ensures accuracy and consistent performance throughout the specified operating temperature range.



Status LEDs, Key Load Port, PLGR/DAGR Port & Zeroize switch

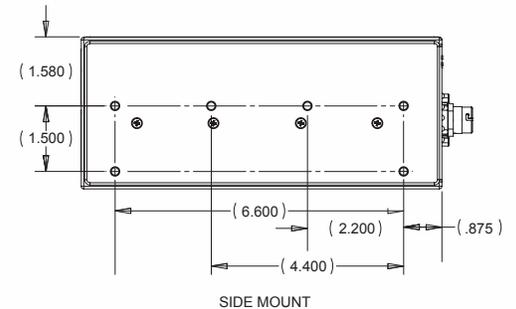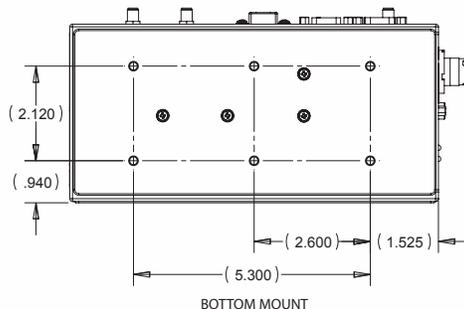

## NanoSync IV Mounting

## Output Specifications

### 10 MHz Output:

Waveform:	Sine wave, AC coupled
Connectors:	(2) SMA Female
Amplitude:	13 dBm +3/-1 dBm @ 50 Ω
Coherency:	Coherent to 1 PPS
Harmonic Distortion:	≤ -50 dBc
Non-Harmonic Distortion:	≤ -60 dBc

### Frequency Accuracy:

- **Locked to GPS:**  
≤ 1E-12 (24 hr. average)
- **Holdover with FE-5680B Rb Atomic Clock (a):**  
≤ 7.5E-11 (at 24 hours, ± 10 °C change)

### Phase Noise:

10 Hz:	≤ -100 dBc/Hz
100 Hz:	≤ -125 dBc/Hz
1 kHz:	≤ -145 dBc/Hz

### Short Term Stability (Allan Deviation, typical):

1 second:	≤ 3E-11
10 seconds:	≤ 1E-11
100 seconds:	≤ 3E-12

### 1PPS Output (b):

Connectors:	(2) SMA Female
Drive Level:	TTL into 50 Ω
Pulse Width:	2 ms
Synchronization:	Rising edge on-time
Pulse Rise Time:	≤ 20 ns
1PPS Jitter:	± 5 ns 2σ (95 %)

### Time Accuracy:

- **Locked to GPS:**  
< 25 ns 2σ (95 %) to UTC
- **Holdover with FE-5680B Rb Atomic Clock (a):**  
@ 24 hours after 48 hrs locked operation: < 4.3 μs

### Time Code Output Options (User Programmable):

Connector:	(1) SMA Female
BCD:	24b or 40b
HaveQuick:	
- HaveQuick 2 (STANAG 4246)	
- PTTI HaveQuick (ICD-GPS-060)	
- Extended HaveQuick (STANAG 4430)	
IRIG:	B02x (x=2,3,6,7)

### GPS Antenna Interface:

Power:	5 VDC @ 100 mA
Connector Type:	SMA Female
Input Gain Required:	+10 dB

### Notes:

- (a) After 48 hours of GPS locked operation, fixed antenna location and antenna delays entered.
- (b) 1 PPS output can be disabled until GPS lock is achieved and time offset error is less than a user programmable amount.

Specifications subject to change without notice.

## Status & Control Ports:

### Serial Port:

Interface:	RS-232C
Connector:	(1) DE-9 (9-pin D-sub), Female
Baud Rate:	19200 Fixed
	1 Start Bit, 8 Data Bits, 1 Stop Bit
	No Parity
Protocol:	FEI-Zyfer Serial Comm Protocol

### Ethernet Port:

Ethernet Type:	10/100Base-TX
Connector:	RJ-45
Configuration:	IPv4, IPv6 address, netmask & gateway user-selectable
Compatibility:	TCP/IP, Ethernet ver. 2.0 / IEEE 802.3 TELNET, SSH, SNMP (v1, v2c, v3)

### Time & Synchronization Protocols:

- **NTP v2, v3, v4 & SNTP v4**  
NTP Server Performance: Stratum 1  
Client synchronization accuracy: 1-10 ms (typical)  
NTP requests per second: ≥ 100
- **PTPv2 Grandmaster Performance:**  
Packet throughput: > 100 Delay Requests/second

### Input Voltage / Power Consumption:

- **Standard: + 24 VDC (18 to 28 VDC)**  
(externally regulated)  
Warm Up: 40 W maximum @ 25 °C  
Warm Up time: ≤ 10 minutes  
Steady State: 20 W maximum @ 25 °C
- **Option: 704A / 1275 D Compliant (15 to 33 VDC)**  
Warm Up: 50 W maximum @ 25 °C  
Warm Up time: ≤ 10 minutes  
Steady State: 30 W maximum @ 25 °C

Note: Input return connected to chassis/signal ground

### Key Load Interface:

- Electrical Interface per IS-GPS-154C & IS-GPS-164
- Communication Protocol per DS-102

### PLGR/DAGR Interface:

- Electrical Interface per IS-GPS-154C & IS-GPS-164 (RS-232 I/O and 1 PPS I/O supported)
- Serial Interface Protocol per IS-GPS-153C

### Chassis Dimensions:

Height:	3.50" (89 mm)
Width:	4.02" (102 mm) excluding I/O connectors
Length:	8.27" (211 mm) excluding connectors
Weight:	< 4.9 lbs. (2.2 kg)

### Environmental:

Operating Temperature:	-20 °C to 50 °C (@ Baseplate)
Rate of Change:	10 °C / Hour maximum
Storage Temperature:	-40 °C to +100 °C
Relative Humidity:	5 % to 95 %, non-condensing
Altitude, Operating:	0 to 15000 feet
Altitude, Storage:	0 to 40000 feet

Additional information on our website:

- NanoSync IV User Manual
- NanoSync IV Serial Comm. Protocol Manual

Visit [www.fei-zyfer.com](http://www.fei-zyfer.com)

## SAASM Receiver Options\*

### Trimble Force 22E (MRU) GRAM SAASM Receiver

**For Use in Man-Portable through High Dynamic Environments:**

- Velocity (High Dynamic Limit): Up to  $\pm 400$  meters/sec
- Acceleration (High Dynamic Limit): Up to  $\pm 40$  meters/sec<sup>2</sup>
- Jerk (High Dynamic Limit): Up to  $\pm 4$  meters/sec<sup>3</sup>

**All-in-view 24 Channel Receiver, with continuous independent tracking:**

- Simultaneous L1 (C/A, P(Y)) and L2 (P(Y)) Dual Frequency Tracking
- Receiver Interface Protocols: ICD-TNL-153C, ICD-TNL-167 SHCI, NMEA 0183 v3.2

**Time Accuracy:**

- UTC(USNO):  $\leq 100$  ns  $1\sigma$  (68.3 %)
- GPS Time:  $\leq 40$  ns  $2\sigma$  (95.5 %)

**Acquisition Time /TTFF:**

- Hot Start:  $\leq 10$  seconds
- Warm Start:  $\leq 60$  seconds

**Position & Velocity Accuracy (in State 5, L1&L2, WAGE enabled & within operating parameters):**

- SDGPS:  $\leq 2$  meters CEP
- WAGE:  $\leq 4$  meters CEP
- Velocity (High Dynamic Environment): 0.1 meters/sec (RMS)

### Rockwell Collins MPE-S GB-GRAM SAASM Receiver

**For Use in Man-Portable, Surface Vehicle or Low Dynamic Environments**

**US Army Standard Embedded Receiver:**

- Velocity (Surface Vehicle Limit): Up to  $\pm 25$  meters/sec
- Acceleration (Surface Vehicle Limit): Up to  $\pm 3$  meters/sec<sup>2</sup>
- Jerk (Surface Vehicle Limit): Up to  $\pm 2$  meters/sec<sup>3</sup>

**All-in-view 12 Channel Receiver, with continuous independent tracking:**

- Simultaneous L1 (C/A, P(Y)) and L2 (P(Y)) Dual Frequency Tracking
- Receiver Interface Protocols: ICD-TNL-153C, NMEA 0183 v3.2
- RAM/FLASH and FLASH/FLASH versions of the MPE-S available and supported

**Time Accuracy (in State 5, L1&L2, WAGE enabled & within other operating parameters)::**

- UTC(USNO):  $\leq 200$  ns  $2\sigma$  (95.5 %)
- GPS Time:  $\leq 52$  ns  $2\sigma$  (95.5 %)

**Acquisition Time /TTFF:**

- Hot Start:  $\leq 10$  seconds
- Warm Start:  $\leq 90$  seconds

**Position & Velocity Accuracy (in State 5, L1&L2, WAGE enabled & within operating parameters):**

- SDGPS:  $\leq 2$  meters CEP
- WAGE:  $\leq 4$  meters CEP
- Velocity (Surface Vehicle): Better than 4.0 meters/sec (3D,  $2\sigma$ )

**Supports GB-GRAM Type I and Type II Form-Factors**

\* U.S. Government policy restricts the sale of Precise Positioning Service (PPS) equipment to those authorized by the U.S. Department of Defense. Non-U.S. authorized users must purchase PPS equipment through the Foreign Military Sales (FMS) process.

FEI-Zyfer, Inc.

7321 Lincoln Way

Garden Grove, CA 92841

Toll-free: 888-886-7465

Main: 714-933-4000

Fax: 714-933-4001

E-mail:

[sales@fei-zyfer.com](mailto:sales@fei-zyfer.com)

[www.fei-zyfer.com](http://www.fei-zyfer.com)

Designed, Manufactured and  
Supported in the U.S.A

