

QuickDraw® BOILER WATER

NICKELSHIELD® NICKEL-PLATED INSTANTANEOUS PACKAGED WATER HEATER

SINGLE-WALL HEAT EXCHANGER


MODEL NUMBER	GPM RECOVERY @ 200°F BOILER WATER		BOILER WATER PUMP MOTOR 120V, 1Ø, 60 Hz.		COLD INLET NPT	HOT OUTLET NPT	BOILER WATER CONNECTION NPT		APPROX SHIP WEIGHT
	40 to 120°F	40 to 140°F	HP	AMPS			INLET	OUTLET	
10 N A-IW	10	6.2	1/3	8	3	2	3	1-1/4	820 #
20 N A-IW	20	12.1	1/3	8	3	2	3	1-1/4	830 #
45 N A-IW	45	27.8	1	16	3	3	4	2-1/2	900 #

Recoveries are based on a 20°F boiler water temperature drop.
For other boiler water temperatures see form PV 6362.

Maximum electrical requirements: 120V, 1Ø, 60 Hz., 24 amps, to single point connection

Intra-tank Circulators:

	HP	Amps	Volts
10 N A-IW	1/7	1.7	120V, 1Ø, 60 Hz.
20 N A-IW	Pump Not Required for Temperature Control Accuracy		
45 N A-IW	1/3	8	120V, 1Ø, 60 Hz.

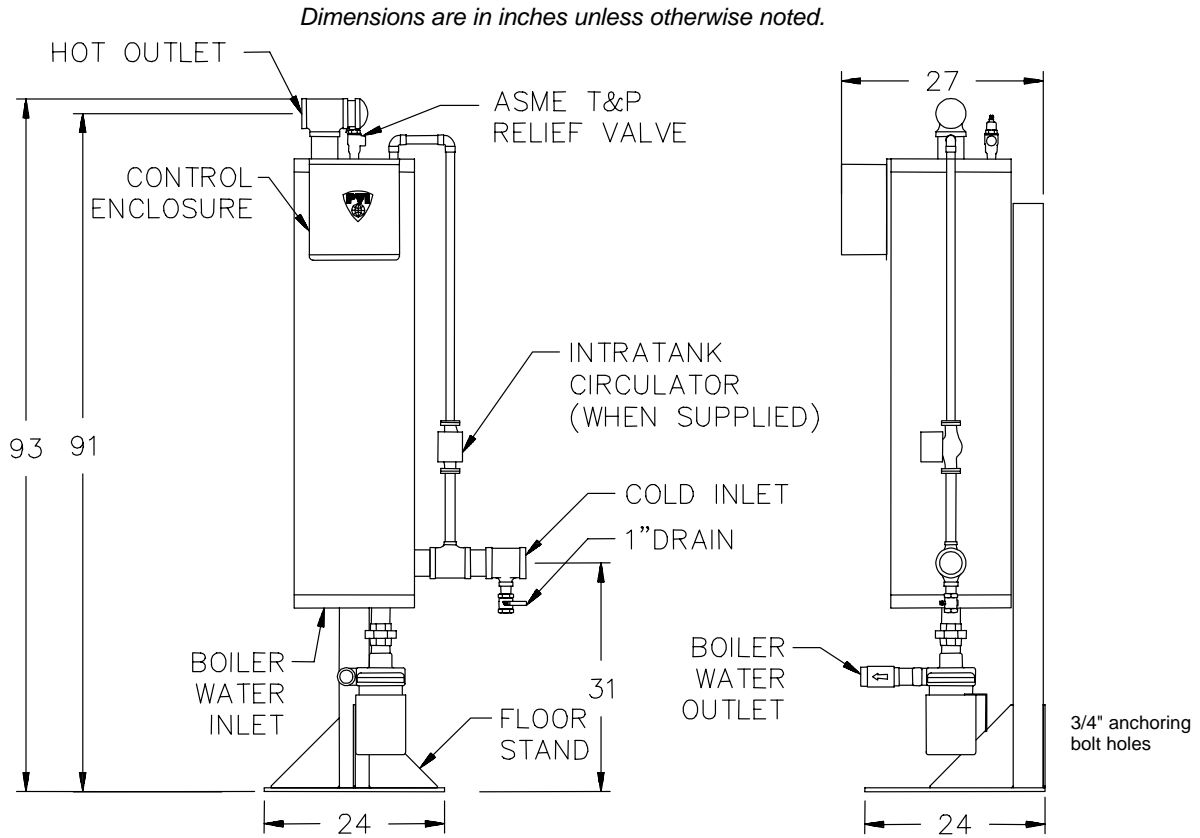

PVI INDUSTRIES, INC.
FORT WORTH, TEXAS 76111
(800) 784-8326

