

DC2 – Rugged 10.4" Touch Panel PC

- **10.4" 4:3 TFT LCD with capacitive touch panel**
- **1024 x 768 pixels resolution**
- **Intel® Atom™ processor**
- **2 Fast Ethernet, 2 USB**
- **Wide-range PSU, 12/24 VDC nom.**
- **-40 to +85°C operating temperature**
- **Fanless and maintenance-free design**
- **Compliant to ISO 7637-2 (E-mark for automotive), IP65 (front), IP20 (rear)**
- **Windows® XP Embedded image (120-day trial version)**



The panel PC DC2 is a rugged, fanless and maintenance-free human-machine interface (HMI) for interactive applications in transportation and industrial automation. It is designed for panel mounting and equipped with a 10.4" 4:3 LCD TFT display with a capacitive touch panel.

The DC2 is controlled by the Intel® Atom™ XL Z520PT running at 1.33 GHz and comes with 1 GB of DDR2 SDRAM and a built-in 2-GB microSD™ card. The standard interfaces comprise 2 Fast Ethernet (via RJ45 connectors) and 2 USB ports as well as four binary inputs (via the 10-pin power supply connector).


The two Ethernet interfaces have switch functionality to provide Ethernet connection to subsequent intelligent displays. A temperature sensor is provided to monitor and control the display. All I/O signals are concentrated at the bottom of the unit.

The DC2 is equipped with an internal 9 to 36 V (12 VDC nom. or 24 VDC nom.) wide-range power supply and able to operate in a -40 to +70°C environment (+85°C for 10 minutes). It complies with the EN 50155, class Tx railway standard when used with an optional includable PSU suited for railway applications. All electronic components are soldered to withstand shock and vibration and prepared for conformal coating.

The unit's control electronics are directly attached to the back of the display, hence bigger screen sizes or other aspect ratios can be realized easily. Further options include other types of the Intel® Atom™ XL processor, M12 connectors for the Ethernet interfaces, a serial interface or GPS adapter that can be added via an SA-Adapter, HD audio via a D-Sub connector and an antenna connector. A PCI Express® Mini card slot (with a SIM card slot) in combination with an external antenna can be used to incorporate wireless functions like GPS, GLONASS, Wi-Fi, WIMAX, GSM/GPRS, UMTS, HSDPA and LTE.

Diagram

- ① Power input connector
- ② USB connectors
- ③ Ethernet connectors
- ④ Optional serial interface
- ⑤ Optional audio interface
- ⑥ Earthing stud

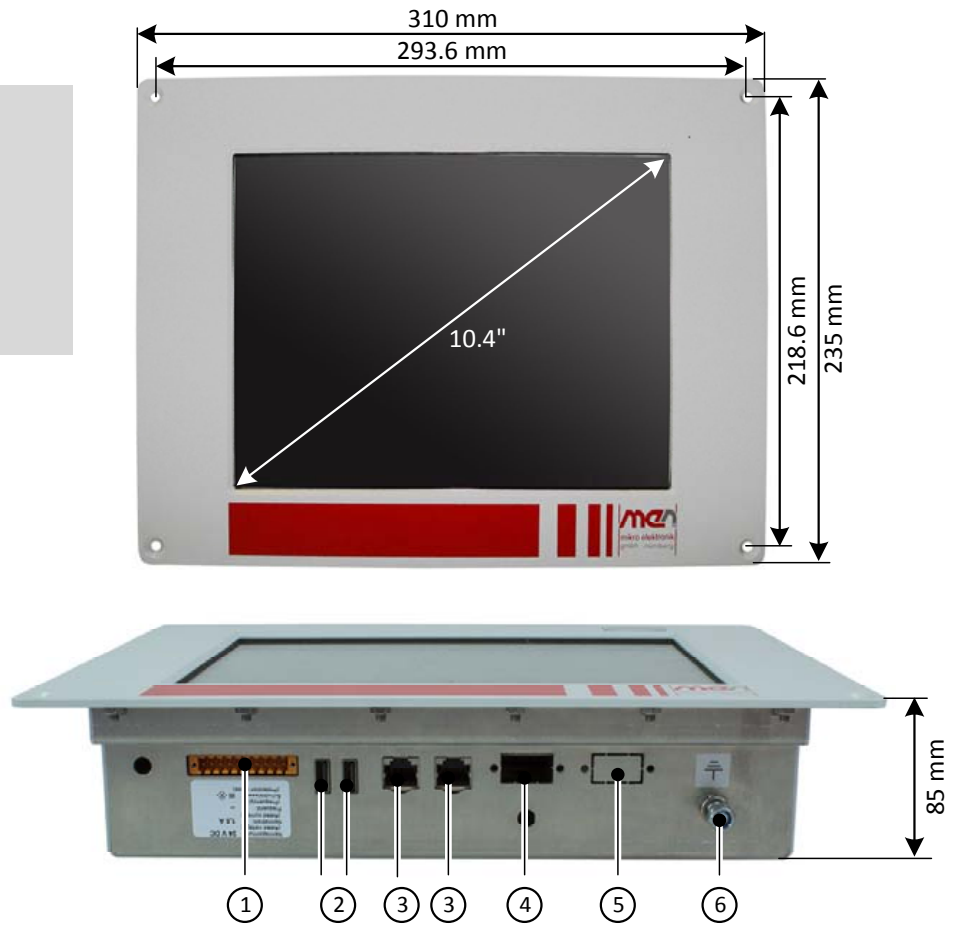

Technical Data

CPU	<ul style="list-style-type: none"> ■ Intel® Atom™ Z520PT <ul style="list-style-type: none"> □ 1.33 GHz processor core frequency □ 533 MHz system bus frequency ■ Chipset <ul style="list-style-type: none"> □ Intel® system controller hub US15W
Display	<ul style="list-style-type: none"> ■ Screen size: 10.4" ■ Resolution: 1024 x 768 (XGA) with aspect ratio 4:3 ■ Luminance: 350 cd/m² ■ Contrast: 1200:1 ■ Response time: Ton+Toff average 25 ms ■ Viewing angle: 176°(H)/176°(V) ■ Backlight with brightness control ■ Interface: LVDS ■ Monitored and controlled by a board management controller (display is turned off at extreme temperatures)
Touch functionality	<ul style="list-style-type: none"> ■ Capacitive touch panel ■ USB-driven touch interface ■ Anti-glare layer
Memory	<ul style="list-style-type: none"> ■ 1 GB DDR2 SDRAM system memory <ul style="list-style-type: none"> □ Soldered □ 533 MHz memory bus frequency ■ microSD™ card slot <ul style="list-style-type: none"> □ 2 GB microSD™ card
I/O	<ul style="list-style-type: none"> ■ USB <ul style="list-style-type: none"> □ Two USB 2.0 host ports □ Accessible via Series A connectors □ UHCI implementation □ Data rates up to 480 Mbit/s ■ Ethernet <ul style="list-style-type: none"> □ Two 10/100Base-T Ethernet channels □ Accessible via RJ45 connectors □ Switch functionality ■ Binary inputs <ul style="list-style-type: none"> □ Four universal binary inputs via 10-pin power connector, e.g., for geographical addressing
Intelligent Power Supply with Controller	<ul style="list-style-type: none"> ■ Input voltage supervision ■ Temperature supervision via LM50 sensor ■ Backlight control (turns off display at configurable temperatures) ■ Buffer functionality for RTC and BIOS CMOS ■ Reset of CPU board possible ■ Wake on time ■ Watchdog ■ Accessible via SMBus
Electrical Specifications	<ul style="list-style-type: none"> ■ Supply voltage: 12 VDC nom. or 24 VDC nom. (9 to 36 V) ■ Power consumption: 12 W typ.
Mechanical Specifications	<ul style="list-style-type: none"> ■ Dimensions: 267 mm x 187.7 mm x 85 mm (electronics), 310 mm x 235 mm (display frame) ■ Weight: 2.3 kg ■ Designed for panel mounting ■ Front protected according to IP65 ■ Rear protected according to IP20

Technical Data

Environmental Specifications	<ul style="list-style-type: none">■ Temperature range (operation):<ul style="list-style-type: none">□ -20..+70°C for the display panel (with automatic switch-off of the display at excess temperatures)□ -40..+70°C, with up to +85°C for 10 minutes according to class Tx (EN 50155) for the computer□ Display is turned off at extreme temperatures□ Conductive cooling□ Fanless operation■ Temperature range (storage): -40..+85°C■ Relative humidity (operation): max. 95% non-condensing■ Relative humidity (storage): max. 95% non-condensing■ Altitude: -300 m to +3000 m■ Shock: according to EN 50155 (10.2.11)■ Vibration: according to EN 50155 (10.2.11)
MTBF	<ul style="list-style-type: none">■ 85 051 h @ 40°C according to IEC/TR 62380 (RDF 2000)
EMC	<ul style="list-style-type: none">■ Conforming to EN 50155, EN 50121-3-2/EN 61000-4-5■ E1 certified by the German Federal Motor Transport Authority
Software Support	<ul style="list-style-type: none">■ Windows® XP Embedded image included (120-day trial version)■ Linux■ For more information on supported operating system versions and drivers see Downloads.

Configuration & Options

Standard Configurations

Article No.	Display	Size	PSU	Processor	Memory	Interfaces
09DC02-00	10.4"	267 mm x 187.7 mm x 85 mm (electronics), 310 mm x 235 mm (display frame)	12/24 VDC nom. (9-36 VDC)	Z520PT, 1.33 GHz	1GB RAM, 2GB MicroSD card	2 Ethernet (RJ45), 2 USB, 4 binary inputs

Options

CPU	<ul style="list-style-type: none"> ■ Intel® Atom™ Z530P, 1.6 GHz, 533 MHz FSB ■ Intel® Atom™ Z510P, 1.1 GHz, 400 MHz FSB ■ Intel® Atom™ Z520PT, 1.33 GHz, 533 MHz FSB ■ Intel® Atom™ Z510PT, 1.1 GHz, 400 MHz FSB
Display	<ul style="list-style-type: none"> ■ Screen size 12", 15", 17" or 19" ■ Other aspect ratios (e.g. 16:10, 15:9) ■ Various resolutions up to 1900x1200 ■ Backlight control via brightness sensor
Memory	<ul style="list-style-type: none"> ■ SATA hard disk drive or solid-state drive ■ USB Flash solid-state drive ■ 2nd microSD™ card slot
I/O	<ul style="list-style-type: none"> ■ Ethernet <ul style="list-style-type: none"> □ 2 Fast Ethernet on M12 connectors ■ HD audio <ul style="list-style-type: none"> □ HD audio codec □ Audio stereo in □ Audio stereo out □ SPDIF out □ All available via 9-pin D-Sub connector ■ Serial interface <ul style="list-style-type: none"> □ 1 serial interface realized via SA-Adapter, e.g., RS232 or RS422, isolated or not, IBIS, GPS
PCI Express® Mini card slot	<ul style="list-style-type: none"> ■ For functions like Wi-Fi, WIMAX, GSM/GPRS, UMTS ■ PCI Express® or USB interface ■ Accessible via, e.g., a reverse SMA connector
Electrical Specifications	<ul style="list-style-type: none"> ■ Additional includable PSU suited for railway applications (EN 50155 compliant)
Mechanical Specifications	<ul style="list-style-type: none"> ■ Front protected according to IP67 ■ Rear protected according to IP40

As the product concept is very flexible, there are many other configuration possibilities. Please contact our sales team if you do not find your required function in the options. Please note that some of these options may only be available for large volumes.

Ordering Information

Standard DC2 Models	09DC02-00	10.4" display and capacitive touch, 9..36V DC input, Intel® Atom™ 1.3GHz, 1GB RAM, 2GB Flash Disk, 2 Fast Ethernet, 2 USB, prepared for UART or fieldbus extension via SA-Adapter, prepared for wireless extensions, -40..+70(+85)°C screened, compliant to ISO 7637-2 (E-mark)
----------------------------	------------------	---

Software: Linux

This product is designed to work under Linux. See below for all available separate software packages.

13MD05-90 MDISS System (and Device Driver) Package (MEN) for Linux. This software package includes most standard device drivers available from MEN.

For a Linux driver package supporting the Micrel KSZ8842-PMQLI Ethernet controller used in the SC21 and the DC2, please refer to www.micrel.com/index.php/en/products/lan-solutions/controllers/article/15-ksz8842-pmql.html. We highly recommend a kernel newer than 2.6.32.

Software: Windows®	This product is designed to work under Windows®. See below for all available separate software packages.	
	10F014-78	Windows® XP Embedded BSP (MEN) for F11S, F14, F15, F17, F18, F19P, F21P, G20, XM1, XM1L, XM2, MM1, MM2, DC1, DC2, DC13, RC1, BC50I, BC50M, BL50W and BL50S
	10Y000-78	Windows® Embedded Standard 7 BSP for F19P, F21P, F22P, F23P, G20, G22, CB70C, CB70, XM2, MM2, BC50M, BC50I, BL50W, BL50S, BC70M, BL70S, BL70W, BL70E, DC2, DC13, F205, F206, F210, F215, F216, G215, P506, P507 and P511
	For a Windows® driver package supporting the Micrel KSZ8842-PMQLI Ethernet controller used in the SC21 and the DC2, please refer to www.micrel.com/index.php/en/products/lan-solutions/controllers/article/15-ksz8842-pmql.html .	
	13XM01-77	Windows® Installset (MEN) for XM1, XM1L, DC1, DC2 and SC21. (Includes all free drivers developed by MEN for the supported hardware.)

For operating systems not mentioned here [contact MEN sales](#).

Documentation	Compare Chart Standard and Custom Panel PCs » Download	
	20DC02-00	DC2 User Manual
	20DC02-ER	DC2 Errata

Contact Information

Germany

MEN Mikro Elektronik GmbH
Neuwieder Straße 3-7
90411 Nuremberg
Phone +49-911-99 33 5-0
Fax +49-911-99 33 5-901

info@men.de
www.men.de

France

MEN Mikro Elektronik SAS
18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33 (0) 450-955-312
Fax +33 (0) 450-955-211

info@men-france.fr
www.men-france.fr

USA

MEN Micro Inc.
860 Penllyn Blue Bell Pike
Blue Bell, PA 19422
Phone (215) 542-9575
Fax (215) 542-9577

sales@menmicro.com
www.menmicro.com

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.

MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication.

MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication.

The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part.

In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.

Copyright © 2015 MEN Mikro Elektronik GmbH. All rights reserved.