

Open Frame LCD

Bar-type Open Frame LCD


19.2" Wide(16:3)

Specifications

RoHS
COMPLIANT
2002/95/EC

Model Name	W19L100-OFM2
Viewable Size Image	19.2" Wide(16:3)
Active Display Area(mm)	478.08(H)x89.64(V)
Pixel Pitch(mm)	0.249X0.249
Number of Pixels	1920x360
Contrast Ratio	700:1(typ.)
Display Color	16.7M(8bit/color)
Brightness(cd/m ²)	500(typ.)
Viewing Angle(CR>=10)	-80~80(H);-60~80(V)
Lamp Life(hrs)	50000
Synchronization Range	31.5~60.0KHz/60~75Hz
Horizontal/Vertical	
Recommended Resolution	1920x360@ 60Hz
Signal Connector	15 pin D-Sub
Power Source	12V DC in, with External AC to DC Adapter (100~240V AC
Power Consumption	25W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Operating Temperature	0°C~50°C
Storage Temperature	-20°C~60°C
Humidity	5~95%
Optional Video Input	No
Optional DVI Input	Yes
Optional Touch Screen	No



Remarks: W19L300 series= VGA / DVI input

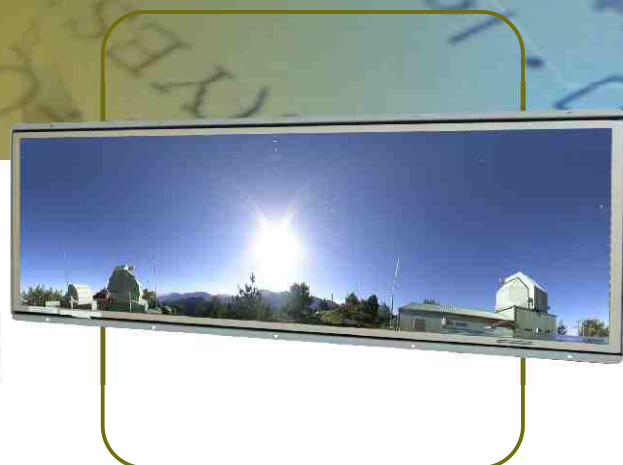

Accessories

VGA cable	D-sub 15 pin male to male	✓
DVI cable	24 pin male to male	✓
User Manual	User guide	✓
User adapter	12V power adapter	✓

Mechanical Drawing: W19L100-OFM2

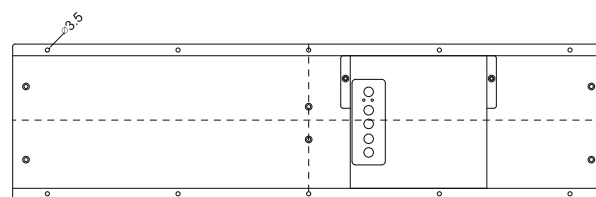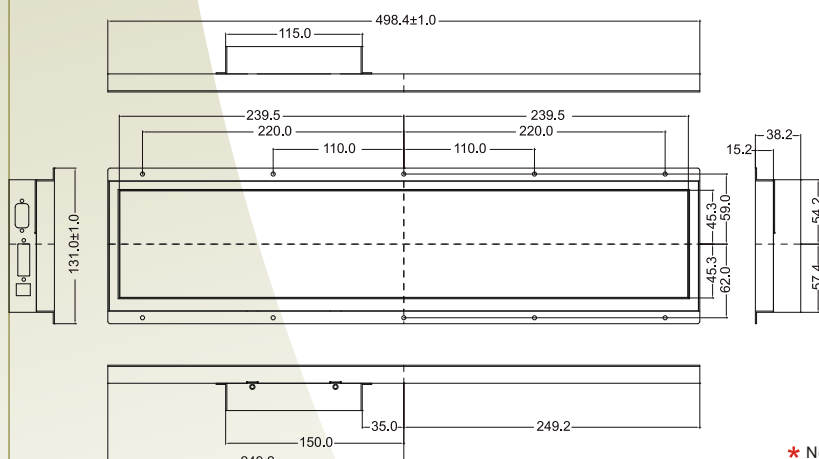

UNIT:mm

* Note: this is a simplified drawing and some components are not marked in detail.
Please contact our sales representative if you need further product information.

Rev.	Reasons	Revised Date
1.0	First release	May-16-11
1.1	Spec Change	Nov-14-12

Open Frame LCD

Bar-type Open Frame LCD

Order Information

Model name	I/O	Type	Touch
W19L300	VGA + DVI	Open frame	N/A

Resolution: 1920x360

- * When device power is on, the resolution will lock in 1920 x 360 automatically, please do not adjust the resolution mode.
- * If the resolution is changed by users, it will recover to 1920 x 360 mode when PC reboots.



Application



Restaurant



Hotel Lobby



Department Store



Retail Store