



Light Duty Commercial Power Direct Vent Energy Saver Gas Water Heater



Photo is of PDX-65S-65FB-3N

The LD Power Direct Vent FVIR Defender Safety System® Models Feature:

- Closed Combustion Venting System—Power Direct Vent closed combustion system utilizes external air for combustion and exhausts directly to the outside through a separate two-pipe system. The air intake and exhaust vent are 3" connections. The equivalent feet of intake venting cannot be greater than the equivalent feet of exhaust venting.
- Flammable Vapor Sensor—Electronic sensor prevents water heater operation if flammable vapors are detected.
- Factory Installed Hydrojet® Total Performance System—Cold water inlet sediment reducing device helps prevent sediment build up in tank. Increases first hour delivery of hot water while minimizing temperature build up in tank.
- Vitraglas® Lining—Bradford White water heater tanks are protected from the corrosive effects of hot water by an exclusive ceramic porcelain-like coating.
- Electronic Gas Control—The integrated, immersion gas control offers more precise temperature control for higher first hour delivery and also allows water temperature adjustment without removing the cover. The control is equipped with an LED display to aid in start-up and diagnostics.
- More Precise Temperature Control—With an adjustable temperature up to 180°F. (Not recommended for 180°F sanitization.)
- Spark to Pilot Ignition System—Eliminates the constant burning pilot used on other water heaters.
- Powerful Blower Motor—Our design has higher torque for greater resistance to outside winds and the power to eliminate problems with difficult venting situations. This significantly quieter motor runs cooler for a considerably longer operational life.
- Optional Concentric Vent Kit Termination—3" termination fitting provides for only one exit opening through a wall or roof. (Subtract 10ft. for intake pipe and 10ft. for exhaust pipe when calculating total vent length.)
- Horizontal and Vertical Venting—With 3" or 4" PVC, ABS, or CPVC (Maximum equivalent vent length for each pipe on reverse side).
- Side Connections—3/4" NPT tappings allow easy connections for space heating applications (Potable water only).
- 2" Non-CFC Foam Insulation—Surrounds the tank surface, saving energy by retarding loss of heat (PDX-65S has 1" Non-CFC Insulation).
- Water Connections— 3/4" NPT factory installed true dielectric fittings extend water heater life and eases installation.
- Factory Installed Heat Traps—Design incorporates a flexible disk that reduces heat loss in piping and eliminates the potential for noise generation.
- Protective Magnesium Anode Rod—Provides added protection against corrosion for long trouble-free service.
- Stainless Steel Flue Baffle—Maximizes the amount of heat absorbed by the tank and reduces heat loss during standby periods.
- Steel Tank—Heavy gauge steel automatically formed, rolled and welded.
- T&P Relief Valve—Included.
- Brass Drain Valve.
- Design Certified by CSA International (formerly AGA and CGA).



3 or 5-Year Limited Tank Warranties / 1-Year Limited Warranty on Component Parts.

For more information on warranty, please visit www.bradfordwhite.com
For products installed in USA, Canada and Puerto Rico. Some states do not allow limitations on warranties. See complete
copy of the warranty included with the heater.

Bradford White received the highest numerical score among water heater/boiler manufacturers in the proprietary J.D. Power and Associates/ McGraw-Hill Construction 2006 HVAC and Water Heater/Boiler Subcontractor Satisfaction Study®. Study based on 882 responses measuring 3 water heater/boiler manufacturers and measures opinions of subcontractors. Proprietary study results are based on experiences and perceptions of subcontractors surveyed in May through July 2006. Your experiences may vary. Visti pipower.com

Commercial Power Direct Vent Gas Water Heater



Light Duty Energy Saver Models

NATURAL GAS AND LIQUID PROPANE GAS

Meet or exceed ASHRAE 90.1b (current standard) C.E.C. Listed 80% Recovery Efficiency

Model Number	Capaci U.S. Im Gal. Ga	1p. l		LP BTU/Hr. Input	Nat. U.S.		Rise LP U.S.	* LP Imp.	A Floor to Exhaust Outlet in.	B Jacket Dia. in.	C Vent Size in.	D Floor to T&P Conn. in.	E Floor to Gas Conn. in.	F Floor to Space Heating Return in.	G Floor to Space Heating Supply in.	H Floor to Air Intake in.	J Floor to Water Conn. in.	K Depth in.	L Ct. Line Distance From Intake to Exhaust in.	Approx. Shipping Weight
PDX-50S-60FB-3N	48 4	0	60,000	60,000	58	48	58	48	68	22	3	521/4	135/8	153/4	521/4	67	593/4	32	91/4	303
PDX-65S-65FB-3N	65 5	4	65,000	60,000	63	52	58	48	711/4	22	3	555/8	135/8	153/4	555/8	691/2	63	321/8	91/4	330
PDX-75S-70FB-3N	75 6	2	70,000	65,000	68	57	63	52	71	26	3	541/4	16 ¹ / ₄	19	541/4	693/8	623/4	36	1111/16	375


Model Number	Capacity Liters	Nat. kW Input	LP kW Input	Recov 56°C Nat. Liters/ Hour	very at Rise* LP Liters/ Hour	A Floor to Exhaust Outlet mm.	B Jacket Dia. mm.	C Vent Size mm.	D Floor to T&P Conn. mm.	Floor to Gas Conn. mm.	F Floor to Space Heating Return mm.	G Floor to Space Heating Supply mm.	H Floor to Air Intake mm.	J Floor to Water Conn. mm.	K Depth mm.	L Ct. Line Distance From Intake to Exhaust mm.	Approx. Shipping Weight kg.
PDX-50S-60FB-3N	182	17.6	17.6	220	220	1727	559	76	1327	346	400	1327	1701	1517	812	235	137
PDX-65S-65FB-3N	246	19.0	17.6	238	220	1809	559	76	1489	346	400	1489	1765	1600	816	235	149
PDX-75S-70FB-3N	284	21.0	19.0	257	238	1803	660	76	1378	413	483	1378	1762	1594	914	297	170


All propane heaters are equipped with a cast iron burner. To order a propane heater change suffix "B" to "C" and "N" to "X".

For 5 year model, change suffix "3" to "5".

*Based on manufacturers rated recovery efficiency.

110 V.A.C Required for Power Venting / 110 V.A.C., 60HZ, 3.1 Amperes.

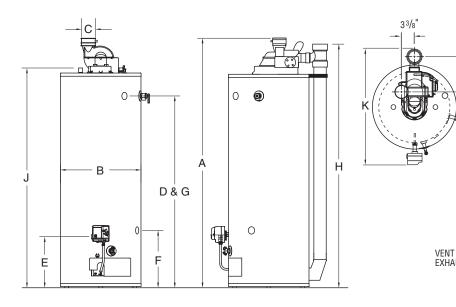



4" Vent Pipe	PDX-50S PDX-65S	PDX-75S			
Max. Intake Length		100 ft.	90ft.		
Max. Exhaust Length	100 ft.	90ft.			
Min. Vent Length	7 ft.	7ft.			
Number	1	95 ft.	85ft.		
of	2	90 ft.	80ft.		
90° Elbows†	3	85 ft.	75ft.		

Subtract 5ft. for each additional 90° elbow. †Consult I&O Manual when using four or more elbows.

Concentric Vent Terminal Kit COMBUSTION AIR VENT EXHAUST P/N 239-44069-01

Meets NAECA Requirements

General

All gas water heaters are certified at 300 PSI test pressure (2068 kPa) and 150 PSI working pressure (1034 kPa). All water connections are 3/4" NPT (19mm) on 11" (203mm) centers. All gas connections are 1/2" (13mm).

All models design certified by CSA International (formerly AGA/CGA), to meet ANSI standard Z-21.10.1 and peak performance rated.

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement. Suitable for Water (Potable) Heating and Space Heating.

Toxic chemicals, such as those used for boiler treatment, shall NEVER be introduced into this system. This unit may NEVER be connected to any existing heating system or component(s) previously used with a non-potable water heating appliance.



For U.S. and Canada field service, contact your professional installer or local Bradford White sales representative.

Sales 800-523-2931 • Fax 215-641-1670 / Technical Support 800-334-3393 • Fax 269-795-1089 • Warranty 800-531-2111 • Fax 269-795-1089 International: Telephone 215-641-9400 • Telefax 215-641-9750 / www.bradfordwhite.com

BRADFORD WHITE-CANADA* INC. Sales / Technical Support 866-690-0961 / 905-238-0100 • Fax 905-238-0105 / www.bradfordwhite.com

Built to be the Best™

©2007, Bradford White Corporation. All rights reserved.

755-B-0807-A Printed in U.S.A