

3G/4G Mobile Router

Smart Cloud Battery-in Wireless
Router with 3.75G SIM Card Slot

BRB73n



Networking

FCC Caution

FCC Part 15.19 Caution:

- This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 - this device may not cause harmful interference and
 - this device must accept any interference received, including interference that may cause undesired operation
- This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.
- Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.

IMPORTANT NOTE:

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

FCC Statement in User's Manual (for class B)

FCC Section 15.105

"Federal Communications Commission (FCC) Statement"

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.


- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CE Statement of Conformity

Our product has been tested in typical configuration by Ecom Sertech Corp and was found to comply with the essential requirement of “Council Directive on the Approximation of the Laws of the Member States relating to Electromagnetic Compatibility” (89/336/EEC; 92/31/EEC; 93/68/EEC)

1 Introduction Product Appearance

1.1 LED Indicator Status Description :

LED	Function	Color	Status	Description
	Power Adapter	Green	On	Power adapter is connected
	Battery-Powered	Green	On	Surplus electricity is between 100% and 20%
		Green Red	On	Surplus electricity is between 20% and 10%
		Red	On	Surplus electricity is lower than 10%
	Charging	Green	Blinking	Battery is charging
		Green	On	Battery is full charged
	Ethernet port activity	Green	On	10/100 Mbps Ethernet is connected
			Blinking 30ms	100Mbps Ethernet Tx/Rx activity
			Blinking 120ms	10Mbps Ethernet Tx/Rx activity
	Wireless/WPS activity	Green	On	Wireless is connected
		Red	Blinking 30ms	Wireless Tx/Rx activity
			Blinking 120ms	WPS function in progress

2 System and Network Setup

The BRB73n is a built-in 3.5G mobile router , it allows user to share the wireless network on a moving vehicle and be an alternative or backup to fixed broadband as well.

To begin with BRB73n , you must have the following minimum system requirements. If your system can't correspond to the following requirements, you might get some unknown troubles on your system.

- Internet Account for XDSL/Cable Modem/3.5G
- One Ethernet (10/100mbps) network interface card or wireless dongle
- TCP/IP and at least one web browser software installed (E.g.: Internet Explorer、Firefox、Safari、Chrome latest version)
- 802.11b、g、n wireless adapter for wireless mobile cliens
- Recommended OS: WinXP, Visata or Win7 / Linux

2.1 Build Network Connection

Administrator can manage the settings for WAN, LAN, Wireless Network, NTP, password, VPN, Firewall, etc.

Please confirm the network environment or the purpose before setting this product.

2.2 Connecting BRB73n

- Prepare the followings before the connection:
- PC or Notebook for setup
- Wireless connection (Ethernet port default is for internet)
- Make sure you are under "Router Mode".
- Turn on your Computer.
- Connect BRB73n to xDSL/ Cable modem with the Ethernet cable, or put in 3.5G SIM card
- After your computer obtained an IP address from wireless router, please start your web browser, and input the IP address of the wireless router (192.168.1.1) in address bar, and the following message should be shown. Default account and password are "admin"



The screenshot shows the login page of the BRB73n web interface. It features a language dropdown menu set to 'English'. Below this are two input fields: 'User Name' and 'Password', both with default values of 'admin' indicated to the right. At the bottom, there are two buttons: an orange 'Login' button and a grey 'Change Password' button.

- Users can set or change user name and password used for accessing the web management interface in this section.
- Input User Name and New Password, then input Confirm Password again.

English

User Name

(default:admin)

Password

(default:admin)

Login

Change Password

Change Password

New Password

Reenter New Password

submit

reset

3 Function introduction

Open a Web browser, and enter <http://192.168.1.1> (Default Gateway)

Sapido 無線分享器 Wireless Router

Home

Firmware Version : Ver0.1.12
Operation Mode : 3.5G
Uptime : 01:00:01:04
Time : 07/04 14:41

Help
This page shows the information of Internet connection and the local area network.
1. **Globe** diagram: The information of Internet connection.
2. **Router** diagram: The information of the local area network. You can also change the settings through this function.
3. **Computer** diagram: For the information of the users who are connecting to this router. You can **block/unlock** the users' connection through this function.

Status

WAN status
Stop

WAN IP Address 100.84.66.149
DNS 1 168.95.1.1
DNS 2 168.95.192.1
DNS 3 0.0.0.0
Attain IP Protocol 3.5G
Gateway 10.64.64.64
WAN Setting [Forwarding Setting...](#)

USB 3.5G Connected

SSID: SAPIDO_BRB 73n_81b517
Encryption: None

Client Number1

Download pdapp
Status page
Logout

3.1 Home menu

Home Click Home button icon to enter MENU as below.

Internet Setup Working

AP

WiFi AP

Status

Parental Control

Office Control

Firmware Upgrade

DoS

VPN Server

NAT Management

Remote Management

Advance Setup

Send SMS

Factory Default

Reboot

Logout

Item	Description
Internet Setup	There are several different method to access Internet , PPPoE、 DHCP、 Static IP、 PPTP、 L2TP、 WiFi ISP
AP (HW switch)	If a router is already set at the house, and you want to make the wireless LAN communication
WiFi AP (HW switch)	When you connect to the internet wirelessly through PC and wireless device without wireless LAN function equipped.
Status	You could check WAN, LAN, Client network in status.
Parental control	You can use URL filter 、 MAC Filter Schedule and Wireless Schedule to limit access Internet.
Office Control	For office environment , there are Multiple AP、 Wireless Access Control、 IP Filtering、 IP Binding and QoS
Firmware Upgrade	This function allows you upgrade the BRB73n firmware to new version. Please note do not power off the device during the upload because it may crash the system.
DoS	Denial of Service
VPN Server	PPTP/L2TP general setup introduction.
NAT Management	There are port forwarding and DMZ function
Remote management	This page allow you to access the GUI on WAN.
Advance Setup	Advance setting menu
Send SMS	Support 3.5G SMS (send out only)
Factory Default	You could reset the current configuration to factory default.
Reboot	This function is used to reboot
Logout	This page is used to logout.

3.2 Internet Setup

Click Internet Setup icon to enter WAN setup as below. The Internet Setup is depended on the service that you contract with the provider. The BRB73n provides five selections for the Internet Mode type, PPPoE, DHCP, Static IP , PPTP、L2TP、WiFi ISP and 3.5G. Check with your ISP if you don't know the WAN type

Internet Setup



PPPoE



DHCP



Static IP



PPTP



L2TP



WiFi ISP



3.5G

3.2.1 PPPoE

PPPoE

PPPoE user name and password

User Name:

Password:

Wireless Setup

Wireless AP ☒ Enable ☐ Disable

SSID

Encryption ▼

WPA_Pre-Shared Key

Apply

Item	Description
User Name	Input your user name provided by your ISP. If you don't know, please check with your ISP.
Password	Input the password provided by your ISP.
Wireless AP	Turn on/off wireless
SSID	Service Set identifier, users can define to any or keep as default.
Encryption	Select wireless encryption type form the drop-down list.


3.2.2 DHCP

DHCP

MAC setting

MAC type ☐ Universal ☒ Specific
Clone MAC Address: 00e04c81b617

Wireless Setup

Wireless AP ☒ Enable ☐ Disable
SSID
Encryption 
WPA_Pre-Shared Key

Apply

Item	Description
MAC type	Select " Universal " or " Specific " Universal : clone controller PC mac address as BRB73n WAN mac address Specific : use BRB73n itself mac address
Wireless AP	Turn on/off wireless
SSID	Service Set identifier, users can define to any or keep as default.
Encryption	Select wireless encryption type form the drop-down list.

3.2.3 Static IP

Static IP

IP Address setting

IP Address:	<input type="text" value="172.1.1.1"/>
Subnet Mask:	<input type="text" value="255.255.255.0"/>
Gateway:	<input type="text" value="172.1.1.254"/>
DNS:	<input type="text" value="8.8.8.8"/>

Wireless Setup

Wireless AP	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
SSID	<input type="text" value="Sapido_Router"/>
Encryption	<input type="text" value="None"/> ▼

Apply

Item	Description
IP Address	Enter the IP address which is provided by your ISP.
Subnet Mask	Please enter the Subnet Mask address
Gateway	Input ISP Default Gateway Address.
DNS	Input DNS information which is provided by your ISP
Wireless AP	Turn on/off wireless
SSID	Service Set identifier, users can define to any or keep as default.
Encryption	Select wireless encryption type form the drop-down list.

3.2.4 PPTP

PPTP

IP Address setting

Address Mode: ☒ Dynamic ☐ Static

Server IP Address:

User Name:

Password:

MTU Size: (1400-1460 Bytes)

☐ Enable MPPE Encryption

☐ Enable MPPC Compression

Wireless Setup

Wireless AP ☒ Enable ☐ Disable

SSID

Encryption ▼

Apply

Item	Description
Address Mode	Select " Dynamic " or " Static "
Server IP Address	Input your server IP address provided by your ISP. If you don't know, please check with your ISP.
User Name	Input PPTP account provided by your ISP.
Password	Input the password provided by your ISP.
MTU Size	Maximum Transmission Unit. Usually provide by computer operation systems (OS). Advanced users can set it manually.
Enable MPPE Encryption	Microsoft Point-to-Point Encryption (MPPE) provides data security for the PPTP connection that is between the VPN client and VPN server.
Enable MPPC Compression	Microsoft Point-to-Point Compression (MPPC) is a scheme used to compress Point-to-Point Protocol (PPP) packets between Cisco and Microsoft client devices. The MPPC algorithm is designed to optimize bandwidth utilization in order to support multiple simultaneous connections. The MPPC algorithm uses a Lempel-Ziv (LZ) based algorithm with a continuous history buffer, called a dictionary
Wireless AP	Turn on/off wireless
SSID	Service Set identifier, users can define to any or keep as default.
Encryption	Select wireless encryption type form the drop-down list.

3.2.5 L2TP

L2TP

IP Address setting

Address Mode: ☒ Dynamic ☐ Static

Server IP Address:

User Name:

Password:

MTU Size: (1400-1460 Bytes)

Wireless Setup

Wireless AP ☒ Enable ☐ Disable

SSID

Encryption ▼

Apply

Item	Description
Address Mode	Select " Dynamic " or " Static "
Server IP Address	Input your server IP address provided by your ISP. If you don't know, please check with your ISP.
User Name	Input PPTP account provided by your ISP.
Password	Input the password provided by your ISP.
MTU Size	Maximum Transmission Unit. Usually provide by computer operation systems (OS). Advanced users can set it manually.
Wireless AP	Turn on/off wireless
SSID	Service Set identifier, users can define to any or keep as default.
Encryption	Select wireless encryption type form the drop-down list.

3.2.6 WiFi ISP

BRB73n WAN get IP address from other wireless AP and LAN/Wireless LAN client
get IP from BRB73n

WiFi ISP

[BACK](#)

Wireless site survey

Select	Encrypt	SSID	Signal	BSSID	Channel	Type
<input type="radio"/>	WPA2-PSK	BRC70n_James 2x	86	00:e0:4c:44:21:32	10 (B+G+N)	AP
<input type="radio"/>	no	Sapido_BR270n_d15cb3	78	00:d0:41:d1:5c:b2	8 (B+G+N)	AP
<input type="radio"/>	WPA2-PSK	ESSID_Sapido_RB-1602G3_d0556c	58	00:d0:41:d0:55:6b	10 (B+G+N)	AP
					-	

[Survey](#)

Pre-Shared Key:

Extended Wireless Setup

Extended SSID:

Encryption

 ▼

WPA_Pre-Shared Key

[Apply](#)

Item	Description
Survey	List all available wireless AP
Pre-Shared Key	Input the wireless AP key which you want to connect
Extend SSID	Provide SSID for wireless client which want to connect to BRB73n
Encryption	Select wireless encryption type form the drop-down list.

3.3 AP

If a router is already set at the house, and you want to make the wireless LAN communication. This mode does not support WAN、DHCP、NAT、DDNS、QoS、Firewall、Static/Dynamic route、VPN Server features

AP

Wireless Setup

Wireless AP	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
SSID	<input type="text" value="Sapido_Router"/>
Encryption:	<input type="text" value="None"/> ▼

Apply

Item	Description
Wireless AP	Turn on/off wireless
SSID	Service Set identifier, users can define to any or keep as default.
Encryption	Select wireless encryption type form the drop-down list.
Wireless AP	Turn on/off wireless

3.4 WiFi AP

When you connect to the internet wirelessly through PC and wireless device without wireless LAN function equipped. This mode does not support WAN、DHCP、NAT、DDNS、QoS、Firewall、Static/Dynamic route、VPN Server features

WiFi AP

Wireless site survey

Select	Encrypt	SSID	Signal	BSSID	Channel	Type
<input type="radio"/>	no	ESSID_Sapido_BR70n_d06032	82	00:d0:41:d0:60:31	11 (B+G+N)	AP
<input type="radio"/>	WPA2-PSK	SAPIDO_BR270n_aacc91	78	00:d0:41:aa:cc:91	1 (B+G+N)	AP
<input type="radio"/>	WPA2-PSK	BR70n_James_2x	78	00:e0:4c:7f:6c:41	11 (B+G+N)	AP
<input type="radio"/>	WEP	SAPIDO_BR470n_d4002	75	00:d0:41:cd:40:02	11	AP

Survey

Pre-Shared Key:

Extended Wireless Setup

Extended SSID:

ESSID_Sapido_Router

Encryption:

None

Apply

Item	Description
Survey	List all available wireless AP
Pre-Shared Key	Input the wireless AP key which you want to connect
Extend SSID	Provide SSID for wireless client which want to connect to BR73n
Encryption	Select wireless encryption type form the drop-down list.


3.5 Status

You could check WAN, LAN, Client network in status

- WAN Configuration

Status


WAN status	USB 3.5G Connected
	<input type="button" value="Stop"/>
WAN IP Address	<input type="text" value="100.84.66.149"/>
DNS 1	<input type="text" value="168.95.1.1"/>
DNS 2	<input type="text" value="168.95.192.1"/>
DNS 3	<input type="text" value="0.0.0.0"/>
Attain IP Protocol	<input type="text" value="3.5G"/>
Gateway	<input type="text" value="10.64.64.64"/>
WAN Setting	<input type="text" value="Forwarding Setting..."/>

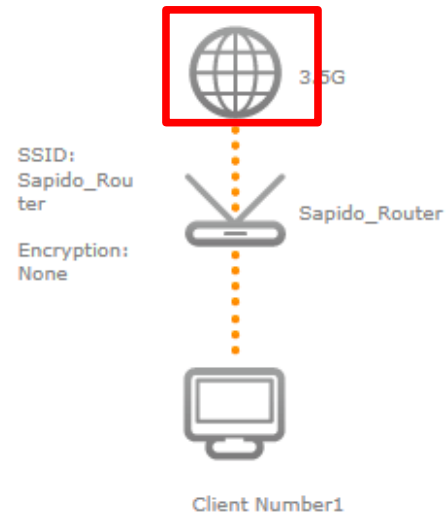

- LAN Configuration

Status

LAN IP Address	<input type="text" value="192.168.1.1"/>
MAC Address	<input type="text" value="00:e0:4c:81:b6:16"/>
Wireless AP	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
SSID	<input type="text" value="Sapido_Router"/>
Encryption	<input type="text" value="None"/>
	<input type="button" value="Apply"/>
PdNet	<input type="text" value=""/>
Device Name	<input type="text" value="Sapido_Router"/>
Web Server on WAN	<input type="text" value=""/>
	<input type="button" value="Apply"/>

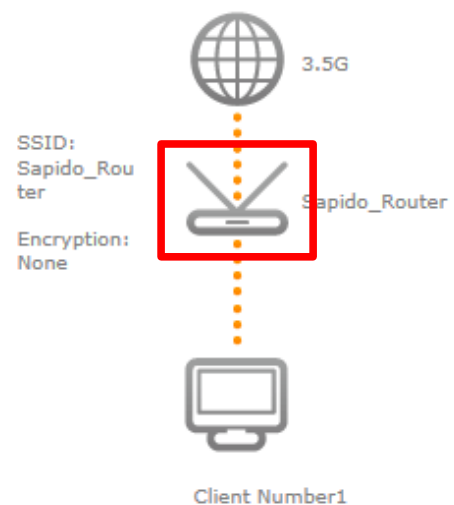

- Client Configuration

Status

Allow or block client
to access internet

Client List

IP address	Host name	Blockade
192.168.1.100	joe	

Blockade List

IP address	Host name	Unlock
------------	-----------	--------

SSID:
Sapido_Rou
ter

Encryption:
None



3.5G



Sapido_Router



Client Number1

3.6 Parental Control

Parental Control provide URL Filtering and MAC Filter Schedule for setup

Parental Control



URL Filtering



MAC Filter Schedule



Wireless Schedule

3.6.1 URL Filtering

URL Filtering is used to restrict users to access specific websites in internet

URL Filtering

BACK

☐ Enable URL Filtering

URL Address:

Current Filter Table:

URL Address

Select

Item	Description
Enable URL Filtering	Please select Enable MAC Filtering to filter MAC addresses
URL Address	Please enter the MAC address that needs to be filtered.
Apply	Click on Apply to save the setting data.
Current Filter Table	It will display all ports that are filtering now.
Delete Selected & Delete All	Click Delete Selected will delete the selected item. Click Delete All will delete all items in this table.

Notes: This function will not be in effect when the Virtual Server is enabled. Please disable Virtual Server before activate the URL Filtering function.

3.6.2 MAC Filter Schedule

When enabled, filtering will be based on the MAC address of LAN computers. Any computer with its MAC address on this list will be blocked from accessing the Internet.

MAC Filter Schedule

[BACK](#)

☐ Disable ☒ Enable All Mac Filter Schedule ☐ Enable Mac Filter Schedule

Day	Start Time	End Time
<input type="checkbox"/> Mon		
<input type="checkbox"/> Tue		
<input type="checkbox"/> Wed		
<input type="checkbox"/> Thu	<input type="text" value="00"/> hr : <input type="text" value="00"/> min	<input type="text" value="00"/> hr : <input type="text" value="00"/> min
<input type="checkbox"/> Fri		
<input type="checkbox"/> Sat		
<input type="checkbox"/> Sun		

[Refresh](#)[Save](#)[Apply](#)

MAC Filter Schedule

[BACK](#)

☐ Disable ☐ Enable All Mac Filter Schedule ☒ Enable Mac Filter Schedule

MAC Address	Day	Start Time	End Time
<input type="text" value="joe"/> <input type="text" value="000000000000"/>	<input type="checkbox"/> Mon <input type="checkbox"/> Tue <input type="checkbox"/> Wed <input type="checkbox"/> Thu <input type="checkbox"/> Fri <input type="checkbox"/> Sat <input type="checkbox"/> Sun	<input type="text" value="00"/> hr : <input type="text" value="00"/> min	<input type="text" value="00"/> hr : <input type="text" value="00"/> min
<input type="text" value="joe"/> <input type="text" value="000000000000"/>	<input type="checkbox"/> Mon <input type="checkbox"/> Tue <input type="checkbox"/> Wed <input type="checkbox"/> Thu <input type="checkbox"/> Fri <input type="checkbox"/> Sat <input type="checkbox"/> Sun	<input type="text" value="00"/> hr : <input type="text" value="00"/> min	<input type="text" value="00"/> hr : <input type="text" value="00"/> min
<input type="text" value="joe"/> <input type="text" value="000000000000"/>	<input type="checkbox"/> Mon <input type="checkbox"/> Tue <input type="checkbox"/> Wed <input type="checkbox"/> Thu <input type="checkbox"/> Fri <input type="checkbox"/> Sat <input type="checkbox"/> Sun	<input type="text" value="00"/> hr : <input type="text" value="00"/> min	<input type="text" value="00"/> hr : <input type="text" value="00"/> min
	<input type="checkbox"/> Mon		

[Refresh](#)[Save](#)[Apply](#)

3.6.3 Wireless Schedule

Wireless available schedule, this page allows you setup the wireless schedule rule.
Please do not forget to configure system before enable this feature

Wireless Schedule

BACK

☐ Enable Wireless Schedule

Enable	Day	From		To	
<input type="checkbox"/>	Sun ▾	00 ▾	00 ▾	00 ▾	00 ▾
<input type="checkbox"/>	Sun ▾	00 ▾	00 ▾	00 ▾	00 ▾
<input type="checkbox"/>	Sun ▾	00 ▾	00 ▾	00 ▾	00 ▾
<input type="checkbox"/>	Sun ▾	00 ▾	00 ▾	00 ▾	00 ▾
<input type="checkbox"/>	Sun ▾	00 ▾	00 ▾	00 ▾	00 ▾
<input type="checkbox"/>	Sun ▾	00 ▾	00 ▾	00 ▾	00 ▾
<input type="checkbox"/>	Sun ▾	00 ▾	00 ▾	00 ▾	00 ▾
<input type="checkbox"/>	Sun ▾	00 ▾	00 ▾	00 ▾	00 ▾
<input type="checkbox"/>	Sun ▾	00 ▾	00 ▾	00 ▾	00 ▾
<input type="checkbox"/>	Sun ▾	00 ▾	00 ▾	00 ▾	00 ▾
<input type="checkbox"/>	Sun ▾	00 ▾	00 ▾	00 ▾	00 ▾

Refresh

Save

Apply

3.7 Office Control

Office control provide Multiple AP、Wireless Access Control、IP Filtering、IP Binding、QoS

Office Control



Multiple AP



Wireless Access Control



IP Filtering



IP Binding



QoS

3.7.1 Multiple AP

The BRB73n can register up to 4 SSIDs (wireless LAN group). It can be used as if there are multiple wireless LAN access points with one product.

Item	Description
Enable	Enable or disable the service.
SSID	Enter the SSID
Data Rate	Select the data transmission rate.
Access	Enable this function can let clients use two access types: a. LAN+WAN: the client can access to the Internet and access in the router's GUI. b. WAN: the client can only access to the Internet.
Active Client List	Display the properties of the client which is connecting successfully.

3.7.2 Wireless Access Control

Access Control allows user to block or allow wireless clients to access this router. Users can select the access control mode, then add a new MAC address with a simple comment and click on “Apply Change” to save the new addition. To delete a MAC address, select its corresponding checkbox under the Select column and click on “Delete Selected” button.

Wireless Access Control

[BACK](#)

Users can allow/deny the computers/devices for accessing Internet through Wi-Fi.: Disable ▾

MAC Address: < joe ▾ Add

Current Access Control List:

MAC Address	Select
-------------	--------

Delete SelectedDelete AllApply

3.7.3 IP Filtering

When enabled, LAN clients are blocked / filtered from accessing the Internet based on their IP addresses

IP Filtering

[BACK](#)

☐ Enable IP Filtering

Local IP Address : Protocol : Both ▾ Add

Current Filter Table:

Local IP Address	Protocol	Select
------------------	----------	--------

Delete SelectedDelete AllApply

Item	Description
Enable IP Filtering	Please select Enable IP Filtering to filter IP addresses.
Local IP Address	Please enter the IP address that needs to be filtered.
Protocol	Please select the protocol type of the IP address
Apply	Click on Apply to add the setting data
Current Filter Table	It will display all ports that are filtering now.
Delete Selected & Delete All	Click Delete Selected will delete the selected item. Click Delete All will delete all items in this table.

3.7.4 IP Binding

This function allows you reserve IP addresses, and assign the same IP address to the network device with the specified MAC address any time it requests an IP address. This is almost the same as when a device has a static IP address except that the device must still request an IP address from the DHCP server.

IP Binding

[BACK](#)☐ **Enable Static DHCP**

IP Address:

MAC Address:

< joe ▼

[Add](#)**Static DHCP List:**

IP Address

MAC Address

Select

[Delete Selected](#)[Delete All](#)[Apply](#)

Item	Description
Enable Static DHCP	Select enable to use Static DHCP function
IP Address	Please enter IP address to limit
MAC address	Please enter MAC address to limit
Static DHCP List	It will display all IP and MAC address you made.
Delete Selected & Delete All	Click Delete Selected will delete the selected item. Click Delete All will delete all items in this table.

3.7.5 QoS

The QoS can let you classify Internet application traffic by source/destination IP address and port number.

To assign priority for each type of application and reserve bandwidth can let you have a better experience in using critical real time services like Internet phone, video conference ...etc.

QoS

[BACK](#)

☐ Enable QoS

Manual Uplink Speed (Kbps) :

Manual Downlink Speed (Kbps) :

Mode:

MAC Address:

[<](#)

Uplink Bandwidth Percentage:

Downlink Bandwidth Percentage:

[Apply Change](#)

Current QoS Rules Table:

MAC Address	Mode	Uplink Bandwidth (Kbps)	Downlink Bandwidth (Kbps)	Select
-------------	------	-------------------------	---------------------------	--------

[Delete Selected](#)[Delete All](#)[Delete Apply](#)

Item	Description
Enable QoS	Check "Enable QoS" to enable QoS function for the WAN port. You also can uncheck "Enable QoS" to disable QoS function for the WAN port.
Manual Uplink Speed	Set the uplink speed by manual to assign the download or upload bandwidth by the unit of Kbps.
Manual Downlink Speed	Set the downlink speed by manual to assign the download or upload bandwidth by the unit of Kbps.
Mode	Select Guaranteed minimum bandwidth or Restricted maximum bandwidth
MAC Address	Set MAC Address if the address type is by MAC Address
Uplink Bandwidth Percentage	LAN device bandwidth of uplink bandwidth
Download Bandwidth Percentage	LAN device bandwidth of download bandwidth
Add	Add the setting data
Delete Selected & Delete All	Click Delete Selected will delete the selected item. Click Delete All will delete all items in this table.

3.8 Firmware Upgrade

This function can upgrade the firmware of the router. There are two methods for user upgrade firmware: Auto upgrade and Manual upgrade.

Caution: To prevent that firmware upgrading is interrupted by other wireless signals and causes failure. We recommend users to use wired connection during upgrading.

Note: The firmware upgrade will not remove your previous settings.

3.8.1 Auto upgrade

It provide auto detect new firmware from Internet, and user can select to upgrade new version or not.

Firmware Upgrade

☒ Auto upgrade ☐ Manual upgrade

Now Version : Ver0.1.12

New Version :

Upgrade Firmware ?

Yes

3.8.2 Manual upgrade

If you download firmware from website, you can upgrade firmware manual as below.

Firmware Upgrade

☐ Auto upgrade ☒ Manual upgrade

Select File: 瀏覽...

Upload

↶ Reset

3.9 DoS

Denial of Service

☐ Disable ☒ Home ☐ Enterprise

- ☒ TCP/UDP Port Scan
- ☒ ICMP Smurf
- ☒ IP Land
- ☒ IP Spoof
- ☒ IP Tear Drop
- ☒ Ping Of Death
- ☒ TCP Scan
- ☒ TCP Syn With Data
- ☒ UDP Bomb
- ☒ UDP Echo Chargen

Low Sensitivity

Item	Description
Home	Check “Home” to enable DoS function for prevention. You also can check “No Prevention” to disable DoS function.
Enterprise	Check “Enterprise” to enable DoS function for prevention. You also can check “No Prevention” to disable DoS function.

3.10 VPN Server

The VPN Server function providing PPTP/L2TP mode are designed to allow users to an external network device / computer and office local area network to establish a secure network connection. And User can safe login office local area network and access to personal documents, files Sharing and other resources. It provides the most convenient VPN encryption.

VPN Server

☐ **Enable setting:**

Connection type: ☒ PPTP ☐ L2TP

VPN Server IP:

Remote IP range: -

Authentication Protocol: ☒ PAP ☐ CHAP ☐ MSCHAP v2

User Name:

Password:

Current Filter Table:

User Name	Connection Type	select
-----------	-----------------	--------

Item	Description
Enable Setting	Check this option, will start the VPN Server feature.
Connection Type	Provide PPTP or L2TP access connection type.
VPN Server IP	Input the IP address of VPN server
Remote IP range	It is the IP range of assigned to the VPN Client
Authentication Protocol	It is provided three types of authentication protocol
MPPE Encryption Mode (RC4)	It is provided three encryption modes
User Name	Input the login name of the client user
Password	Input the login password of the client user
Current Filter Table	It will display all ports that are filtering now.
Delete Selected & Delete All	Click Delete Selected will delete the selected item. Click Delete All will delete all items in this table.

3.11 NAT Management

This section contains configurations for the BRB73n 's advanced functions such as: virtual server, and DMZ to provide your network under a security environment

NAT Management



Virtual Server



DMZ

3.11.1 Virtual Server

The Virtual Server feature allows users to create Virtual Servers by re-directing a particular range of service port numbers (from the WAN port) to a particular LAN IP address.

Virtual Server

BACK

☐ Enable Virtual Server

Address:

Protocol:

Public Port Range:

Private Port Range:

Apply Change

Current Port Forwarding Table:

Local IP Address	Protocol	Public Port Range	Private Port Range	Select
------------------	----------	-------------------	--------------------	--------


Delete Selected

Delete All

Apply

Item	Description
Enable Port Forwarding	Select to enable Port Forwarding service or not.
Address	Specify the IP address which receives the incoming packets.
Protocol	Select the protocol type.
Public Port Range	Enter the port number, for example 80-80.
Private Port Range	Enter the port number, for example 20-22.
Current Port Forwarding Table	It will display all port forwarding regulation you made.
Delete Selected & Delete All	Click Delete Selected will delete the selected item. Click Delete All will delete all items in this table.

Please find the following figure to know that what the virtual server is. The web server is located on 192.168.1.100, forwarding port is 80, and type is TCP+UDP.

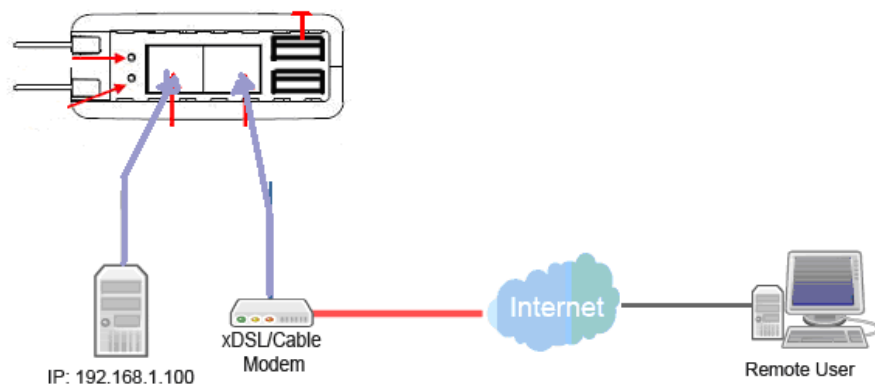

3.11.2 DMZ

The DMZ feature allows one local user to be exposed to the Internet for special-purpose applications like Internet gaming or videoconferencing. When enabled, this feature opens all ports to a single station and hence renders that system exposed to intrusion from outside. The port forwarding feature is more secure because it only opens the ports required by that application.

DMZ

☐ Enable DMZ

DMZ Host IP Address :

Item	Description
Enable DMZ	It will enable the DMZ service if you select it.
DMZ Host IP Address	Please enter the specific IP address for DMZ host.

3.12 Send SMS

BRB73n allow user to send text message by 3.5G network

Send SMS

Phone Number:

Item	Description
Phone Number	Phone number which user want to send text message to.

3.13 Factory Default

You could reset the current configuration to factory default.

3.14 Reboot

This function is used to reboot

3.15 Logout

This page is used to logout

4 Advance Setup

4.1 Internet Mode

4.1.1 Internet Setup

Please refer [Internet Setup](#)

4.1.2 AP (switch to AP mode)

Please refer [AP mode](#)

4.1.3 WiFi AP (switch to WiFi AP mode)

Please refer [WiFi AP mode](#)


4.1.4 WiFi ISP

Please refer [WiFi ISP mode](#)

4.2 IP Config

4.2.1 WAN

4.2.1.1 PPPoE

User Name:	<input type="text"/>
Password:	<input type="password"/>
Service Name:	<input type="text"/>
Connection Type:	<div>Continuous </div>
	<div>ConnectDisconnect</div>
Idle Time:	<div>5(1-1000 minutes)</div>
MTU Size:	<div>1452(1360-1492 Bytes)</div>
<div><input checked="" type="radio"/> Attain DNS Automatically</div>	
<div><input type="radio"/> Set DNS Manually</div>	
DNS 1:	<input type="text" value="8.8.8.8"/>
DNS 2:	<input type="text" value="0.0.0.0"/>
DNS 3:	<input type="text" value="0.0.0.0"/>
Clone MAC Address:	<input type="text" value="000000000000"/>
<div><input checked="" type="checkbox"/> Enable IGMP Proxy</div>	
<div><input type="checkbox"/> Enable Ping Access on WAN</div>	
<div>↻ Refresh</div>	
<div>💾 Save</div>	
<div>Apply</div>	

Item	Description
User Name	Input your user name provided by your ISP. If you don't know, please check with your ISP.
Password	Input the password provided by your ISP.
Service Name	Input the service name provided by your ISP.
Connection Type	Three types for select: Continues , Connect on Demand , and Manual .
MTU Size	Maximum Transmission Unit. Usually provide by computer operation systems (OS). Advanced users can set it manually.
DNS	Select Attain DNS Automatically . Or select Set DNS Manually , if you want to specify the DNS, and enter the DNS provided by your ISP in DNS 1 2 3.
Clone Mac Address	Some ISPs require MAC address registration. In this case, enter the MAC address registered to the provider to "Clone MAC Address"
Save & Apply	Click on Save to save the setting date, the Apply button for execute current configuration.

4.2.1.2 DHCP

Host Name:

MTU Size: (1400-1492 Bytes)

☒ Attain DNS Automatically
☐ Set DNS Manually

DNS 1:

DNS 2:

DNS 3:

Clone MAC Address:

☒ Enable IGMP Proxy
☐ Enable Ping Access on WAN

Item	Description
Host Name	You can keep the default as the host name, or input a specific name if required by your ISP.
MTU Size	Maximum Transmission Unit. Usually provide by computer operation systems (OS). Advanced users can set it manually.
DNS	Select Attain DNS Automatically . Or select Set DNS Manually , if you want to specify the DNS, and enter the DNS provided by your ISP in DNS 1 2 3.
Clone Mac Address	Some ISPs require MAC address registration. In this case, enter the MAC address registered to the provider to "Clone MAC Address"
Save & Apply	Click on Save to save the setting date, the Apply button for execute current configuration.

4.2.1.3 Static IP

IP Address:	<input type="text" value="172.1.1.1"/>
Subnet Mask:	<input type="text" value="255.255.255.0"/>
Gateway:	<input type="text" value="172.1.1.254"/>
MTU Size:	<input type="text" value="1500"/> (1400-1500 Bytes)
DNS 1:	<input type="text" value="8.8.8.8"/>
DNS 2:	<input type="text" value="0.0.0.0"/>
DNS 3:	<input type="text" value="0.0.0.0"/>
Clone MAC Address:	<input type="text" value="000000000000"/>
<input checked="" type="checkbox"/> Enable IGMP Proxy	
<input type="checkbox"/> Enable Ping Access on WAN	
<input type="button" value="↻ Refresh"/>	<input type="button" value="💾 Save"/> <input type="button" value="Apply"/>

Item	Description
IP Address	Enter the IP address which is provided by your ISP.
Subnet Mask	Please enter the Subnet Mask address
Gateway	Input ISP Default Gateway Address.
MTU Size	Maximum Transmission Unit. Usually provide by computer operation systems (OS). Advanced users can set it manually.
DNS	Select Attain DNS Automatically . Or select Set DNS Manually , if you want to specify the DNS, and enter the DNS provided by your ISP in DNS 1 2 3.
Clone Mac Address	Some ISPs require MAC address registration. In this case, enter the MAC address registered to the provider to "Clone MAC Address"
Save & Apply	Click on Save to save the setting date, the Apply button for execute current configuration.

4.2.1.4 PPTP

Address Mode: ☒ Dynamic ☐ Static

Server IP Address:

User Name:

Password:

MTU Size: (1400-1460 Bytes)

☐ Enable MPPE Encryption

☐ Enable MPPC Compression

☒ Attain DNS Automatically

☐ Set DNS Manually

DNS 1:

DNS 2:

DNS 3:

Clone MAC Address:

☒ Enable IGMP Proxy

☐ Enable Ping Access on WAN

Item	Description
Enable Dynamic Route	Enable or Disable dynamic route
IP Address	Enter the IP address which is provided by your ISP.
User Name	Input PPTP account provided by your ISP.
Password	Input the password provided by your ISP.
Enable MPPE Encryption	Microsoft Point-to-Point Encryption (MPPE) provides data security for the PPTP connection that is between the VPN client and VPN server.
Enable MPPC Compression	Microsoft Point-to-Point Compression (MPPC) is a scheme used to compress Point-to-Point Protocol (PPP) packets between Cisco and Microsoft client devices. The MPPC algorithm is designed to optimize bandwidth utilization in order to support multiple simultaneous connections. The MPPC algorithm uses a Lempel-Ziv (LZ) based algorithm with a continuous history buffer, called a dictionary.
MTU Size	Maximum Transmission Unit. Usually provide by computer operation systems (OS). Advanced users can set it manually.
DNS	Select Attain DNS Automatically . Or select Set DNS Manually , if you want to specify the DNS, and enter the DNS provided by your ISP in DNS 1 2 3.
Clone Mac Address	Some ISPs require MAC address registration. In this case, enter the MAC address registered to the provider

	to "Clone MAC Address"
Save & Apply	Click on Save to save the setting date, the Apply button for execute current configuration.

4.2.1.5 L2TP

Address Mode: ☒ Dynamic ☐ Static

Server IP Address:

User Name:

Password:

MTU Size: (1400-1460 Bytes)

☒ Attain DNS Automatically
☐ Set DNS Manually


DNS 1:


DNS 2:

DNS 3:

Clone MAC Address:

☒ Enable IGMP Proxy
☐ Enable Ping Access on WAN

 Refresh

 Save

Apply

Item	Description
Enable Dynamic Route	Enable or Disable dynamic route
IP Address	Enter the IP address which is provided by your ISP.
User Name	Input L2TP account provided by your ISP.
Password	Input the password provided by your ISP.
MTU Size	Maximum Transmission Unit. Usually provide by computer operation systems (OS). Advanced users can set it manually.
DNS	Select Attain DNS Automatically . Or select Set DNS Manually , if you want to specify the DNS, and enter the DNS provided by your ISP in DNS 1 2 3.
Clone Mac Address	Some ISPs require MAC address registration. In this case, enter the MAC address registered to the provider to "Clone MAC Address"
Save & Apply	Click on Save to save the setting date, the Apply button for execute current configuration.

4.2.1.6 3.5G

Mode ☒ Auto ☐ Manual

Network Traffic Monitor ☒ Enable ☐ Disable

Limit Internet Traffic ☒ Enable ☐ Disable

Limit Upload Traffic: Kbps

Limit Download Traffic: Kbps

Service:

Connect Speed: ☒ Auto Switch ☐ 2.5G/2.75G ☐ 3G/3.5G

SIM PIN: ☒ on ☐ off

Password:

Retype SIM PIN:

Authentication: ☒ Auto ☐ CHAP ☐ PAP

☒ Attain DNS Automatically

☐ Set DNS Manually

DNS 1:

DNS 2:

DNS 3:

Clone MAC Address:

☒ Enable IGMP Proxy

☐ Enable Ping Access on WAN

Item	Description
Mode	Input your user name provided by your ISP. If you don't know, please check with your ISP.
Network Traffic Monitor	BRB73n will record 3.5G traffic usage volume
Limit Internet Traffic	User can limit 3.5G traffic usage volume to prevent over budget
Connection Speed	Provide 3 kinds of speed , auto is recommended
SIM PIN	SIM card PIN number
Authentication	Provide 3 kinds of authentication methods , auto is recommended
Wireless AP	Turn on/ off wireless function
SSID	Service Set identifier, users can define to any or keep as default.
Encryption	Select wireless encryption type form the drop-down list.

4.2.2 LAN

Use this page to set up the local IP address and subnet mask for your router. Please select LAN Interface Setup under the IP Config menu and follow the instructions below to enter the LAN setting page to configure the settings you want.

LAN Interface Setup

IP Address:	<input type="text" value="192.168.1.1"/>
Subnet Mask:	<input type="text" value="255.255.255.0"/>
Gateway:	<input type="text" value="0.0.0.0"/>
DHCP:	<input type="button" value="Server"/> ▼
DHCP Client Range:	<input type="text" value="192.168.1.100"/> - <input type="text" value="192.168.1.200"/> <input type="button" value="Show Client"/>
DHCP Lease Time:	<input type="text" value="480"/> (1 - 10080 minutes)
Static DHCP:	<input type="button" value="Set Static DHCP"/>
Domain Name:	<input type="text" value="Sapido_Router"/>
802.1d Spanning Tree:	<input type="button" value="Disabled"/> ▼
Clone MAC Address:	<input type="text" value="000000000000"/>

Item	Description
IP Address	The default value of LAN IP address is 192.168.1.1 for this router.
Subnet Mask	Input Subnet Mask, normally it is 255.255.255.0.
Gateway	Input ISP Default Gateway Address. If you don't know, please check with your ISP.
DHCP	Enable or disable DHCP services. The DHCP server will automatically allocate an unused IP address from the IP address pool to the requesting computer if enabled.
DHCP Client Range	Define the DHCP client range and then the DHCP server will assign an IP to the requesting computer from this range. The Show Client will display every assigned IP address, MAC address, and expired time. The default range is 192.168.1.100 - 192.168.1.200.
DHCP Lease Time	IP available time
Static DHCP	Please refer IP Binding
Domain Name	The name of device
802.1d Spanning Tree	IEEE 802.1d Spanning Tree Protocol (STP) is a link layer network protocol that ensures a loop-free topology for any bridged LAN. The main purpose of STP is to ensure that you do not create loops when you have redundant paths in your network. Loops are

	deadly to a network.
Clone MAC Address	Copy the MAC address from the device you had registered to your ISP if your ISP asks for the specific MAC Address.


4.2.3 DDNS

You can assign a fixed host and domain name to a dynamic Internet IP address. Each time the router boots up, it will re-register its domain-name-to-IP-address mapping with the DDNS service provider. This is the way Internet users can access the router through a domain name instead of its IP address.

Note: make sure that you have registered with a DDNS service provider before enabling this feature.

Dynamic DNS

☐ **Enable DDNS**

Service Provider :  dyndns ▼

Domain Name :

User Name/Email :

Password/Key :

Note:

For TZO, you can have a 30 days free trial [here](#) or manage your TZO account in [control panel](#)

For DynDNS, you can create your DynDNS account

Please enter Domain Name, User Name/Email, and Password/Key. After entering, click on Apply Changes to save the setting, or you may click on Reset to clear all the input data.

Item	Description
Enable/Disable DDNS	Select enable to use DDNS function. Each time your IP address to WAN is changed, and the information will be updated to DDNS service provider automatically.
Service Provider	Choose correct Service Provider from drop-down list, here including DynDNS, TZO, ChangeIP, Eurodns, OVH, NO-IP, ODS, Regfish embedded in BRB73n .
User Name/Email	User name is used as an identity to login Dynamic-DNS service.
Password/Key	Password is applied to login Dynamic-DNS service.
Save & Apply	Click on “Save” to save the setting data. The “Apply” button can execute current configuration

4.3 Ipv6 Config

IPv6 Setting

[i Help](#)☒ **Enable IPv6**

WAN

Origin Type: WAN Link Type:

PPPoE

User Name: Password: Service Name: AC Name: Connection Type: Idle Time: (1-1000 minutes)MTU Size: (1360-1492 bytes)

DNSv6 Setting

Enable DNSv6 ☒Router Name ☒ Attain DNS
Automatically☐ Set DNS Manually

DNS1

Prefix Length

 : : : : : : :

Item	Description
Origin Type	SLAAC、DHCPv6、IP。 Please check ISP to get correct type
WAN Link Type	PPPoE、IP
PPPoE	Use IPv4 PPPoE account and password to do IPv6 connect
Child Prefix Address	Check ISP to get this data
Static IP	Check ISP to get IP address and default gateway IP address
Router Name	Router domain
DNSv6	Select Attain DNS Automatically. Or select Set DNS Manually, if you want to specify the DNS, and enter the DNS provided by your ISP in DNS

4.4 Wireless

4.4.1 Wireless Basic Settings

Wireless Basic Settings

☐ **Disable Wireless**

Band:

Mode: Multiple AP

Network Type:

SSID:

Channel Width:

Control Sideband:

Channel Number:

Broadcast SSID:

WMM:

Data Rate:

Associated Clients:

☐ **Enable Mac Clone**

☐ **Enable Universal Repeater**

SSID Extended:

Item	Description
Disable Wireless	Turn off the wireless service.
Band	Select the frequency. It has 6 options: 2.4 GHz (B/G/N/B+G/G+N/B+G+N).
Mode	Select the mode. It has 3 modes to select: (AP, Client, WDS, AP+WDS). Multiple AP: Please check Section 4.1.2.1. * In Wi-Fi AP mode only support Client mode.
Network Type	<ul style="list-style-type: none">Infrastructure : one of the two methods for connecting to wireless networks with Wi-Fi enabled devices such as laptops, Pda's I-phone etc. These devices are connected to wireless network with the help of Access point (AP). Wireless Access Points are usually routers or switches which are connected to internet by Ethernet port.Ad hoc : By using ad hoc mode, devices are capable for communicating directly with each other. No Access point (routers / switches) is required for communication between devices

	and all devices in the range connect in peer to peer communication mode.
SSID	Service Set identifier, users can define to any or keep as default.
Channel Width	Please select the channel width, it has 3 options: 20MHz / 40MHz / Auto
Control Sideband	Enable this function will control your router use lower or upper channel.
Channel Number	Please select the channel; it has Auto, 1, 2~11 or 13 options.
Broadband SSID	User may choose to enable Broadcast SSID or not.
WMM	Enable / Disable Wi-Fi Multimedia
Data Rate	Please select the data transmission rate.
Associate Clients	Check the AP connectors and the Wireless connecting status.
Enable MAC Clone (Single Ethernet Client)	Clone the MAC address for ISP to identify.
Enable Universal Repeater Mode (Acting as AP and Client simultaneously)	Allow to equip with the wireless way conjunction upper level, provide the bottom layer user link in wireless and wired way in the meantime. (The IP that bottom layer obtains is from upper level.) Please also check Section 4.1.2.2
SSID of Extended Interface	While linking the upper level device in wireless way, you can set SSID to give the bottom layer user search.
Multiple AP	BRB73n can register up to 4 SSIDs (wireless LAN group). It can be used as if there are multiple wireless LAN access points with one product. Each SSID could be set with different data rate, WMM and access type
Save & Apply	Click on "Save" to save the setting data. The "Apply" button can execute current configuration

4.4.2 Advanced Settings

Wireless Advanced Settings

[Help](#)

Fragment Threshold: (256-2346)
RTS Threshold: (0-2347)
Beacon Interval: (20-1024 ms)
Preamble Type: ☒ Long Preamble ☐ Short Preamble
IAPP: ☒ Enabled ☐ DisabledDisabled
Protection: ☐ Enabled ☒ Disabled
Aggregation: ☒ Enabled ☐ Disabled
Short GI: ☒ Enabled ☐ Disabled
WLAN Partition: ☐ Enabled ☒ Disabled
20/40MHz Coexist: ☒ Enabled ☐ Disabled
RF Output Power: ☒ 100% ☐ 70% ☐ 50% ☐ 35% ☐ 15%

[Refresh](#)[Save](#)[Apply](#)

Item	Description
Fragment Threshold	To identify the maxima length of packet, the over length packet will be fragmentized. The allowed range is 256-2346, and default length is 2346.
RTS Threshold	This value should remain at its default setting of 2347. The range is 0~2347. Should you encounter inconsistent data flow, only minor modifications are recommended. If a network packet is smaller than the present RTS threshold size, the RTS/CTS mechanism will not be enabled. The router sends Request to Send (RTS) frames to a particular receiving station and negotiates the sending of a data frame. After receiving an RTS, the wireless station responds with a Clear to Send (CTS) frame to acknowledge the right to begin transmission. Fill the range from 0 to 2347 into this blank.
Beacon Interval	Beacons are packets sent by an access point to synchronize a wireless network. Specify a beacon interval value. The allowed setting range is 20-1024 ms..
Preamble Type	PLCP is Physical layer convergence protocol and PPDU is PLCP protocol data unit during transmission, the PSDU shall be appended to a PLCP preamble and header to create the PPDU. It has 2 options: Long Preamble and Short Preamble.
IAPP	Inter-Access Point Protocol is a recommendation that describes an optional extension to IEEE 802.11 that provides wireless access-point communications among multivendor systems.
Protection	Please select to enable wireless protection or not.
Aggregation	Enable this function will combine several packets to one and transmit it. It can reduce the problem when mass

	packets are transmitting.
Short GI	Users can get better wireless transmission efficiency when they enable this function.
WLAN Partition	Shut down the communication between the connected wireless LAN devices. If you set up as "Enabled", devices connected with the router, such as a printer, will not be able to use. Default Setting: "Disabled"
20/40MHz Coexist	Configure 20/40MHz coexisting scheme. If you set up as "Enabled", "20MHz" and "40MHz" will coexist. Normally use as "Disabled". Default Setting: "Disabled"
RF Output Power	Users can adjust RF output power to get the best wireless network environment. Users can choose from 100%, 70%, 50%, 35%, and 15%.

4.4.3 Security

Here users define the security type and level of the wireless network. Selecting different methods provides different levels of security. Please note that using any encryption may cause a significant degradation of data throughput on the wireless link. There are five Encryption types supported: "None", "WEP", "WPA", "WPA2", and "WPA-Mixed". Enabling WEP can protect your data from eavesdroppers. If you do not need this feature, select "None" to skip the following setting

Wireless Security

[i Help](#)

Select SSID:

Encryption:

Authentication Mode: ☐ Enterprise (RADIUS) ☒ Personal (Pre-Shared K

WPA Cipher Suite: ☐ TKIP ☐ AES

WPA2 Cipher Suite: ☐ TKIP ☒ AES

Pre-Shared Key Format:

Pre-Shared Key:

Item	Description
WEP	<p>WEP is the most general encryption scheme among wireless LAN security, configure the common encrypted key (WEP Key) for access point and wireless LAN handset. WEP key length are "64bit", "128bit", and "256bit" (This product corresponds up to 128bit), larger the value is, more the character can be set, and encryption strength will enhanced.</p> <p>* If you configure the encryption key as "5 letters in half-width alphabets and numbers" or "Hexadecimal in 10 digits", please select "64-bit".</p> <p>* If you configure the encryption key as "13 letters in half-width alphabets and numbers" or "Hexadecimal in 26 digits", please select "128-bit".</p>
WPA / WPA2	<p>WPA/WPA2 is wireless LAN security standard which is strengthen over WEP. On WPA-PSK/WPA2-PSK, uses encrypted key called pre-shared key, and set up common encryption key for access point and wireless LAN handset like WEP. There are "AES" and "TKIP" as encryption scheme. "TKIP" automatically updates the key at regular intervals, check and approve the communication, so it can communicate safer than WEP key which uses single encryption key for</p>

	long time. "AES" is harder to decode comparing to "TKIP", so it can say tougher encryption scheme than "TKIP"
WPA-Mixed	Support WPA and WPA2 at the same time
802.1x Authentication Radius	For radius server authentication
Personal (Pre-Shared Key)	<p>* If you configure Pre-Shared Key as "Hexadecimal in 64 digits", please select "Hex (64 characters) ".</p> <p>* If you configure encryption key in "8 to 63 letters in half-width alphabets and numbers", please select "Passphrase</p>

4.4.4 Access Control

Please refer [Wireless Access Control](#)

4.4.5 WPS

This page allows user to change the setting for WPS (Wi-Fi Protected Setup). Using this feature could let your wireless client atomically synchronize it's setting and connect to the Access Point in a minute without any hassle. SAPIDO BRB73n could support both Self-PIN or PBC modes, or use the WPS button (at real panel) to easy enable the WPS function.

PIN model, in which a PIN has to be taken either from a sticker label or from the web interface of the WPS device. This PIN will then be entered in the AP or client WPS device to connect.

PBC model, in which the user simply has to push a button, either an actual or a virtual one, on both WPS devices to connect.

BRB73n WPS only support no encryption and WPA2

Please follow instructions below to enable the WPS function.

- **Setup Wireless LAN with WPS PIN :**
 - Get the WPS PIN number from wireless card and write it down.



- Fill in the PIN number from the wireless card in Client PIN Number field, and then click "Start PIN".

Wi-Fi Protected Setup [Help](#)

☐ **Disable WPS**

Self-PIN Number: 99956042

Push Button Configuration:

Stop WSC:

Client PIN Number:

Current Key Info:

Authentication	Encryption	Key
Open	None	N/A

- Click PIN from Adapter Utility to complete the WPS process with the wireless router.




- Wireless dongle should connect to BRB73n
- Start PBC:
 - Press the BRB73n WPS button and wait for WPS LED blinking
 - Press the dongle WPS button
 - Wireless dongle should connect to BRB73n

4.4.6 WDS

When selected in the Basic Settings page and enabled here, Wireless Distribution System (WDS) enables the router to be used as a wireless bridge. Two Wireless-N Routers in bridge mode can communicate with each other through their wireless interfaces. To accomplish this, all wireless routers should be set to the same channel and the MAC address of other AP / Routers should be entered in the table.

The WDS explanation is as the following picture

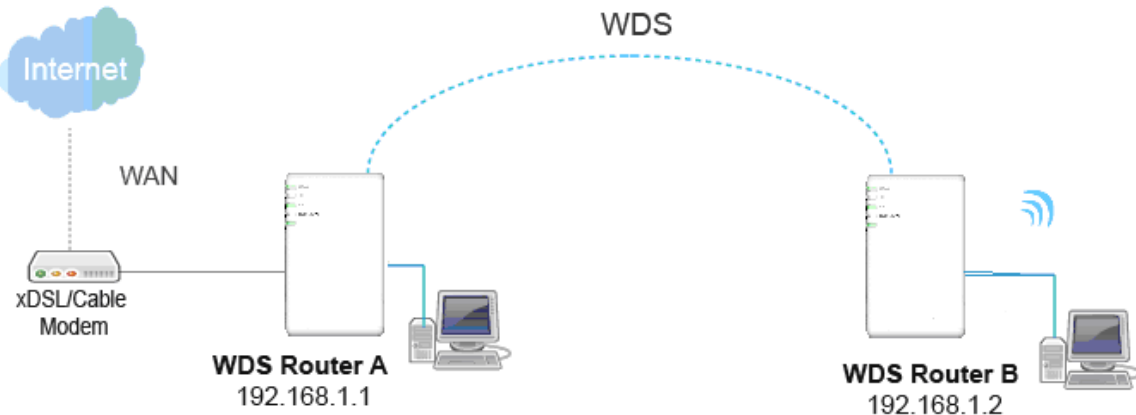

Router_A :

- a Set the connection mode to “AP+WDS” from “Wireless Basic Setting”, and then select the channel number (in this example is "11"). Click Apply Changes to save the setting.

Wireless Basic Settings

☐ Disable Wireless

Band: 2.4 GHz (B+G+N) ▼

Mode: AP+WDS ▼ Multiple AP

Network Type: Infrastructure ▼

SSID: Sapido_Router

Channel Width: 40MHz ▼


Control Sideband: Upper ▼

Channel Number: 11 ▼

b Please check the MAC address

Status

LAN IP Address	<input type="checkbox"/> 192.168.1.1
MAC Address	<input type="checkbox"/> 00:e0:4c:81:b6:16
Wireless AP	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
SSID	<input type="checkbox"/> Sapido_Router
Encryption	<input type="checkbox"/> None ▼
<input type="button" value="Apply"/>	
PdNet	<input type="checkbox"/> <input checked="" type="checkbox"/>
Device Name	<input type="checkbox"/> Sapido_Router
Web Server on WAN	<input type="checkbox"/> <input checked="" type="checkbox"/>
<input type="button" value="Apply"/>	

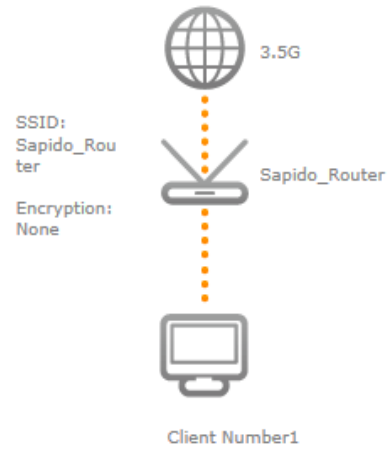

- c Enable WDS function from the page – “WDS Setting”, and then fill in the MAC address of Router_B. Click Apply Changes to save the setting data

WDS Settings Help

☒ **Enable WDS** Select encryption for security..

MAC Address:

Data Rate:

Add Set Security Show Statistics

WDS Security Setup:

MAC Address	Tx Rate (Mbps)	Select
Delete Selected Delete All Apply		

d The WDS AP List will show the WDS device MAC address

WDS Settings Help

☒ **Enable WDS**

MAC Address:

Data Rate: Auto

Add Set Security Show Statistics

WDS Security Setup:

MAC Address	Tx Rate (Mbps)	Select
12:34:56:78:90:12	Auto	<input type="checkbox"/>

Delete Selected Delete All Apply

Router_B :

a Setup Router_B WDS

WDS Settings Help

☒ **Enable WDS**

MAC Address:

Data Rate: Auto


Add Set Security Show Statistics

WDS Security Setup:

MAC Address	Tx Rate (Mbps)	Select
-------------	----------------	--------

Delete Selected Delete All Apply

b Router_B LAN PC will get IP address from Router_A

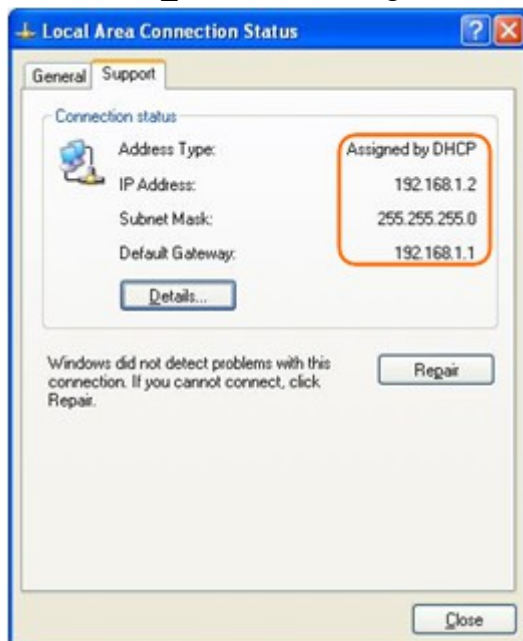

If you failed the WDS setting, please check you setting with refer to the list below

	Router A	Router B
Wireless Mode	AP+WDS	WDS
LAN IP Address	Set the same segment as the router B(Note 1). Example :192.168.1.1.	Set the same segment as the router A(Note 1). Example :192.168.1.2.
Security	Set the same security as Router B	Set the same security as Router A
DHCP	Enable	Disable
Note 1: LAN IP address should be under the same segment but cannot be the same number.		

4.4.7 Wireless Schedule

Please refer [Wireless Schedule](#)

4.5 NAT

Please refer [NAT Management](#)

4.6 VPN Server

Please refer [VPN Server](#)

4.7 Firewall

4.7.1 DoS

Please refer [DoS](#)

4.7.2 QoS

QoS

[i Help](#)☐ Enable QoS☒ Automatic Uplink SpeedManual Uplink Speed (Kbps) : ☒ Automatic Downlink SpeedManual Downlink Speed (Kbps) :

QoS Rule Advanced Settings :

Address Type: ☒ IP ☐ MAC

Local IP Address:

 -

MAC Address:

Mode:

Guaranteed minimum bandwidth ▾

Uplink Bandwidth
(Kbps):Downlink Bandwidth
(Kbps):Apply Change

Current QoS Rules Table:

Local IP Address	MAC Address	Mode	Uplink Bandwidth (Kbps)	Downlink Bandwidth (Kbps)	Select
------------------	-------------	------	-------------------------	---------------------------	--------

Delete SelectedDelete AllDelete Apply

Item	Description
Enable QoS	Check “Enable QoS” to enable QoS function for the WAN port. You also can uncheck “Enable QoS” to disable QoS function for the WAN port.
Automatic uplink speed	Check the Automatic uplink speed.
Manual Uplink speed	Input uplink bandwidth manually
Automatic downlink speed	Check the Automatic downlink speed.
Manual Downlink speed	Input downlink bandwidth manually
Address Type	Set QoS by IP Address or MAC address
Local IP Address	Set local IP Address if the address type is by IP Address
MAC Address	Set MAC Address if the address type is by MAC Address
Mode	Select Guaranteed minimum bandwidth or Restricted maximum bandwidth
Uplink Bandwidth	Key in the bandwidth.
Downlink Bandwidth	Key in the bandwidth.

4.7.3 Port Filtering

Port Filtering

 Help

☐ Enable Port Filtering


Port Range : Protocol : Both

Current Filter Table:

Port Range	Protocol	Select
------------	----------	--------

Item	Description
Enable Port Filtering	Select Enable Port Filtering to filter ports.
Port Range	Enter the port number that needs to be filtered.
Protocol	Please select the protocol type of the port.
Add	Click on Add to save the setting data.
Current Filter Table	Check ISP to get IP address and default gateway IP address
Delete Selected & Delete All	It will display all ports that are filtering now.
DNSv6	Click Delete Selected will delete the selected item. Click Delete All will delete all items in this table.

Port 80 has been blocked as the following illustrate.

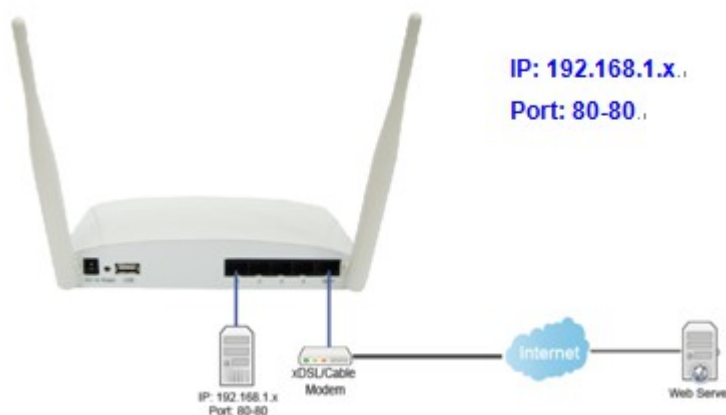

4.7.4 IP Filtering

Please refer [IP Filtering](#)

4.7.5 MAC Filter Schedule

Please refer [Mac Filter Schedule](#)

4.7.6 URL Filtering

Please refer [URL Filtering](#)

4.7.7 IP Binding

Please refer [IP Binding](#)


4.7.8 VLAN

VLAN Settings

 Help

☐ Enable VLAN

Enable	Network location	WAN/LAN	Forwarding Rule	Tag	VID (1~4090)	Priority	CFI
<input type="checkbox"/>	Wireless 1 Primary AP	LAN	NAT ▾	<input type="checkbox"/>	1	0 ▾	<input type="checkbox"/>
<input type="checkbox"/>	Wireless 1 Virtual AP1	LAN	NAT ▾	<input type="checkbox"/>	1	0 ▾	<input type="checkbox"/>
<input type="checkbox"/>	Wireless 1 Virtual AP2	LAN	NAT ▾	<input type="checkbox"/>	1	0 ▾	<input type="checkbox"/>
<input type="checkbox"/>	Wireless 1 Virtual AP3	LAN	NAT ▾	<input type="checkbox"/>	1	0 ▾	<input type="checkbox"/>
<input type="checkbox"/>	Wireless 1 Virtual AP4	LAN	NAT ▾	<input type="checkbox"/>	1	0 ▾	<input type="checkbox"/>
<input type="checkbox"/>	Ethernet Port	WAN	NAT ▾	<input type="checkbox"/>	1	0 ▾	<input type="checkbox"/>

 Refresh

 Save

Apply

Item	Description
Forwarding Rule	Bridge or NAT mode
Tag	Add VLAN tag to packet
VID	Set VLAN ID (1~4096)
Priority	It indicates the frame priority level. Values are from 0 (best effort) to 7 (highest); 1 represents the lowest priority
CFI	Enable or Disable CFI

4.8 System Management

This section including Wake on LAN, Change Username/Password, Upgrade Firmware, Profiles Save, Remote Management, Time Zone, UPnP, Route Setup, VPN Passthrough, and Wan Type Auto Detection. It is easy and helpful for users making more detailed settings

4.8.1 Wake on LAN

Switch your computer ON through your LAN or the Internet . To support WOL you must have a computer with Motherboard that supports WOL, as well as a Network Controller (NIC) supporting this function. Most of the newer Motherboard (circa 2002 and On), have an On Board NIC that supports WOL. Otherwise you need to install a PCI NIC that is WOL capable.

Wake on Lan Schedule

[i Help](#)

☐ Enable Wake on LAN Schedule

Enable	Day	Time	MAC Address	Active Now
<input type="checkbox"/>	Sun	00 : 00	<div>▼</div> <div>000000000000</div>	
<input type="checkbox"/>	Sun	00 : 00	<div>▼</div> <div>000000000000</div>	
<input type="checkbox"/>	Sun	00 : 00	<div>▼</div> <div>000000000000</div>	
<input type="checkbox"/>	Sun	00 : 00	<div>▼</div> <div>000000000000</div>	

4.8.2 Change Password

Users can set or change user name and password used for accessing the web management interface in this section.

Change Password

User Name:

New Password:

Confirmed Password:

Input User Name and New Password, then input Confirm Password again.

4.8.3 Firmware Upgrade

Please refer [Firmware Upgrade](#)

4.8.4 Profiles Save

Users can create a backup file that contains current router settings. This backup file can be used to restore router settings. This is especially useful in the event you need to reset the router to its default settings.

Save/Reload Settings

Save Settings to File:

Load Settings from File:

4.8.5 Remote Management

This page allows you to access the GUI on WAN

Remote manager

HTTP Connection Port:

Enable Web Server Access on WAN:

Item	Description
HTTP Connection Port	Users can access GUI by this port , default is 80
Enable Web Server Access on WAN	Allow user access GUI from WAN side

4.8.6 Time Zone

Users can select time zone and synchronize the local clock on the router.

Time Zone Setting

Time Zone Select :
(GMT+08:00)Taipei

☒ Enable NTP client update
☐ Automatically Adjust Daylight Saving

NTP server : ☒ 220.130.158.71 - Taiwan ☐ (Manual IP Setting)

4.8.7 UpnP

Universal Plug and Play (UPnP) is a standard of networking protocols promulgated by the UPnP Forum. The goals of UPnP are to allow devices to connect seamlessly and to simplify the implementation of networks in the home (data sharing, communications, and entertainment) and in corporate environments for simplified installation of computer components. BR070N supports UPnP function, and can cooperate with other UPnP devices. When you activate UPnP, please click My Network Places. Users will see an Internet Gateway Device icon. By click the icon, users can enter the GUI of the router. If you do not wish to use UPnP, you can disable it.

UPnP Setting

Enable/Disable UPNP: ☒ Enabled ☐ Disabled

4.8.8 Router Setup

Dynamic routing is a distance-vector routing protocol, which employs the hop count as a routing metric. RIP prevents routing loops by implementing a limit on the number of hops allowed in a path from the source to a destination. The maximum number of hops allowed for RIP is 15

Static routing is a data communication concept describing one way of configuring path selection of routers in computer networks. It is the type of routing characterized by the absence of communication between routers regarding the current topology of the network. This is achieved by manually adding routes to the

router routing table.

Item	Description
Enable Dynamic Route	Enable or Disable dynamic route
NAT	Enable or Disable NAT function
Transmit	There are 3 options : 1. Disable : do not send any RIP packet out 2. Send RIP1 packet out 3. Send RIP2 packet out
Receive	There are 3 options : 4. Disable : do not receive any RIP packet 5. Only receive RIP1 packet 6. Only receive RIP2 packet
Enable Static Route	Enable or Disable dynamic route
IP Address	Destination IP address
Subnet Mask	Destination IP subnet mask
Gateway	Gateway IP address for destination
Metric	Metric number on router's routing table
Interface	Static route rule for LAN or WAN interface

Routing Setup

[Help](#)

☐ Enable Dynamic Route

NAT: ☒ Enabled ☐ Disabled
Transmit: ☒ Disabled ☐ RIP 1 ☐ RIP 2
Receive: ☒ Disabled ☐ RIP 1 ☐ RIP 2

☐ Enable Static Route

IP Address:
Subnet Mask:
Gateway:
Metric:
Interface:

Static Route Table:

Destination IP Address	Netmask	Gateway	Metric	Interface	Select
------------------------	---------	---------	--------	-----------	--------

4.8.9 VPN Passthrough

Virtual Private Networking (VPN) is typically used for work-related networking. For VPN tunnels, the router supports IPsec, Pass-through, PPTP Pass-through, and L2TP Pass-through.


VPN Passthrough Setting


Enable/Disable IPSec Passthrough: ☒ Enabled ☐ Disabled

Enable/Disable PPTP Passthrough: ☒ Enabled ☐ Disabled

Enable/Disable L2TP Passthrough: ☒ Enabled ☐ Disabled

Enable/Disable IPV6 Passthrough: ☒ Enabled ☐ Disabled

 Refresh

 Save

Apply

Item	Description
IPSec Pass-through	Internet Protocol Security (IPSec) is a suite of protocols used to implement secure exchange of packets at the IP layer. To allow IPSec tunnels to pass through the router, IPSec Pass-through is enabled by default. To disable IPSec Pass-through , select Disable
PPTP Pass-through	Point-to-Point Tunneling Protocol is the method used to enable VPN sessions to a Windows NT 4.0 or 2000 server. To allow PPTP tunnels to pass through the router, PPTP Pass-through is enabled by default. To disable PPTP Pass-through, select Disable.
L2TP Pass-through	To allow the L2TP network traffic to be forwarded to its destination without the network address translation tasks.
IPV6 Pass-through	Allow IPV6 packet to be forwarded to its destination without the network address translation tasks.

4.9 Send SMS

Please refer [Send SMS](#)

5 Q & A

5.1 Installation

- Where is the XDSL Router installed on the network?
A: In a typical environment, the Router is installed between the XDSL line and the LAN. Plug the XDSL Router into the XDSL line on the wall and Ethernet port on the Hub (switch or computer).
- Why does the throughput seem slow?
A: To achieve maximum throughput, verify that your cable doesn't exceed 100 meter. If you have to do so, we advise you to purchase a bridge to place it in the middle of the route in order to keep the quality of transmitting signal. Out of this condition you would better test something else.
 - Verify network traffic does not exceed 37% of bandwidth.
 - Check to see that the network does not exceed 10 broadcast messages per second.
 - Verify network topology and configuration.

5.2 LED

- Why doesn't BRB73n power up?
A: Check if the output voltage is suitable, or check if the power supply is out of order.
- The Internet browser still cannot find or connect to BRB73n after verifying the IP address and LAN cable, the changes cannot be made, or password is lost.
A: In case BRB73n is inaccessible; you can try to restore its factory default settings. Please press the "Reset" button and keep it pressed for over 7 seconds and the light of STATUS will vanish. The LEDs will flash again when reset is successful.
- Why does BRB73n shut down unexpectedly?
A: Re-plug your power adapter. Then, check the STATUS indicator; if it is off, the internal flash memory is damaged. For more help, please contact with your provider.

5.3 Installation

- What is the default IP address of the router for LAN port?
A: The default IP address is 192.168.1.1 with subnet mask 255.255.255.0
- I don't know my WAN IP.
A: There are two ways to know.
Way 1: Check with your Internet Service Provider.
Way 2: Check the setting screen of BRB73n. Click on Status & Log item to select Network Configuration on the Main Menu. WAN IP is shown on the WAN interface.
- How can I check whether I have static WAN IP Address?
A: Consult your ISP to confirm the information, or check Network Configuration in BRB73n's Main Menu.
- Will the Router allow me to use my own public IPs and Domain, or do I have

to use the IPs provided by the Router?

A: Yes, the Router mode allows for customization of your public IPs and Domain.

5.4 OS Setting

- Why can't my computer work online after connecting to BRB73n ?
A: It's possible that your Internet protocol (TCP/IP) was set to use the following IP address. Please do as the following steps. (Windows 2000 & XP)
Start > Settings > Network and Dial-up Connections > double click on Internet Protocol(TCP/IP) > select obtain IP address automatically > Click on OK button. Then, open Internet browser for testing. If you still can't go online, please test something else below.
 - Verify network configuration by ensuring that there are no duplicate IP addresses.
 - Power down the device in question and ping the assigned IP address of the device. Ensure no other device responds to that address.
 - Check that the cables and connectors or use another LAN cable.
- Why can't I connect to the router's configuration utility?
A: Possible Solution 1: Make sure that your Ethernet connect properly and securely. Make sure that you've plugged in the power cord.
Possible Solution 2: Make sure that your PC is using an IP address within the range of 192.168.1.2 to 192.168.1.254. Make sure that the address of the subnet mask is 255.255.255.0. If necessary, the Default Gateway data should be at 192.168.1.1. To verify these settings, perform the following steps:

Windows 2000, or XP Users:

- Click on Windows Start > click on Run > input cmd > click on OK button.
- At the DOS prompt, type ipconfig/all.
- Check the IP Address, Subnet Mask, Default Gateway data. Is this data correct? If the data isn't correct. Please input ipconfig/release > press Enter > input ipconfig/renew > press Enter.

Possible Solution 3: Verify the connection setting of your Web browser and verify that the HTTP Proxy feature of your Web browser is disabled. Make these verifications so that your Web browser can read configuration pages inside your router. Launch your Web browser.

Internet Explorer Users:

- Click on Tools > Internet Options > Connections tab.
- Select never dial a connection, click on Apply button, and then click on OK button.
- Click on Tools and then click on Internet Options.
- Click on Connections and then click on LAN Settings.
- Make sure none of the check boxes are selected and click on OK button.
- Click on OK button.

Netscape Navigator Users:

- Click on Edit > Preferences > double-click Advanced in the Category window.
- Click on Proxies > select Direct connection to the Internet > click on OK button.
- Click on Edit again and then click on Preferences.
- Under category, double-click on Advanced and then click on Proxies.
- Select Direct connection to the Internet and click on OK button.
- Click on OK button.
- Web page hangs, corrupt downloads, or nothing but junk characters is being displayed on the screen. What do I need to do?
A: Force your NIC to 10Mbps or half duplex mode, and turn off the "Auto-negotiate" feature of your NIC as a temporary measure. (Please look at the Network Control Panel, in your Ethernet Adapter's Advanced Properties tab.)
- Why can't I connect to the Web Configuration?
A: you can remove the proxy server settings in your web browser.

5.5 BRB73n Setup

- Why does BRB73n's setup page shut down unexpectedly?
A: If one of the pages appears incompletely in BRB73n's setup pages, please click on Logout item on the Main Menu before shutting it down. Don't keep it working. Then, close Internet browser and open it again for going back to the previous page.
- I don't know how to configure DHCP.
A: DHCP is commonly used in the large local network. It allows you to manage and distribute IP addresses from 2 to 254 throughout your local network via BRB73n. Without DHCP, you would have to configure each computer separately. It's very troublesome. Please Open Internet browser > Input 192.168.1.1 in the website blank field > Select DHCP Server under the IP Config Menu. For more information, please refer to Router Mode or AP Mode).
- How do I upgrade the firmware of BRB73n ?
A: Periodically, a new Flash Code is available for BRB73n on your product supplier's website. Ideally, you should update BRB73n's Flash Code using Firmware Upgrade on the System Management menu of BRB73n Settings.
- Why is that I can ping to outside hosts, but cannot access Internet websites?
A: Check the DNS server settings on your PC. You should get the DNS servers settings from your ISP. If your PC is running a DHCP client, remove any DNS IP address setting. As the router assign the DNS settings to the DHCP-client-enabled PC.
- BRB73n couldn't save the setting after click on Apply button?
A: BRB73n will start to run after the setting finished applying, but the setting isn't written into memory. Here we suggest if you want to make sure the setting would be written into memory, please reboot the device via Reboot under System Management directory.

5.6 Wireless LAN

- Why couldn't my wireless notebook work on-line after checking?
A: Generally, Wireless networks can sometimes be very complicated to set up, particularly if you're dealing with encryption and products from different vendors. Any number of variables can keep your workstations from talking to each other. Let's go over some of more common ones.

For starters, verify that your router and your workstation are using the same SSID descriptions. SSID acts as a password when a mobile device tries to connect to the wireless network. The SSID also differentiates one WLAN from another, so all access points and all devices attempting to connect to a specific WLAN must use the same SSID. A workstation will not be permitted to connect to the network unless it can provide this unique identifier. This is similar to the function of your network's Workgroup or Domain name.

When you're experiencing conductivity problems, it is always best to keep things simple. So next you are going to do is that, please disable any WEP encryption you might have configured.

Successful implementation of encryption also includes the use of a shared key. A HEX key is the most common, but other formats are also used. This key identifies the workstation to the router as a trusted member of this network. Different manufacturers can implement this key technology in ways that might prevent them from working correctly with another vendor's products. So pay attention to detail is going to be the key to a successful installation.

Next make sure the router and the NIC are configured to use the same communications channel. There are normally 11 of them, and the default channel can also vary from vendor to vendor. You might also want to confirm that the router has DHCP services enabled and an address pool configured. If not, the NIC won't be able to pick up an IP address. I have run across a few access points that offer DHCP services but do not assign all of the needed IP information to the NIC. As a result, I was able to connect to the network, but could not browse the web. The point is, don't assume anything. Verify for yourself that all of the required settings are being received by the workstation.

Finally, you might want to keep the system you're trying to configure in the same room as the router, at least during the initial configuration, in order to minimize potential interference from concrete walls or steel beams.

- My PC can't locate the Wireless Access Point.
A: Check the following:
 - Your PC is set to Infrastructure Mode. (Access Points are always in Infrastructure Mode.)
 - The SSID on your PC and the Wireless Access Point are the same. Remember that the SSID is case-sensitive. So, for example "Workgroup" does NOT match "workgroup".
 - Both your PC and the Wireless Access Point must have the same setting for WEP. The default setting for the Wireless Router is disabled, so your wireless station should also have WEP disabled.
 - If WEP is enabled on the Wireless Router, your PC must have WEP enabled, and the key must match.

- If the Wireless Router's Wireless screen is set to Allow LAN access to selected Wireless Stations only, then each of your Wireless stations must have been selected, or access will be blocked.
 - To see if radio interference is causing a problem, see if connection is possible when close to the Wireless Access Point. Remember that the connection range can be as little as 100 feet in poor environments.
- Wireless connection speed is very slow.

A: The wireless system will connect at highest possible speed, depending on the distance and the environment. To obtain the highest possible connection speed, you can experiment with following:

 - Access Point location: Try adjusting the location and orientation of the Access Point.
 - Wireless Channel: If interference is the problem, changing to another channel may show a marked improvement.
 - Radio Interference: Other devices may be causing interference. You can experiment by switching other devices off, and see if this helps. Any "noisy" devices should be shielded or relocated.
 - RF Shielding: Your environment may tend to block transmission between the wireless stations. This will mean high access speed is only possible when close to the Access Point.
- Some applications do not run properly when using the Wireless Router.

A: The Wireless Router processes the data passing through it, so it is not transparent. Use the Special Application feature to allow the use of Internet applications which do not function correctly. If this does solve the problem, you can use the DMZ function. This should work with almost every application, but:

 - It is a security risk, since the firewall is disabled.
 - Only one (1) PC can use this feature.
- I can't connect to the Wireless Router to configure it.

A: Check the following:

 - The Wireless Router is properly installed, LAN connections are OK, and it is powered ON.
 - Make sure that your PC and the Wireless Router are on the same network segment.
 - If your PC is set to "Obtain an IP Address automatically" (DHCP client), restart it.
 - If your PC uses a Fixed (Static) IP address, make sure that it is using an IP Address within the range 192.168.1.129 to 192.168.1.253 and thus compatible with the Wireless Router's default IP Address of 192.168.1.254. Also, the Network Mask should be set to 255.255.255.0 to match the Wireless Router. In Windows, you can check these settings by using Control Panel ~ Network to check the Properties for the TCP/IP protocol.
- The WinXP wireless interface couldn't communicate the WEP with SAPIDO BRB73n's wireless interface.

A:The default WEP of WinXP is Authentication Open System - WEP, but the WEP of SAPIDO BRB73n is only for Shared Key - WEP, it caused both sides couldn't communicate. Please select the WEP of WinXP from Authentication Open System to Pre-shared Key - WEP, and then the WEP wireless interface between WinXP and SAPIDO BRB73n would be communicated.

5.1 Support

- What is the maximum number of IP addresses that the XDSL Router will support?
A:The Router will support to 253 IP addresses with NAT mode.
- Is the Router cross-platform compatible?
A:Any platform that supports Ethernet and TCP/IP is compatible with the Router.

5.2 Others

- Why does the router dial out for PPPoE mode very often?
A:Normally some of game, music or anti-virus program will send out packets that trigger the router to dial out, you can close these programs. Or you can set the idle time to 0, then control to dial out manually.
- What can I do if there is already a DHCP server in LAN?
A:If there are two DHCP servers existing on the same network, it may cause conflict and generate trouble. In this situation, we suggest to disable DHCP server in router and configure your PC manually.

6 Appendices

6.1 Operating Systems

- Microsoft : Windows 2000, XP, Vista, Windows 7.
- Apple : Mac OS X 10.4.7, Leopard and the following related versions.
- Linux : Redhat 9, Fedora 6 & 7, Ubuntu 7.04 and the following related versions.

6.2 Browsers

- Internet Explorer ver. 6 and 7 and the following related versions.
- FireFox ver. 2.0.0.11 and the following related versions.3.
- Safari ver. 3.04 and the following related versions.

6.3 Communications Regulation Information

Should any consumers need to learn more information, services and supports, please contact the supplier of your product directly.