

55" All-in-One ePoster Digital Kiosk

Dual-sided Display Solution with Single-side Touch

EP5555T



Vertical visual appeal gets interactive impact with the two-sided ViewSonic® EP5555T ePoster with one-side touch functionality.* The free-standing, all-in-one design delivers convenience as well as high-impact, glossy-black good looks, for quick and easy deployment. Engage your audience coming and going with vivid HD images and one-sided touch that invites interaction with your message. Drive content using the internal media player, or connect to your corporate network via a supplementary media player. And rest assured, it's all safe and secure thanks to the locking back cover and tempered glass faceplate.

Key Features:


- Interactive built-in multi-touch panel
- 4096x4096 touch resolution
- Dual internal media players with memory card
- Easy connectivity to PC or network media via HDMI, VGA, YPbPr, USB or composite video (A/V)
- Built-in AC power outlet and mounting cradle enable the use of additional media players

Designed for:

- Retail
- Public venues
- Hospitality

55" All-in-One ePoster Digital Kiosk

EP5555T

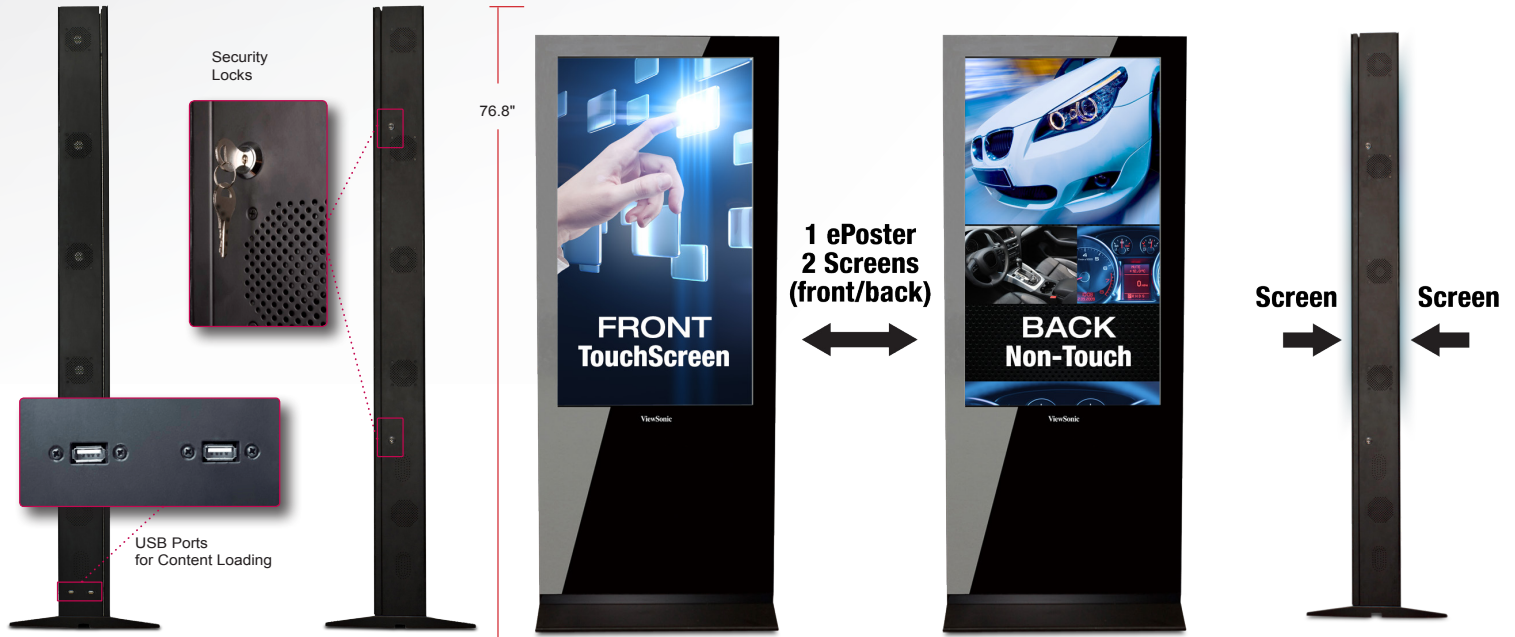

Specifications

DUAL DISPLAY	Type	55" color TFT active matrix LCD
	Display Area	26.8" horizontal x 47.6" vertical; 55" diagonal
	Optimum Resolution	1920 x 1080
	Contrast Ratio	5000:1 (typ)
	Viewing Angles	178° horizontal, 178° vertical
	Response Time	6.0ms
	Light Source	Long life, 50,000 hrs. (typ)
	Brightness	450 cd/m ²
	Aspect Ratio	16:9
	Panel Surface	Anti-glare, Hard coating (3H)
INTERNAL	Storage	4GB
FILE SUPPORT	Video	MPEG 1/2/3, H/264, Xvid 1.00-AVI, MP4
	Photo	JPEG
	Audio	WMA, MP3, M4A (AA CC)
AUDIO OUTPUT	Speakers	Internal 5-watt (x2)
CONNECTOR	Analog	VGA 15-pin mini D-sub (x1) YPbPr A/V
	Digital	HDMI (x1)
	USB	Type A (x2)
	LAN	RJ45 Pigtail
	Audio In	3.5mm mini jack (x1)
	Power	3-pin plug
CONTROLS (OSD)	Main Menu	Input source System Display Clock setup On/Off timer Volume setup Exit

TOUCH SCREEN	Touch Mode	Dual point click, long press right click, double click, draw
	Resolution	4096 x 4096 dots
	Response Time	8ms
	Supports OS	Windows® 7/2000/XP/Vista
	Interface	USB 2.0 (full speed), USB 1.1 port HID compliant
POWER	Voltage	AC 100-240V (universal), 50-60Hz
	Consumption	900W (max)
OPERATING CONDITIONS	Temperature	32-104°F (0-40°C)
	Humidity	20-90% (non-condensing)
DIMENSIONS (W x H x D)	Physical	32.7 x 76.8 x 18.3 in. / 830 x 1950 x 465 mm
	Packaging	81.8 x 38.5 x 24.4 in. / 2078 x 978 x 620 mm
WEIGHT	Net	308 lbs / 140 kg
	Gross	334.4 lbs / 152 kg
REGULATIONS		FCC, ICES 003, CE
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
WARRANTY		1-year limited warranty with extended options available

What's in the box?

EP5555T ePoster, power cord, remote control with batteries, key, Quick Start Guide, User Manual and Software on CD



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.