



## FALCON: Smart Portable Solution

Condition monitoring has never been so easy!!





# OneProd

## FALCON Technical datasheet

Document reference:  
Name:

TDS3143 December 2013 C  
FALCON technical datasheet

**[www.acoemgroup.com](http://www.acoemgroup.com)**  
**[support@acoemgroup.com](mailto:support@acoemgroup.com)**

# TABLE OF CONTENT

USE AND APPLICATIONS .....	5
Smart balancer.....	5
Smart data collector .....	5
Automatic machine controller.....	6
Main applications .....	6
Condition monitoring, new generation .....	7
Unique user comfort.....	7
Accessibility to all .....	7
Maximum productivity .....	7
Suited to industrial settings .....	7
Description of FALCON packages .....	8
FALCON Balancer .....	8
FALCON Basic.....	8
FALCON Smart.....	8
FALCON Expert .....	8
FALCON Automatic controller.....	8
Accessibles options .....	8
Summary table .....	9
FALCON general specifications .....	10
FALCON Signal processing.....	11
Balancing specifications .....	12
Data collector/analyser specifications .....	13
Available collection levels .....	13
Data collection speed table .....	14
FALCON WLS wireless triaxial accelerometer .....	15
Physical .....	15
Battery .....	15
Metrology .....	15
Environment .....	15
Communication .....	15
Description of FALCON automatic diagnosis .....	16
Machine and components types .....	16
Main analysed defects .....	16
Limitations .....	16
Unrivalled reliability .....	16
Results .....	16
FALCON packages and kits .....	16
FALCON standard hardware kit.....	17
Data collection sensor kits (your selection) .....	17
Balancing kits .....	17

## USE AND APPLICATIONS

---

Relying on ACOEM's 25 years of experience (formerly 01dB-Metravib, Stell Diagnostic, 01dB-Stell and then 01dB Acoustics & Vibration) in developing portable instruments for condition monitoring, FALCON includes all the technology to address any set of machines

FALCON is a multifunction instrument that can be used as:

- A smart balancer
- A smart data collector
- An advanced analyser
- An automatic machine controller



### SMART BALANCER

---

This function allows correcting unbalance on your machines. It is possible to balance rotors of any size, from the simplest to the most complex one (1 to 4-plane balancing). Using multi-channel acquisition, parallel measurements are possible on all sensors.

FALCON Balancer includes all tools to guide the operator and control the results during the entire balancing process:

- Easy to use with the "guided" mode
- Graphic display of measurements and weight positions
- Automatic setup of tachometer
- Trial weight estimation
- Control of the data at each step with recommendation to improve result quality
- Rotation speed control
- Tools to split or merge weights
- Result assessment according to ISO 10816-3 and ISO 1940
- Get a detailed report documented with histograms, pictures and spectra.

With FALCON, the balancing of your machines is more accurate, more secure and faster.

### SMART DATA COLLECTOR

---

The FALCON data collector allows any user to perform periodic monitoring of your rotating machines, based on their vibration signatures. FALCON offers the most efficient solution at each step of the implementation of condition monitoring in your factory. The defects of your rotating machines can thus be detected several months in advance and the maintenance operations can be scheduled, which avoids unscheduled shutdowns and associated production losses.

Suited to non specialists due to its automatic configuration and diagnosis tool, its advanced measurement capabilities also turn FALCON into the perfect tool for the analysis of the most complex problems:

- Locally with FALCON,
- On the computer with the powerful XPR analysis software.

## AUTOMATIC MACHINE CONTROLLER


---

FALCON can be used as a machine automatic controller, i.e., users who are not experts in vibration and signal processing can, in a fully autonomous way, know the condition of their machine accurately and in a way that can be understood by anyone.

Without any software required on site, one can thus:

- Control, on a one-time basis or periodically, the condition of suspicious machines in order to decide on a maintenance action to carry out;
- Use FALCON as a control tool at the end of the production line in a repair workshop, for instance, or to check the proper correction of an unbalance or alignment problem...

Based on FALCON's communication capabilities through a hosted platform, one can also, at any time, request remote advice from an expert. By accessing raw data measured by FALCON, the expert will be able to provide you with all the information required to make a decision for the most critical or most complex cases.

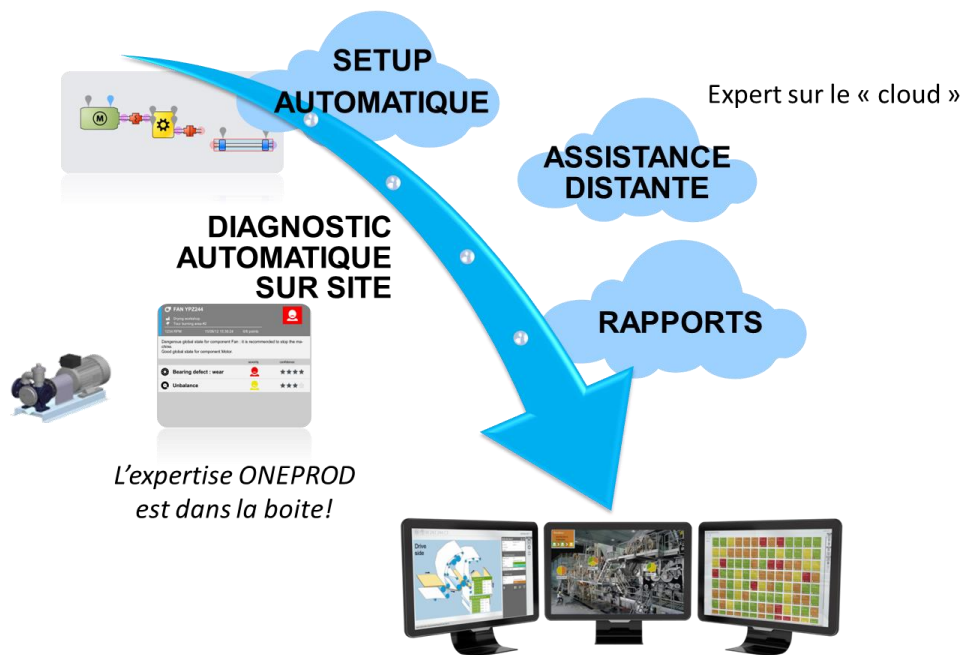

## MAIN APPLICATIONS

---

FALCON is available for all industrial applications where ONEPROD-based condition monitoring is deployed:

- Steel industry
- Mining
- Chemistry
- Petrochemistry
- Power
- Oil & gas
- Cement works
- Paper industry
- Food industry
- Pharmaceuticals
- Water and waste treatment
- Fabrics
- Automotive industry
- Defence
- Wind power
- Air and space
- Teaching/Research
- Other industries...

# CONDITION MONITORING, NEW GENERATION

## UNIQUE USER COMFORT

FALCON is the first new generation portable instrument that offers a user comfort unrivalled on the market:

- Large colour touchscreen with high brightness
- Built-in sensors: pyrometer, stroboscope, camera
- Wireless vibration data collector
- Wireless communication with the information system

## ACCESSIBILITY TO ALL

With FALCON, any user can start condition monitoring by following up vibrations. All required functions are accessible, even to non specialists:

- Automatic configuration module based on the description of machine kinematics. Only the information listed on the identification plate is required! (speed, power...)
- Automatic defect detection and identification based on the embedded automatic diagnosis capabilities


## MAXIMUM PRODUCTIVITY

FALCON is the fastest data collection tool on the market and stands out at the scale of an industrial site:

- Synchronous triaxial wireless collection: 3 measurements carried out in a single shot and simultaneously
- Real-time processing: no waiting time before display of the results
- Automatic detection of the measurement points by reading of the bar code: no error is possible
- Documentation of routes allowing guiding the roundsman and making measurement more reliable (pictures of sensor positioning, navigation on a map...)

## SUITED TO INDUSTRIAL SETTINGS

- Anti-shock design, resistant to a fall of 1.2 m
- Screen protection
- IP65 protection
- Specific FALCON-EX model suited to dangerous areas: ATEX Zone 2, IECEx (pending)

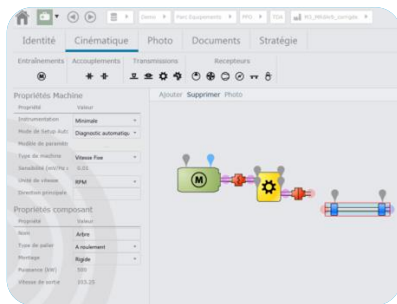

## DESCRIPTION OF FALCON PACKAGES

---

Several packages are available depending on your own requirements.

The same instrument can contain all or part of the available functions and can easily be upgraded from one package to another.

### FALCON BALANCER

---

The FALCON BALANCER package is a fully stand-alone portable device embedding a lot of functions improving the productivity and reliability of balancing, making FALCON the best balancing tool of the market. This package exists in 2-channel and in 4-channel version.

### FALCON BASIC

---

The BASIC data collector package is especially adapted to all industrialists who want to start condition monitoring on a set of machines and discover the world of vibration analysis step by step.

### FALCON SMART

---

The SMART data collection package is especially adapted to all industrialists who want to improve the reliability of their facilities in a very productive and easy way. With FALCON SMART data collector, the expert is in the box!

### FALCON EXPERT

---

The EXPERT data collector package is especially adapted to all users who have good knowledge of vibration analysis and can provide reliable diagnosis and maintenance recommendation on their own. The EXPERT data collector package will provide them with the most productive tool of the market, thus helping them to drastically save time.

### FALCON AUTOMATIC CONTROLLER

---

The FALCON Machine Automatic Controller package is particularly well suited to industrialists who want to perform on-site diagnosis of a set of machines very easily and with minimum investment.

It can be perfectly adapted to the need for automatic control by users who are not experts in vibration analysis. For instance, as a control tool at the end of the line in a repair workshop.

### ACCESSIBLES OPTIONS

---

- **Digital Recorder:** This option increases the time signal acquisition capability to ranges of signals up to 4,096 Ksamples or 80 s to be distributed over the number of channels used.
- **Balancing:** The balancing function can be added as an option to each of the following packages: AUTO CONTROLLER, BASIC, SMART and EXPERT.
- **Automatic Diagnosis:** The automatic diagnosis capabilities, as well as the automatic setup module for automatic diagnosis (required), can be added as options to the EXPERT package. Note: These functions are available as standard functions in the AUTO CONTROLLER and SMART packages.
- **Automatic Setup for monitoring configuration (off automatic diagnosis):** Automatic creation of monitoring measurements with simple description of the machine kinematics, based on a library of model points. Included in the AUTO CONTROLLER and SMART Packages, it is also available as an option for the EXPERT package. This option allows for considerable time savings during the set-up phases of large sets of machines.
- **Temporary licence:** FALCON allows managing temporary licences. Use a function only when you need it!
- **Upgradeability:** Each FALCON package can be upgraded. You can upgrade your instrument from one package to another at any time.
- **Sensor Option:** Standard BASIC, SMART and EXPERT packages are provided with a wireless triaxial accelerometer (classic wired single-axis accelerometer in option). A wired version of these packages (wireless triaxial accelerometer in option) is however available upon request.



**SUMMARY TABLE**

	Balancer		Auto	Data Collector / Analyzer		
	2Ch	4Ch	Controller	Basic	Smart	Expert
<b>Computer Software Included</b>						
XPR EASY				●	●	
XPR ADVANCED					○	●
XPR PREMIUM						○
FALCON Data Transfer Module			● (C)	●	●	●
Automatic Setup for Monitoring (all machines)			● (C)		●	○
Automatic Setup for Automatic Diagnosis (cf. automatic diagnosis limitations)			● (C)		●	○
SUPERVISION access for 1 user			● (C)	●	●	●
XPR Desktop Use for 1 user				●	●	●
XPR Network Use for 1 user				○	○	○
Additional XPR & SUPERVISION users				○	○	○
<b>Instrument Characteristics</b>						
Analog Channels (simultaneous)	2	4	1	1	1	4
Tachometer Inputs	●	●	●	●	●	●
DC Coupled Inputs	●	●	●	●	●	●
Stroboscope	●	●	●	●	●	●
Embedded Pyrometer	●	●	●	●	●	●
Colourful 7" TouchScreen	●	●	●	●	●	●
Camera	●	●			●	●
Automatic Point Detection					●	●
<b>Embedded Processing</b>						
Real Time Processing (Instant Result Display)	●	●	●	●	●	●
Fmax - 80kHz	●	●	●	●	●	●
Spectral Lines - 6400	●	●	●	●	●	●
Spectral Lines - 102,4k						●
Zoom						●
Embedded Automatic Diagnosis			●		●	○
<b>Recording Types</b>						
Time Wave - 8k samples	●	●	●	●	●	●
Time Wave - 64 ksamples					○	●
Offroute				●	●	●
Process entry			●	●	●	●
Demodulation				●	●	●
Time Waveform Recorder at 51,2kHz (4Msamples, 80s)						○
Balancing Functionality, incl. Built-in reports	●	●	○	○	○	○
Coast-down/Run Up						○ pending
X-Channel Phase						○ pending
<b>Sensors &amp; Accessories Included</b>						
Wireless 3-axis sensor with USB charger			○	●	●	●
Data collection Wired Accelerometer Kit			●	○	○	○
Balancing Accelerometer Kit	2	4				
Balancing kit (tachy + magnetic base + cable)	●	●		○	○	○
2m Straight cord for tachometer (ECTA6b/BNC connectors)	●	●	●	●	●	●
Contact Point M6	●	●	●	●	●	●
Coiled-cord ECTA/BNC	●	●	●	●	●	●
Quick start Guide	●	●	●	●	●	●
DVD with firmware and users manuals	●	●	●	●	●	●
USB cable	●	●	●	●	●	●
Standard Power Supply	●	●	●	●	●	●
Connector caps	●	●	●	●	●	●
Transportable case	●	●	●	●	●	●
Harness & carrying strap	●	●	●	●	●	●
Cementing Stud M6 x5 units	●	●	●	●	●	●
1x Flat Magnet	●	●	●	●	●	●
<b>Maintenance Contract &amp; Warranty</b>						
ONEPROD Product Hotline 1 year Free Support	●	●	●	●	●	●
FALCON Instrument 1 year Warranty	●	●	●	●	●	●
FALCON 1 year free Firmware Upgrade	●	●	●	●	●	●
Condition Monitoring Software 1 year free Upgrade	●	●	●	●	●	●
Maintenance contract 1 year extension	○	○	○	○	○	○
Maintenance contract 2 year extension	○	○	○	○	○	○

● Included ○ Option ● (C) Internet access required (Cloud)

## FALCON GENERAL SPECIFICATIONS

### Touchscreen

Graphic colour touchscreen  
Resolution: 800x480 pixels  
Dimension: 154x92 mm (D7")  
Adjustable brightness  
Can be used outdoors  
Icon functions

### Touch keyboard

On touchscreen:

- 10 contextual function keys
- Functions are organised for single-hand measurement (left or right)
- Direct access to general functions: Home, Help, Setup, Screen copy, Picture, Bar code reader, Text note, Audio comment, Pyrometer, Stroboscope
- Full keyboard for text input. Several keyboards available: qwerty, azerty, Chinese...

### Acquisition

Synchronous on 4 channels + trigger input

24-bits conversion

Sampling frequency:

- 102.4 kHz for each channel
- Up to 204.8 kHz on 1 channel

Antialiasing filter

Wireless acquisition with FALCON WLS triaxial accelerometer

Digital signal processors

Real-time processing:

- 40 kHz on 4 channels
- Up to 80 kHz on 2 channels

Memory: 3.5 GB for measurements

### Communication

USB 2 type B device (direct connection to PC)

USB 2 type A host (for USB stick)

Ethernet

Wi-Fi

### Battery

Auto test and calibration function

High density Li-Ion type

Rechargeable without removing

Battery lifetime: 10 hours under intense use

Programmable automatic standby mode and switch-off

### Analogue Inputs

Up to 4 programmable signal inputs (depending on instrument option):

- Frequency range: 0 - 40 kHz on 4 channels, 80 kHz on 1 channel
- Overload indicator in % with memorisation
- IEPE interface with real time integrity control, range  $\pm 8V$  (power supply: 4 mA constant current 23 VDC)
- Dynamic signal measurements (acceleration, vibration velocity, absolute displacement, relative displacement, electrical current, etc.)
  - +/- 10 VAC
  - 0, -24 V for proximity probes (a -24Vdc power supply is available on each channel)
- Input impedance AC/DC: 100 k $\Omega$
- Accuracy: +/- 1%
- Sensors without electronics with optional charge amplifier
- DC input: from -24 VDC to +24 VDC for measurements of position and process parameters
- AC coupling: 0.3 Hz
- Compatible with triaxial sensor

### Trigger input:

Range: +/- 10 V, 0 to +24 V, 0 to -24 V

Adjustable triggering parameters

Automatic setup function

For rotation speed measurement, synchronous analysis, balancing, order analysis.

Input impedance: 100 k $\Omega$

+ 5 Vdc power supply for tachometer probe

-24 Vdc power supply for proximity probes

### Microphone input

Microphone input for audio inspection notes

### ANALOGUE OUTPUTS

1 headphone output to listen sensor signal, recorded signal or audio inspection notes

1 stroboscope output: TTL

For each channel and trigger input:

-24 Vdc power supply for proximity probe

### BUILT-IN PYROMETER WITH LASER-SIGHTING

Contactless temperature measurement:

- Range: 0 to 200°C
- Accuracy: +/- 3°C for ambient temperature ranging from 18°C to 28°C.
- Resolution: 0.5°C
- Repeatability: +/- 1°C
- Field of view: 5° @ 50%
- (Ø target  $\approx$  4 cm @ 50 cm)
- Time response: 1 s
- Fixed emissivity: 95%

### BUILT-IN STROBOSCOPE

Rotation speed measurement:

- Range: 30 to 15000 RPM
- Automatic setting to machine speed predefined in setup
- Adjustment:
  - 1/2, x2
  - Fast
  - Fine
- Flash duration : adjustable from 0.5 to 15°
- Can be used independently or to adjust rotation speed in a route or from a spectrum display

### Built-in camera

Resolution: 640 x 480

Autofocus

Distance: 20 cm to  $\infty$

Flash mode

### Identification of measurement point

Built-in bar code reader

Reading distance: from 20 cm to 50 cm according to code dimension

Bar code format: QRcode

Learning mode to avoid codes manual input

### Mechanical/environment

Protection: IP65.

Case with shock protection rubber

Shock protection: 1.2 m drop

Standard compliance:

- Safety: IEC61010-1
- EMC: directive 2004-108-CE

Dimensions: 200 x 265 x 65 mm

Weight: 1.8 kg including battery and rubber protection

Operating temperature: -10°C to 55°C

Humidity: 95% no condensation

### FALCON-EX, intrinsically safe version:

ATEX certification (pending)

IECEx certification (pending)

EX II 3 G, EEx ic IIC T4 option and supplies with certified accessories.

### Remote access

FALCON can be set up so as to communicate with your network through its Ethernet or Wi-Fi interface and used as a remote station. You can then use the applications installed on your computer directly from FALCON (SUPERVISION, CMMS...).

## FALCON SIGNAL PROCESSING

### Vibration Overall Level

High-pass filters: 2, 10, 3,000 Hz,  
 Low-pass filters: 300, 1,000, 2,000, 3,000, 20,000, 40,000 Hz  
 Vibration velocity in accordance with ISO 2954, ISO10816, VDI 2056 standards for rotating machinery, VDI 2063 standard (2-300 Hz) for reciprocating machines  
 Detection: RMS, true or equivalent peak, true or equivalent peak-to-peak  
 Rolling element detection: defect factor scale from 0 to 12 for standard rotation speed\*  
 Measurement of Kurtosis (Shock detection for low speed rolling element bearing)\*

- High-pass filter: 50 Hz to 20 kHz, 1 Hz step
- Low-pass filter: 500 Hz to 20 kHz, 1 Hz step (LPF > 2 x HPF)

Programmable measurement time: 1 to 99 s

Alarms: 4 alarm types, up to 4 alarm levels, comparison to previous measurement

Display: instantaneous measurement, measured value, alarm limits, previous measurement

Display of measurement and alarm levels as bar-graphs

Integration: none, single or double integration for measurement of acceleration, velocity or displacement

Overall level value in engineering unit and dB

### Rotation Speed

External trigger input with direct access to trigger level setup.

Automatic setup mode. Range: 12 to 288,000 RPM (0.2 to 4,800 Hz)

With built-in stroboscope

DC input

Keyboard input

### Other parameters

Integrated pyrometer with laser-sighting for contactless temperature measurement

Any other parameters (user-defined parameter and unit) with DC input and keyboard input

Machine operating condition

### Time Wave

Number of samples: 256, 512, 1,024, 2,048, 4,096, 8,192, 16,384, 32,768, 65,536. Extended number of samples with long time wave option: up to 80 s split over the number of channels or 4,096K samples.

Demodulation of time waveform (band-pass filtered)

Sampling frequency (Hz): 204.8K, 102.4K, 51.2K, 25.6K, 12.8K, 5.12K, 2.56 K, 1.28K, 512, 256, 128

Integration: none, single or double integration for measurement of acceleration, velocity or displacement

Synchronous analysis:

- Triggering on signal or trigger input. Trigger delay programmable from -8192 samples to +20 seconds
- Programmable trigger level on positive or negative slope
- Averaging: from 1 to 4,096 with linear or exponential mode

Time analysis on all types of signal: vibration, force, pressure, current... (user-defined parameter and unit)

Orbit display with 2 channel measurement

### Spectral Analysis

Number of lines: 100, 200, 400, 800, 1 600, 3 200, 6 400, 12.8k, 25.6k, 51.2k, 102.4k (102.4k only with 2 channels max)

Envelope: spectrum of demodulated time waveform filtered by a programmable band-pass filter (any central frequency, band width = 1/2 to 1/128 of analysis range).

Max number of lines: 6,400

Zoom factor: 2, 4, 8, 16, 32, 64, 128.

Frequency ranges (Hz): 80k, 40k, 20k, 10k, 5k, 2k, 1k, 500, 200, 100, 50

Averaging: from 1 to 4,096 with linear, exponential or peak hold mode

Overlap rate: 0, 50, 75%

Real time: up to 40 kHz

Weighting window: Rectangular, Hanning, Flat-top

Synchronous analysis: triggering on signal or trigger input. Trigger delay programmable from -8,192 samples to +20 seconds

Programmable trigger level on positive or negative slope

Display: Lin/Log, automatic scaling, engineering unit/dB, RMS/Peak/Peak-Peak amplitude for each type of parameter, Hz, RPM

Display of instantaneous spectrum and averaging during measurement

Spectral analysis on all types of signal: vibration, force, pressure, current... (user-defined parameter and unit)

### Vector measurement (phased spectrum)

Number of lines: 100, 200, 400, 800, 1,600, 3,200, 6,400



Frequency ranges (Hz): 40k, 20k, 10k, 5k, 2k, 1k, 500, 200, 100, 50

Synchronous averaging: from 1 to 4,096

Display: Lin/Log, automatic scaling, engineering unit/dB,

RMS/Peak/Peak-Peak amplitude for each type of parameter, Hz, RPM

Display of instantaneous spectrum and averaging during measurement

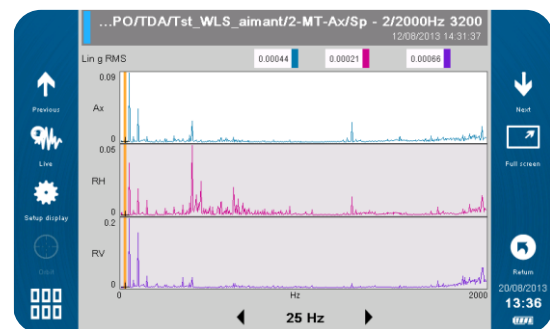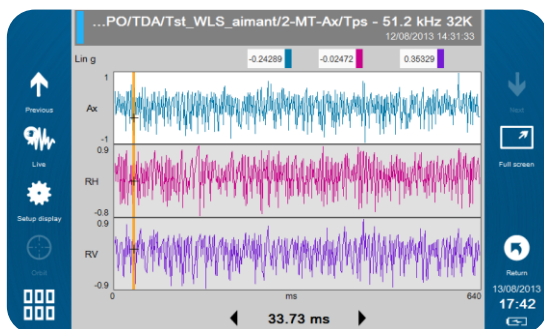

# BALANCING SPECIFICATIONS

### Balancing types

FALCON allows performing 1 to 4-plane balancing. Rotors from any size can thus be balanced, from the simplest (single-plane balancing) to the most complex (3 or 4-plane balancing, 4-channel option required).

### Measurements

Balancing using acceleration, velocity or displacement. Measurement and compensation of Run Out if balancing using proximity probes.

Parallel measurements (2 or 4 channels), which results in a more accurate, more secure and faster procedure. Rotation speed: from 12 to 288,000 RPM (from 0.2 to 4,800 Hz).

Amplitude range:

- With 100 mV/g accelerometer: acceleration: 80 g. Measurement is also possible for vibration, velocity and displacement
- With 8 mV/μm (200 mV/mil) proximity probe: 1.5 mm (60 mils)

Amplitude: display in physical units or dB

Phase: 4-digit display from 0 to 360° (or any other user-defined unit). Precision: +0.5°

### Results display

Indication of rotation speed in Hz or RPM

Display in measurement in table mode and in graphic polar mode

Storage in 2-level tree structure: folder/balancing

Display of trial and balancing masses in table mode and in graphic polar mode. 3D mode for 2-plane balancing.

Metric or imperial units.

### Assistance to configuration

Easy duplication of balancing with copy/paste function: for any stored balancing, it is very easy to do a new balancing operation, by following the previously used procedure.

Direct access to tachometric signal and configuration using an automatic setup function.

Trial values for masses and estimated positions.

Function to distribute masses over two defined angles.

Function to merge additional masses with installed masses.

User-defined angle unit to make mass installation easier.

### Assistance to measurement

Measurement with programmable averaging to decrease external disturbance.

Display of instant value during averaging.

Balancing in a single operation using stored influence factors.

Calculation of balancing masses for any operation (with or without trial masses).

### Results reliability

Automatic control of rotation and vibration speeds dispersion to check measurement reliability.

Display of balancing quality rating (standards ISO 1940, VDI 2060, NFE 90.600).

Display of the limits of standard ISO 10816-3

Step-by-step guiding of the user during balancing: at any moment, the user can know where he/she is in the balancing process and follow the guide step by step.

### Balancing report





The report is generated from an entirely user-configurable template in WORD format. It includes:

- Balancing configuration
- Summary of balancing with graphic histogram
- Picture of sensor mounting
- Comment
- Detailed results
- Spectra at the beginning and the end of balancing

### Management of interruptions

Possibility to stop and resume balancing as you want

Possibility to repeat any operation without repeating the entire procedure

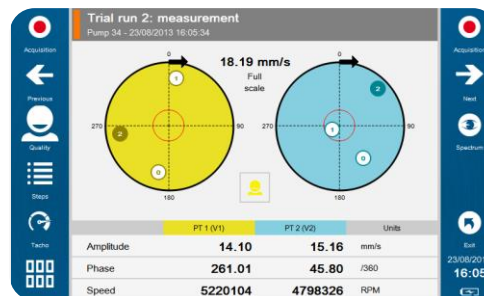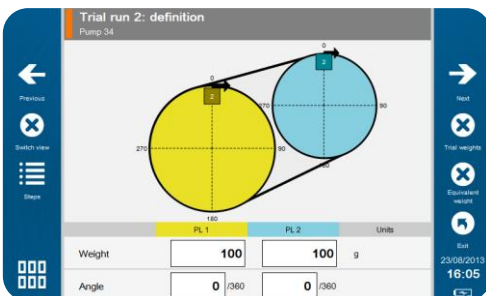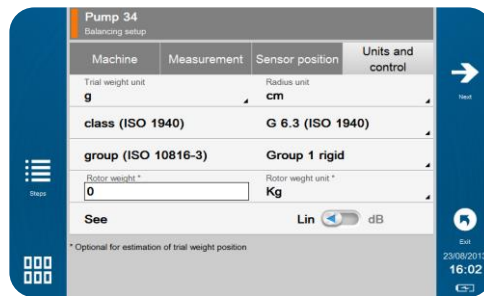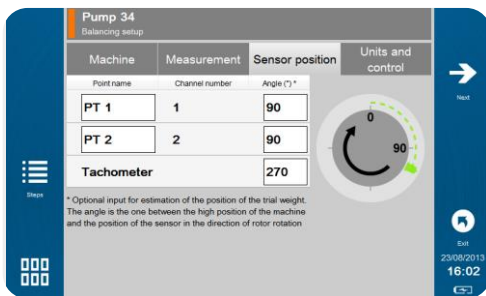

# DATA COLLECTOR/ANALYSER SPECIFICATIONS

### Flexibility of data transfer

Direct connection to PC through USB,  
 Connection to network or PC via Ethernet or Wi-Fi  
 USB stick (remote transfer by e-mail...)

### User-friendly navigation

Organisation as a tree structure:

- Location,
- Machine,
- Point,
- Measurement

Fast navigation in a route based on list or map navigation modes (pictures)

Identification: up to 22 characters/level (20 for measurement)

### Automatic positioning on points or machines

Learning upon the first route by FALCON

Automatic recognition of point or machine by reading of QR code labels.

### Simultaneous measurement on 1 to 4 channels

Management of wireless triaxial accelerometer

Management of wired triaxial accelerometer

Management of 4 synchronous channels from 4 single-axis wired accelerometers. This operating mode requires using 2 cables with Y-connectors to connect to the FALCON ports.

### Real-time processing

Parallel processing

Instant display of measurement results, as soon as the time signal measurement is completed.

### Instant access to automatic diagnosis

As soon as the measurement is completed, the result of automatic diagnosis is available, even in collection mode if the machine was configured to do automatic diagnosis.

### Visual display of the data on the instrument

Display during measurement of (your selection):

- Progress bar
- Values of overall levels
- Scrolling of time signal

Consultation of data on FALCON for on-site analysis

### Input of information during collection

Selection of an inspection note in a predefined list

Input of a free comment (even in Chinese!)

Recording of an audio comment

Picture of the inspection using the built-in camera

Input of the class of operating conditions relative to the measurement. Trends can then be filtered by operating condition when analysing the data in the powerful XPR analysis software.

### “Off route” mode:

Specific route to carry out measurements that are not programmed in the PC.

Creation made easy with copy/paste of the machines of any route.


Measurements created off route can be unloaded into the analysis platform for existing machines or into a new machine created automatically.

## AVAILABLE COLLECTION LEVELS

Available measurement and processing capabilities for 2 levels of function depending on available FALCON packages:

	FALCON AUTO CONTROLLER - BASIC - SMART	FALCON EXPERT
<b>Acquisition and processing performances</b>		
Analog Channels	1	4
Overall Levels calculation	●	●
Time waveforms of up to 8K samples	●	●
Time waveforms of up to 64K samples		●
Spectra of up to 6400 lines	●	●
Spectra of up to 102 400 lines		●
Envelope	●	●
Zoom		●
Vector	●	●
Recorder: time wave of up to 80s (4M samples)		○

● Included ○ Option


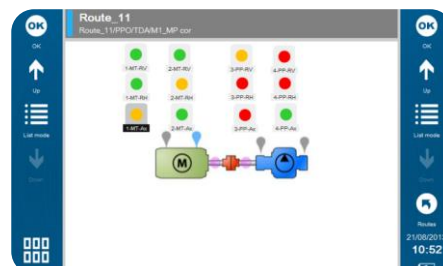


**DATA COLLECTION SPEED TABLE**

Machine Setup	Measurement Type		High Pass Filter	Low Pass Filter	Analysis Freq. Range (Hz)	Sampling Freq. (Hz)	Spectral lines	Time wave samples	Nb of averages	Overlap	TOTAL TIME FOR 3 AXES	<i>incl. Time wave lenght required</i>	<i>Mean time / axis with Tri axial sensor</i>
Basic	FFT	Acc	10 Hz		2 000		1 600		8	1	4 s	2,2 s	1,3 s
	Time Wave	Acc	10 Hz			5 120		4 k	1				
Fan	Overall	Acc	10 Hz	20 kHz							9 s	7 s	3 s
	Overall	Velocity	10 Hz	1 kHz									
	FFT	Acc	2 Hz		200		800		4	1			
	FFT	Acc	2 Hz		2 000		1 600		8	1			
	FFT	Acc	2 Hz		20 000		3 200		12	1			
	Time Wave	Acc	2 Hz			51 200		8 k	1				
Dryer	Overall	Acc	3 kHz	20 kHz							9 s	7 s	3 s
	FFT	Acc	2 Hz		2 000		6 400		6	1			
	FFT	Acc	2 Hz		20 000		800		100	1			
	FFT Env	Acc	2 Hz		20 000		1 600		6	1			
	Time Wave	Acc	2 Hz			12 800		32 k	1				
Crusher	Overall	Acc	2 Hz	20 kHz							9 s	7 s	3 s
	Overall	Velocity	10 Hz	1 kHz									
	Overall	DEF											
	FFT	Acc	2 Hz		200		800		4	1			
	FFT	Acc	2 Hz		2 000		1 600		8	1			
	FFT	Acc	2 Hz		20 000		800		12	1			
	Time Wave	Acc	2 Hz		20 000		1 600		10	1			
Cooling Tower	Overall	Acc	2 Hz	20 kHz							16 s	14 s	5,3 s
	Overall	DEF											
	FFT	Acc	2 Hz		200		1 600		4	1			
	FFT	Acc	2 Hz		2 000		1 600		8	1			
	FFT	Acc	2 Hz		20 000		800		16	1			
	FFT Env	Acc	2 Hz		20 000		1 600		10	1			
	Time Wave	Acc	10 Hz			5 120		16 k	1				

Notes:

- All axes are measured synchronously with the same measurement setup as described above.
- Measurement time for 1 axis with mono axis accelerometer will be very similar to 3 axes total time with tri-axial accelerometer, as it has no impact on the time wave length required.
- Measurement setups above are given as examples. Other treatments can be performed embedded in FALCON during the data collection or automatically by post processing in the analysis software after transfer of the data.

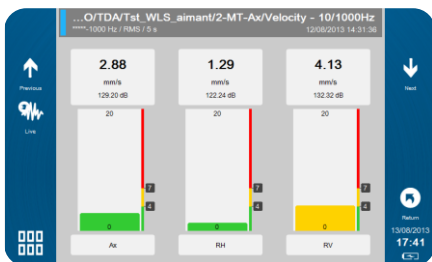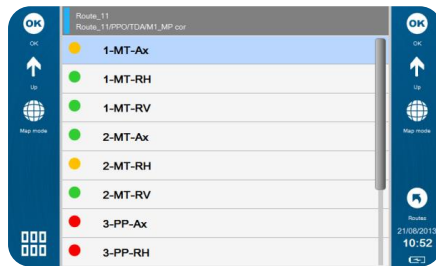

## FALCON WLS WIRELESS TRIAXIAL ACCELEROMETER

---

### PHYSICAL

---

- Dimensions: Ø40 x H115 mm
- Weight: 373 g
- Resistance to shocks: 5 000 g
- Mounting: M6 threaded hole
- Mounting accessories:
  - Fixing studs
  - Magnet for planar surfaces, to be used with flat bases
  - Indexed magnet for automatic positioning of axes on planar surfaces, to be used with indexed bases
  - Bipolar magnet for all surfaces

### BATTERY

---

- Type: Li-ion
- Operating life: 8 hours
- Rechargeable through USB
- Automatic stand-by mode: after 10 min

### METROLOGY

---

- Synchronous 3-axis acquisition (X, Y, Z)
- Bandwidth: 20 kHz on all axes
- Frequency range at 3 dB:
  - 15 kHz (Z)
  - 6 kHz (XY)
- Full scale: 80 g
- Signal-to-Noise ratio: 80 dB
- Accuracy: +/- 3%

### ENVIRONMENT


---

- Operating temperature: from -20°C to +80°C
- Protection: IP65
- ATEX/IECEX certification (pending)

### COMMUNICATION

---

- Automatic sensor detection by FALCON
- FALCON detection time upon power up of sensor (ON/OFF): 30s
- Pairing: association of sensor to one FALCON at a time
- Coexistence:
  - Several FALCON-WLS systems can operate together in the same area.
  - FALCON operates with one triaxial wireless sensor at a time.
- Wireless protocol: Wi-Fi
- Range from 10 m to 20 m depending on the environment

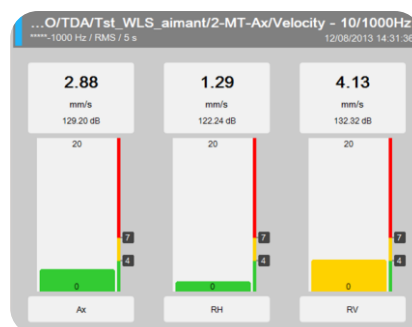

## DESCRIPTION OF FALCON AUTOMATIC DIAGNOSIS

Associated with the automatic setup provided in the PC software, FALCON's built-in automatic diagnosis offers condition monitoring to all. One just needs to describe the kinematics of the machine and to do the measurements: FALCON takes care of the diagnosis!

### MACHINE AND COMPONENTS TYPES

- Electric motors (synchronous, asynchronous, DC)
- Pump
- Fan
- Compressors (Centrifuge, Lobed)
- Gearbox with up to 4 stages
- Bevel gearbox
- Roller
- Shaft

### MAIN ANALYSED DEFECTS

- Unbalance
- Misalignment
- Bearing and lubrication
- Mounting, clearance, friction
- Gear defects
- Cavitation

### LIMITATIONS

- Speed: 120 to 12000 RPM
- Types of bearings managed:
  - Roller Bearings
  - Journal Bearing: not all defects are supported for journal bearings (instability...).


### UNRIVALLED RELIABILITY

Proven in many industrial cases over the years, in any type of industry due to the ONEPROD Measurement and Analysis SERVICES activity, FALCON provides results showing unrivalled relevance and reliability.


### RESULTS

From the analysis of the symptoms observed on your rotating machines, FALCON provides, in a fully automatic mode:

- Advice and recommendation on the global condition of the machine, taking into account all measurement points
- Automatic detection of multiple defects on the same machine
- Automatic detection of multiple defects on the same measurement point
- Supply of a result, even with an incomplete measurement, as soon as the first point is measured
- For each defect:
  - Localisation of the defect on the machine
  - Severity of the defect
  - Confidence level given by FALCON
  - 1<sup>st</sup> level of recommendation for maintenance action

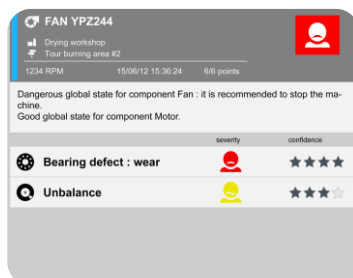

*Automatic Result of the global health status of a machine*

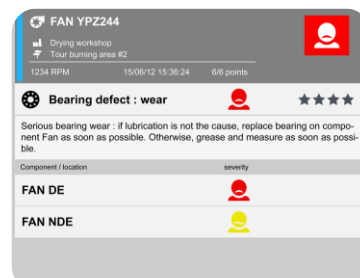

*Detailed information on a defect with identified location*



## FALCON PACKAGES AND KITS

---

### FALCON STANDARD HARDWARE KIT

---

- Carrying case
- A built-in rechargeable battery pack
- A mains power supply unit: 110/220 V 50/60 Hz
- 1 voltage input cable
- Safety harness
- USB cables
- Quick start manual
- User manual on CD
- Safety instructions
- Sensor kit depending on FALCON package
  - 2-plane balancing kit for FALCON 2-plane Balancer
  - 4-plane balancing kit for FALCON 4-plane Balancer
  - FALCON WLS or ASH kit (your selection) for other packages

### DATA COLLECTION SENSOR KITS (YOUR SELECTION)

---

- FALCON WLS wireless triaxial sensor kit
  - 1 x triaxial wireless sensor with wrist strap and built-in rechargeable battery pack
  - 1 x USB charger including a mains power block: 110/220 V 50/60 Hz + USB cable
  - 1 x magnet for FALCON WLS wireless triaxial accelerometer, M6 mounting
- ASH wired sensor kit
  - 1 x ASH201-A accelerometer
  - 1 x spiral cable (0.75 m wound, 2 m unwound)
  - 1 x M6 magnet for ASH sensor
  - 1 x M6 contact point

### BALANCING KITS

---

- 2-plane balancing sensor kit
  - 2 x ASH201-A accelerometers
  - 2 x M6 magnets for ASH sensors
  - 2 x 5-m straight cables for ASH201
  - 1 x optical trigger device for phase measurement with laser sighting, including:
    - 1 x optical trigger input
    - 1 x 1.5-m straight cable
    - 1 x 5-m extension cable
    - 1 x self-adhesive reflecting tape (1 meter)
    - 1 x magnetic base for the optical triggering device
- 4-plane balancing sensor kit
  - 4 x ASH201-A accelerometers
  - 4 x magnets for ASH201-A
  - 4 x 5-m straight cables for ASH201
  - 2 x 20-cm Y ECTA/ECTA adaptors for connecting 2 sensors on a FALCON channel
  - 1 x optical triggering device for phase measurement with laser sighting, including:
    - 1 x optical trigger input
    - 1 x 1.5-m straight cable
    - 1 x 5-m extension cable
    - 1 x self-adhesive reflecting tape (1 meter)
    - 1 x magnetic base for the optical triggering device

**ACOEM**  
**Smart monitoring, diagnosis & solutions**

**ACOEM** propose une offre globale de monitoring intelligent, de diagnostic et de solutions s'appuyant sur une maîtrise unique des phénomènes vibratoires et acoustiques.

**ACOEM** contribue ainsi à améliorer :

- la qualité de vie et la prévention des risques en milieu urbain ou industriel
- la productivité et la fiabilité des process industriels
- la conception de produits robustes, silencieux et performants
- la protection des sites, des véhicules et des hommes en milieu hostile

Partout dans le monde, **ACOEM** accompagne les acteurs de l'Environnement, de l'Industrie et de la Défense avec ses marques **01dB**, **METRAVIB** et **ONEPROD**.

Retrouvez nous sur [www.acoemgroup.com](http://www.acoemgroup.com).



200 chemin des Ormeaux  
69578 LIMONEST – FRANCE  
Tél. : +33 (0)4 72 52 48 00

[www.acoemgroup.com](http://www.acoemgroup.com)

---

Asie  
Tél. : +66 (2) 7112 293 – Fax : +66 (2) 7112 293

Amérique du Sud  
Tél. : +55 (11) 5089 6460 – Fax : +55 (11) 5089 6454

---