

Warning ● Ask a qualified installer or contractor to install this product. Do not try to install the product yourself.



Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion.

● Use only those parts and accessories supplied or specified by Daikin. Ask a qualified installer or contractor to install those parts and accessories. Use of unauthorised parts and accessories or improper installation of parts and accessories can result in water or refrigerant leakage, electrical shock, fire or explosion.

● Read the user's manual carefully before using this product. The user's manual provides important safety instructions and warnings. Be sure to follow these instructions and warnings.

If you have any enquiries, please contact your local importer, distributor and/or retailer.

Cautions on product corrosion

1. Air conditioners should not be installed in areas where corrosive gases, such as acid gas or alkaline gas, are produced.
2. If the outdoor unit is to be installed close to the sea shore, direct exposure to the sea breeze should be avoided. If you need to install the outdoor unit close to the sea shore, contact your local distributor.

Split Type Air Conditioners

DC Inverter Control 50 Hz **R-32**

Urusara 7

FTKJ Series

FTKV Series

FTKC Series



Urusara 7



FTKJ Series

Đại lý phân phối






















DAIKIN INDUSTRIES, LTD.

- HEAD OFFICE
Umeda Center Bldg., 2-4-12, Nakazaki-Nishi, Kita-ku, Osaka, 530-8323 Japan
 - CÔNG TY CỔ PHẦN VIỆT KIM
Tầng 14-15, tòa nhà Nam Á, 201-203 Cách Mạng Tháng 8, P.4, Q.3, TP.HCM
Tel: (08) 62 504 888 Fax: (08) 62 504 999
 - CHI NHÁNH HÀ NỘI
Tầng 12, tòa nhà Ocean Park Tower, 1 Đào Duy Anh, Quận Đống Đa, Hà Nội
Tel: (04) 35 657 677 Fax: (04) 35 657 688
 - CHI NHÁNH ĐÀ NẴNG
Tầng 12, Lô A2.1, Đường 30/4, P. Hòa Cường Bắc, Q. Hải Châu, TP. Đà Nẵng
Tel: (0511) 362 4250 Fax: (0511) 362 4251
- www.daikin.com.vn

Lineup of DC Inverter Air Conditioners with R-32 Refrigerant

Daikin is the sole manufacturer to produce both air conditioning equipment and refrigerants worldwide. Our cutting-edge technologies and use of advanced R-32 refrigerant provide enhanced comfort while reducing the impact on climate change.

	2.0 kW Class	2.5 kW Class	3.5 kW Class	5.0 kW Class	6.0 kW Class	7.1 kW Class
Urusara 7 R-32 INVERTER		 FTXZ25NVMV	 FTXZ35NVMV	 FTXZ50NVMV		
FTKJ Series R-32 INVERTER		 FTKJ25NVMVW (white)	 FTKJ35NVMVW (white)	 FTKJ50NVMVW (white)		
		 FTKJ25NVMVS (silver)	 FTKJ35NVMVS (silver)	 FTKJ50NVMVS (silver)		
FTKV Series R-32 INVERTER		 FTKV25NVMV	 FTKV35NVMV	 FTKV50NVMV	 FTKV60NVMV	 FTKV71NVMV
FTKC Series R-32 INVERTER Smile Curve	 FTKC20PVMV	 FTKC25PVMV	 FTKC35PVMV	 FTKC50NVMV	 FTKC60NVMV	



Urusara 7

A New Kind of Cool

Urusara 7 puts the latest Japanese air conditioning technology at your fingertips, offering a unique, total comfort experience for any lifestyle. Powerful year-round cooling and dehumidifying are just the beginning.

Urusara 7 is also the world's first air conditioner to use next-generation R-32 refrigerant¹. Along with its many energy-saving features, this higher performance refrigerant gives Urusara 7 unrivalled energy efficiency².

Features

- Redesigned air intake and heat exchanger
- World-first³ humidity control technology
- Precision circulation airflow
- Reliable streamer discharge air purification
- Convenient automatic filter cleaning system
- Innovative design with Japanese aesthetic



urusara 7

Daikin Air Conditioner Made in Japan



reddot design award
winner 2013

Category: Product Design 2013



Notes: 1. This is for residential-use wall-mounted type air conditioners as of November 2012, when Daikin launched Urusara 7 in the Japanese market.
2. In January 2013, the 4.0 to 7.1 kW class models for the Japanese market received the Minister's Prize from Japan's Ministry of Economy, Trade and Industry in the Fiscal 2012 Grand Prizes for Excellence in Energy Efficiency and Conservation.
3. As of 1999, when Daikin launched Ururu Sarara in the Japanese market.



FTKJ Series

Form. Function. Design.

Sleek European style of FTKJ series proves once again that design is everything. Yet this elegant body also houses cutting-edge smart technology which provides outstanding comfort and performance in any situation.

The series also delivers Daikin's well-known energy efficiency, thanks to features such as its redesigned swing compressors. This versatile system truly is a total solution for designers, architects and home-owners alike.

Features

- Energy-saving COP of 3.59 to 4.81
- Stylish finish in eye-pleasing colours
- Wide selection of comfort technologies
- Whisper quiet sound level
- Remote control from mobile devices



White



Silver



reddot award 2014
winner



German
Design Award
SPECIAL
MENTION 2015



Urusara 7

Heat Pump



FTX225/35/50

Model name	Indoor unit		FTXZ25	FTXZ35	FTXZ50	
	Outdoor unit		RXZ25	RXZ35	RXZ50	
Capacity	Cooling	Rated (Min.-Max.)	kW	2.45 (0.6-3.9)	3.45 (0.6-5.3)	4.95 (0.6-5.8)
			Btu/h	8,400 (2,000-13,300)	11,800 (2,000-18,100)	16,900 (2,000-19,800)
	Heating	Rated (Min.-Max.)	kW	3.6 (0.6-7.5)	5.0 (0.6-9.0)	6.3 (0.6-9.4)
			Btu/h	12,300 (2,000-25,600)	17,100 (2,000-30,700)	21,500 (2,000-32,100)
Power consumption	Cooling	Rated (Min.-Max.)	W	430 (110-880)	680 (110-1,330)	1,150 (110-1,600)
	Heating			620 (100-2,010)	1,000 (100-2,530)	1,410 (100-2,640)
Indoor unit			FTXZ25	FTXZ35	FTXZ50	
Dimensions (H×W×D)		mm	295 × 798 × 370			
Outdoor unit			RXZ25	RXZ35	RXZ50	
Dimensions (H×W×D)		mm	595 × 795 × 300			

See the Urusara 7 catalogue for details.

FTKJ Series

Cooling Only



FTKJ25/35/50 (white)



FTKJ25/35/50 (silver)

Model name	Indoor unit		FTKJ25 (white)	FTKJ35 (white)	FTKJ50 (white)
	Outdoor unit		RKJ25	RKJ35	RKJ50
Cooling capacity	Rated (Min.-Max.)	kW	2.5 (1.2-3.4)	3.5 (1.3-4.1)	5.2 (1.7-5.5)
		Btu/h	8,500 (4,100-11,600)	11,900 (4,400-14,000)	17,700 (5,800-18,800)
Power consumption	Rated	W	520	855	1,450
Indoor unit			FTKJ25 (white)	FTKJ35 (white)	FTKJ50 (white)
			FTKJ25 (silver)	FTKJ35 (silver)	FTKJ50 (silver)
Dimensions (H×W×D)		mm	303 × 998 × 212		
Outdoor unit			RKJ25	RKJ35	RKJ50
Dimensions (H×W×D)		mm	550 × 765 × 285		735 × 825 × 300

See the FTKJ series catalogue for details.

Contents of FTKV and FTKC Series



P9 It's Time for DC Inverter



P21 Choice of Wide Range of Airflow Patterns




P11 Lineup of FTKV Series



P23 Quiet Nights in Your Neighbourhood

P13 Lineup of FTKC Series




P15 Inverter Advantages



P25 Set and Forget On/Off Operation



P17 DC Inverter Advantages



P27 Photocatalytic Air Purifying



P19 Less Wasted Energy with Infrared Sensors

Function List of FTKV and FTKC Series	P29
Functions	P31
Specifications and Options for FTKV Series	P35
Specifications and Options for FTKC Series	P37



FTKV and FTKC Series

It's Time for DC Inverter

Inverter air conditioners are well known for their precise control. In fact, their outstanding efficiency can cut energy bills compared to non-inverter models. This precision also means greater comfort, plus full power at the touch of a button.


With its strong environmental commitment, Daikin has been using its market-leading position to promote inverter systems worldwide. DC Inverter models feature advanced DC motors. These motors use high-power magnets to generate rotation, giving them greater efficiency than AC motors.

Features

- Improved performance over non-inverter models
- Optimal control with Intelligent Eye and Econo Mode
- Advanced comfort features including 3D Airflow
- Greater convenience with weekly scheduling
- Titanium Apatite Photocatalytic Air-Purifying Filter



FTKV25/35

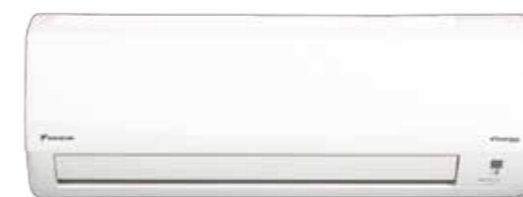

FTKC20/25/35



Smile Curve



The FTKC series features Daikin's new smile curve design for the front panel. The smile curve creates a stylish, modern appearance which blends easily with any interior decor.

Lineup of FTKV Series

FTKV Series Cooling Only



FTKV25/35NVMV



RKV25/35NVMV


R-32 **INVERTER**



2.5 kW Class	FTKV25NVMV / RKV25NVMV		
Cooling Capacity	Rated (Min.-Max.)	kW	2.5 (1.2-3.4)
		Btu/h	8,500 (4,100-11,600)
3.5 kW Class	FTKV35NVMV / RKV35NVMV		
Cooling Capacity	Rated (Min.-Max.)	kW	3.5 (1.3-4.1)
		Btu/h	11,900 (4,400-14,000)



FTKV50/60NVMV



RKV50/60NVMV

R-32 **INVERTER**



5.0 kW Class	FTKV50NVMV / RKV50NVMV		
Cooling Capacity	Rated (Min.-Max.)	kW	5.2 (1.7-6.0)
		Btu/h	17,700 (5,800-20,500)
6.0 kW Class	FTKV60NVMV / RKV60NVMV		
Cooling Capacity	Rated (Min.-Max.)	kW	6.0 (1.9-7.0)
		Btu/h	20,500 (6,500-23,900)



FTKV71NVMV



RKV71NVMV

R-32 **INVERTER**

7.1 kW Class	FTKV71NVMV / RKV71NVMV		
Cooling Capacity	Rated (Min.-Max.)	kW	7.1 (2.3-8.9)
		Btu/h	24,200 (7,800-30,400)

Lineup of FTKC Series

FTKC Series Cooling Only



FTKC20/25/35PVMV



RKC20/25/35PVMV

R-32

INVERTER



2.0 kW Class				FTKC20PVMV / RKC20PVMV	
Cooling Capacity	Rated (Min.-Max.)	kW	2.0 (1.0-2.4)		
		Btu/h	6,800 (3,400-8,200)		
2.5 kW Class				FTKC25PVMV / RKC25PVMV	
Cooling Capacity	Rated (Min.-Max.)	kW	2.5 (1.0-3.4)		
		Btu/h	8,500 (3,400-11,600)		
3.5 kW Class				FTKC35PVMV / RKC35PVMV	
Cooling Capacity	Rated (Min.-Max.)	kW	3.5 (1.3-4.1)		
		Btu/h	11,900 (4,400-14,000)		



FTKC50/60NVMV



RKC50/60NVMV

R-32

INVERTER



5.0 kW Class				FTKC50NVMV / RKC50NVMV	
Cooling Capacity	Rated (Min.-Max.)	kW	5.2 (1.6-5.9)		
		Btu/h	17,700 (5,500-20,100)		
6.0 kW Class				FTKC60NVMV / RKC60NVMV	
Cooling Capacity	Rated (Min.-Max.)	kW	6.0 (1.8-6.9)		
		Btu/h	20,500 (6,100-23,500)		

Inverter Advantages



■ Less Temperature Fluctuation


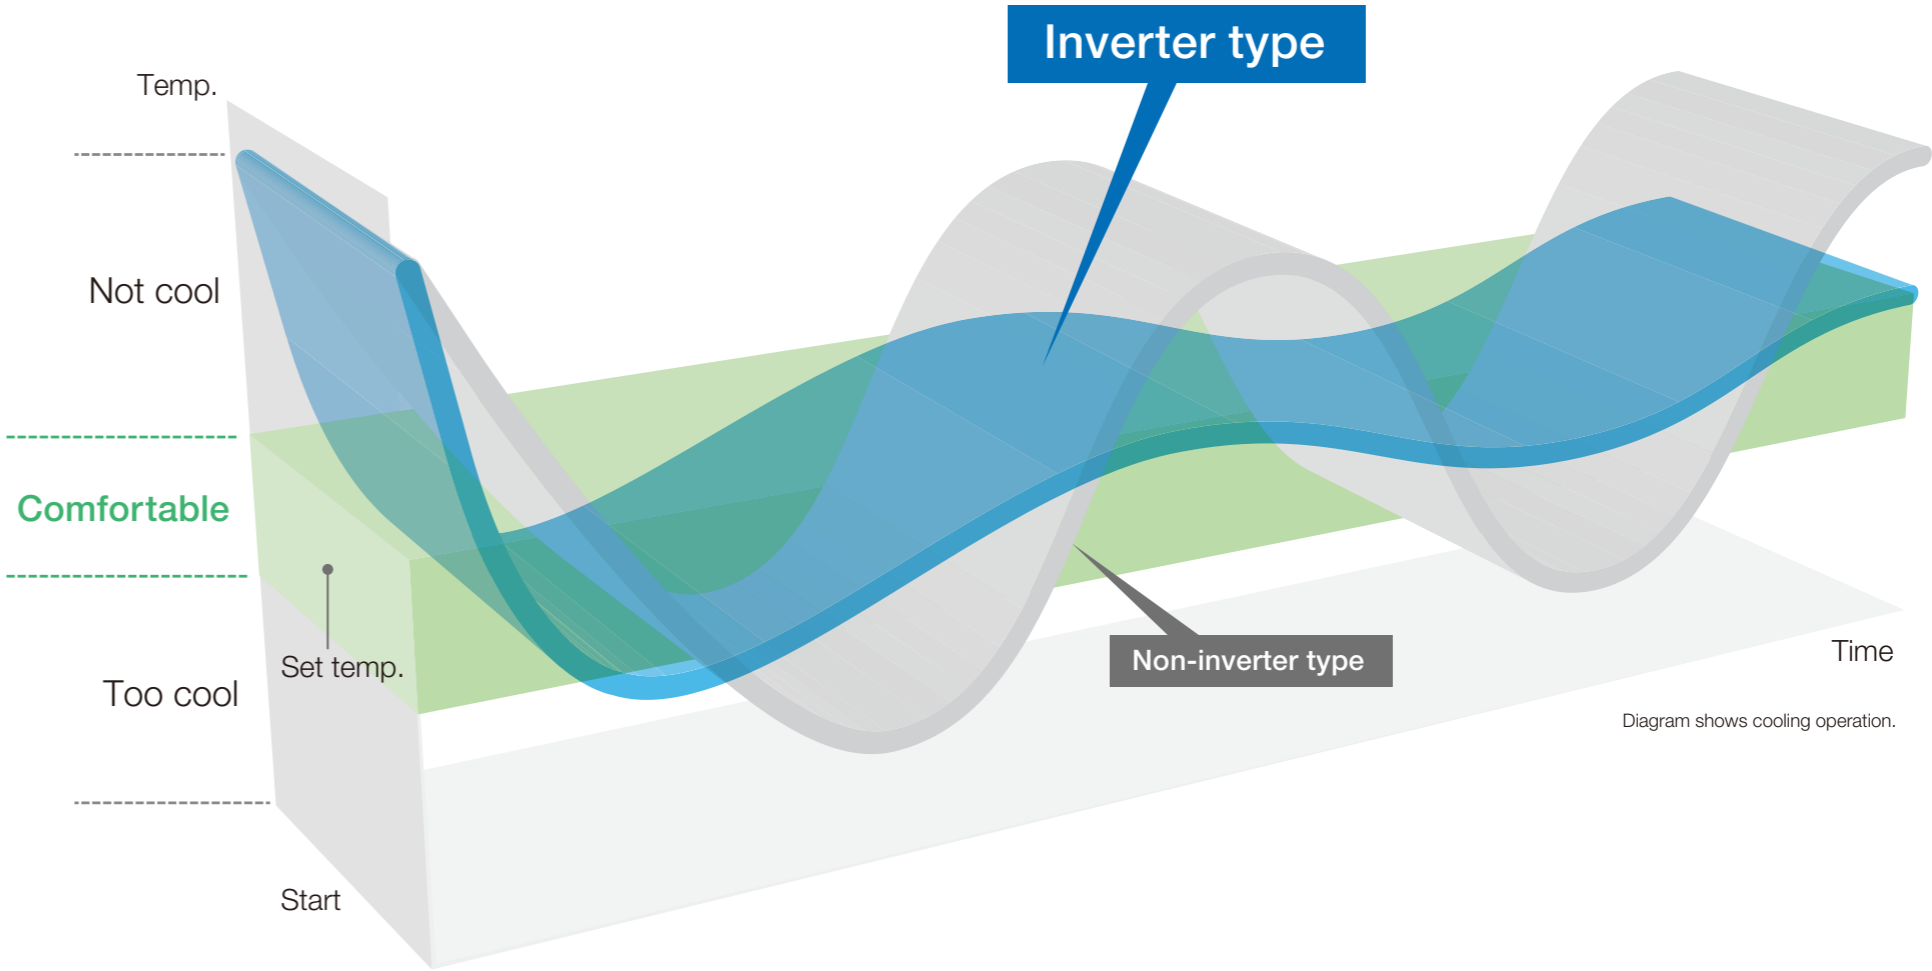


Diagram shows cooling operation.

More Energy-Saving than Non-Inverter

Inverters are devices which are able to vary their capacity by adjusting operating frequency. Inverter air conditioners do this by altering the power supply frequency of their compressors. In contrast, non-inverter air conditioners have a fixed capacity and can only control the indoor temperature by starting or stopping their compressors.

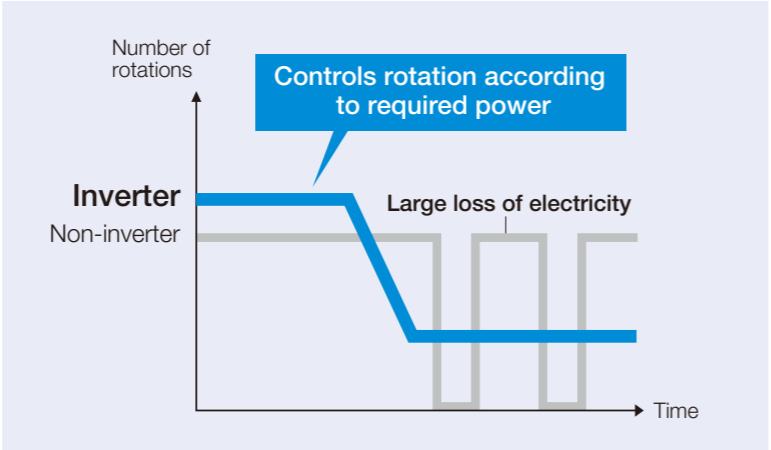

Inverter systems can cut energy consumption compared to non-inverter models. This helps to reduce household power bills and also lowers CO₂ emissions caused by electricity generation.

Powerful

Inverter air conditioners operate at maximum capacity as soon as they start up. This burst of increased power allows them to reach the set temperature more quickly.

Energy-Saving

As the set temperature is reached, inverter operation adjusts to low capacity to maintain the room temperature. This precise control makes inverter models more energy-efficient than non-inverters, which must repeatedly start or stop their compressors.

Comfortable


Inverter systems finely adjust their capacity according to the air conditioning load, minimising the difference between the set temperature and room temperature. This ensures higher comfort levels than with non-inverter systems.



DC Inverter Advantages

DC Inverter Control

DC Inverter is Daikin's term for an inverter air conditioner equipped with a DC motor. These motors use magnets to generate rotation, making them more efficient than AC motors. Daikin has fitted its advanced DC motors for compressors and fan motors with powerful neodymium magnets to achieve even greater efficiency. It calls these devices Reluctance DC motors.

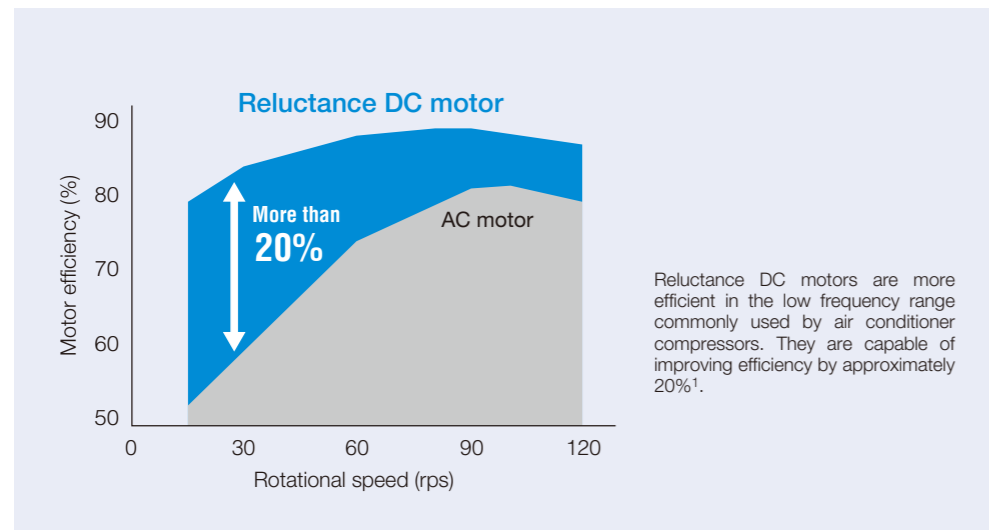


Swing Compressor

With its smooth rotation, the swing compressor significantly decreases friction and vibration. It also eliminates the leakage of refrigerant gas during compression. These advantages provide quiet and efficient operation.

Reluctance DC Motor for Compressors

The compressor is one of an air conditioner's core components and its performance is directly linked to the motor. Daikin was the first to successfully use a Reluctance DC motor with a scroll compressor in commercial-use air conditioners². It has now adapted this high-efficiency motor for the swing compressors in its residential-use systems.

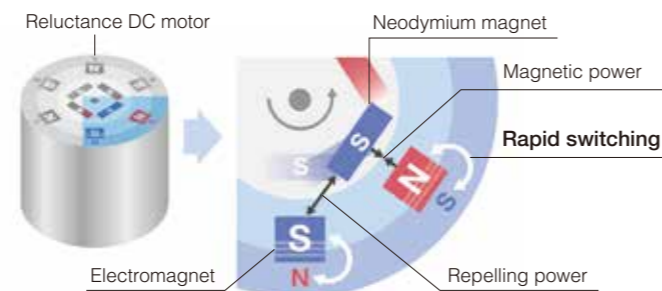

Embedding high-strength neodymium magnets in the shaft turns the entire centre of the motor into a powerful magnet. By rapidly switching the poles of this electromagnet, the Reluctance DC motor is able to produce even greater speed and power.

High COPs of 3.45 to 4.63

The FTKV series achieves COPs of 3.80 to 4.63 and the FTKC series 3.45 to 4.00 thanks to Daikin's DC Inverter control and combined energy-saving technologies.

The FTKV series have received Vietnam's 5 Star Energy Label, which is the country's highest energy-efficiency rating for inverter type air conditioners. The FTKC series have received Vietnam's 5 Star Energy Label.

What Is COP? An air conditioner's COP (coefficient of performance) indicates how efficiently the unit uses energy. A higher COP means greater energy efficiency. It also means lower electricity consumption, and of course lower power bills.

$$\text{COP} = \frac{\text{Capacity (W)}}{\text{Power consumption (W)}}$$


The Next Generation Refrigerant R-32

As the sole worldwide manufacturer of both air conditioning equipment and refrigerants, Daikin is continuously researching refrigerants as well as new technologies that can save energy consumption for air conditioners. Use of the refrigerants with a lower impact on global warming is urgently required because climate change has been one of global critical issues. Daikin has now adopted R-32. This next generation refrigerant does not deplete the ozone layer and lower impact on global warming.

R-32 Features

1. Zero ozone layer depletion
2. Low global warming potential
3. Increased energy efficiency
4. Less impact on global warming

Electricity Consumption after One Year of Operation³

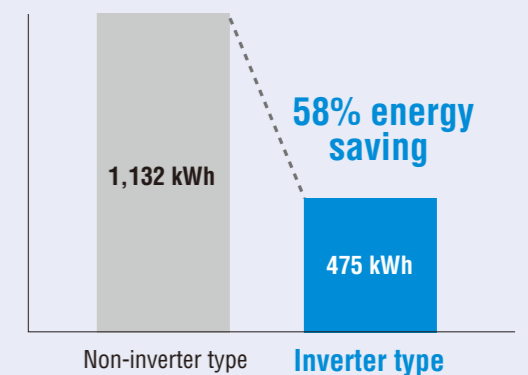


Compared to non-inverter models, Urusara 7 cuts power consumption by up to 58%. This helps to reduce electricity bills for the user and also decreases CO₂ emissions caused by power generation.

Notes: 1. Values are based on in-house simulations.
 2. Daikin's achievement was recognised by the Institute of Electrical Engineers of Japan at the 54th Academic Promotion and Technical Development Awards in 1998.
 3. Test method: In-house simulation based on the principles of JIS-C9612B.1.6.5 for inverter models and JIS-C9612B.1.6.4 for non-inverter models
 Test inverter model: 3.5 kW class model of Urusara 7 for the Thailand market, rated COP 5.00, COP in the partial load region 6.39
 Test non-inverter model: 3.5 kW class Daikin non-inverter model for the Thailand market, COP 3.45
 Test location: Bedroom of 24 m²
 Test conditions: Annual average outdoor temperature in Bangkok
 Test period: 9 hours of operation from 10:00 p.m. to 7:00 a.m.




Less Wasted Energy with Infra red Sensors

Intelligent Eye

Intelligent Eye prevents energy wastage by using its infrared sensors to detect human movement in a room. If there is no movement for 20 minutes, it automatically adjusts the set temperature by approximately 2°C. Once Intelligent Eye is turned on, it operates automatically without any further setting.



This function is available for FTKV series.

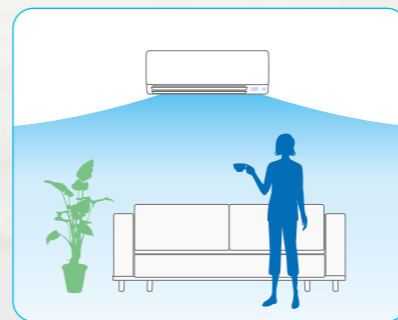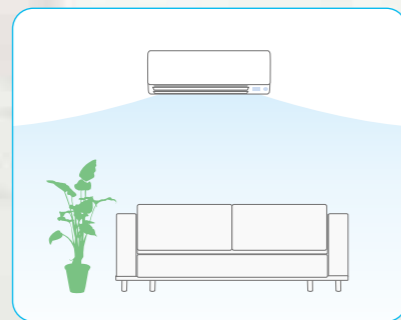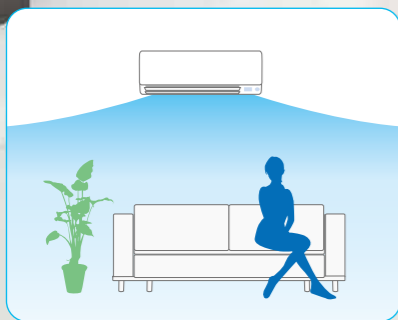


If Intelligent Eye detects no movement for 20 minutes, it adjusts the set temperature by approximately 2°C.

When a person enters the room, it automatically returns the temperature to the set level.

Econo Mode

This function limits the maximum power consumption. It helps to reduce power usage if the cooling load is high, for example, at startup or during large gatherings and periods of direct sunshine.

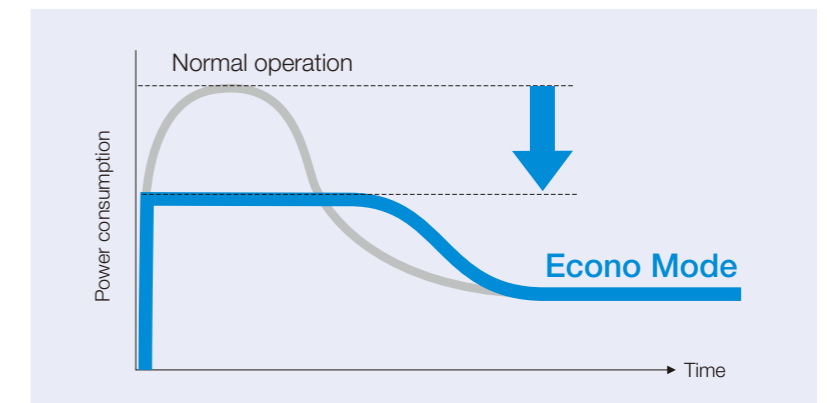

Maximum capacity decreases during Econo Mode, requiring more time to reach the set temperature.

Standby Electricity Saving

Electrical appliances still use a surprising amount of power even when they are waiting in standby mode. Recognising this, Daikin has developed the Standby Electricity Saving function to reduce this hidden power consumption.

This function is available for FTKV50/60/71 and FTKC50/60.

Choice of Wide Range of Airflow Patterns

Power-Airflow Dual Flaps

The Power-Airflow Dual Flaps flatten out during cooling operation to deliver air to every part of a room. Selecting the low angle sends air right to the corners, while choosing the high angle spreads air around the centre.

This function is available for the FTKV series and FTKC50/60.
For FTKC20/25/35, the Power-Airflow Flap is available.




When you choose the low angle, cool air slides off to reach the corners of the room.



Wide-Angle Louvers

The Wide-Angle Louvers provide effective airflow coverage no matter where the indoor unit is placed in a room. The louvers deliver cool air right to the corners of any space. The FTKV50/60/71 can be adjusted directly from the wireless remote controller. Other units can be set manually.

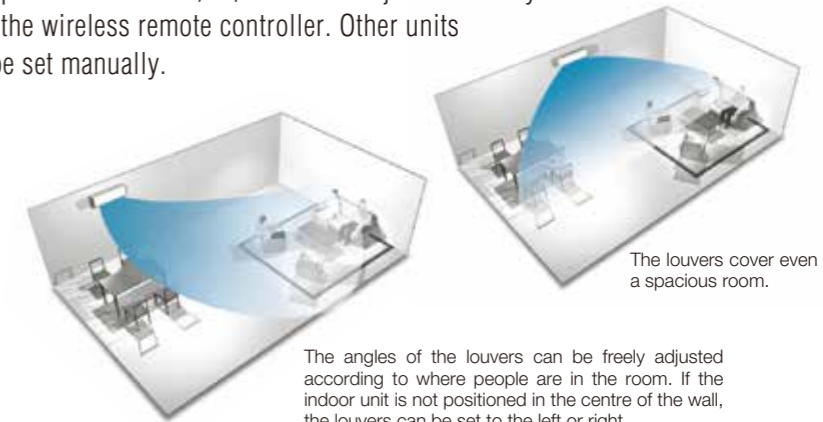


The louvers cover even a spacious room.

The angles of the louvers can be freely adjusted according to where people are in the room. If the indoor unit is not positioned in the centre of the wall, the louvers can be set to the left or right.

3D Airflow

3D Airflow combines Vertical and Horizontal Auto-Swing to reduce indoor temperature fluctuation. This function circulates air to every part of a room for uniform cooling of even large spaces. To start 3D Airflow, push both the Vertical and Horizontal Auto-Swing buttons. The flaps and louvers swing in turn.

This function is available for the FTKV50/60/71.

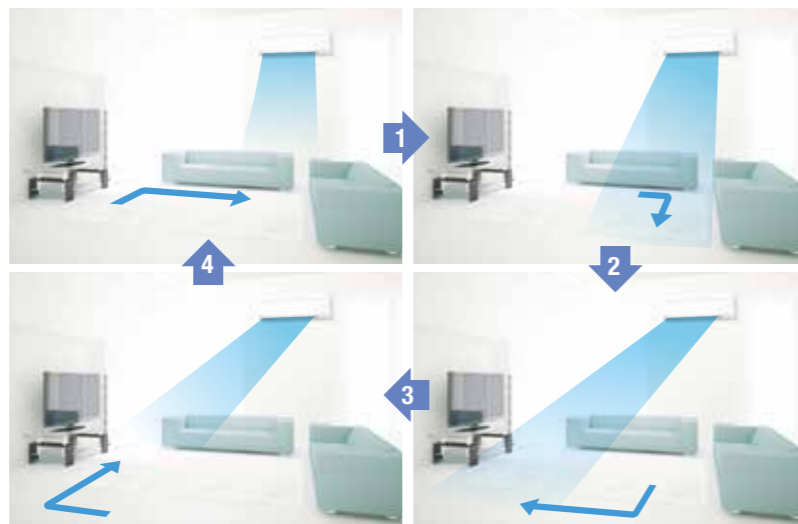

The flaps and louvers swing in turn, expanding the comfort zone.

Inverter Powerful Operation


Inverter Powerful Operation boosts airflow to maximum volume for a 20 minute period. This function is convenient for quickly adjusting the indoor temperature to the set temperature. After 20 minutes, the unit automatically returns to its previous settings.



Comfort Airflow Mode

Comfort Airflow Mode prevents uncomfortable drafts from blowing directly on to a person's body. During cooling operation, the flap moves upward to prevent cold drafts.

This function is available for FTKV50/60/71 and FTKC20/25/35.

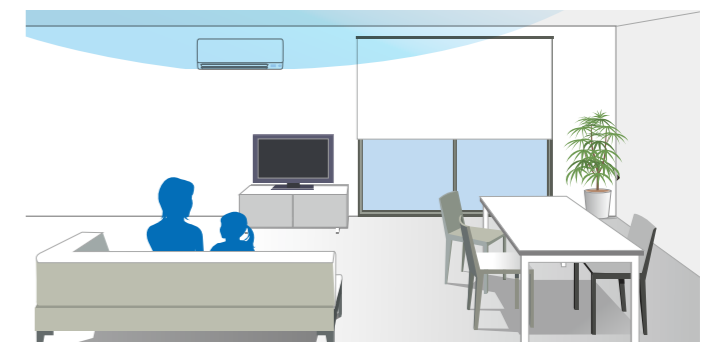


Quiet Nights in Your Neighborhood






Indoor Unit Quiet Operation

The FTKV and FTKC series give you a choice of 5-step, Quiet or Automatic settings for the fan speed. The Quiet setting selects Indoor Unit Quiet Operation, which decreases the sound pressure level by 3 dB (A) below the Low setting.

This wide range of settings allows you to precisely control the fan speed according to your needs. For example, the Quiet function will help you to sleep more comfortably at night. The sound pressure level is just 22 dB (A)¹ for the FTKV25 and FTKC25.

FTKV25	
Fan speeds	Sound pressure levels
High (H)	37 dB (A)
Low (L)	25 dB (A)
 Quiet (SL)	22 dB (A)

3 dB (A)

	Auto	SL	L	M	H
					
Fan speed	Low ←————→ High				
Sound pressure level	Each decrease in airflow volume reduces the sound pressure level.				

Outdoor Unit Quiet Operation

This function decreases the sound pressure level by 3 to 6 dB (A) below the rated operation. It provides a sound pressure level of 43 dB (A)¹ for the RKV25. Capacity may decrease when Outdoor Unit Quiet Operation is selected.

This function is not available for RKC20/25/35.


RKV25	
Operations	Sound pressure levels
Rated (H)	46 dB (A)
Quiet (SL)	43 dB (A)

3 dB (A)



Night Set Mode


Pressing the Off timer button automatically selects Night Set Mode. This function prevents excessive cooling for a pleasant sleep. One hour after the Off timer button is pressed, the room temperature is raised by 0.5°C.

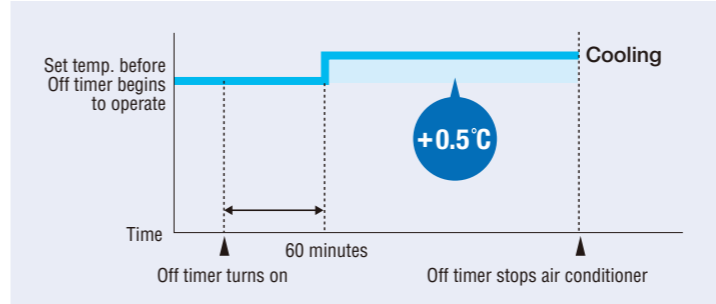

Cooling operation: Room temperature is raised by 0.5°C after 60 minutes.



22 dB (A) is so quiet you can even hear whispers²

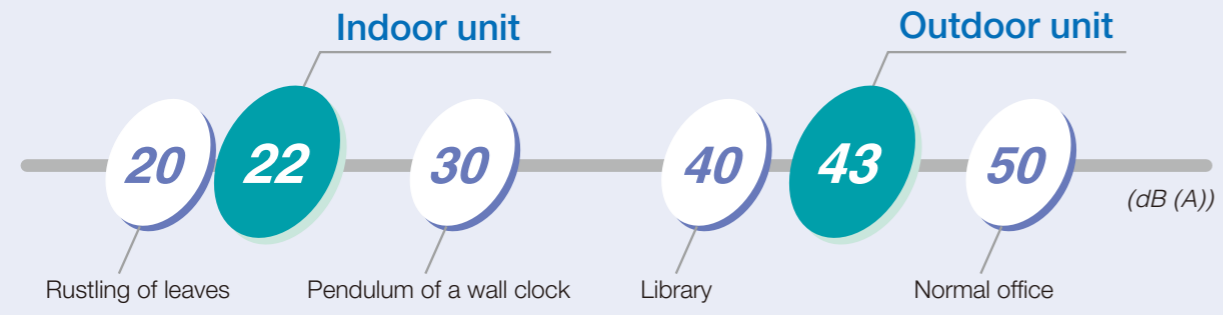

Notes: 1. This value is for operation at 220 V, 50 Hz.
2. Based on "Examples of Sound Pressure Levels", Ministry of the Environment, Japan, November 2002.

Set and Forget On/Off Operation

Weekly Timer

The Weekly Timer allows up to four actions to be programmed for each day of the week. It is possible to schedule not only the On and Off times but also to set temperatures. Once you set up the Weekly Timer, the air conditioner operates each day without controller input. The Weekly Timer synchronises the air conditioner with your family's schedule, greatly improving comfort in your home.

This function is available for the FTKV50/60/71.



Living room Monday to Friday

Programme 1.	Programme 2.	Programme 3.	Programme 4.
On	Off	On	Off
22°C		21°C	
6:00 a.m	8:00 a.m	6:00 p.m	11:00 p.m

If you set the Weekly Timer 30 minutes before your wake-up time, you can avoid the hot and humid morning air and enjoy a pleasantly cool room as you get up.

The Weekly Timer will automatically stop operation after you leave home on a busy morning. You can forget about the air conditioner.

If you set the Weekly Timer an hour before you arrive home, you can enjoy a wave of cool air as soon as you step through the door.

The Weekly Timer will automatically stop operation when you go to bed.

Bedroom Monday to Friday

Programme 1.	Programme 2.	Programme 3.	Programme 4.
On	Off	On	Off
26°C		26°C	
10:30 p.m	2:00 a.m	6:00 a.m	7:00 a.m

Even if you go to bed at 11:00 p.m., the air conditioner will operate before 30 minutes to help you fall into a comfortable sleep.


Even if you go to bed at 11:00 p.m., the air conditioner will operate for another three hours to help you fall asleep. Stopping operation during the night prevents overcooling and saves you from catching a chill.

If you set the Weekly Timer 30 minutes before your wake-up time, you can avoid the hot and humid morning air and enjoy a pleasantly cool room as you get up.

The Weekly Timer will automatically stop operation when you leave home.

Controller Buttons and Copy Function

You can set up the Weekly Timer using the wireless remote controller. The copy function also enables a daily programme to be repeated on other days as required. This makes it even easier to set the timer.

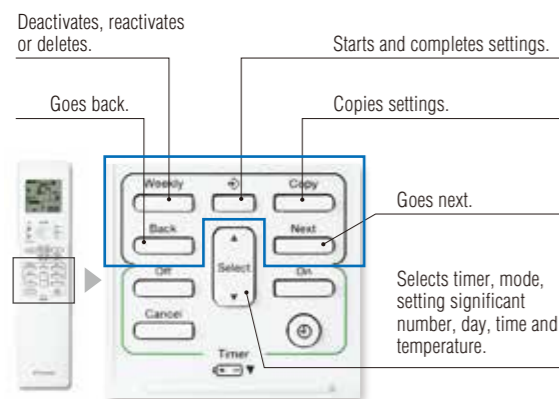

Photocatalytic Air Purifying



Titanium Apatite Photocatalytic Air-Purifying Filter

Photocatalytic air purifying is a deodorising and antibacterial technology. Daikin was the first to apply this advance to the air-purifying filters used in air conditioners¹. Daikin's success has led manufacturers in various industries to adopt the technology for antibacterial products.


Titanium apatite is an advanced photocatalytic material with great adsorption power. While a filter's micron-level fibres trap dust, titanium apatite effectively adsorbs and decomposes bacteria. The photocatalyst is activated simply by exposure to light. This filter delivers consistent performance for approximately three years if it is washed with water once every six months.



This filter is not a medical device. Benefits such as the adsorption and decomposition of bacteria are only effective for substances which are directly attached to the Titanium Apatite Photocatalytic Air-Purifying Filter.





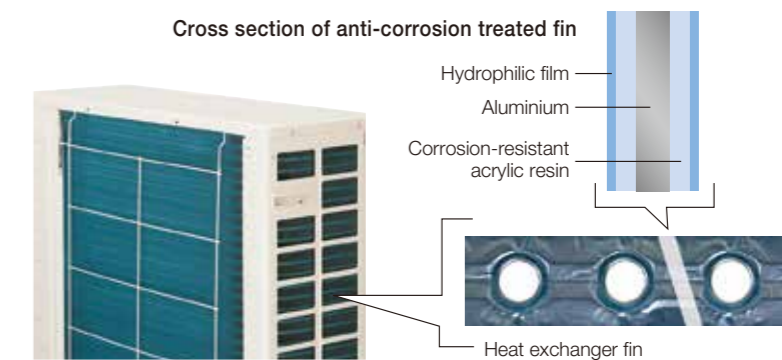






















Anti-Corrosion Treatment of Outdoor Heat Exchanger Fins








The outdoor unit's heat exchanger fins are processed using a special anti-corrosion treatment. The surface is covered with a thin acrylic resin layer to provide enhanced resistance to acid rain and salt corrosion.



Note: 1. This practical application of titanium apatite was a world first. Announced in September 2003 at the 3rd International Workshop on the Utilization and Commercialization of Photocatalytic Systems, Coatings for Clean Surfaces, Water and Air Purification.

Function List of FTKV and FTKC Series

Indoor Unit		FTKV Series			FTKC Series	
Models		FTKV25/35	FTKV50/60	FTKV71	FTKC20/25/35	FTKC50/60
Functions						
	DC Inverter Control	●	●	●	●	●
Comfortable Airflow	 Power-Airflow Dual Flaps	●	●	●		●
	 Power-Airflow Flap				●	
	 Wide-Angle Louvers	●	●	●	●	●
	 Vertical Auto-Swing (up and down)	●	●	●	●	●
	 Horizontal Auto-Swing (left and right)		●	●		
	 3D Airflow		●	●		
Comfort Control	Comfort Airflow Mode		●	●	●	
	 Indoor Unit Quiet Operation	●	●	●	●	●
	 Intelligent Eye	●	●	●		
	 Programme Dry Function	●	●	●	●	●
Lifestyle Convenience	 Auto Fan Speed	●	●	●	●	●
	 Standby Electricity Saving		●	●		●
	 Econo Mode	●	●	●	●	●
	 Inverter Powerful Operation	●	●	●	●	●
	 Wireless Remote Controller with Backlight	●	●	●		
Cleanliness	 Indoor Unit On/Off Switch	●	●	●	●	●
	 Titanium Apatite Photocatalytic Air-Purifying Filter	●	●	●	●	●
Timers	 Wipe-Clean Flat Panel	●	●	●	●	●
	 24 Hour On/Off Timer	●	●	●	●	●
	 Weekly Timer		●	●		
Worry Free	 Night Set Mode	●	●	●	●	●
	 Auto-Restart after Power Failure	●	●	●	●	●
	 Self-Diagnosis with Digital Display	●	●	●	●	●

Outdoor Unit		FTKV Series			FTKC Series	
Models		RKV25/35	RKV50/60	RKV71	RKC20/25/35	RKC50/60
Functions						
Comfort Control	 Outdoor Unit Quiet Operation	●	●	●		●
Worry Free	 Anti-Corrosion Treatment of Outdoor Heat Exchanger Fins	●	●	●	●	●

Functions

Comfortable Airflow

Power-Airflow Dual Flaps
The Power-Airflow Dual Flaps can flatten out during cooling operation to deliver cool air to the corners of a room.
This function is available for FTKV series and FTKC50/60.
▶ See page 21

Power-Airflow Flap
The Power-Airflow Flap flattens out during cooling operation to deliver cool air to the corners of a room.
This function is available for FTKC20/25/35.
▶ See page 21


Wide-Angle Louvers
The Wide-Angle Louvers provide wide airflow coverage for effective operation no matter where the indoor unit is placed in a room.
▶ See page 22

Vertical Auto-Swing (up and down)
This function automatically moves the flaps up and down to distribute air across a room.

Horizontal Auto-Swing (left and right)
Horizontal Auto-Swing automatically moves the louvers to the left and right to cover a room with cool air.
This function is available for FTKV50/60/71.
▶ See page 21

3D Airflow
This function combines Vertical and Horizontal Auto-Swing to circulate a cloud of cool air right to the corners of even large spaces. The flaps and louvers swing in turn.
This function is available for FTKV50/60/71.
▶ See page 21

Comfort Airflow Mode
This function prevents uncomfortable drafts from blowing directly on to the body. To prevent drafts, the flap moves upward during cooling operation.
This function is available for FTKV50/60/71 and FTKC20/25/35.
▶ See page 22

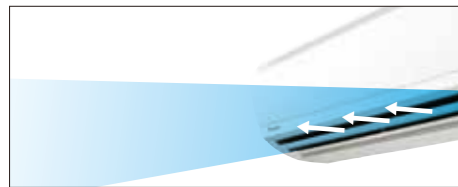

Cleanliness

Titanium Apatite Photocatalytic Air-Purifying Filter
This filter contains the advanced photocatalytic material titanium apatite. While the filter's micron-level fibres trap dust, this photocatalyst adsorbs and decomposes bacteria. The filter can be used for up to three years with proper maintenance.
▶ See pages 27 and 28


Wipe-Clean Flat Panel
The flat panel design can be cleaned with only the single pass of a cloth across its smooth surface. The flat panel can also be easily removed for more thorough cleaning.

Comfort Control

Indoor Unit Quiet Operation
Indoor unit operating sound pressure levels can be decreased from the Low setting fan speed using the wireless remote controller.
▶ See page 23

Outdoor Unit Quiet Operation
Outdoor unit operating sound pressure levels can be decreased from the rated operation sound using the wireless remote controller.
This function is not available for RKC20/25/35.
▶ See page 23

Intelligent Eye
Intelligent Eye with its infrared sensor automatically controls air conditioner operation according to human movement in a room. When there is no movement for 20 minutes, it adjusts the temperature by approximately 2°C for energy savings.
This function is available for FTKV series.
▶ See page 19

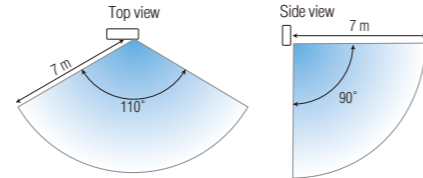

Programme Dry Function
The microprocessor works to eliminate humidity while maintaining the most consistent temperature possible. It automatically controls the temperature and fan speed.


Auto Fan Speed
The microprocessor automatically controls fan speed to adjust the room temperature to the set temperature.

Timers

24 Hour On/Off Timer
This timer can start or stop the air conditioner within a 24 hour period. It can be preset in 10 minute steps by pressing the On/Off Timer button on the wireless remote controller. The On Timer and Off Timer can be used in combination.

Weekly Timer
The Weekly Timer allows up to four actions to be programmed for each day of the week. It is possible to schedule not only the on and off times, but also the desired temperatures during these periods. The copy function also makes the setting much easier and enables a daily programme to be repeated on other days as required.
This function is available for FTKV50/60/71.
▶ See pages 25 and 26

Night Set Mode
Pressing the Off Timer button automatically selects Night Set Mode. This function prevents excessive cooling for a pleasant sleep. After 60 minutes, the room temperature is raised by 0.5°C for cooling operation.
▶ See page 24

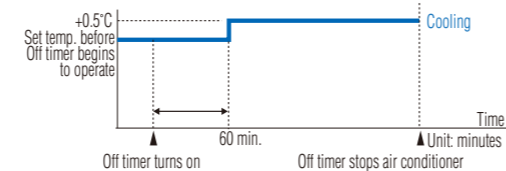

Lifestyle Convenience

Standby Electricity Saving
Even when an air conditioner is not operating, it requires standby power. However, thanks to this function, the required standby power can be reduced.
This function is available for FTKV50/60/71 and FTKC50/60.
▶ See page 20

Econo Mode
This mode limits maximum power consumption. This improves operating efficiency and also prevents circuit breakers from being overloaded.
▶ See page 20

Inverter Powerful Operation
This function boosts cooling performance for 20 minute period. It is convenient when the air conditioner is first turned on or it is necessary to change the room temperature quickly.
▶ See page 22

Wireless Remote Controller with Backlight
The backlit LCD allows easy operation in the dark. Frequently used functions are conveniently located on the front of the controller.
This function is available for FTKV series.



Indoor Unit On/Off Switch
The unit can be conveniently started by hand if the wireless remote controller is misplaced or its batteries are not charged.




Indoor Unit On/Off Switch

Worry Free

Auto-Restart after Power Failure
The air conditioner memorises the settings for operation mode (cooling, dry and fan only), airflow, temperature, etc., and automatically returns to them when power is restored after a power failure.

Self-Diagnosis with Digital Display
Malfunction codes are shown on the digital display panel of the wireless remote controller for fast and easy maintenance.

Anti-Corrosion Treatment of Outdoor Heat Exchanger Fins
The outdoor unit's heat exchanger fins are processed using a special anti-corrosion treatment. The surface is covered with a thin acrylic resin layer to enhance the fins' resistance to acid rain and salt corrosion.
▶ See page 28

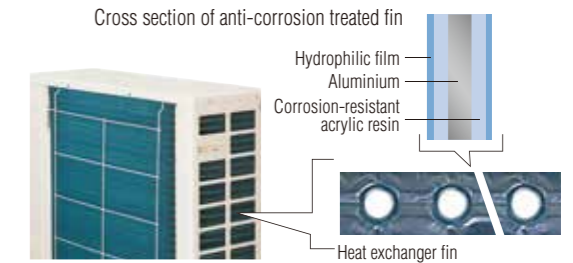


Smile Curve
The FTKC series features Daikin's new smile curve design for the front panel. The smile curve creates a stylish, modern appearance which blends easily with any interior decor.

Wireless Remote Controller

FTKV25/35



- 1 On and Off switch
- 2 Selects fan speed.
- 3 Auto Fan Speed and Indoor Unit Quiet Operation
- 4 Inverter Powerful Operation
- 5 Selects operation mode: Cooling, Dry and Fan Only.
- 6 Outdoor Unit Quiet Operation
- 7 24 Hour Off Timer and Night Set Mode
- 8 Cancels timers.

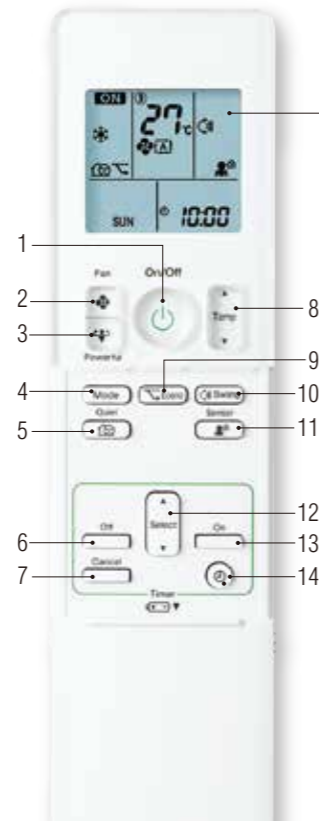


- The backlit LCD allows easy operation in the dark.
- 8 Sets room temperature.
 - 9 Econo Mode
 - 10 Sets vertical airflow direction. Vertical Auto-Swing
 - 11 Intelligent Eye
 - 12 Selects time.
 - 13 24 Hour On Timer
 - 14 Sets clock.

FTKC20/25/35



- 1 Sets room temperature.
- 2 Econo Mode
- 3 Inverter Powerful Operation
- 4 Selects operation mode: Cooling, Dry and Fan Only.
- 5 Comfort Airflow Mode
- 6 24 Hour On Timer
- 7 24 Hour Off Timer and Night Set Mode

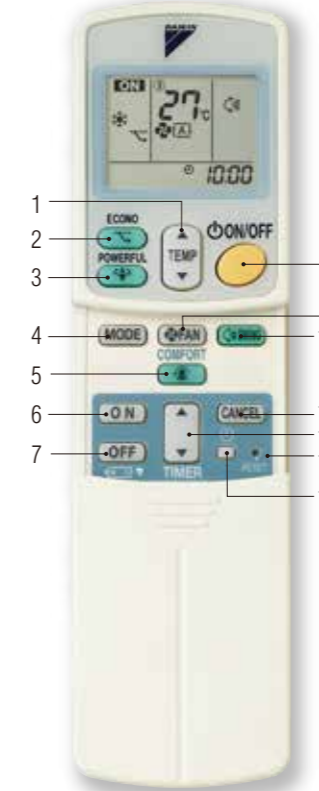


- 8 On and Off switch
- 9 Selects fan speed. Auto Fan Speed and Indoor Unit Quiet Operation
- 10 Sets vertical airflow direction. Vertical Auto-Swing
- 11 Cancels timer.
- 12 Selects time.
- 13 Resets settings.
- 14 Sets clock.

FTKV50/60/71



- 1 On and Off switch
- 2 Selects fan speed.
- 3 Auto Fan Speed and Indoor Unit Quiet Operation
- 4 Inverter Powerful Operation
- 5 Selects operation mode: Cooling, Dry and Fan Only.
- 6 Comfort Airflow Mode and Intelligent Eye
- 7 Starts and completes settings.
- 8 Deactivates, reactivates or deletes Weekly Timer settings.
- 9 Goes back.
- 10 24 Hour Off Timer and Night Set Mode
- 11 Cancels timers.

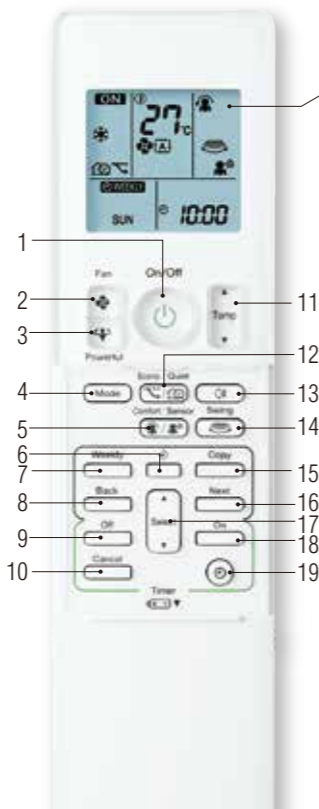


- The backlit LCD allows easy operation in the dark.
- 11 Sets room temperature.
 - 12 Econo Mode and Outdoor Unit Quiet Operation
 - 13 Sets vertical airflow direction. Vertical Auto-Swing and 3D Airflow
 - 14 Sets horizontal airflow direction. Horizontal Auto-Swing and 3D Airflow
 - 15 Copies settings.
 - 16 Goes next.
 - 17 Selects timer, mode, setting significant number, day, time and temperature.
 - 18 24 Hour On Timer
 - 19 Sets clock.

FTKC50/60



- 1 Sets room temperature.
- 2 Econo Mode
- 3 Inverter Powerful Operation
- 4 Selects operation mode: Cooling, Dry and Fan Only.
- 5 Outdoor Unit Quiet Operation
- 6 24 Hour On Timer
- 7 24 Hour Off Timer and Night Set Mode

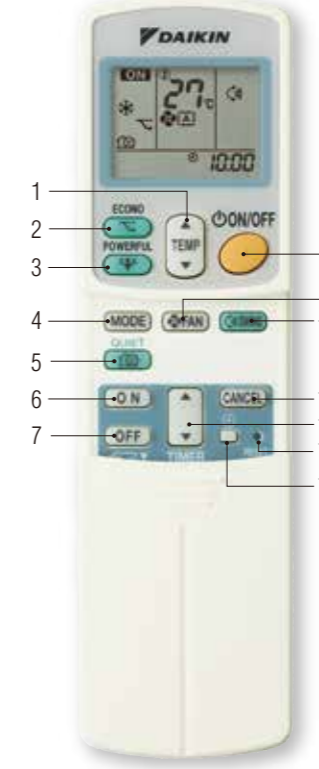

- 8 On and Off switch
- 9 Selects fan speed. Auto Fan Speed and Indoor Unit Quiet Operation
- 10 Sets vertical airflow direction. Vertical Auto-Swing
- 11 Cancels timer.
- 12 Selects time.
- 13 Resets settings.
- 14 Sets clock.

Specifications for FTKV Series

Model name		Indoor unit	FTKV25NVMV	FTKV35NVMV	FTKV50NVMV	FTKV60NVMV	FTKV71NVMV	
		Outdoor unit	RKV25NVMV	RKV35NVMV	RKV50NVMV	RKV60NVMV	RKV71NVMV	
Capacity	Rated	kW	2.5 (1.2-3.4)	3.5 (1.3-4.1)	5.2 (1.7-6.0)	6.0 (1.9-7.0)	7.1 (2.3-8.9)	
	(Min.-Max.)	Btu/h	8,500 (4,100-11,600)	11,900 (4,400-14,000)	17,700 (5,800-20,500)	20,500 (6,500-23,900)	24,200 (7,800-30,400)	
Power supply		1 phase, 220-240 V, 50 Hz / 1 phase, 220-230 V, 60 Hz						
Running current	Rated	A	2.7	4.4	6.0	7.4	9.3	
Power consumption		W	540	910	1,300	1,580	2,000	
COP		W/W	4.63	3.85	4.00	3.80	3.55	
Indoor unit		FTKV25NVMV	FTKV35NVMV	FTKV50NVMV	FTKV60NVMV	FTKV71NVMV		
Front panel colour		Pure white						
Airflow rate	H	m³/min (cfm)	7.8 (275)	8.0 (282)	14.3 (504)	15.4 (544)	18.2 (643)	
Fan speed		5 steps, quiet and automatic						
Sound pressure levels	H/L/SL	dB (A)	37/25/22	38/26/23	43/34/31	45/35/32	46/37/33	
Dimensions	H x W x D	mm	283 x 800 x 195		290 x 1,050 x 250		340 x 1,050 x 248	
Machine weight		kg	9		12		14	
Outdoor unit		RKV25NVMV	RKV35NVMV	RKV50NVMV	RKV60NVMV	RKV71NVMV		
Casing colour		Ivory white						
Compressor	Type	Hermetically sealed swing type						
	Motor output	W	800		1,300		2,400	
Refrigerant	Type	R-32						
	Charge	kg	0.9		1.2		1.5	
Sound pressure levels	H/SL	dB (A)	46/43	47/44	48/44	52/46	52/49	
Dimensions	H x W x D	mm	550 x 765 x 285		735 x 825 x 300		770 x 900 x 320	
Machine weight		kg	34		43		60	
Operation range		°CDB	19.4 to 46					
Piping connection	Liquid	mm	ø6.4					
	Gas		ø9.5		ø12.7		ø15.9	
	Drain		ø18.0					
Max. piping length	m	20		30				
Max. level difference		15		20				

Note: The above values are based on operation with a 220 V, 50 Hz power supply.

Measurement conditions

- Cooling capacity is based on: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; piping length 7.5 m.
- Sound pressure levels are based on the temperature conditions 1 above. These are anechoic conversion values. These values are normally somewhat higher during actual operation as a result of ambient conditions.

Options for FTKV Series

Indoor Unit

No.	Item	FTKV25/35/50/60/71
1	5-room centralised controller	KRC72A
2	Wiring adaptor for time clock/remote controller (Normal open pulse contact/normal open contact)	KRP413AB1S
3	Titanium apatite photocatalytic air-purifying filter	KAF970A46
4	Remote controller loss prevention with chain	KKF910A4

Notes: *1. A wiring adaptor (KRP413AB1S) is also required for each indoor unit.
*2. The time clock and other devices should be obtained locally.
*3. The filter is a standard accessory.



5-room centralised controller
KRC72A



Titanium apatite photocatalytic
air-purifying filter
KAF970A46



Remote controller loss
prevention with chain
KKF910A4

Outdoor Unit

No.	Item	RKV25/35	RKV50/60	RKV71
1	Air direction adjustment grille	KPW937A4	KPW945A4	
2	Drain plug	KKP937A4		KKP945A4

Note: *1. One set includes five pieces for five units.



Air direction adjustment grille
KPW945A4



Drain plug
KKP937A4

Control System

No.	Item	FTKV25/35/50/60/71
1	Central remote controller	DCS302CA61
2	Unified On/Off controller	DCS301BA61
3	Schedule timer	DST301BA61
4	Interface adaptor for DIII-NET use	KRP928BB2S

Note: *1. Interface adaptor for DIII-NET use (KRP928BB2S) is also required for each indoor unit.



Central remote controller
DCS302CA61



Unified On/Off controller
DCS301BA61



Schedule timer
DST301BA61

Specifications for FTKC Series

Model name	Indoor unit		FTKC20PVMV	FTKC25PVMV	FTKC35PVMV	FTKC50NVMV	FTKC60NVMV
	Outdoor unit		RKC20PVMV	RKC25PVMV	RKC35PVMV	RKC50NVMV	RKC60NVMV
Capacity	Rated (Min.-Max.)	kW	2.0 (1.0-2.4)	2.5 (1.0-3.4)	3.5 (1.3-4.1)	5.2 (1.6-5.9)	6.0 (1.8-6.9)
		Btu/h	6,800 (3,400-8,200)	8,500 (3,400-11,600)	11,900 (4,400-14,000)	17,700 (5,500-20,100)	20,500 (6,100-23,500)
Power supply			1 phase, 220-240 V, 50 Hz / 1 phase, 220-230 V, 60 Hz				
Running current	Rated	A	2.6	3.3	4.5	6.7	8.0
Power consumption		W	500	700	990	1,445	1,740
COP		W/W	4.00	3.57	3.54	3.60	3.45
Indoor unit			FTKC20PVMV	FTKC25PVMV	FTKC35PVMV	FTKC50NVMV	FTKC60NVMV
Front panel colour			Shiny pure white				
Airflow rate	H	m³/min (cfm)	9.0 (318)		9.3 (324)	14.3 (504)	15.4 (544)
Fan speed			5 steps, quiet and automatic				
Sound pressure levels	H/L/SL	dB (A)	38/25/22		39/26/22	42/32/29	44/34/31
Dimensions	H x W x D	mm	283 x 770 x 203			290 x 1,050 x 237	
Machine weight		kg	8			12	
Outdoor unit			RKC20PVMV	RKC25PVMV	RKC35PVMV	RKC50NVMV	RKC60NVMV
Casing colour			Ivory white				
Compressor	Type		Hermetically sealed swing type				
	Motor output	W	441	641	913	1,300	
Refrigerant	Type		R-32				
	Charge	kg	0.5		0.7	1.2	
Sound pressure levels	H/SL	dB (A)	46/–	47/–	49/–	48/44	52/46
Dimensions	H x W x D	mm	550 x 658 x 275			735 x 825 x 300	
Machine weight		kg	23	22	26	43	
Operation range		°CDB	19.4 to 46				
Piping connection	Liquid	mm	ø6.4				
	Gas		ø9.5			ø12.7	
	Drain		ø16.0			ø18.0	
Max. piping length		m	15			30	
Max. level difference			12			20	

Note: The above values are based on operation with a 220 V, 50 Hz power supply.

Measurement conditions

- Cooling capacity is based on: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; piping length 7.5 m.
- Sound pressure levels are based on the temperature conditions 1 above. These are anechoic conversion values. These values are normally somewhat higher during actual operation as a result of ambient conditions.

Options for FTKC Series

Indoor Unit

No.	Item	FTKC20/25/35	FTKC50/60
1	5-room centralised controller	–	KRC72A
2	Wiring adaptor for time clock/remote controller (Normal open pulse contact/normal open contact)	–	KRP413AB1S
3	Titanium apatite photocatalytic air-purifying filter	KAF970A46	
4	Remote controller loss prevention with chain	KKF917A4	

Notes: *1. A wiring adaptor (KRP413AB1S) is also required for each indoor unit.

*2. The time clock and other devices should be obtained locally.

*3. The filter is a standard accessory.



5-room centralised controller
KRC72A



Titanium apatite photocatalytic
air-purifying filter
KAF970A46



Remote controller loss
prevention with chain
KKF917A4

Outdoor Unit

No.	Item	RKC20/25/35	RKC50/60
1	Air direction adjustment grille	KPW937B4	KPW945A4
2	Drain plug	*1 KKP937A4	

Note: *1. One set includes five pieces for five units.



Air direction adjustment grille
KPW945A4



Drain plug
KKP937A4

Control System

No.	Item	FTKC20/25/35	FTKC50/60
1	Central remote controller	–	DCS302CA61
2	Unified On/Off controller	–	DCS301BA61
3	Schedule timer	–	DST301BA61
4	Interface adaptor for DIII-NET use	–	KRP928BB2S

Note: *1. Interface adaptor for DIII-NET use (KRP928BB2S) is also required for each indoor unit.



Central remote controller
DCS302CA61



Unified On/Off controller
DCS301BA61



Schedule timer
DST301BA61